

## BF1 and BF2 P Series Fibers

BF1 and BF2 series fibers are diffuse-mode bifurcated glass fibers with a straight tip.

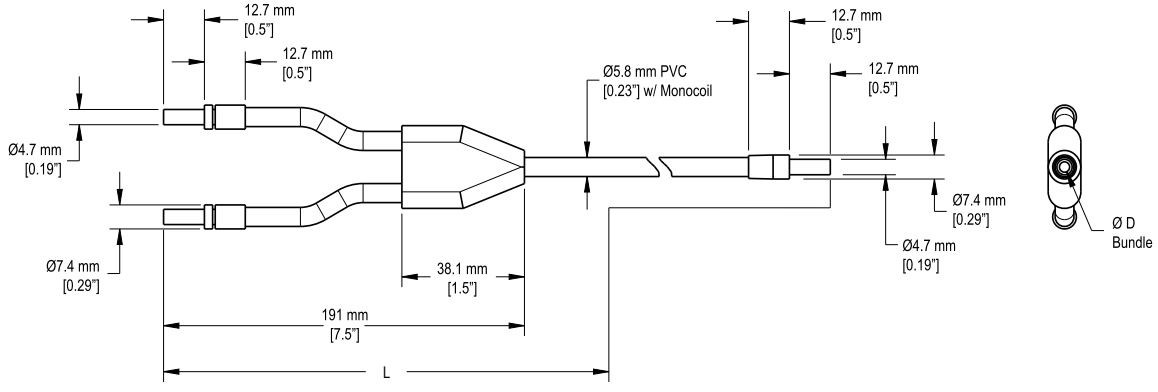


| Model | CAD Files | L | D |
|---|---|---|---|
| **BF215P** | CAD files: DXF, PDF, IGS, STP | 4572 mm (180") | 3.18 mm (0.125") |
| **BF28P** | | 2438 mm (96") | 3.18 mm (0.125") |
| **BF13P** | | 914 mm (36") | 1.6 mm (0.062") |
| **BF23P** | | 914 mm (36") | 3.18 mm (0.125") |
| **BF24P** | | 1219 mm (48") | 3.18 mm (0.125") |
| **BF25P** | | 1524 mm (60") | 3.18 mm (0.125") |
| **BF26P** | | 1829 mm (72") | 3.18 mm (0.125") |

## BFxLMSRE Glass Fibers

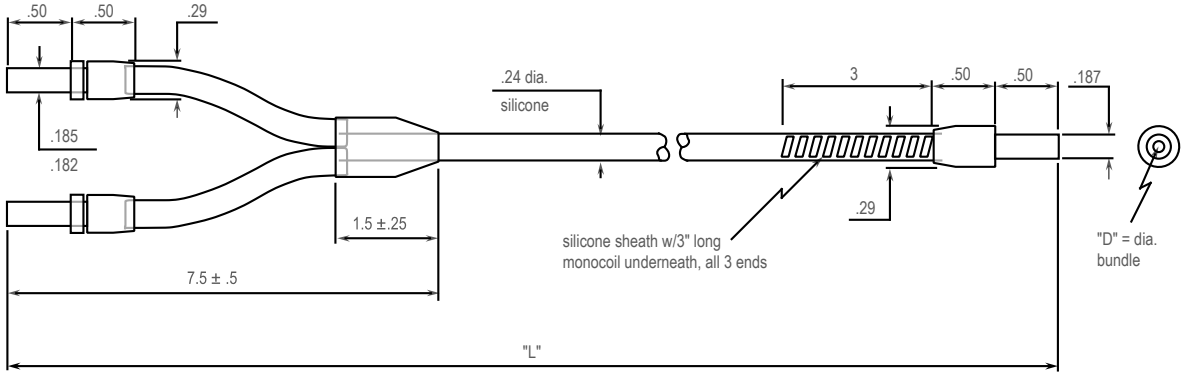


| Model | CAD Files | L (in) | D (in) |
|---|---|---|---|
| **BF13LMSRE** | CAD files: PDF | 36 | 0.062 |


Original Instructions
12-Aug-26

© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com

b_51959288
p/n: b_51959288 Rev. B

ПРОМЭЛЕКТРОНИКА/ sales@prom-elec.com


# BFxxS Glass Fibers

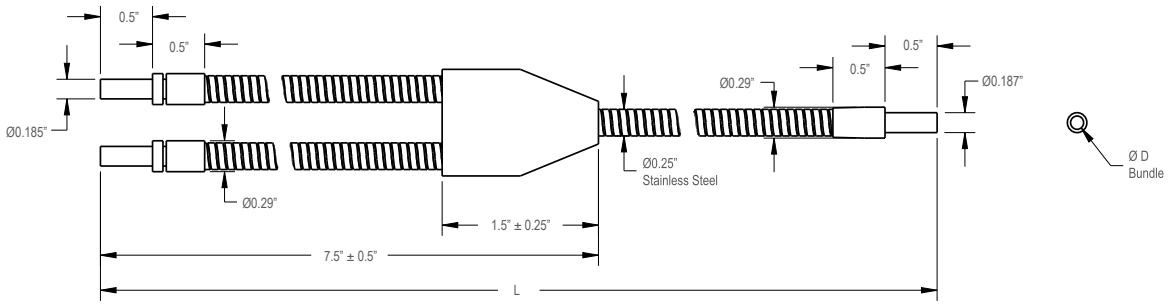


| Models | CAD Files | L (in) | D (in) |
|---|---|---|---|
| **BF13S** | CAD files: PDF | 36 | 0.062 |
| **BF2.9S** | | 11 | 0.125 |
| **BF23S** | | 36 | 0.125 |
| **BF23SM600** | | 36 | 0.125 |
| **BF24S** | | 48 | 0.125 |
| **BF26S** | | 72 | 0.125 |
| **BF29S** | | 108 | 0.125 |
| **BF212S** | | 144 | 0.125 |
| **BF230S** | | 360 | 0.125 |

Models ending in M600 have potted fibers on the threaded end with an epoxy rated to a maximum temperature of 600 °F.


# BF2.5xP Glass Fibers

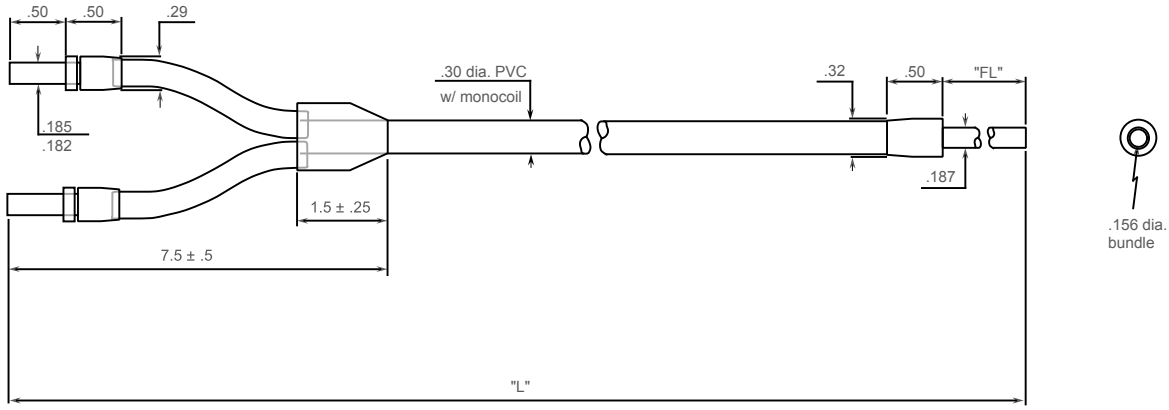


| Model | CAD Files | FL (in) | L (in) |
|---|---|---|---|
| **BF2.53P** | CAD files: PDF | 0.50 | 36 |



© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com

# BF2.5xS Glass Fibers

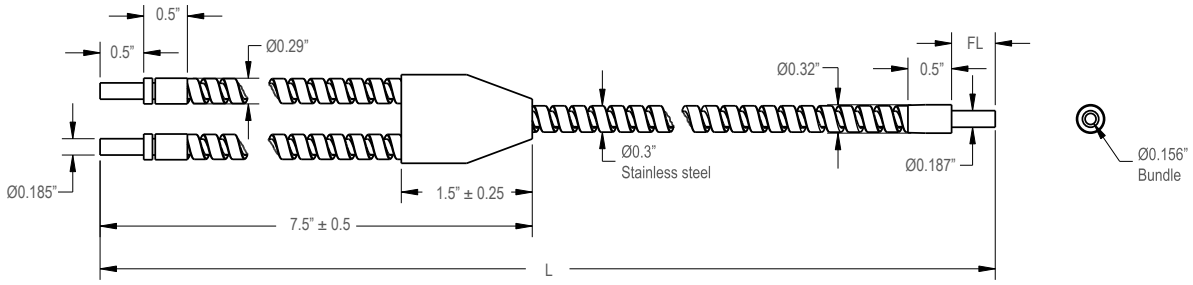



| Model | CAD Files | FL (in) | L (in) |
|---|---|---|---|
| **BF2.53S** | CAD files: PDF | 0.50 | 36 |

# BFxxxPM316SS Glass Fibers

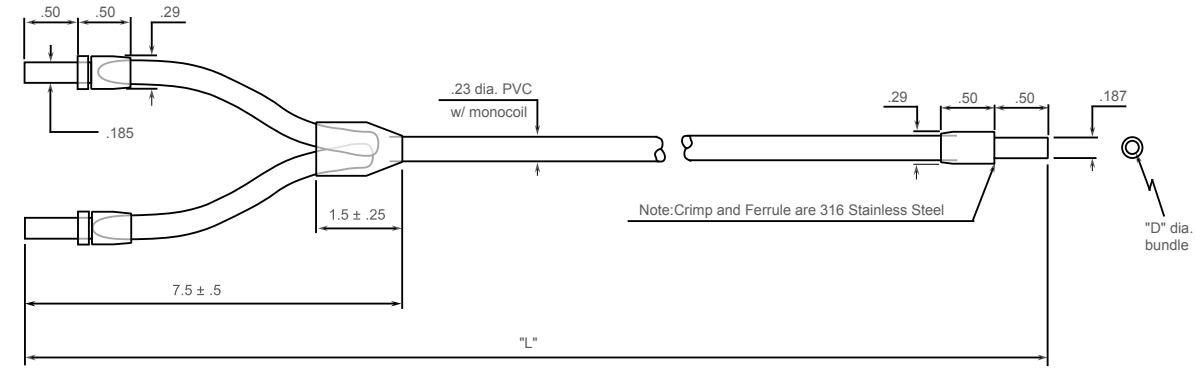


| Model | CAD Files | L (in) | D (in) |
|---|---|---|---|
| **BF216PM316SS** | CAD files: PDF | 192 | 0.125 |


# BFxxSM1 and SM2 Glass Fibers

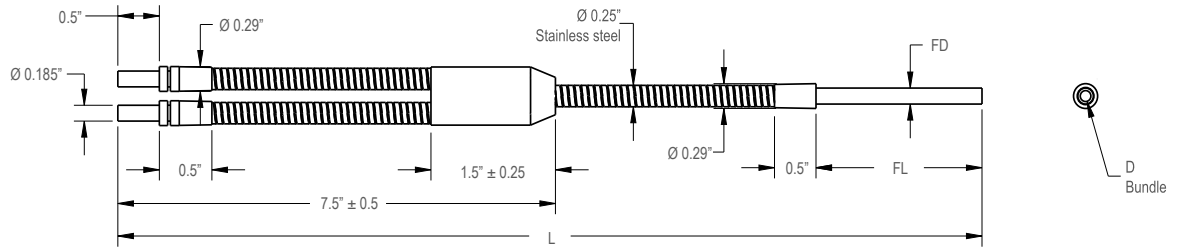


| Model | CAD Files | L (in) | D (in) | FD (in) | FL (in) |
|---|---|---|---|---|---|
| **BF23SM1.06** | CAD files: PDF | 36 | 0.125 | 0.187 | 1.06 |
| **BF23SM1.5** | | 36 | 0.125 | 0.187 | 1.5 |
| **BF23SM2** | | 36 | 0.125 | 0.187 | 2 |
| **BF23SM6** | | 36 | 0.125 | 0.187 | 6 |



© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com

# BFxxSM3FMB Glass Fibers

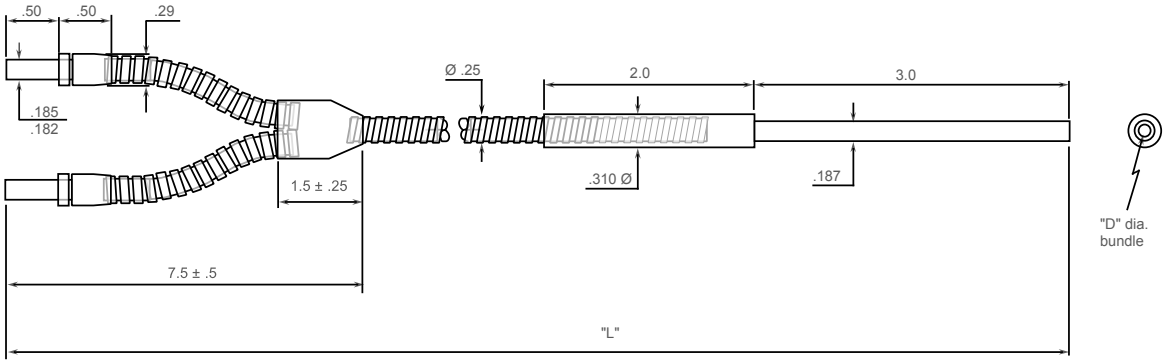



| Model | CAD Files | L (in) | D (in) |
|---|---|---|---|
| **BF23SM3FMB** | CAD files: PDF | 36 | 0.125 |

# BF23SMAMALB10NF Glass Fiber

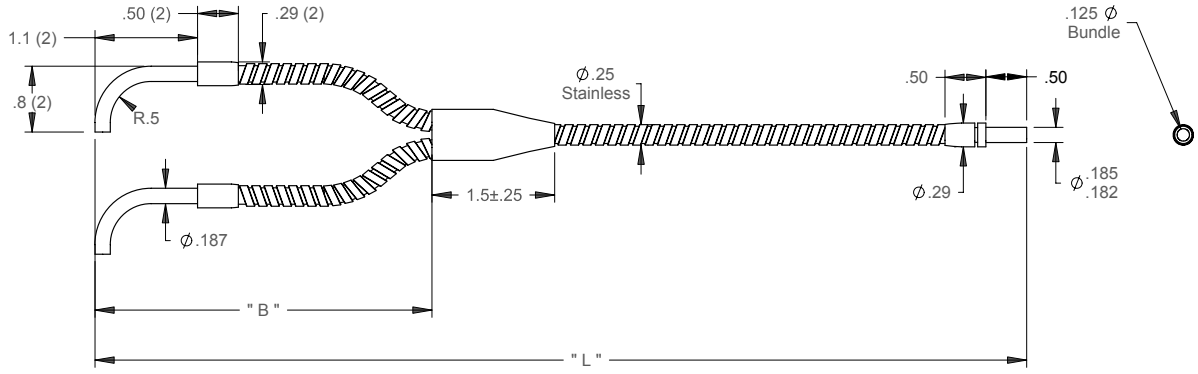


| Model | CAD Files | B (in) | L (in) |
|---|---|---|---|
| **BF23SMAMALB10NF** | CAD files: PDF | 10 | 36 |

# BF23SMHF Glass Fiber

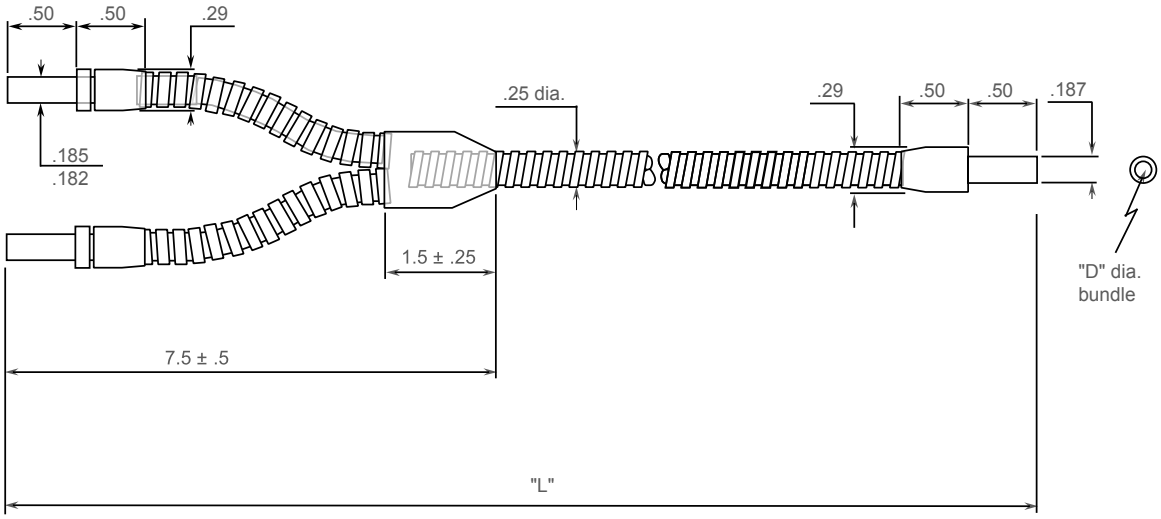




© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com


| Model | CAD Files | L (in) | D (in) |
|---|---|---|---|
| **BF23SMHF** | CAD files: PDF | 36 | 0.125 |

## BF26S Glass Fibers

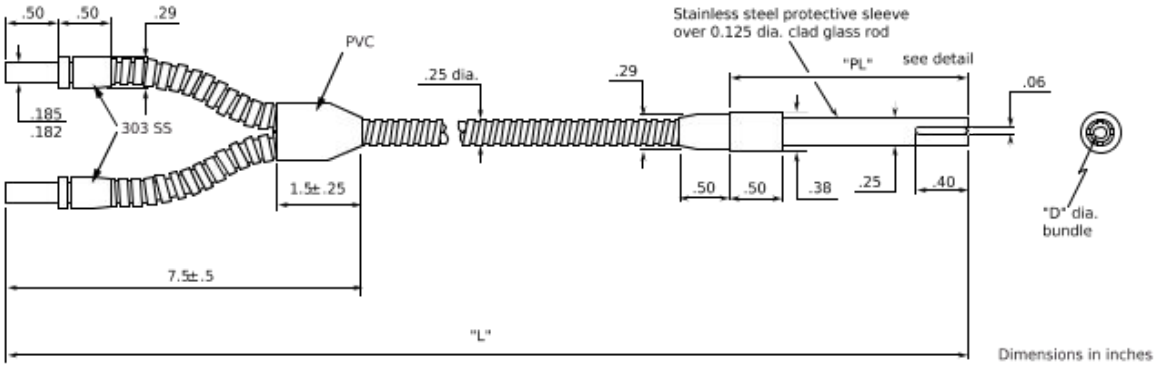


| Model | CAD Files | L (in) | PL (in) |
|---|---|---|---|
| **BF26SMFLSM2.09** | CAD files: PDF | 72 | 2.09 |

## BF2M Glass Fiber

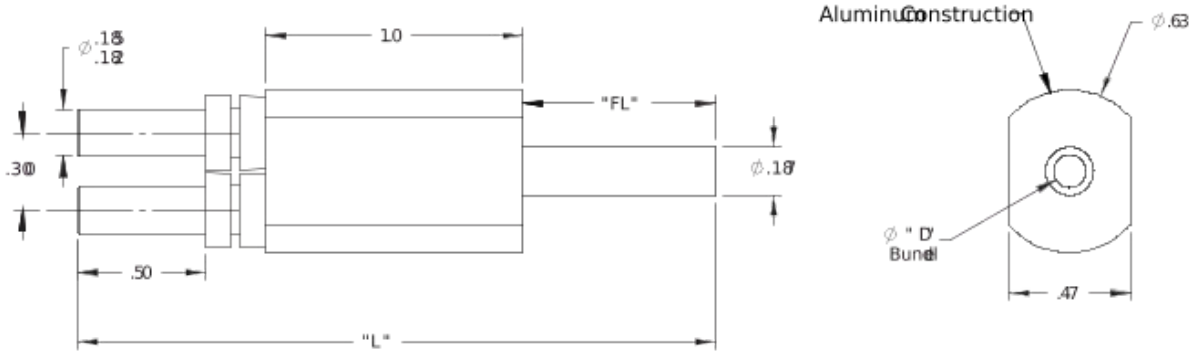


| Model | CAD Files | L (in) | FL (in) | D (in) |
|---|---|---|---|---|
| **BF2M300** | CAD files: PDF | 2.3 | 0.50 | 0.125 |


© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com