Power Entry Modules

With over 26,000 combinations Bulgin's mains power entry modules offer a very adaptable and flexible solution to panel design.
Power entry modules allow combinations of mains inlets and outlets, filtered inlets, switches, fuseholders, voltage selectors and indicators mounted in either horizontal or vertical format bezels ready for quick snap-fit assembly. The compact design occupies the minimum of panel area and a single rectangular mounting hole, offering easy installation for this mains power entry module.

Our range offers a flange fixing alternative for designers who prefer the security of screw fixing. All types and variations are available through Bulgin's extensive distribution network.

Components used in Power Entry Modules.

Note: Components are Approved Individually (where applicable).
Please see individual component pages for full specifications.

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА

Overview of Power Entry Modules

	Inlets				Outlets	Inlet/ Outlet Combinations	
Style	**C14**	**C14 Fused**	**C16**	**C20**	**Sheet F**	**C14**	**C14 Fused**
Snap to Panel Vertical	With Single Contact switch Page 420 With other components Pages 421, 422, 423	With Single Contact switch Page 418 With Double Contact Switch Page 419	With Single Contact switch Page 420 With other components Pages 421, 422, 423	With Single Contact switch Page 424	With Single Contact switch Page 426	With other components Page 425	
Snap to Panel Horizontal	Mini Bezel With Single Contact Switch Page 432 Mini Bezel With Double Contact Switch Page 432	With Single Contact switch Page 427 With Double Contact Switch Page 428				With Single Contact switch Page 429	With Double Contact switch Page 430 No additional components Page 431
Flange Mount - Vertical 		With Single Contact switch Page 433 With Double Contact switch Page 434					

C14 IEC Fused Inlet - Vertical

Vertical Module Arrangement

BZV01/Z0000/01

- Fused Inlet with 2.8mm or 6.3mm tags
- Single Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

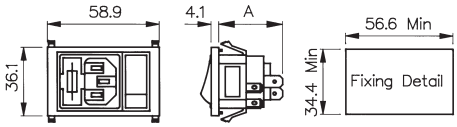

BZV01/*****/** } A = 59.7 With Filter
BZV02/*****/** } 27.4 Without Filter
BZV15/*****/** } A = 59.7 With Filter
BZV16/*****/** } 37.9 Without Filter
Panel Thickness. 1.0, 1.5, 2.0, 3.0mm.

How to order -

BZV XX	/	XXXXX	/	XX

Type of Inlet / Outlet

Single Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:
01 = PF0011/63
02 = PF0011/28

Twin Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:
15 = PF0033/63
16 = PF0033/28

Filtered or Non Filtered Inlet

Z0000 = Non Filtered
Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437
E.g. BZV01/A0620/01

Filtered or Non Filtered Inlet

Single Contact Switch:
01 = S.P. Switch

Single Contact Neon Switch:
02 = S.P. Red Neon Switch
08 = S.P. Green Neon Switch

Neon Indicator:
03 = Red Neon Indicator

Single Contact High Inrush Switch:
46 = S.P. High Inrush Switch

Single Contact Switch Marked I/O:
69 = S.P. Switch (I/O)

Single Contact Neon Switch Marked (I/O):
71 = S.P. Red Neon Switch (I/O)
74 = S.P. Green Neon Switch (I/O)

Single Contact High Inrush Switch Marked (I/O):
98 = S.P. High Inrush Switch (I/O)

C14 IEC Fused Inlet - Vertical

Vertical Module Arrangement

BZV01/Z0000/10

- Fused Inlet with 2.8mm or 6.3mm tags
- Double Contact Switch or
- Indicator Variations
- Filtered Inlet Option
- Options of I/O marked switches

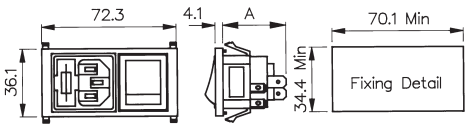

BZV01/*****/** } A = 59.7 With Filter
BZV02/*****/** } A = 27.4 Without Filter
BZV15/*****/** } A = 59.7 With Filter
BZV16/*****/** } A = 37.9 Without Filter

Panel Thickness. 1.0, 1.5, 2.0, 3.0mm.

How to order -

BZV XX	/	XXXXX	/	XX

Type of Inlet / Outlet

Single Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:
01 = PF0011/63
02 = PF0011/28

Twin Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:
15 = PF0033/63
16 = PF0033/28

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437
E.g. BZV01/A0620/10

Combination of Other Components

Neon Indicator:
D3 = Red Neon Indicator

Double Contact Switch:
10 = D.P. Switch

Double Contact Neon Switch:
11 = D.P. Red Neon Switch
12 = D.P. Green Neon Switch

Double Contact High Inrush Switch:
13 = D.P. High Inrush Switch

Double Contact Switch Marked I/O:
70 = D.P. Switch (I/O)

Double Contact Neon Switch Marked (I/O):
76 = D.P. Red Neon Switch (I/O)
77 = D.P. Green Neon Switch (I/O)

Double Contact High Inrush Switch Marked (I/O):

78 = D.P. High Inrush Switch (I/O)
B1 = D.P. High Inrush Green Neon Switch (I/O)

C14 and C16 IEC Inlet - Vertical

Vertical Module Arrangement

BZV03/Z0000/02

- Inlet with 2.8mm or 6.3mm tags
- Single Contact Switch or Neon Indicator Variations
- Filtered Inlet Option
- Options of I/O marked switches
- Non Fused

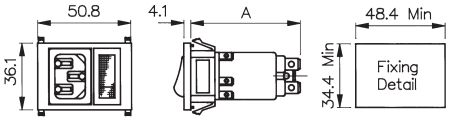

BZV03, BZV04/*****/** A = 62.5 With Filter
28.1 Without Filter
BZV05, BZV06/*****/** A = 28.1

Panel Thickness. 1.0, 1.5, 2.0, 3.0mm.

How to order -

BZV XX	/	XXXXX	/	XX

Type of Inlet / Outlet

C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:
03 = PX0575/63
04 = PX0575/28
C16 Power Inlet (hot condition), 6.3 or 2.8mm tabs:
05 = PX0595/63
06 = PX0595/28

Please note type 05 and 06 are not available in filtered version

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see page 435
E.g. BZV03/A0120/02

Combination of Other Components

Single Contact Switch:
01 = S.P. Switch

Single Contact Neon Switch:
02 = S.P. Red Neon Switch
08 = S.P. Green Neon Switch

Neon Indicator:
03 = Red Neon Indicator
Single Contact High Inrush Switch:
46 = S.P. High Inrush Switch

Single Contact Switch Marked I/O:
69 = S.P. Switch (I/O)

Single Contact Neon Switch Marked (I/O):
71 = S.P. Red Neon Switch (I/O)
74 = S.P. Green Neon Switch (I/O)

Single Contact High Inrush Switch Marked (I/O):

98 = S.P. High Inrush Switch (I/O)

C14 and C16 IEC Inlet - Vertical

Vertical Module Arrangement

BZV03/Z0000/07

- Inlet with 2.8mm or 6.3mm tags
- Double Contact Switch/ Fuseholder/Indicator/ Voltage Selectors/ Blanking Plate
- Filtered Inlet Option
- Options of I/O marked switches



Panel Thickness. 1.0, 1.5, 2.0, 3.0mm.
BZV03, BZV04/*****/** A = 62.5 With Filter
39.0 Without Filter
BZV05, BZV06/*****/** A = 39.0

How to order -

BZV XX / XXXXX / XX

Type of Inlet / Outlet

C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:

03 = PX0575/63
04 = PX0575/28

C16 Power Inlet (hot condition), 6.3 or 2.8mm tabs:

05 = PX0595/63
06 = PX0595/28

Please note type 05 and 06 are not available in filtered version

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see page 435
E.g. BZV03/A0120/07

Combination of Other Components

Twin Fuseholder and Double Contact Switch:
05 = 2 x FX0359 + D.P. Switch

Twin Fuseholder and Double Contact Neon Switch:
06 = 2 x FX0359 + D.P. Red Neon Switch
09 = 2 x FX0359 + D.P. Green Neon Switch
19 = 2 x FX0359 + D.P. Red Neon Switch 125V

Twin Fuseholder and Neon Indicator:
07 = 2 x FX0359 + Red Neon Indicator

Voltage Selector, Fuseholder and Double Contact Switch:
15 = 1 x VS0001 + 1 x FX0359 + Double Contact switch

Voltage Selector, Fuseholder and Double Contact Neon Switch:
16 = 1 x VS0001 + 1 x FX0359 + D.P. Red Neon Switch
18 = 1 x VS0001 + 1 x FX0359 + D.P. Green Neon Switch

Voltage Selector, Fuseholder and Neon Indicator:
17 = 1 x VS0001 + 1 x FX0359 + Red Neon Indicator

Twin Fuseholder and Double Contact High Inrush Switch:
20 = 2 x FX0359 + D.P. High Inrush Switch

Twin Fuseholder and Double Contact High Inrush Neon Switch:
21 = 2 x FX0359 + 1 x D.P. High Inrush Green Neon Switch
22 = 2 x FX0359 + 1 x D.P. High Inrush Red Neon Switch

Voltage Selector, Neon Indicator and Double Contact Switch
25 = 1 x VS0001 + 1 x DX0928/110V/Red + D.P. Switch
26 = 1 x VS0001 + 1 x DX0928/110V/Green + D.P. Switch
27 = 1 x VS0001 + 1 x DX0928/250V/Red + D.P. Switch
28 = 1 x VS0001 + 1 x DX0928/250V/Green + D.P. Switch

Voltage Selector, Neon Indicator and Double Contact High Inrush Switch:
29 = 1 x VS0001 + 1 x DX0928/250V/Red + D.P. High Inrush Switch
30 = 1 x VS0001 + 1 x DX0928/250V/Green + D.P. High Inrush Switch

Fuseholder, Neon Indicator and Double Contact Switch
31 = 1 x FX0359 + 1 x DX0928/110V/Red + D.P. Switch
32 = 1 x FX0359 + 1 x DX0928/110V/Green + D.P. Switch
33 = 1 x FX0359 + 1 x DX0928/250V/Red + D.P. Switch
34 = 1 x Fx0359 + 1 x DX0928/250V/Green + D.P. Switch

Fuseholder, Neon Indicator and Double Contact High Inrush Switch:
35 = 1 x FX0359 + 1 x DX0928/250V/Red + D.P. High Inrush Switch
36 = 1 x FX0359 + 1 x DX0928/250V/Green + D.P. High Inrush Switch

Fuseholder, Blanking Plate and Double Contact High Inrush Neon Switch:
47 = 1 x FX0359 + 1 x Blanking Plate (Right) + D.P. High Inrush Green Neon Switch

Fuseholder, Blanking Plate and Double Contact Switch:
48 = 1 x FX0359 + 1 x Blanking Plate (Right) + D.P. Switch

C14 and C16 IEC Inlet - Vertical

Vertical Module Arrangement

BZV03/Z0000/07

- Inlet with 2.8mm or 6.3mm tags
- Double Contact Switch/
- Fuseholder/Indicator/ Voltage Selectors/ Blanking Plate
- Filtered Inlet Option Options of I/O marked switches



Panel Thickness. 1.0, 1.5, 2.0, 3.0mm.
BZV03, BZV04/*****/** A = 62.5 With Filter
39.0 Without Filter
BZV05, BZV06/*****/** A = 39.0

How to order -

BZV XX / XXXXX / XX

Type of Inlet / Outlet

C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:

03 = PX0575/63
04 = PX0575/28

C16 Power Inlet (hot condition), 6.3 or 2.8mm tabs:

05 = PX0595/63
06 = PX0595/28

Please note type 05 and 06 are not available in filtered version

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see page 435
E.g. BZV03/A0120/07

Combination of Other Components

Twin Fuseholder and Double Contact Switch Marked (I/O):
72 = 2 x FX0359 + D.P. Switch (I/O)

Twin Fuseholder and Double Contact Neon Switch Marked (I/O):
73 = 2 x FX0359 + D.P. Red Neon Switch (I/O)
75 = 2 x FX0359 + D.P. Green Neon Switch(I/O)
82 = 2 x FX0359 + D.P. Red Neon Switch 125V(I/O)

Voltage Selector, Fuseholder and Double Contact Switch Marked (I/O):
79 = 1 x VS0001 + 1 x FX0359 + Double Contact switch (I/O)

Voltage Selector, Fuseholder and Double Contact Neon Switch Marked (I/O):
80 = 1 x VS0001 + 1 x FX0359 + D.P. Red Neon Switch (I/O)
81 = 1 x VS0001 + 1 x FX0359 + D.P. Green Neon Switch (I/O)

Twin Fuseholder and Double Contact High Inrush Switch Marked (I/O):
83 = 2 x FX0359 + D.P. High Inrush Switch (I/O)

Twin Fuseholder and Double Contact High Inrush Neon Switch Marked (I/O):
84 = 2 x FX0359 + 1 x D.P. High Inrush Green Neon Switch (I/O)
85 = 2 x FX0359 + 1 x D.P. High Inrush Red Neon Switch (I/O)

Voltage Selector, Neon Indicator and Double Contact Switch Marked (I/O):
86 = 1 x VS0001 + 1 x DX0928/110V/Red + D.P. Switch (I/O)
87 = 1 x VS0001 + 1 x DX0928/110V/Green + D.P. Switch (I/O)
88 = 1 x VS0001 + 1 x DX0928/250V/Red + D.P. Switch (I/O)
89 = 1 x VS0001 + 1 x DX0928/250V/Green + D.P. Switch (I/O)

Voltage Selector, Neon Indicator and Double Contact High Inrush Switch Marked (I/O):
90 = 1 x VS0001 + 1 x DX0928/250V/Red + D.P. High Inrush Switch(I/O)
91 = 1 x VS0001 + 1 x DX0928/250V/Green + D.P. High Inrush Switch(I/O)

Fuseholder, Neon Indicator and Double Contact Switch Marked (I/O)
92 = 1 x FX0359 + 1 x DX0928/110V/Red + D.P. Switch (I/O)
93 = 1 x FX0359 + 1 x DX0928/110V/Green + D.P. Switch (I/O)
94 = 1 x FX0359 + 1 x DX0928/250V/Red + D.P. Switch (I/O)
95 = 1 x FX0359 + 1 x DX0928/250V/Green + D.P. Switch (I/O)

Fuseholder, Neon Indicator and Double Contact High Inrush Switch Marked (I/O):
96 = 1 x FX0359 + 1 x DX0928/250V/Red + D.P. High Inrush Switch (I/O)
97 = 1 x FX0359 + 1 x DX0928/250V/Green + D.P. High Inrush Switch (I/O)

Fuseholder, Blanking Plate and Double Contact High Inrush Neon Switch Marked (I/O):
99 = 1 x FX0359 + 1 x Blanking Plate (Right) + D.P. High Inrush Green Neon Switch (I/O)

Fuseholder, Blanking Plate and Double Contact Switch Marked (I/O):
A0 = 1 x FX0359 + 1 x Blanking Plate (Right) + D.P. Switch (I/O)
B2 = 1 x VS0002 + 1 x Blanking Plate
B3 = 1 x FX0359 + 1 x Blanking Plate + D.P. High Inrush Switch (I/O)
B5 = 1 x VS0001 + 1 x Blanking Plate + D.P Switch (I/O)

C14 and C16 IEC Inlet - Vertical

Vertical Module Arrangement

BZV04/Z0000/04

- Inlet with 2.8mm or 6.3mm tags
- Fuseholder/Voltage Selector/Indicator options/Blanking plate



BZV03, BZV04/*****/** A = 62.5 With Filter, 39.0 Without Filter.

BZV05, BZV06/*****/** A = 39.0.

Panel Thickness. 1.0, 1.5, 2.0, 3.0mm.

How to order -

BZV XX / XXXXX / XX

Type of Inlet / Outlet

C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:
03 = PX0575/63
04 = PX0575/28

C16 Power Inlet (hot condition), 6.3 or 2.8mm tabs:
05 = PX0595/63
06 = PX0595/28

Please note type 05 and 06 are not available in filtered version

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see page 435
E.g. BZV03/A0120/04

Combination of Other Components

Twin Fuseholder:
04 = 2 x FX0359

Voltage Selector and Fuseholder:
14 = 1 x VS0001 + 1 x FX0359

Voltage selector and Neon:
37 = 1 x VS0001 + DX0928/110V/Red
38 = 1 x VS0001 + DX0928/110V/Green
39 = 1 x VS0001 + DX0928/250V/Red
40 = 1 x VS0001 + DX0928/250V/Green

Fuseholder and Neon:
41 = 1 x FX0359 + DX0928/110V/Red
42 = 1 x FX0359 + DX0928/110V/Green
43 = 1 x FX0359 + DX0928/250V/Red
44 = 1 x FX0359 + DX0928/250V/Green

Fuseholder and Blanking Plate:
45 = 1 x FX0359 + Blanking Plate

Voltage Selector and Blanking Plate:
B2 = 1 x VS0001 + Blanking Plate

C20 IEC Inlet - Vertical

Vertical Module Arrangement

BZV49/Z0000/69

- Inlet with 4.8mm or 6.3mm tags
- Single Contact Switch marked I/O
- Illuminated, red or green, switches
- High inrush non-illuminated switch

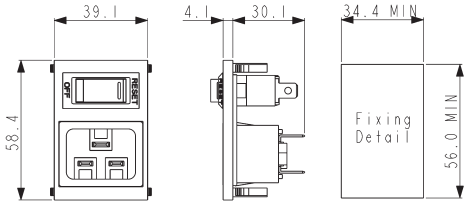

How to order -

BZV XX	/	XXXXX	/	XX

Type of Inlet / Outlet

C20 Power Inlet (cold condition), 4.8 or 6.3mm tabs:

49 = PX0598/63
50 = PX0598/48

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Combination of Other Components

Single Contact Switch:
01 = S.P. Switch

Single Contact Switch Marked (I/O):
69 = S.P. Switch (I/O)

Single Contact Illuminated Switch:
02 = S.P. Illuminated Red
08 = S.P. Illuminated Green

Single Contact Non-illuminated High Inrush Switch Marked I/O:

98 = S.P. High Inrush Switch (I/O)
Single Contact Illuminated (Red or Green 250v Neon) Switch Marked I/O:

71 = S.P. Switch Illuminated Red (I/O)
74 = S.P. Switch Illuminated Green (I/O)

C14 IEC Inlet/Sheet F IEC Outlet - Vertical

Vertical Module Arrangement

BZV09/Z0000/04

- Inlet/Outlet Combination
- 2.8mm or 6.3mm tags
- Filtered Inlet and Blanking Plate options
- Shuttered or Non-shuttered Outlet
- Fused

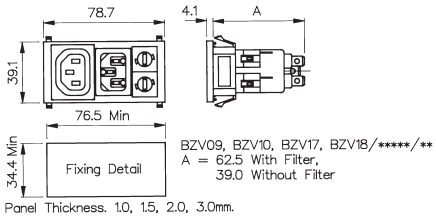

How to order -

BZV XX	/	XXXXX	/	XX

Type of Inlet / Outlet

C14 Power Inlet (cold condition) and Sheet F Non-shuttered Power Outlet, 2.8 or 6.3mm tabs:

09 = PX0575/63 + PX0695/63
10 = PX0575/28 + PX0695/28

C14 Power Inlet (cold condition) and Sheet F Shuttered Power Outlet, 2.8 or 6.3mm tabs:

17 = PX0575/63 + PX0783/63
18 = PX0575/28 + PX0783/28

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see page 435
E.g. BZV09/A0120/04

Combination of Other Components

Twin Fuseholder:
04 = 2 x FX0359

Voltage Selector and Fuseholder:
14 = 1 x VS0001 + 1 x FX0359

Voltage selector and Neon:
37 = 1 x VS0001 + DX0928/110V/Red
38 = 1 x VS0001 + DX0928/110V/Green
39 = 1 x VS0001 + DX0928/250V/Red
40 = 1 x VS0001 + DX0928/250V/Green

Fuseholder and Neon:
41 = 1 x FX0359 + DX0928/110V/Red
42 = 1 x FX0359 + DX0928/110V/Green
43 = 1 x FX0359 + DX0928/250V/Red
44 = 1 x FX0359 + DX0928/250V/Green

Fuseholder and Blanking Plate:
45 = 1 x FX0359 + Blanking Plate

Voltage Selector and Blanking Plate:
B2 = 1 x VS0001 + Blanking Plate

Sheet F IEC Outlet - Vertical

Vertical Module Arrangement

BZV45/Z0000/02

- Outlet with 2.8mm or 6.3mm tags
- Shuttered or Non-Shuttered
- Single Contact Switch or Neon Indicator
- I/O Marking Options

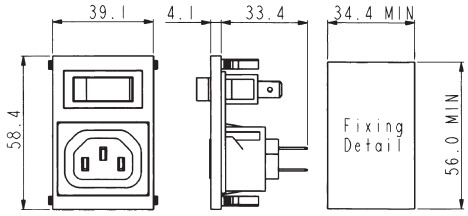

How to order -

BZV XX	/	XXXXX	/	XX

Type of Inlet / Outlet

Sheet F Power Outlet (non shuttered), 6.3 or 2.8mm tabs:

45 = PX0695/63
46 = PX0695/28

Sheet F Power Outlet (shuttered), 6.3 or 2.8mm tabs:

47 = PX0783/63
48 = PX0783/28

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Combination of Other Components

Single Contact Switch:
01 = S.P. Switch

Single Contact Neon Switch:
02 = S.P. Red Neon Switch
08 = S.P. Green Neon Switch

Neon Indicator:

03 = Red Neon Indicator

Single Contact High Inrush Switch:
46 = S.P. High Inrush Switch

Single Contact Switch Marked I/O:
69 = S.P. Switch (I/O)

Single Contact Neon Switch Marked (I/O):
71 = S.P. Red Neon Switch (I/O)
74 = S.P. Green Neon Switch (I/O)

Single Contact High Inrush Switch Marked (I/O):
98 = S.P. High Inrush Switch (I/O)

C14 IEC Fused Inlet - Horizontal

Horizontal Module Arrangement

BZH01/Z0000/01

- Fused Inlet with 2.8mm or 6.3mm tags
- Single Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

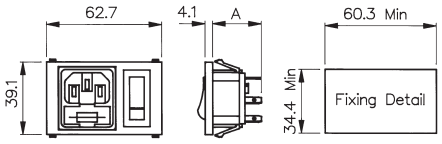

BZH01/*****/** } A = 59.7 With Filter
BZH02/*****/** } A = 27.4 Without Filter
BZH15/*****/** } A = 59.7 With Filter
BZH16/*****/** } A = 37.9 Without Filter
Panel Thickness. 1.0, 1.5, 2.0, 3.0mm

How to order -

BZH XX	/	XXXXX	/	XX

Type of Inlet / Outlet

Single Fused C14 Power Inlet (cold condition), 2.8 or 6.3mm tabs:

01 = PF0011/63
02 = PF0011/28

Twin Fused C14 Power Inlet (cold condition), 2.8 or 6.3mm tabs:

15 = PF0033/63
16 = PF0033/28

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437
E.g. BZH01/A0620/01

Combination of Other Components

Single Contact Switch:
01 = S.P. Switch

Single Contact Neon Switch:
02 = S.P. Red Neon Switch
08 = S.P. Green Neon Switch

Neon Indicator:
03 = Red Neon Indicator

Single Contact High Inrush Switch:
46 = S.P. High Inrush Switch

Single Contact Switch Marked I/O:
69 = S.P. Switch (I/O)

Single Contact Neon Switch Marked (I/O):
71 = S.P. Red Neon Switch (I/O)
74 = S.P. Green Neon Switch (I/O)

Single Contact High Inrush Switch Marked (I/O):
98 = S.P. High Inrush Switch (I/O)

C14 IEC Fused Inlet - Horizontal

Horizontal Module Arrangement



BZH01/Z0000/10

- Fused Inlet with 2.8mm or 6.3mm tags
- Double Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

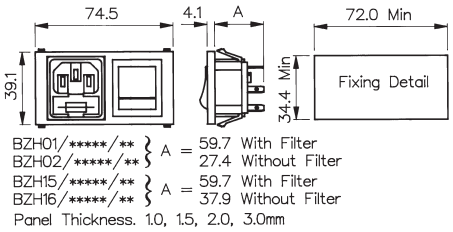

How to order -

BZH XX	/	XXXXX	/	XX

Type of Inlet / Outlet

Single Fused C14 Power Inlet (cold condition), 2.8 or 6.3mm tabs:

01 = PF0011/63
02 = PF0011/28

Twin Fused C14 Power Inlet (cold condition), 2.8 or 6.3mm tabs:

15 = PF0033/63
16 = PF0033/28

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437
E.g. BZH01/A0620/10

Combination of Other Components

Neon Indicator:
03 = Red Neon Indicator

Double Contact Switch:
10 = D.P. Switch

Double Contact Neon Switch:
11 = D.P. Red Neon Switch
12 = D.P. Green Neon Switch

Double Contact High Inrush Switch:
13 = D.P. High Inrush Switch

Double Contact Switch marked I/O:
70 = D.P. Switch (I/O)

Double Contact Neon Switch Marked (I/O):
76 = D.P. Red Neon Switch (I/O)
77 = D.P. Green Neon Switch (I/O)

Double Contact High Inrush Switch Marked (I/O):
78 = D.P. High Inrush Switch (I/O)
B1 = D.P. High Inrush Green Neon Switch (I/O)

C14 IEC Fused Inlet - Horizontal

Horizontal Module Arrangement

BZH09/Z0000/01

- Inlet/Outlet Combination with 2.8mm or 6.3mm tags
- Shuttered or Non-Shuttered Outlet
- Single Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

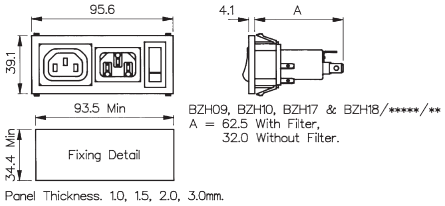

How to order -

BZH XX	/	XXXXX	/	XX

Type of Inlet / Outlet

C14 Power Inlet (cold condition) and Sheet F Non-shuttered Power Outlet, 2.8 or 6.3mm tabs:

09 = PX0575/63 + PX0695/63
10 = PX0575/28 + PX0695/28

C14 Power Inlet (cold condition) and Sheet F Shuttered Power Outlet , 2.8 or 6.3mm tabs:

17 = PX0575/63 + PX0783/63
18 = PX0575/28 + PX0783/28

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see page 435
E.g. BZH09/A0120/01

Combination of Other Components

Single Contact Switch:
01 = S.P. Switch

Single Contact Neon Switch:
02 = S.P. Red Neon Switch
08 = S.P. Green Neon Switch

Neon Indicator:
03 = Red Neon Indicator

Single Contact High Inrush Switch:
46 = S.P. High Inrush Switch

Single Contact Switch Marked I/O:
69 = S.P. Switch (I/O)

Single Contact Neon Switch Marked (I/O):
71 = S.P. Red Neon Switch (I/O)
74 = S.P. Green Neon Switch (I/O)

Single Contact High Inrush Switch Marked (I/O):
98 = S.P. High Inrush Switch (I/O)

C14 IEC Inlet/Sheet F IEC Outlet - Horizontal

Horizontal Module Arrangement



BZH11/Z0000/10

- Inlet/Outlet Combination with 2.8mm or 6.3mm tags
- Single or Twin Fused Inlet
- Shuttered or Non-Shuttered Outlet
- Double Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

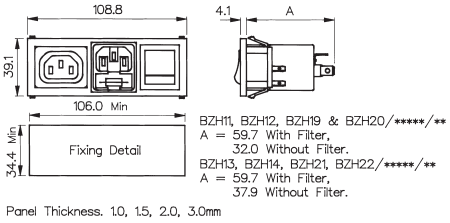

How to order -

BZH XX	/	XXXXX	/	XX

Type of Inlet / Outlet

Single Fused C14 Power Inlet (cold condition) and Sheet F Power Outlet, 2.8 or 6.3mm tabs:

11 = PF0011/63 + PX0695/63
12 = PF0011/28 + PX0695/28

Twin Fused C14 Power Inlet (cold condition) and Sheet F Power Outlet , 2.8 or 6.3mm tabs:

13 = PF0033/63 + PX0695/63
14 = PF0033/28 + PX0695/28

Single Fused C14 Power Inlet (cold condition) and Sheet F Shuttered Power Outlet, 2.8 or 6.3mm tabs:

19 = PF0011/63 + PX0783/63
20 = PF0011/28 + PX0783/28

Twin Fused C14 Power Inlet (cold condition) and Sheet F Shuttered Power Outlet , 2.8 or 6.3mm tabs:

21 = PF0033/63 + PX0783/63
22 = PF0033/28 + PX0783/28

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437
E.g. BZH11/A0620/10

Combination of Other Components

Neon Indicator:
D3 = Red Neon Indicator

Double Contact Switch:
10 = D.P. Switch

Double Contact Neon Switch:
11 = D.P. Red Neon Switch
12 = D.P. Green Neon Switch

Double Contact High Inrush Switch:
13 = D.P. High Inrush Switch

Double Contact Switch Marked I/O:
70 = D.P. Switch (I/O)

Double Contact Neon Switch Marked (I/O):
76 = D.P. Red Neon Switch (I/O)
77 = D.P. Green Neon Switch (I/O)

Double Contact High Inrush Switch Marked (I/O):
78 = D.P. High Inrush Switch (I/O)
B1 = D.P. High Inrush Green Neon Switch (I/O)

C14 IEC Inlet/Sheet F IEC Outlet - Horizontal

Horizontal Module Arrangement



BZH11/Z0000/00

- Fused Inlet/Outlet
- Combination with 2.8mm or 6.3mm tags
- Filtered Inlet Option
- Single or Twin Fused

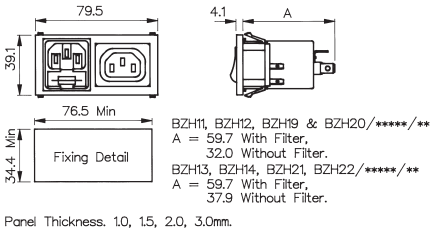

How to order -

BZH XX	/	XXXXX	/	XX

Type of Inlet / Outlet

Single Fused C14 Power Inlet (cold condition) and Sheet F Non-shuttered Power Outlet, 2.8 or 6.3mm tabs:

11 = PF0011/63 + PX0695/63
12 = PF0011/28 + PX0695/28

Twin Fused C14 Power Inlet (cold condition) and Sheet F Non-shuttered Power Outlet , 2.8 or 6.3mm tabs:

13 = PF0033/63 + PX0695/63
14 = PF0033/28 + PX0695/28

Single Fused C14 Power Inlet (cold condition) and Sheet F Shuttered Power Outlet, 2.8 or 6.3mm tabs:

19 = PF0011/63 + PX0783/63
20 = PF0011/28 + PX0783/28

Twin Fused C14 Power Inlet (cold condition) and Sheet F Shuttered Power Outlet , 2.8 or 6.3mm tabs:

21 = PF0033/63 + PX0783/63
22 = PF0033/28 + PX0783/28

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437
E.g. BZH11/A0620/00

Combination of Other Components

None

00 = None

C14 IEC Inlet - Mini Bezel

Minimum Combined Bezel Size

BZM27/Z0000/57B

- Inlet with 2.8, 4.8 or 6.3mm tags
- Horizontal Module Arrangement
- Single and Double Contact Switch Variations
- Filtered Inlet Option



Panel Thickness 1.0, 1.5, 2.0, 3.0mm

BZM27/*****/*** } A = 63.5 With Filter.
BZM28/*****/*** } 29.1 Without Filter.

B = 54.9 With D.P. Switch. 45.9 With S.P. Switch.
C = 57.5 With D.P. Switch. 48.5 With S.P. Switch.

How to order -

BZM XX / XXXXX / XX / X

Type of Inlet / Outlet

C14 Power Inlet (cold condition), 6.3, 4.8 & 2.8mm tabs:

27 = PX0575/63
42 = PX0575/48
28 = PX0575/28

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see page 435
E.g. BZM27/A0120/57B

Switch Variation

Single Contact Switch, 4.8mm or solder tab, marked I/O:
53 = S.P. Switch, 4.8mm tab (I/O)
54 = S.P. Switch, solder tab (I/O)

Single Contact Illuminated Switch, 4.8mm or solder tab:
55 = S.P. Switch Illum. Red, 4.8mm tab
61 = S.P. Switch Illum. Green, 4.8mm tab
56 = S.P. Switch Illum. Red, solder tab
62 = S.P. Switch Illum. Green, solder tab

Double Contact Switch, 4.8mm or solder tab, marked I/O:
57 = D.P. Switch, 4.8mm tab (I/O)
58 = D.P. Switch, solder tab (I/O)

Double Contact Illuminated Switch, 4.8mm or solder tab:
59 = D.P. Switch Illum. Red, 4.8mm tab
63 = D.P. Switch Illum. Green, 4.8mm tab
60 = D.P. Switch Illum. Red, solder tab
64 = D.P. Switch Illum. Green, solder tab

Double Contact High Inrush, 4.8mm tabs:
65 = D.P. High Inrush Switch, 4.8mm tabs (S.P. format)

Double Contact High Inrush, 4.8mm tabs, marked I/O:
68 = D.P. High Inrush Switch, 4.8mm tabs, I/O (S.P. format)

Single Contact Illuminated Switch, 4.8mm or solder tab, Marked I/O:
A1 = S.P. Switch Illum. Red, 4.8mm tab (I/O)
A5 = S.P. Switch Illum. Green, 4.8mm tab (I/O)
A2 = S.P. Switch Illum. Red, solder tab (I/O)
A6 = S.P. Switch Illum. Green, solder tab (I/O)

Double Contact Illuminated Switch, 4.8mm or solder tab, Marked I/O:
A3 = D.P. Switch Illum. Red, 4.8mm tab
A7 = D.P. Switch Illum. Green, 4.8mm tab
A4 = D.P. Switch Illum. Red, solder tab
A8 = D.P. Switch Illum. Green, solder tab

Panel Thickness

1.0mm = A
1.5mm = B
2.0mm = C
3.0mm = D

C14 IEC Fused Inlet - Polyflange

Vertical Module Arrangement

BVA01/Z0000/02

- Fused Inlet with 2.8mm or 6.3mm tags
- Screw Fixing to Panel
- Single Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

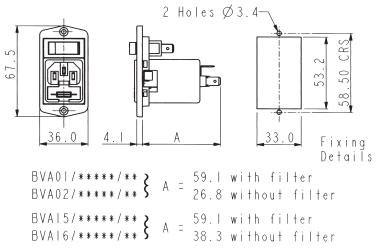

Vertical Module Arrangement

BVB01/Z0000/01

- Fused Inlet with 2.8mm or 6.3mm tags
- Screw Fixing to Panel
- Single Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

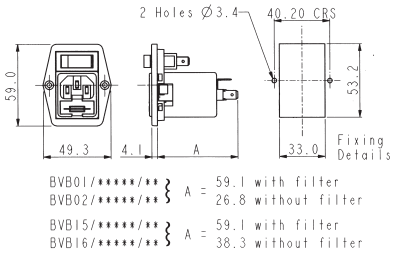

How to order -

BV X	XX	/	XXXXX	/	XX

Flange Type

A = Top fixing

B = Side fixing

Type of Inlet / Outlet

Single Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:

01 = PF0011/63
02 = PF0011/28

Twin Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:

15 = PF0033/63
16 = PF0033/28

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437
E.g. BVA01/A0620/01

Combination of Other Components

Single Contact Switch:
01 = S.P. Switch

Single Contact Neon Switch:
02 = S.P. Red Neon Switch
08 = S.P. Green Neon Switch

Neon Indicator:
03 = Red Neon Indicator

Single Contact High Inrush Switch:
46 = S.P. High Inrush Switch

Single Contact Switch Marked I/O:
69 = S.P. Switch (I/O)

Single Contact Neon Switch Marked (I/O):
71 = S.P. Red Neon Switch (I/O)
74 = S.P. Green Neon Switch (I/O)

Single Contact High Inrush Switch Marked (I/O):
98 = S.P. High Inrush Switch (I/O)

C14 IEC Fused Inlet - Polyflange

Vertical Module Arrangement

BVA01/Z0000/10

- Fused Inlet with 2.8mm or 6.3mm tags
- Screw Fixing to Panel
- Double Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

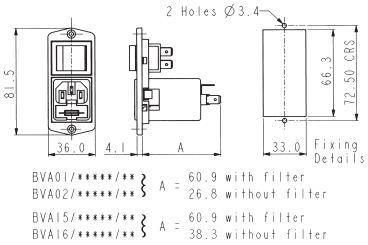

Vertical Module Arrangement

BVB01/Z0000/11

- Fused Inlet with 2.8mm or 6.3mm tags
- Screw Fixing to Panel
- Double Contact Switch Variations
- Filtered Inlet Option
- Options of I/O marked switches

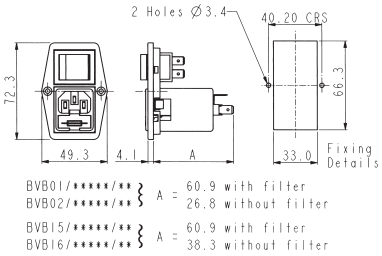

How to order -

BV X	XX	/	XXXXX	/	XX

Flange Type

A = Top fixing

B = Side fixing

Type of Inlet / Outlet

Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:

01 = PF0011/63
02 = PF0011/28

Twin Fused C14 Power Inlet (cold condition), 6.3 or 2.8mm tabs:

15 = PF0033/63
16 = PF0033/28

Filtered or Non Filtered Inlet

Z0000 = Non Filtered

Axxxx = Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see pages 436 - 437
E.g. BVA01/A0620/10

Combination of Other Components

Neon Indicator:
D3 = Red Neon Indicator

Double Contact Switch:
10 = D.P. Switch

Double Contact Neon Switch:
11 = D.P. Red Neon Switch
12 = D.P. Green Neon Switch

Double Contact High Inrush Switch:
13 = D.P. High Inrush Switch

Double Contact Switch Marked I/O:
70 = D.P. Switch (I/O)

Double Contact Neon Switch Marked (I/O):
76 = D.P. Red Neon Switch (I/O)
77 = D.P. Green Neon Switch (I/O)

Double Contact High Inrush Switch Marked (I/O):
78 = D.P. High Inrush Switch (I/O)
B1 = D.P. High Inrush Green Neon Switch (I/O)

C14 IEC Fused Inlet

EMI Filter Options

BVA01/Z0000/10

- For Polysnap modules BZV03, BZV04, BZV09, BZV10, BZV17, BZV18, BZH09, BZH10, BZH17, BZH18, BZM27, BZM28
- PX0575 style IEC inlet
- Using PS01/A style filter
- Standard Attenuation Filter

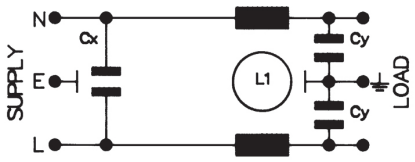

How to order -

B XXXX	/	A	XX	X	X	/	XX
Polysnap Part No.		**Filter Type**	**Rating**	**L/C Circuit**	**Additional Components**		**Polysnap Part No.**
From Polysnap Selection		A = Standard	01 = 1A 03 = 3A 06 = 6A 10 = 10A	1 = Version 1 2 = Version 2 3 = Version 3	0 = None		From Polysnap Selection

Rating	Version	L1	Cx	Cy
1 AMP	1	2 x 2.8mH	1 x 15nF	2 x 2.2nF
“	2	2 x 10mH	1 x 15nF	2 x 2.2nF
“	3	2 x 10mH	1 x 47nF	2 x 2.2nF
3 AMP	1	2 x 0.75mH	1 x 15nF	2 x 2.2nF
“	2	2 x 1.8mH	1 x 15nF	2 x 2.2nF
“	3	2 x 1.8mH	1 x 47nF	2 x 2.2nF
6 AMP	1	2 x 0.3mH	1 x 15nF	2 x 2.2nF
“	2	2 x 0.7mH	1 x 15nF	2 x 2.2nF
“	3	2 x 0.7mH	1 x 47nF	2 x 2.2nF
10 AMP	1	2 x 0.17mH	1 x 15nF	2 x 2.2nF
“	2	2 x 0.35mH	1 x 15nF	2 x 2.2nF
“	3	2 x 0.17mH	1 x 47nF	2 x 2.2nF

Part No. Example

BZV03/A0120/02

BZV style Polysnap module with PX0575 IEC power inlet, filter rated at 1 amp, L/C circuit version 2 (L1 = 2 x 10mH, Cx = 1 x 15nF, Cy = 2 x 2.2nF) 6.3mm tabs and single Contact red neon switch.

Filter Specification

Max. Working Voltage:	250V a.c. 50-400Hz
Earth Leakage Current:	<0.35mA (250V. 50Hz)
Temperature Range:	–25ºC to +85ºC
Max. Ambient Temp.: (@ Full Load)	40ºC (derate linearly to 0A @ 85ºC)
Test Voltage:	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral
Approvals:	
Attenuation Curves:	See PS01/A filter, page 440

C14 Inlet Single Fuse - Standard Filter

EMI Filter Options

- For Polysnap modules BZV01, BZV02, BZH01, BZH02, BZH11, BZH12, BZH19, BZH20, BVA01, BVA02, BVB01, BVB02
- PF0011 style single fuse IEC inlet
- Using PS21/A style filter
- Standard Attenuation Filter

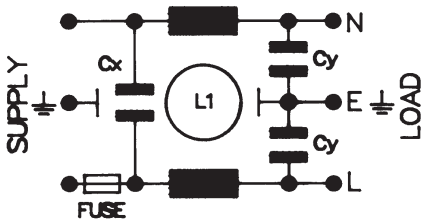

How to order -

B XXXX	/	A	XX	X	X	/	XX
Polysnap Part No.		**Filter Type**	**Rating**	**L/C Circuit**	**Additional Components**		**Polysnap Part No.**
From Polysnap Selection		A = Standard	01 = 1A 03 = 3A 06 = 6A	2 = Version 2 3 = Version 3	0 = None		From Polysnap Selection

Rating	Version	L1	Cx	Cy
1 AMP	1			
“	2			
“	3	2 x 12mH	1 x 47nF	2 x 2.2nF
3 AMP	1			
“	2	2 x 1.8mH	1 x 15nF	2 x 2.2nF
“	3	2 x 6.5mH	1 x 47nF	2 x 2.2nF
6 AMP	1			
“	2	2 x 0.7mH	1 x 15nF	2 x 2.2nF
“	3	2 x 2mH	1 x 47nF	2 x 2.2nF
10 AMP	1			
“	2			
“	3			

Part No. Example

BZV01/A0630/01

BZV style Polysnap module with PF0011 single fused (5 x 20mm) IEC power inlet, filter rated at 6 amp, L/C circuit version 3 (L1 = 2 x 2.0mH, Cx = 1 x 47nF, Cy = 2 x 2.2nF), 6.3mm tabs and single Contact switch.

Filter Specification

Max. Working Voltage:	250V a.c. 50-400Hz
Earth Leakage Current:	<0.35mA (250V. 50Hz)
Temperature Range:	–25ºC to +85ºC
Max. Ambient Temp.: (@ Full Load)	40ºC (derate linearly to 0A @ 85ºC)
Test Voltage:	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral
Approvals:	
Attenuation Curves:	See PS21/A filter, page 444

C14 Inlet Twin Fuse - Standard Filter

EMI Filter Option

- For Polysnap modules BZV15, BZV16, BZH13, BZH14, BZH15, BZH16, BZH21, BZH22, BVA15, BVA16, BVB15, BVB16
- PF0033 style twin fuse IEC inlet
- Using PS26/A filter
- Standard Attenuation Filter

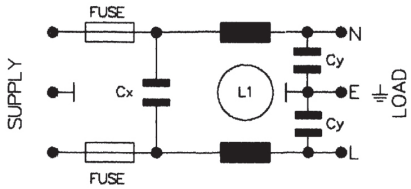

How to order -

B XXXX	/	A	XX	X	X	/	XX
Polysnap Part No.		**Filter Type**	**Rating**	**L/C Circuit**	**Additional Components**		**Polysnap Part No.**
From Polysnap Selection		A = Standard	02 = 2A 04 = 4A	2 = Version 2	0 = None		From Polysnap Selection

Rating	Version	L1	Cx	Cy
1 AMP	1			
"	2			
"	3	2 x 1.8mH	1 x 15nF	2 x 2.2nF
4 AMP	1			
"	2	2 x 0.7mH	1 x 15nF	2 x 2.2nF
"	3			

Part No. Example

BZH13/A0420/00

BZH style Polysnap module with PF0033 twin fused (5 x 20mm) IEC power inlet, filter rated at 4 amps, L/C circuit version 2 (L1 = 2 x 0.7mH, Cx = 1 x 15nF, Cy = 2 x 2.2nF) 6.3mm tabs and no additional components.

Filter Specification

Max. Working Voltage:	250V a.c. 50-400Hz
Earth Leakage Current:	<0.35mA (250V. 50Hz)
Temperature Range:	–25ºC to +85ºC
Max. Ambient Temp.: (@ Full Load)	40ºC (derate linearly to 0A @ 85ºC)
Test Voltage:	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral
Approvals:	
Attenuation Curves:	See PS26/A filter, page 446