S15C Modbus Master to IO-Link Device Converter for GPS

Datasheet

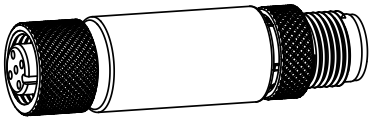

- Compact Modbus master to IO-Link device converter for use with GPS50M GPS Receiver
- Predefined ModBus registers are sent over IO-Link automatically
- Rugged over-molded design meets IEC IP65, IEC IP67, and IEC IP68
- Connects directly to a sensor or anywhere in-line for ease of use

Models

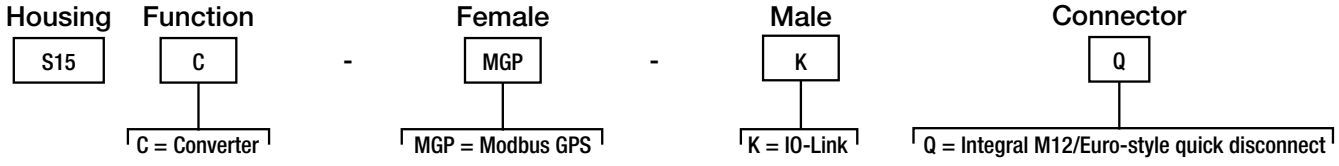

IO-Link®

IO-Link® is a point-to-point communication link between a master device and a sensor and/or light. It can be used to automatically parameterize sensors or lights and to transmit process data. For the latest IO-Link protocol and specifications, please visit www.io-link.com.

For the latest IODD files, please refer to the Banner Engineering Corp website at: www.bannerengineering.com.

Process Data In (Device to Master)

The S15C converter provides for the reading of three user-selectable sets of 15 Modbus Registers.

For more information, see Banner P/N 178135 *GPS Module*, Banner P/N 217180 *S15C Modbus Converter (GPS) - IO-Link Data Reference Guide*, and Banner P/N 217162 *S15C-MGP-KQ IODD Files*.

RegSet 0

Register Set 0 reads the following Modbus Registers:

RegSet 0		
Reg Adr 01	40001	Latitude Signed Upper
Reg Adr 02	40002	Latitude Signed Lower
Reg Adr 03	40003	Longitude Signed Upper
Reg Adr 04	40004	Longitude Signed Lower
Reg Adr 05	40005	Altitude Signed Upper
Reg Adr 06	40006	Altitude Signed Lower
Reg Adr 07	40007	UTC Time Signed Upper
Reg Adr 08	40008	UTC Time Signed Lower
Reg Adr 09	40009	Date Signed Upper
Reg Adr 10	40010	Date Signed Lower
Reg Adr 11	42006	Signal Quality
Reg Adr 12	42008	Number of Satellites Being Tracked
Reg Adr 13	42010	Time (seconds) since the last DGPS update
Reg Adr 14	42104	2D/3D Fix

Original Document
217588 Rev. C

17 September 2020

217588

ПРОМЭЛЕКТРОНИКА/ sales@prom-elec.com

RegSet 1

Register Set 1 reads the following Modbus Registers:

RegSet 1		
Reg Adr 01	42129	PDOP - Position Dilution of Precision Register Upper
Reg Adr 02	42130	PDOP - Position Dilution of Precision Register Lower
Reg Adr 03	42131	HDOP - Horizontal Dilution of Precision Registers Upper
Reg Adr 04	42132	HDOP - Horizontal Dilution of Precision Registers Lower
Reg Adr 05	42133	VDOP - Vertical Dilution of Precision Registers Upper
Reg Adr 06	42134	VDOP - Vertical Dilution of Precision Registers Lower
Reg Adr 07	42207	Speed Upper
Reg Adr 08	42208	Speed Lower
Reg Adr 09	42209	Direction Upper
Reg Adr 10	42210	Direction Lower

RegSet 2

Register Set 2 reads the following Modbus Registers specific to sensor information:

RegSet 2		
Reg Adr 01	44101	Serial Number Upper
Reg Adr 02	44102	Serial Number Lower
Reg Adr 03	44103	Model Number Upper
Reg Adr 04	44104	Model Number Lower
Reg Adr 05	44105	Production Date Upper
Reg Adr 06	44106	Production Date Lower
Reg Adr 07	44301	RF Firmware Part Number Upper
Reg Adr 08	44302	RF Firmware Part Number Lower
Reg Adr 09	44303	RF Firmware Version Upper
Reg Adr 10	44304	RF Firmware Version Lower
Reg Adr 11	44305	RF Firmware Version Engineering
Reg Adr 12	44306	RF EEPROM Part Number Upper
Reg Adr 13	44307	RF EEPROM Part Number Lower
Reg Adr 14	44308	RF EEPROM Version Upper
Reg Adr 15	44309	RF EEPROM Version Lower

Wiring Diagrams

Male	Female	Pin	Wire Color
		1	Brown
		2	White
		3	Blue
		4	Black

Female (Sensor)	Signal Description
Pin 1	18 V DC to 30 V DC
Pin 2	RS485/D1/B/+
Pin 3	Ground
Pin 4	RS485/D0/A/-

Male (IO-Link Master)	Signal Description
Pin 1	18 V DC to 30 V DC
Pin 2	Banner-specific
Pin 3	Ground
Pin 4	IO-Link

Status Indicators

Power LED Indicator (Green)

- Solid Green = Power On
- Off = Power Off

IO-Link Communication LED Indicator (Amber)

- Flashing Amber (900 ms On, 100 ms Off) = IO-Link communications are active
- Off = IO-Link communications are not present

Modbus Communication LED Indicator (Amber)

- Flashing Amber (4 Hz) = Modbus communications are active
- Solid Amber for 2 seconds to Off = Modbus communications are lost after connection
- Solid Amber for 2 seconds to Flashing Amber (4 Hz) = Modbus communications momentarily lost, but communication reestablished
- Solid Amber = Modbus communications are intermittent, or communications error occurs more frequently than once every 2 seconds
- Off = Modbus communications are not present

Specifications

Supply Voltage
18 V DC to 30 V DC at 50 mA maximum

Supply Protection Circuitry
Protected against reverse polarity and transient voltages

Leakage Current Immunity
400 µA

Indicators
Green power
Amber IO-Link communications
Amber ModBus communications

Connections
Integral male/female 4-pin M12/Euro-style quick disconnect

Construction
Coupling Material: Nickel-plated brass
Connector Body: PVC translucent black

Vibration and Mechanical Shock
Meets IEC 60068-2-6 requirements (Vibration: 10 Hz to 55 Hz, 0.5 mm amplitude, 5 minutes sweep, 30 minutes dwell)
Meets IEC 60068-2-27 requirements (Shock: 15G 11 ms duration, half sine wave)

Certifications

Environmental Rating
IEC IP65, IEC IP67, IEC IP68
NEMA/UL Type 1

Operating Conditions
Temperature: –40 °C to +70 °C (–40 °F to +158 °F)
90% at +70 °C maximum relative humidity (non-condensing)
Storage Temperature: –40 °C to +80 °C (–40 °F to +176 °F)

Required Overcurrent Protection

WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.
Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.
Supply wiring leads < 24 AWG shall not be spliced.
For additional product support, go to www.bannerengineering.com.

Supply Wiring (AWG)	Required Overcurrent Protection (Amps)
20	5.0
22	3.0
24	2.0
26	1.0
28	0.8
30	0.5

Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise.

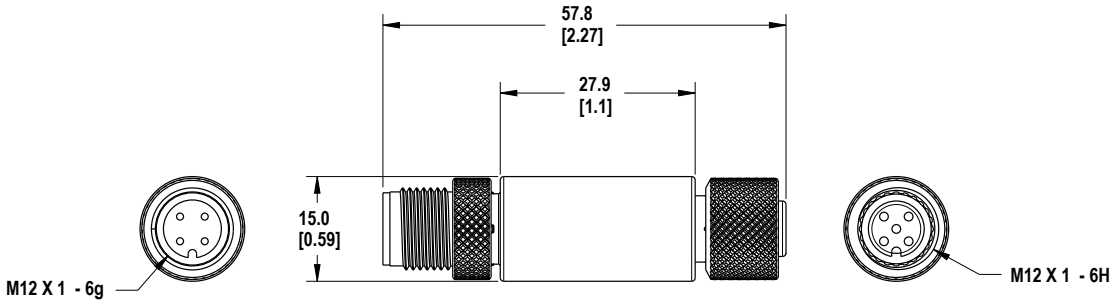

Accessories

Cordsets

4-Pin Threaded M12/Euro-Style Cordsets—Double Ended				
Model	**Length**	**Style**	**Dimensions**	**Pinout**
MQDEC-401SS	0.31 m (1 ft)	Male Straight/ Female Straight		Female  Male  1 = Brown 2 = White 3 = Blue 4 = Black
MQDEC-403SS	0.91 m (2.99 ft)			
MQDEC-406SS	1.83 m (6 ft)			
MQDEC-412SS	3.66 m (12 ft)			
MQDEC-420SS	6.10 m (20 ft)			
MQDEC-430SS	9.14 m (30.2 ft)			
MQDEC-450SS	15.2 m (49.9 ft)			

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

FCC Part 15 and CAN ICES-3 (B)/NMB-3(B)

This device complies with part 15 of the FCC Rules and CAN ICES-3 (B)/NMB-3(B). Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules and CAN ICES-3 (B)/NMB-3(B). These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the manufacturer.

© Banner Engineering Corp. All rights reserved