Features

General Purpose LED Work Lights



Shown are flat-mount model with touch-button and 30 mm base-mount model without the touch-button

- Designed for desk, work station, enclosure, and small area lighting
- Optimized for use with flex arm mount for adjustable, industrial task lighting[1]
- Excellent, even distribution for close-range lighting applications
- Standard or touch models available
- Touch models can be actuated with bare hands or gloves via the integrated capacitive switch on the face of the model
- Flat-mount or 30 mm base-mount models available
- Cabled, quick-disconnect, and terminal connection models available
- Rugged, sealed polycarbonate housing rated to IP65, IP67, and IP69K
- Low-profile design with several mounting options
- 12 V DC to 30 V DC operation
- High lumen output and low power consumption at less than 3 watts
- Touch models are dimmable via the touch interface, and all models are dimmable via PWM[2] input on the control wire



For PWM dimming, use with the LC15T-127AP1RBGQP dimmer module. For more information, refer to the LC15T In-Line Touch Switch datasheet, p/n 217460.

Models

Flat-mount models include a 48 mm (1.9 in) circular velcro mounting kit for easy mounting with no additional hardware.

Housing	Mounting	–	Generation	Function	Color	Connection
WL50	**F**	**–**	**3**	**T**	**W**	**Q**
	F = Flat model Blank = M30 threaded base		3 = 3rd generation	T = Touch Blank = Non-touch	W = Daylight white (5000K)	Q = Integral 4-pin M12 male quick-disconnect connector QP = 150 mm (6 in) PVC-jacketed cable with a 4-pin M12 male quick-disconnect connector Blank = 2 m (6.5 ft) integral PVC-jacketed cable W/30 = 9 m (30 ft) integral PVC-jacketed cable T = Screw terminal (base mount option only)

The following models are no longer available for order but are still covered by the information in this document.

- WL50-3TWT
- WL50F-3TW W/30

Device Configuration

Device Interface	Function
Single Touch	**ON/OFF** A single touch in the off-state turns the device on. A single touch in the on-state turns the device off.
Touch and Hold	**Lumen Control** Touch and hold to increase the Lumen Output from 10% to 100%. Continue to touch and hold to decrease the Lumen Output from 100% to 10%.
Double Touch	**100% ON** Double touch to return to 100% Lumen Output.

[1] Flex Arm Lights are available pre-assembled with integrated WL50 light for plug and play operation with available power supplies. Refer to the Flex Arm Light literature, p/n 222095, and PSW-24-1 Power Supply literature, p/n 214507.

[2] Pulse width modulation is a digital way to represent an analog value by varying the width of pulses at a constant frequency. The duty cycle (on-time versus off-time) is measured in percent from 1-100.

Original Instructions
26-Mar-26




© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com

219928
p/n: 219928 Rev. B

ПРОМЭЛЕКТРОНИКА/ sales@prom-elec.com

NOTE: The unit flashes at the maximum and the minimum state to notify the user that the limit has been reached.

Wiring

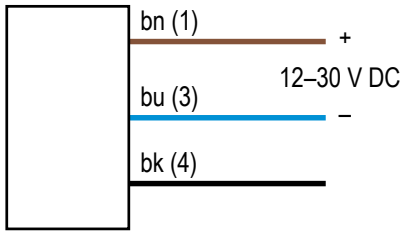Diagram	Wire	Connection	Pinout (Male)	Pinout (Female)
	1 - Brown	12 V DC to 30 V DC	 1 = Brown 2 = White 3 = Blue 4 = Black	 1 = Brown 2 = White 3 = Blue 4 = Black
	2 - White	Not used		
	3 - Blue	DC common		
	4 - Black	Pulse width modulation (PWM) input. For maximum intensity, leave the black wire floating or connected to common. Connecting to 12 V DC to 30 V DC causes LEDs to shut off.		

Specifications

Supply Voltage

12 V DC to 30 V DC

Use only with a suitable Class 2 power supply (UL) or SELV power supply (CE)

Supply Current

Model	Max. Current Draw (A) at 12 V DC	Typical Current Draw (A)		
		12 V DC	24 V DC	30 V DC
WL50-3	0.25	0.22	0.1	0.085

Power-Up Response Time

1 ms maximum for touch models

Dimming and Control

Non-touch models: PWM frequency 100-600 Hz

Touch models: On/off, 10% to 100% dimming, and PWM input

See "Device Configuration" on page 1 for detailed function

Pulse Width Modulation (PWM)

Frequency: Up to 600 Hz

Voltage: 12 V DC to 30 V DC

Current: 3 mA maximum

Duty Cycle Range:

Off - 0%
On - 100%

Supply Protection Circuitry

Protected against reverse polarity and transient voltages

Construction

Housing: Polycarbonate

Connector: Nickel-plated quick-disconnect connector or PVC-jacketed cable

Mounting

Base mount: M30 × 1.5 threaded base, maximum torque 4.5 N·m (40 in·lbf)

Flat: Included 48 mm (1.9 in) circular velcro mounting kit

Connections

Integral 4-pin M12 male quick-disconnect connector, 150 mm (6 in) PVC-jacketed cable with an M12 quick disconnect, or 2 m (6.5 ft) integral PVC-jacketed cable, depending on model

Terminal model: 3 color-coded screw terminals for up to 16 AWG wire, screw terminal maximum torque 0.11 N·m (1.0 lbf·in)

Flex arm: 300 mm (11.8 in) PVC cable with an M12 quick-disconnect connector

Environmental Rating

Rated IP65, IP67, and IP69K per ISO 20653

Cabled models meet IP69K per ISO 20653 if the cable is protected from high-pressure spray

The illuminated side of the terminal models meets IP65, IP67, and IP69K per ISO 20653 when installed in an enclosure

Terminal connection points meet IP00

LED Lifetime

Lumen maintenance - L_{70}

When operating within specifications, output will decrease less than 30% after 50,000 hours.

Operating Temperature

–40 °C to +50 °C (–40 °F to +122 °F)

Storage Temperature

–40 °C to +70 °C (–40 °F to +158 °F)

Vibration and Mechanical Shock

Vibration: 10 Hz to 55 Hz, 1.0 mm peak-to-peak amplitude per IEC 60068-2-6

Shock: 15G 11 ms duration, half sine wave per IEC 60068-2-27

Impact: IK06 (IEC EN 60068-2-75)

Third Wire Functionality

Touch models: PWM input overrides touch control

Standard models: PWM input full on-off, with 10%-100% dimming

Light Characteristics

Daylight White Efficacy: up to 125 lumens/Watt typical at 24 V DC at 25 °C (77 °F)

CRI: 82, typical

Model	Color	Color Temperature (CCT)	Lumens (Typical at 25 °C)	Watts at 24 V DC	Luminous Efficacy (lm/w)
WL50-3	Daylight White	5000K (±300K)	300	2.4	125

© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com

Certifications and Approvals

Banner Engineering BV
Park Lane, Culliganlaan 2F bus 3
1831 Diegem, BELGIUM

Required Overcurrent Protection

WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.

Supply wiring leads < 24 AWG shall not be spliced.


For additional product support, go to www.bannerengineering.com.

Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	2.0	30	0.5


Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.


Flat Mount

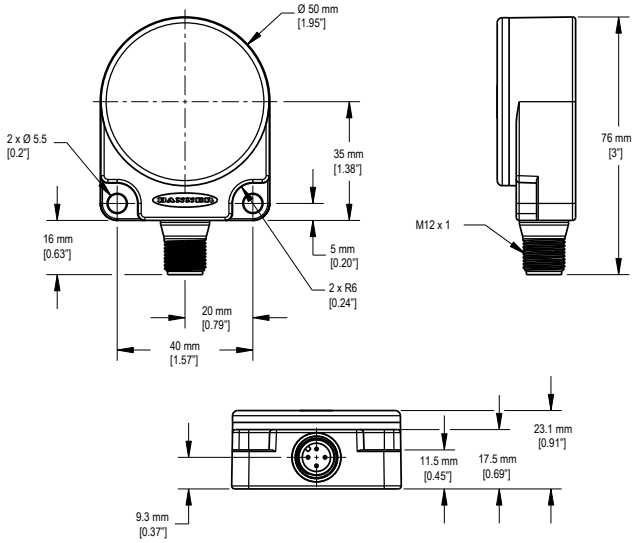

30 mm Base Mount

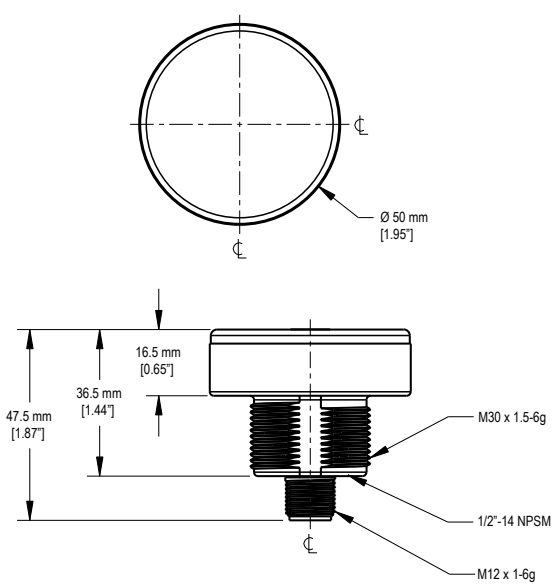


Terminal Base Mount

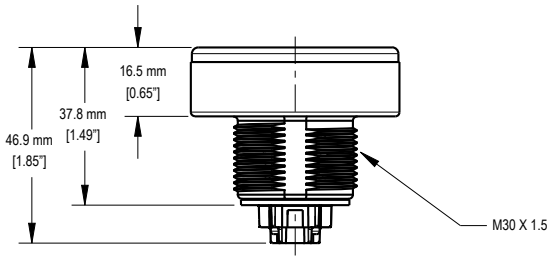


© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com

Optical Data


Polar Candela Distribution

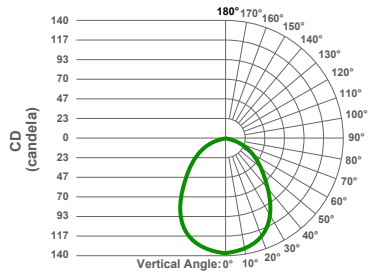

Isolux Pattern




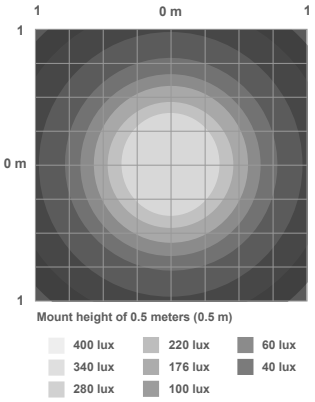


Illuminance at a Distance

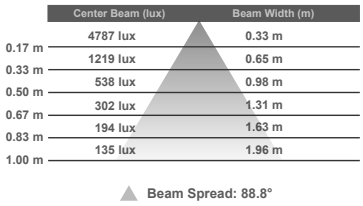

Accessories


Cordsets

4-Pin Single-Ended M12 Female Cordsets					
Model	**Length**	**Style**	**Dimensions**	**Pinout (Female)**	
MQDC-406	2 m (6.56 ft)	Straight			1 = Brown 2 = White 3 = Blue 4 = Black 5 = Not used
MQDC-415	5 m (16.4 ft)				
MQDC-430	9 m (29.5 ft)				
MQDC-450	15 m (49.2 ft)				
MQDC-406RA	2 m (6.56 ft)	Right-Angle			
MQDC-415RA	5 m (16.4 ft)				
MQDC-430RA	9 m (29.5 ft)				
MQDC-450RA	15 m (49.2 ft)				

Dimmers


LC15T-127AL2RGQP

- In-line capacitive touch switch with M12 connectors
- On/Off control and illuminated indication
- Rated for up to 30 V DC and 4 A maximum output current
- Rugged and waterproof IP67 housing




© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com

LC15T-127AP1RBGQP
- In-line capacitive touch switch with M12 connectors
- On/Off/Dimming control and illuminated indication
- Rated for up to 30 V DC and 4 A maximum output current
- Rugged and waterproof IP67 housing




LC65P1T
- Potentiometer with terminal and M12 connector options
- PWM control
- Rated for up to 30 V DC and 4 A maximum output current
- Unsealed IP20 housing



Brackets


SMB30A
- Right-angle bracket with curved slot for versatile orientation
- Clearance for M6 (¼ in) hardware
- Mounting hole for 30 mm sensor
- 12-gauge stainless steel
- CAD Files: DXF, PDF, IGS, STP

Hole center spacing: A to B=40
Hole size: A=ø 6.3, B= 27.1 × 6.3, C=ø 30.5




SMB30SC
- Swivel bracket with 30 mm mounting hole for sensor
- Black reinforced thermoplastic polyester
- Stainless steel mounting and swivel locking hardware included
- CAD Files: DXF, PDF, IGS, STP

Hole center spacing: A=ø 50.8
Hole size: A=ø 7.0, B=ø 30.0




SMB30MM
- 12-gauge stainless steel bracket with curved mounting slots for versatile orientation
- Clearance for M6 (¼ in) hardware
- Mounting hole for 30 mm sensor
- CAD Files: DXF, PDF, IGS, STP


Hole center spacing: A=51, A to B=25.4
Hole size: A=42.6 × 7, B=ø 6.4, C=ø 30.1




Flex Arm Light
- Fully assembled plug and play
- 457 mm (18 in) long
- See Flex Arm Light literature, p/n 222095



LMB30LP
- Low profile
- 30 mm mounting hole
- 300 series stainless steel
- CAD Files: DXF, PDF, IGS, STP



LMB30LPC
- For 28 mm tubular racking
- LMB30LP attached to clamp bracket
- Toolless mount to racking
- 30 mm mounting hole
- CAD Files: DXF, PDF, IGS, STP



© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

© Banner Engineering Corp. All rights reserved.