Features

General-purpose LED Work Lighting

To view or download the latest technical information about this product, including specifications, dimensions, accessories, and wiring, go to www.bannerengineering.com.



- Three lens options, depending on model, to vary spot size
- Illuminates a large area with an even pattern of light and no shadows
- 12 V DC to 30 V DC operation
- Cabled and quick-disconnect connector models available
- 50 mm diameter with flat profile and 30 mm mounting base
- Rugged sealed housing rated to IP67

WARNING:

- **Do not use this device for personnel protection**
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or de-energized (off) output condition.

Models

Model	LED Color	Lumens	Lux		Lens Angle	Connection[1]
			0.5 m	1 m		
WL50SWL5Q	White, 5000-8300 K	295	13780	3445	±5° (smaller, more focused spot; see graph)	Integral 5-pin M12 male quick-disconnect connector (use with a 4-wire mating cordset; only 2 wires used for connection)
WL50SRL5Q	Red, 620 nm to 630 nm	110	8000	2000		
WL50SGL5Q	Green, 520 nm to 535 nm	210	13000	3250		
WL50SWL11Q	White, 5000-8300 K	285	5460	1365	±11° (larger spot; see graph)	
WL50SRL11Q	Red, 620 nm to 630 nm	105	2500	625		
WL50SGL11Q	Green, 520 nm to 535 nm	200	3900	975		
WL50SWL20Q	White, 5000K to 8300 K	270	2000	500	±20° (largest spot; see graph)	
WL50SRL20Q	Red, 620 nm to 630 nm	100	1040	260		
WL50SGL20Q	Green, 520 nm to 535 nm	190	1700	425		

The following models are no longer available for order but are still covered by the information in this document.

- WL50SRL5
- WL50SGL5
- WL50SRL11
- WL50SGL11

[1] Integral quick-disconnect connector models are listed. For the integral 2 m (6.5 ft) PVC cable, omit suffix **Q** from model number (example, **WL50SWL5**). A model with a quick-disconnect connector requires a mating cordset (see "Accessories" on page 4).

Original Instructions
26-Mar-26

© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com

158250
p/n: 158250 Rev. F

ПРОМЭЛЕКТРОНИКА/ sales@prom-elec.com

Wiring

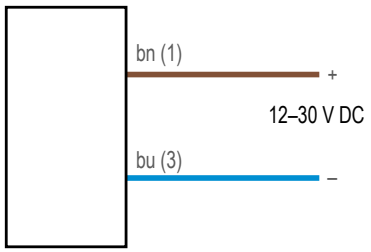



Pinout Key:

1 = Brown
2 = Not used
3 = Blue
4 = Not used

Specifications

Supply Voltage and Current

Operating voltage: 12 V DC to 30 V DC

Current draw: 400 mA maximum

Supply Protection Circuitry

Protected against reverse polarity and transient voltages

Light Source

Three high-intensity LEDs; see models table for color temperature or wave lengths

Useful Life

When operating within specifications, output will decrease less than 30% after 50,000 hours

Construction

Black anodized aluminum housing; polycarbonate window; nickel-plated quick-disconnect connector or PVC-jacketed cable; black zinc-plated steel mounting nut

Mounting:

30 × 1.5 mm thread base mount

Connections

Integral 5-pin M12 male quick-disconnect connector or2 m (6.5 ft) integral PVC-jacketed cable, depending on the model; 4-pin connecting cordset required for quick-disconnect connector models, only 2 wires are used

Environmental Rating

IP67, IP69K per ISO 20653

NOTE: Do not spray the cable with a high-pressure sprayer or cable damage will result.

Operating Conditions

–20 °C to +50 °C (–4 °F to +122 °F)

95% maximum relative humidity (non-condensing)

Vibration and Mechanical Shock

All models meet MIL-STD-202F, Method 201A (Vibration: 10 Hz to 60 Hz maximum, 0.06 inch (1.52 mm) double amplitude, 10G maximum acceleration) requirements. Also meets IEC 60947-5-2 (Shock: 30G 11 ms duration, half sine wave) requirements.

Storage Temperature

–40 °C to +70 °C (–40 °F to +158 °F)

Certifications

Banner Engineering BV
Park Lane, Culliganlaan 2F bus 3
1831 Diegem, BELGIUM

Required Overcurrent Protection

WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.

Supply wiring leads < 24 AWG shall not be spliced.

For additional product support, go to www.bannerengineering.com.

Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	2.0	30	0.5

© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com

Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

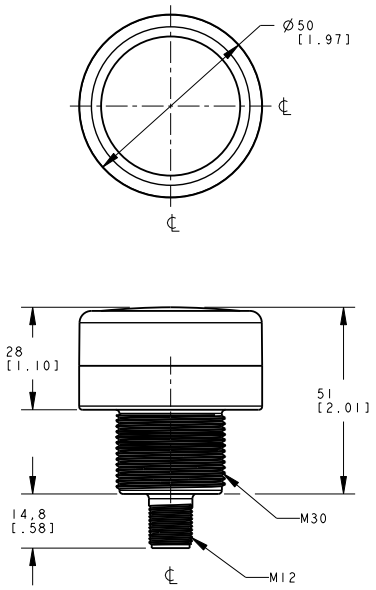

Beam Patterns

Percentage of Maximum Light Intensity Per Lens Type at 0.5 Meter (Typical)

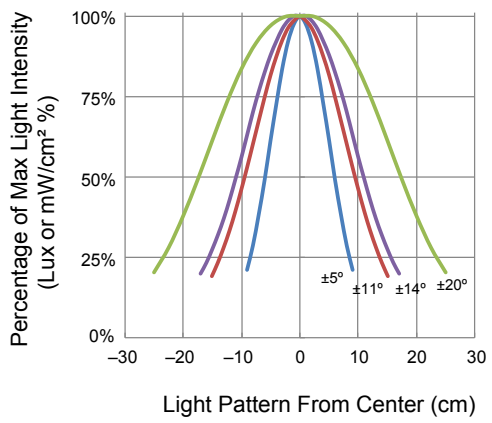

Percentage of Maximum Light Intensity Per Lens Type at 1 Meter (Typical)

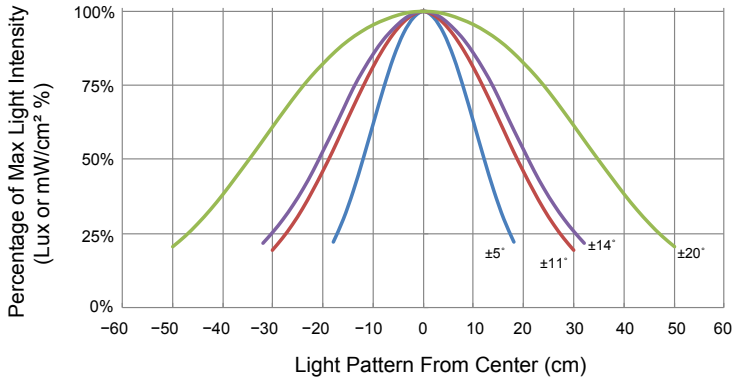

© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com

Accessories

Cordsets

4-Pin Single-Ended M12 Female Cordsets					
Model	**Length**	**Style**	**Dimensions**	**Pinout (Female)**	
MQDC-406	2 m (6.56 ft)	Straight			1 = Brown 2 = White 3 = Blue 4 = Black 5 = Not used
MQDC-415	5 m (16.4 ft)				
MQDC-430	9 m (29.5 ft)				
MQDC-450	15 m (49.2 ft)				
MQDC-406RA	2 m (6.56 ft)	Right-Angle			
MQDC-415RA	5 m (16.4 ft)				
MQDC-430RA	9 m (29.5 ft)				
MQDC-450RA	15 m (49.2 ft)				

Mounting Brackets

All measurements are in mm.

SMB30A

- Right-angle bracket with curved slot for versatile orientation
- Clearance for M6 (¼ in) hardware
- Mounting hole for 30 mm sensor
- 12-gauge stainless steel
- CAD Files: DXF, PDF, IGS, STP

Hole center spacing: A to B=40
Hole size: A=ø 6.3, B= 27.1 × 6.3, C=ø 30.5



SMB30SC

- Swivel bracket with 30 mm mounting hole for sensor
- Black reinforced thermoplastic polyester
- Stainless steel mounting and swivel locking hardware included
- CAD Files: DXF, PDF, IGS, STP

Hole center spacing: A=ø 50.8
Hole size: A=ø 7.0, B=ø 30.0



SMB30FA

- Swivel bracket with tilt and pan movement for precise adjustment
- Mounting hole for 30 mm sensor
- 12-gauge 304 stainless steel
- Easy sensor mounting to extrude rail T-slot
- Metric- and inch-size bolt available
- CAD Files: DXF, PDF, IGS, STP

Bolt thread: SMB30FA, A=3/8 - 16 × 2 in; SMB30FAM10, A=M10 - 1.5 × 50
Hole size: B=ø 30.1



© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com

SMBAMS30RA

- Right-angle SMBAMS series bracket
- 30 mm hole for mounting sensors
- Articulation slots for 90°+ rotation
- 12-gauge (2.6 mm) cold-rolled steel
- CAD Files: DXF, PDF, IGS, STP

Hole center spacing: A=26.0, A to B=13.0
Hole size: A=26.8 × 7.0, B=ø 6.5, C=ø 31.0



SMB30MM

- 12-gauge stainless steel bracket with curved mounting slots for versatile orientation
- Clearance for M6 (¼ in) hardware
- Mounting hole for 30 mm sensor
- CAD Files: DXF, PDF, IGS, STP

Hole center spacing: A=51, A to B=25.4
Hole size: A=42.6 × 7, B=ø 6.4, C=ø 30.1



SMBAMS30P

- Flat SMBAMS series bracket
- 30 mm hole for mounting sensors
- Articulation slots for 90°+ rotation
- 12-gauge 300 series stainless steel
- CAD Files: DXF, PDF, IGS, STP

Hole center spacing: A=26.0, A to B=13.0
Hole size: A=26.8 × 7.0, B=ø 6.5, C=ø 31.0



Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com