


MODEL NO.	"L"	P/N
BAT66ST5TA-VL	2000	96010
BAT63ST5TA-VL	1000	96009

NOTES:

1. OPERATING TEMPERATURE AT TIP -140°C ~ +249°C.
2. MINIMUM BEND RADIUS R25.

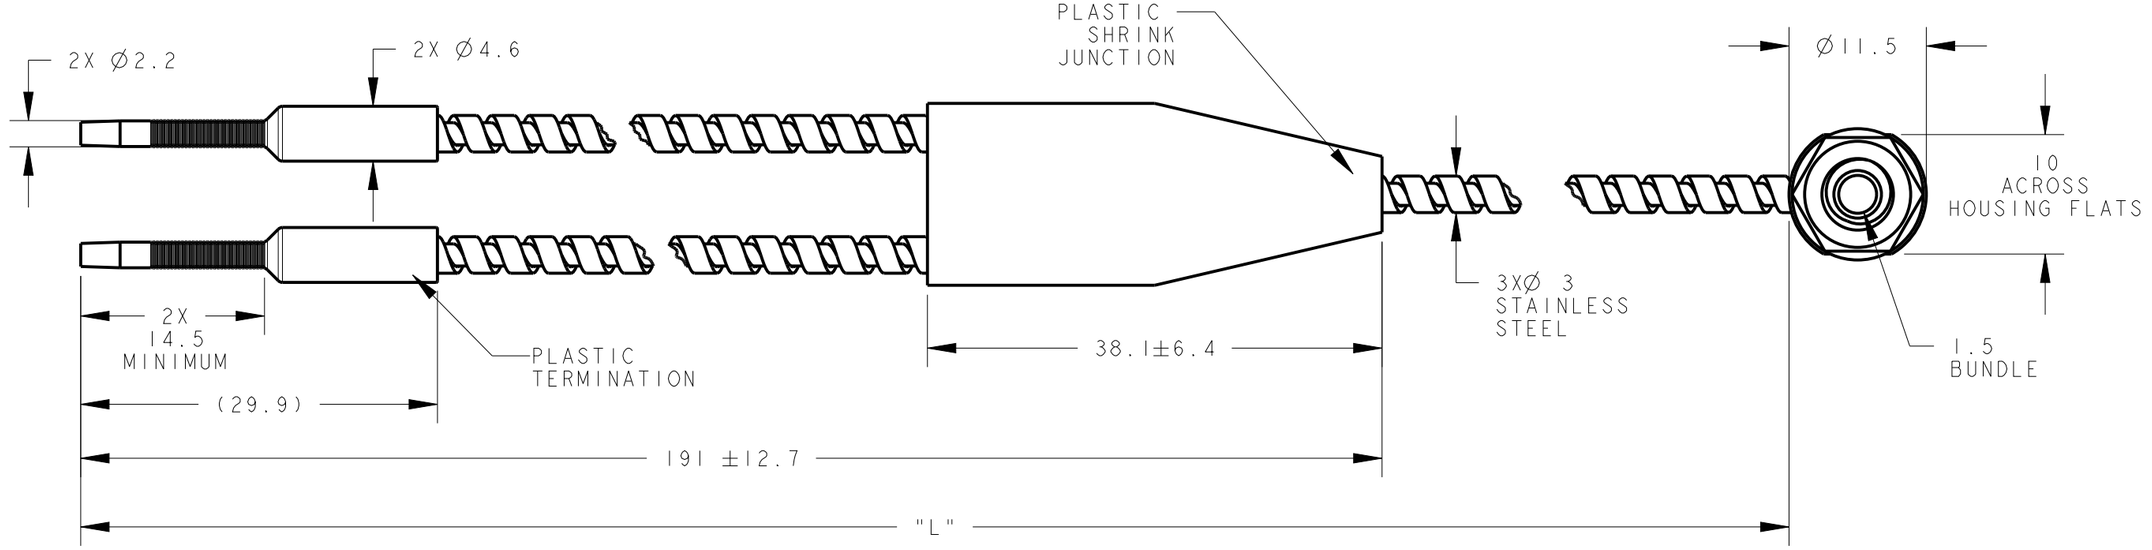



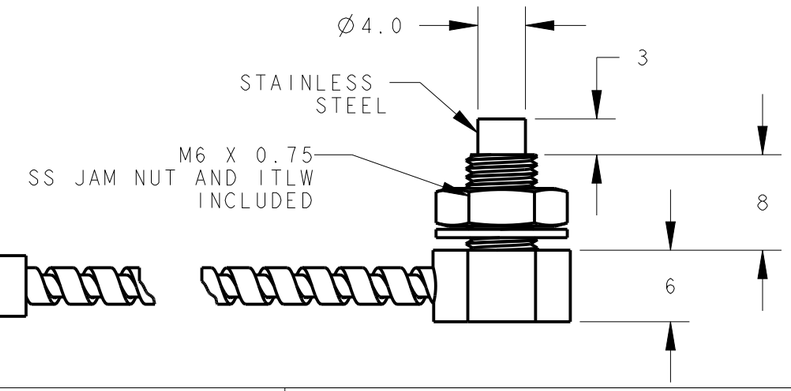

NOTES:
1. ALL DIMENSIONS ARE MILLIMETERS [INCHES] UNLESS OTHERWISE NOTED.
2. REFER TO "www.bannerengineering.com" FOR ADDITIONAL DATA AND SPECIFICATIONS.

This drawing is the property of BANNER ENGINEERING CORP. Any use or reproduction, in any form, without prior written permission of Banner is prohibited.
© 2015 Banner Engineering Corp.

THIRD ANGLE PROJECTION

BANNER ENGINEERING CORP.
www.bannerengineering.com

TITLE

BAT6 SERIES GLASS FIBER TIGHT ANGLE M6 THREAD VL

SIZE	DRAWING NO.	REV.
B	189692	B
SCALE 2:1	SHEET 1 OF 1	

CREO

ПРОМЭЛЕКТРОНИКА/ sales@prom-elec.com