

SIEMENS



Motion Control Drives

# SINAMICS Inverters for Single-Axis Drives Built-In Units

Catalog  
D 31.1

Edition  
2018  
PDF Update  
06/2018

[siemens.com/drives](https://www.siemens.com/drives)

## Related catalogs

|                                                                                                                                                                                                |         |                                                                                     |                                                                                                                                                                                                                                                                                        |             |                                                                                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------|
| <b>Motion Control Drives</b><br>SINAMICS Inverters for Single-Axis Drives<br>Distributed Inverters<br><br>E86060-K5531-A121-A1-7600                                                            | D 31.2  |    | <b>Industrial Controls</b><br>SIRIUS<br><br>PDF (E86060-K1010-A101-A8-7600)                                                                                                                                                                                                            | IC 10       |    |
| <b>SINAMICS Drives</b><br>SINAMICS G120P and<br>SINAMICS G120P Cabinet<br>pump, fan, compressor converters<br><br>PDF (E86060-K5535-A101-A5-7600)                                              | D 35    |    | <b>Industrial Controls</b><br>SIRIUS Classic<br><br>PDF (E86060-K1010-A191-A5-7600)                                                                                                                                                                                                    | IC 10 AO    |    |
| <b>SINAMICS S120</b><br>Chassis Format Converter Units<br>Cabinet Modules<br><b>SINAMICS S150</b><br>Converter Cabinet Units<br>E86060-K5521-A131-A6-7600                                      | D 21.3  |    | <b>Low-Voltage Power Distribution and Electrical Installation Technology</b><br>SENTRON • SIVACON • ALPHA<br>Protection, Switching, Measuring and Monitoring<br>Devices, Switchboards and Distribution Systems<br>PDF (E86060-K8280-A101-A7-7600)<br>Print (E86060-K8280-A101-A6-7600) | LV 10       |    |
| <b>Motion Control Drives</b><br>SINAMICS S120 and SIMOTICS<br><br>E86060-K5521-A141-A1-7600                                                                                                    | D 21.4  |    | <b>SIMATIC</b><br>Products for<br>Totally Integrated Automation<br><br>E86060-K4670-A101-B6-7600                                                                                                                                                                                       | ST 70       |    |
| <b>SIMOTICS S-1FG1</b><br><b>Servo geared motors</b><br>Helical, Parallel shaft, Bevel and<br>Helical worm geared motors<br><br>E86060-K5541-A101-A3-7600                                      | D 41    |   | <b>SIMATIC HMI / PC-based Automation</b><br>Human Machine Interface Systems<br>PC-based Automation<br><br>E86060-K4680-A101-C6-7600                                                                                                                                                    | ST 80/ST PC |   |
| <b>SIMOTICS GP, SD, XP, DP</b><br><b>Low-Voltage Motors</b><br>Type series 1FP1, 1LE1, 1LE5, 1MB1 and 1PC1<br>Frame sizes 63 to 355<br>Power range 0.09 to 500 kW<br>E86060-K5581-A111-B2-7600 | D 81.1  |  | <b>Industrial Communication</b><br>SIMATIC NET<br><br>E86060-K6710-A101-B8-7600                                                                                                                                                                                                        | IK PI       |  |
| <b>FLENDER Couplings</b><br>Standard Couplings<br><br>E86060-K5710-A111-A5-7600                                                                                                                | MD 10.1 |  | <b>SITRAIN</b><br>Training for Industry<br><br><a href="http://www.siemens.com/sitrain">www.siemens.com/sitrain</a>                                                                                                                                                                    |             |  |
| <b>SIMOGEAR</b><br><b>Geared Motors</b><br>Helical, parallel shaft, bevel, helical worm<br>and worm geared motors<br><br>E86060-K5250-A111-A5-7600                                             | MD 50.1 |  | <b>Products for Automation and Drives</b><br>Interactive Catalog<br>Download<br><br><a href="http://www.siemens.com/ca01download">www.siemens.com/ca01download</a>                                                                                                                     | CA 01       |  |
| <b>Motion Control System</b><br>SIMOTION<br>Equipment for Production Machines<br><br>E86060-K4921-A101-A4-7600                                                                                 | PM 21   |  | <b>Industry Mall</b><br>Information and Ordering Platform<br>on the Internet:<br><br><a href="http://www.siemens.com/industrymall">www.siemens.com/industrymall</a>                                                                                                                    |             |  |

**SIEMENS**

# SINAMICS Inverters for Single-Axis Drives

Built-In Units

Catalog D 31.1 · 2018 – PDF Update 06/2018

Dear Customer,

We are happy to present you with the new PDF version of Catalog D 31.1 · 2018 – PDF Update 06/2018. Catalog D 31.1 · 2018 is still available in printed format and provides a comprehensive overview of the SINAMICS inverters for single-axis drives – **built-in units** – consisting of the SINAMICS V20, SINAMICS G120C, SINAMICS G120 and SINAMICS S110 product families.

The catalog has been revised and expanded. We would like to draw your attention to the following product innovations:

- SINAMICS V20, frame size FSAC including system components
- SINAMICS G120 PM240-2 Power Modules, frame size FSG including system components such as new dv/dt filters plus VPL
- SINAMICS G120 Smart Access for wireless commissioning, operation and diagnostics via mobile device
- SINAMICS G firmware V4.7 SP10

The products listed in this Catalog are also included in the Industry Mall.  
Please contact your local Siemens office for additional information.

Up-to-date information about SINAMICS is available online at  
[www.siemens.com/sinamics](http://www.siemens.com/sinamics)

You can access our Interactive Catalog and our Industry Mall on the Internet at:  
[www.siemens.com/industrymall](http://www.siemens.com/industrymall)

Your personal contact will be glad to receive your suggestions and recommendations for improvement. You can find your representative in our personal contacts database at  
[www.siemens.com/automation-contact](http://www.siemens.com/automation-contact)

We hope that you will often enjoy using Catalog D 31.1 as a selection and ordering reference document and wish you every success with our products and solutions.

With kind regards,



Bernd Heuchemer  
Vice President  
Marketing  
Siemens AG, Digital Factory Division, Motion Control



# SINAMICS Inverters for Single-Axis Drives

## Built-In Units

### Motion Control Drives



#### Catalog D 31.1 · 2018 – PDF Update 06/2018

Supersedes:

Catalog D 31.1 · 2018 – PDF edition

Refer to the Industry Mall for current updates of this catalog:

[www.siemens.com/industrymall](http://www.siemens.com/industrymall)

The products contained in this catalog can also be found in the Interactive Catalog CA 01.

Article No.: E86060-D4001-A510-D8-7500

Please contact your local Siemens branch.

### NEW

Click on an Article No. in the catalog PDF to call it up in the Industry Mall and to obtain all the information.

Article No.

6SL3070-0AA00-0AG0  
6SL3072-0AA00-0AG0



Or directly on the Internet, e.g.

[www.siemens.com/product?6SL3070-0AA00-0AG0](http://www.siemens.com/product?6SL3070-0AA00-0AG0)



The products and systems described in this catalog are distributed under application of a certified quality management system in accordance with DIN EN ISO 9001. The certificate is recognized by all IQNet countries.

|                                   |    |
|-----------------------------------|----|
| System overview                   | 1  |
| Firmware functionality            | 2  |
| Safety Integrated                 | 3  |
| Energy efficiency                 | 4  |
| Communication                     | 5  |
| Technology functions              | 6  |
| SINAMICS V20 basic converters     | 7  |
| SINAMICS G120C compact inverters  | 8  |
| SINAMICS G120 standard inverters  | 9  |
| SINAMICS S110 servo drives        | 10 |
| SIMOTICS motors and geared motors | 11 |
| Engineering tools                 | 12 |
| Drive applications                | 13 |
| Services and documentation        | 14 |
| Appendix                          | 15 |

# Digital Enterprise

The building blocks that ensure everything works together perfectly in the digital enterprise

Digitalization is already changing all areas of life and existing business models. It is placing greater pressure on industry while at the same time creating new business opportunities. Today, thanks to scalable solutions from Siemens, companies can already become a digital enterprise and ensure their competitiveness.



## Industry faces tremendous challenges



### Reduce time-to-market

Today manufacturers have to bring products to market at an ever-increasing pace despite the growing complexity of these products. In the past, a major manufacturer would push aside a small one, but now it is a fast manufacturer that overtakes a slow one.



### Boost flexibility

Consumers want customized products, but at a price they would pay for a mass-produced item. That only works if production is more flexible than ever before.



### Improve quality

To ensure a high level of quality while meeting legal requirements, companies have to establish closed quality loops and enable the traceability of products.



### Boost efficiency

Today the product itself needs to be sustainable and environmentally friendly, while energy efficiency in production has become a competitive advantage.



### Increase security

Increasing networking escalates the threat to production facilities of cyberattacks. Today more than ever, companies need suitable security measures.



### The digital enterprise has already become a reality

To fully benefit from all the advantages of digitalization, companies first have to achieve complete consistency of their data. Fully digitally integrated business processes, including those of suppliers, can help to create a digital representation of the entire value chain. This requires

- the integration of industrial software and automation,
- expansion of the communication networks,
- security in automation,
- and the use of business-specific industrial services.

### MindSphere

#### The cloud-based open IoT operating system from Siemens

With MindSphere, Siemens offers a cost-effective and scalable cloud platform as a service (PaaS) for the development of applications. The platform, designed as an open operating system for the Internet of Things, makes it possible to improve the efficiency of plants by collecting and analyzing large volumes of production data.

### Totally Integrated Automation (TIA)

#### Where digitalization becomes reality

Totally Integrated Automation (TIA) ensures the seamless transition from the virtual to the real world. It already encompasses all the necessary conditions for transforming the benefits of digitalization into true added value. The data that will form the digital twin for actual production is generated from a common base.

#### Digital Plant

Learn more about the digital enterprise for the process industry  
[www.siemens.com/digitalplant](http://www.siemens.com/digitalplant)

#### Digital Enterprise Suite

Learn more about the digital enterprise for the discrete industry  
[www.siemens.com/digital-enterprise-suite](http://www.siemens.com/digital-enterprise-suite)

# Integrated Drive Systems


Faster on the market and in the black with Integrated Drive Systems

Integrated Drive Systems are Siemens' trendsetting answer to the high degree of complexity that characterizes drive and automation technology today. The world's only true one-stop solution for entire drive systems is characterized in particular by its threefold integration: Horizontal, vertical, and lifecycle integration ensure that every drive system component fits seamlessly into the whole system, into any automation environment, and even into the entire lifecycle of a plant.

The outcome is an optimal workflow – from engineering all the way to service that entails more productivity, increased efficiency, and better availability. That's how Integrated Drive Systems reduce time to market and time to profit.

## Horizontal integration

**Integrated drive portfolio:** The core elements of a fully integrated drive portfolio are frequency converters, motors, couplings, and gear units. At Siemens, they're all available from a single source. Perfectly integrated, perfectly interacting. For all power and performance classes. As standard solutions or fully customized. No other player in the market can offer a comparable portfolio. Moreover, all Siemens drive components are perfectly matched, so they are optimally interacting.

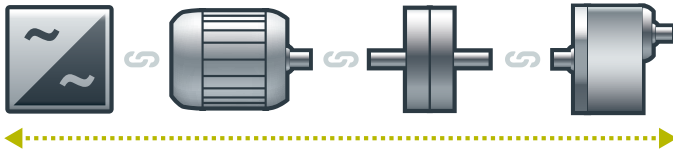


You can boost the availability of your application or plant to up to

**99%\***

\*e.g., conveyor application

## Vertical integration

Thanks to **vertical integration**, the complete drive train is seamlessly integrated in the entire automation environment – an important prerequisite for production with maximum value added. Integrated Drive Systems are part of Totally Integrated Automation (TIA), which means that they are perfectly embedded into the system architecture of the entire industrial production process. This enables optimal processes through maximum communication and control.

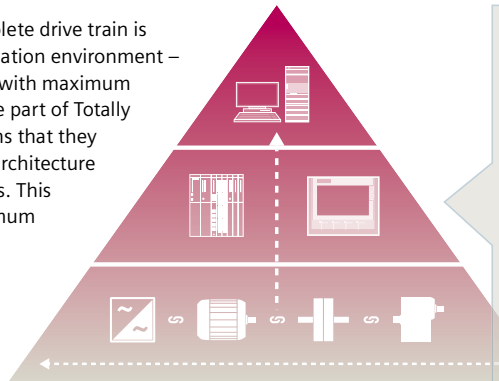


With TIA Portal you can cut your engineering time by up to

**30%**

## Lifecycle integration

**Lifecycle integration** adds the factor of time: Software and service are available for the entire lifecycle of an Integrated Drive System. That way, important optimization potential for maximum productivity, increased efficiency, and highest availability can be leveraged throughout the system's lifecycle – from planning, design, and engineering to operation, maintenance, and all the way even to modernization.

With Integrated Drive Systems, assets become important success factors. They ensure shorter time to market, maximum productivity and efficiency in operation, and shorter time to profit.

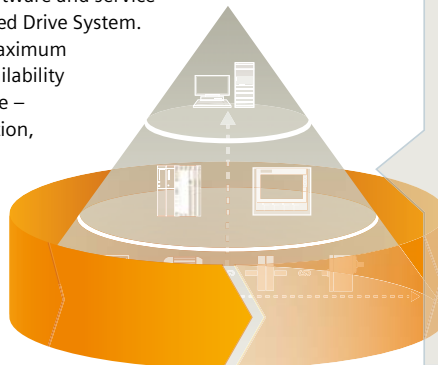

With Integrated Drive Systems you can reduce your maintenance costs by up to

**15%**

System overview



|      |                                                              |
|------|--------------------------------------------------------------|
| 1/2  | The SINAMICS drives family                                   |
| 1/6  | Drive selection                                              |
| 1/7  | SIMOTICS motors                                              |
| 1/7  | SIMOGEAR geared motors                                       |
| 1/8  | SIMOTICS motors for motion control applications              |
| 1/10 | SIMOTICS low-voltage motors for line and converter operation |
| 1/11 | Motion Control Encoder measuring systems                     |
| 1/12 | MOTION-CONNECT connection systems                            |

Further information about SINAMICS, SIMOTICS and SIMOGEAR can be found on the Internet at  
[www.siemens.com/sinamics](http://www.siemens.com/sinamics)  
[www.siemens.com/simotics](http://www.siemens.com/simotics)  
[www.siemens.com/simogear](http://www.siemens.com/simogear)


# System overview

1

## The SINAMICS drives family

### Overview

#### Integration in automation

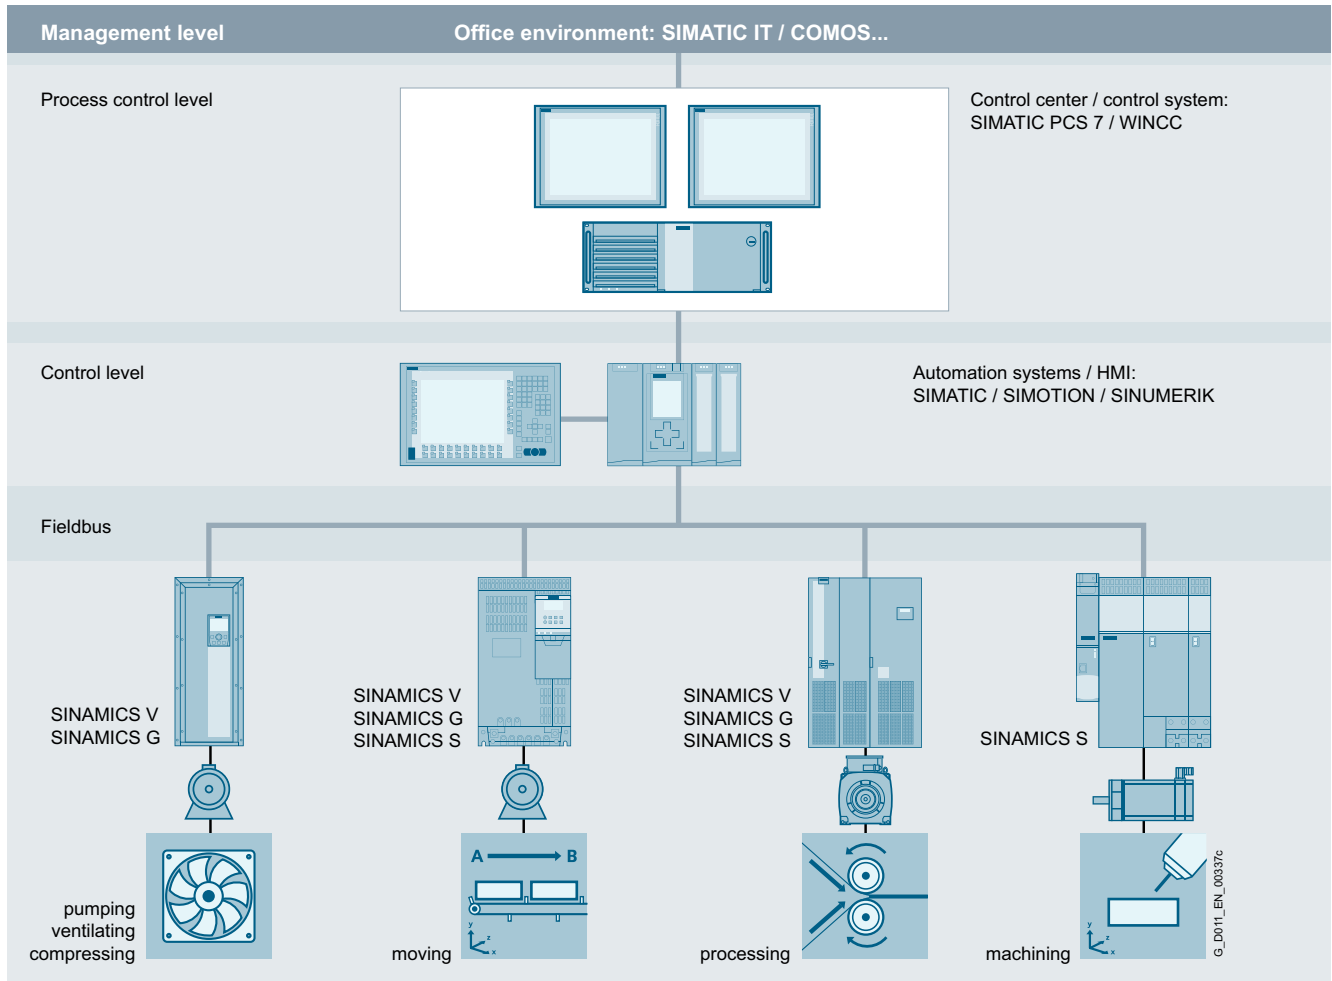

#### Totally Integrated Automation and communication

SINAMICS is an integral component of the Siemens "Totally Integrated Automation" concept. Integrated SINAMICS systems covering configuration, data storage, and communication at automation level ensure low-maintenance solutions with the SIMATIC, SIMOTION and SINUMERIK control systems.

Depending on the application, the appropriate variable frequency drives can be selected and incorporated in the automation concept. With this in mind, the drives are clearly subdivided into their different applications. A wide range of communication options (depending on the drive type) are available for establishing a communication link to the automation system:

- PROFINET
- PROFIBUS
- EtherNet/IP
- Modbus TCP
- Modbus RTU
- AS-Interface
- BACnet MS/TP

#### Applications

SINAMICS is the comprehensive family of drives from Siemens designed for machine and plant engineering applications. SINAMICS offers solutions for all drive tasks:

- Simple pump and fan applications in the process industry
- Demanding single drives in centrifuges, presses, extruders, elevators, as well as conveyor and transport systems
- Drive line-ups in textile, plastic film, and paper machines as well as in rolling mill plants
- Highly dynamic servo drives for machine tools, as well as packaging and printing machines

**Overview** (continued)*SINAMICS as part of the Siemens modular automation system****Innovative, energy-efficient and reliable drive systems and applications as well as services for the entire drive train***

The solutions for drive technology place great emphasis on the highest productivity, energy efficiency and reliability for all torque ranges, performance and voltage classes.

Siemens offers not only the right innovative variable frequency drive for every drive application, but also a wide range of energy-efficient low-voltage motors, geared motors, explosion-protected motors and high-voltage motors for combination with SINAMICS.

Furthermore, Siemens supports its customers with global pre-sales and after-sales services, with over 295 service points in 130 countries – and with special services e.g. application consulting or motion control solutions.

***Energy efficiency******Energy management process***

Efficient energy management consultancy identifies the energy flows, determines the potential for making savings and implements them with focused activities.

Almost two thirds of the industrial power requirement is from electric motors. This makes it all the more important to use drive technology permitting energy consumption to be reduced effectively even in the configuration phase, and consequently to optimize plant availability and process stability. With SINAMICS, Siemens offers powerful energy efficient solutions which, depending on the application, enable a significant reduction in electricity costs.

# System overview

1

## The SINAMICS drives family

### Overview (continued)

#### Up to 70 % potential for savings using variable-speed operation

SINAMICS enables great potential for savings to be realized by controlling the motor speed. In particular, huge potential savings can be recovered from pumps, fans and compressors which are operated with mechanical throttle and valves. Here, changing to variable-speed drives brings enormous economic advantages. In contrast to mechanical control systems, the power consumption at partial load operation is always immediately adjusted to the demand at that time. So energy is no longer wasted, permitting savings of up to 60 % – in exceptional cases even up to 70 %. Variable-speed drives also offer clear advantages over mechanical control systems when it comes to maintenance and repair. Current spikes when starting up the motor and strong torque surges become things of the past – and the same goes for pressure waves in pipelines, cavitation or vibrations which cause sustainable damage to the plant. Smooth starting and ramp-down relieve the load on the mechanical system, ensuring a significantly longer service life of the entire drive train.

#### Regenerative feedback of braking energy

In conventional drive systems, the energy produced during braking is converted to heat using braking resistors. Energy produced during braking is efficiently recovered to the supply system by versions of SINAMICS G and SINAMICS S drives with regenerative feedback capability and these devices do not therefore need a braking resistor. This permits up to 60 % of the energy requirement to be saved, e.g. in lifting applications. Energy which can be reused at other locations on a machine. Furthermore, this reduced power loss simplifies the cooling of the system, enabling a more compact design.

#### Energy transparency in all configuration phases


Early on, in the configuration phase, the SIZER for Siemens Drives engineering tool provides information on the specific energy requirement. The energy consumption across the entire drive train is visualized and compared with different plant concepts.

#### SINAMICS in combination with energy-saving motors

Engineering integration stretches beyond the SINAMICS drive family to higher-level automation systems, and to a broad spectrum of energy-efficient motors with a wide range of performance classes, which, compared to previous motors, are able to demonstrate up to 10 % greater efficiency.

### Variants

Depending on the application, the SINAMICS range offers the ideal variant for any drive task.

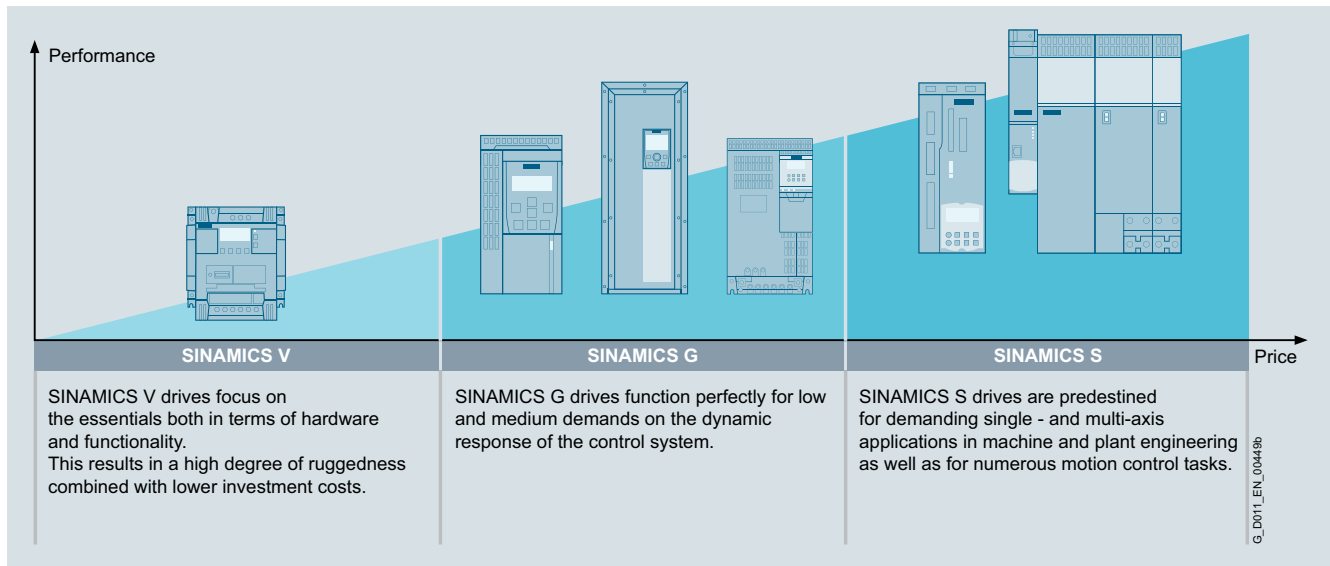

**Overview** (continued)**Platform concept**

All SINAMICS variants are based on a platform concept. Joint hardware and software components, as well as standardized tools for dimensioning, configuration, and commissioning tasks ensure high-level integration across all components. SINAMICS handles a wide variety of drive tasks with no system gaps. The different SINAMICS variants can be easily combined with each other.

**Quality management according to EN ISO 9001**

SINAMICS conforms to the most exacting quality requirements. Comprehensive quality assurance measures in all development and production processes ensure a consistently high level of quality.

Of course, our quality management system is certified by an independent authority in accordance with EN ISO 9001.

**IDS – Integration at its very best**

The Siemens Integrated Drive Systems (IDS) solution offers perfectly matched drive components with which you can meet your requirements. The drive components reveal their true strengths as an Integrated Drive System over the full range from engineering and commissioning through to operation: Integrated system configuration is performed using the Drive Technology Configurator: Just select a motor and an inverter and design them with the SIZER for Siemens Drives engineering tool. The STARTER and SINAMICS Startdrive commissioning tools integrate the motor data and at the same time simplify efficient commissioning. Integrated Drive Systems are incorporated in the TIA Portal – this simplifies engineering, commissioning and diagnostics.

| Low voltage                                                                                                                                                         |                                                                                                                                            |                                                                                                                                                                                                |                                                                                     |                                                                                    |                                                                                                                           |                                                                                     |                                                                                                                                                                                                       |                                                                                                                                                                                               |                                                                                      | DC voltage                                                                                               | Medium voltage                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Basic performance                                                                                                                                                   |                                                                                                                                            | General performance                                                                                                                                                                            |                                                                                     |                                                                                    |                                                                                                                           |                                                                                     | High performance                                                                                                                                                                                      |                                                                                                                                                                                               |                                                                                      | DC applications                                                                                          | Applications with high outputs                                                                                                                                       |
|                                                                                  |                                                          |                                                                                                              |  |  |                                         |  |                                                                                                                    |                                                                                                           |  |                     |                                                                                  |
| SINAMICS V20                                                                                                                                                        | SINAMICS V90                                                                                                                               | SINAMICS G120C<br>G120<br>G120P<br>G120P Cabinet                                                                                                                                               | SINAMICS G110D<br>G120D<br>G110M<br>SIMATIC ET 200pro FC-2                          | SINAMICS G130<br>G150                                                              | SINAMICS G180                                                                                                             | SINAMICS S110                                                                       | SINAMICS S210                                                                                                                                                                                         | SINAMICS S120<br>S120M                                                                                                                                                                        | SINAMICS S150                                                                        | SINAMICS DCM                                                                                             | SINAMICS GH150<br>GH180<br>GM150<br>SM150<br>GL150<br>SL150<br>SM120CM                                                                                               |
| 0.12 kW to 30 kW                                                                                                                                                    | 0.05 kW to 7 kW                                                                                                                            | 0.37 kW to 630 kW                                                                                                                                                                              | 0.37 kW to 7.5 kW                                                                   | 75 kW to 2700 kW                                                                   | 2.2 kW to 6600 kW                                                                                                         | 0.55 kW to 132 kW                                                                   | 0.05 kW to 0.75 kW                                                                                                                                                                                    | 0.55 kW to 5700 kW                                                                                                                                                                            | 75 kW to 1200 kW                                                                     | 6 kW to 30 MW                                                                                            | 0.15 MW to 85 MW                                                                                                                                                     |
| Pumps, fans, compressors, conveyor belts, mixers, mills, spinning machines, textile machines, refrigerated display counters, fitness equipment, ventilation systems | Handling machines, packaging machines, automatic assembly machines, metal forming machines, printing machines, winding and unwinding units | Pumps, fans, compressors, conveyor belts, mixers, mills, extruders, building management systems, process industry, HVAC, single-axis positioning applications in machine and plant engineering | Conveyor technology, single-axis positioning applications (G120D)                   | Pumps, fans, compressors, conveyor belts, mixers, mills, extruders                 | Sector-specific for pumps, fans, compressors, conveyor belts, extruders, mixers, mills, kneaders, centrifuges, separators | Single-axis positioning applications in machine and plant engineering               | Packaging machines, handling equipment, feed and withdrawal devices, stacking units, automatic assembly machines, laboratory automation, wood, glass and ceramics industry, digital printing machines | Production machines (packaging, textile and printing machines, paper machines, plastic processing machines), machine tools, plants, process lines and rolling mills, marine drives, test bays | Test bays, cross cutters, centrifuges                                                | Rolling mill drives, wire-drawing machines, extruders and kneaders, cableways and lifts, test bay drives | Pumps, fans, compressors, mixers, extruders, mills, crushers, rolling mills, conveyor technology, excavators, test bays, marine drives, blast furnace fans, retrofit |
| Catalog D 31.1                                                                                                                                                      | Catalog D 33                                                                                                                               | Catalogs D 31.1, D 35                                                                                                                                                                          | Catalog D 31.2                                                                      | Catalog D 11                                                                       | Catalog D 18.1                                                                                                            | Catalog D 31.1                                                                      | Catalog D 32                                                                                                                                                                                          | Catalogs D 21.3, D 21.4 NC 62                                                                                                                                                                 | Catalog D 21.3                                                                       | Catalog D 23.1                                                                                           | Catalogs D 15.1, D 12                                                                                                                                                |
| Engineering tools (e.g. Drive Technology Configurator, SIZER for Siemens Drives, STARTER and SINAMICS Startdrive)                                                   |                                                                                                                                            |                                                                                                                                                                                                |                                                                                     |                                                                                    |                                                                                                                           |                                                                                     |                                                                                                                                                                                                       |                                                                                                                                                                                               |                                                                                      |                                                                                                          |                                                                                                                                                                      |

G\_D011\_EN\_00450K

# System overview

## Drive selection

1

### Overview

#### SINAMICS selection guide – typical applications

| Use                                          | Requirements for torque accuracy/speed accuracy/position accuracy/coordination of axes/functionality |                                                                                                                                                                                       |                                                                                                               |                                                                                                          |                                                                                                          |                                                                                                                                              |
|----------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
|                                              | Continuous motion                                                                                    |                                                                                                                                                                                       |                                                                                                               | Non-continuous motion                                                                                    |                                                                                                          |                                                                                                                                              |
|                                              | Basic                                                                                                | Medium                                                                                                                                                                                | High                                                                                                          | Basic                                                                                                    | Medium                                                                                                   | High                                                                                                                                         |
|                                              |                                                                                                      |                                                                                                                                                                                       |                                                                                                               |                                                                                                          |                                                                                                          |                                                                                                                                              |
| <b>Pumping, ventilating, compressing</b><br> | Centrifugal pumps<br>Radial / axial fans<br>Compressors                                              | Centrifugal pumps<br>Radial / axial fans<br>Compressors                                                                                                                               | Eccentric screw pumps                                                                                         | Hydraulic pumps<br>Metering pumps                                                                        | Hydraulic pumps<br>Metering pumps                                                                        | Descaling pumps<br>Hydraulic pumps                                                                                                           |
|                                              | V20<br>G120C<br>G120P                                                                                | G120P<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                              | S120                                                                                                          | G120                                                                                                     | S110                                                                                                     | S120                                                                                                                                         |
| <b>Moving</b><br>                            | Conveyor belts<br>Roller conveyors<br>Chain conveyors                                                | Conveyor belts<br>Roller conveyors<br>Chain conveyors<br>Lifting/ lowering devices<br>Elevators<br>Escalators/<br>moving walkways<br>Indoor cranes<br>Marine drives<br>Cable railways | Elevators<br>Container cranes<br>Mining hoists<br>Excavators for open-cast mining<br>Test bays                | Acceleration conveyors<br>Storage and retrieval machines                                                 | Acceleration conveyors<br>Storage and retrieval machines<br>Cross cutters<br>Reel changers               | Storage and retrieval machines<br>Robotics<br>Pick & place<br>Rotary indexing tables<br>Cross cutters<br>Roll feeds<br>Engagers/ disengagers |
|                                              | V20<br>G110D<br>G110M<br>G120C<br>ET 200pro FC-2 <sup>2)</sup>                                       | G120<br>G120D<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                      | S120<br>S150<br>DCM                                                                                           | V90<br>G120<br>G120D                                                                                     | S110<br>S210<br>DCM                                                                                      | S120<br>S210<br>DCM                                                                                                                          |
| <b>Processing</b><br>                        | Mills<br>Mixers<br>Kneaders<br>Crushers<br>Agitators<br>Centrifuges                                  | Mills<br>Mixers<br>Kneaders<br>Crushers<br>Agitators<br>Centrifuges<br>Extruders<br>Rotary furnaces                                                                                   | Extruders<br>Winders/unwinders<br>Lead/follower drives<br>Calenders<br>Main press drives<br>Printing machines | Tubular bagging machines<br>Single-axis motion control such as<br>• Position profiles<br>• Path profiles | Tubular bagging machines<br>Single-axis motion control such as<br>• Position profiles<br>• Path profiles | Servo presses<br>Rolling mill drives<br>Multi-axis motion control such as<br>• Multi-axis positioning<br>• Cams<br>• Interpolations          |
|                                              | V20<br>G120C                                                                                         | G120<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                               | S120<br>S150<br>DCM                                                                                           | V90<br>G120                                                                                              | S110<br>S210                                                                                             | S120<br>S210<br>DCM                                                                                                                          |
| <b>Machining</b><br>                         | Main drives for<br>• Turning<br>• Milling<br>• Drilling                                              | Main drives for<br>• Drilling<br>• Sawing                                                                                                                                             | Main drives for<br>• Turning<br>• Milling<br>• Drilling<br>• Gear cutting<br>• Grinding                       | Axis drives for<br>• Turning<br>• Milling<br>• Drilling                                                  | Axis drives for<br>• Drilling<br>• Sawing                                                                | Axis drives for<br>• Turning<br>• Milling<br>• Drilling<br>• Lasering<br>• Gear cutting<br>• Grinding<br>• Nibbling and punching             |
|                                              | S110                                                                                                 | S110<br>S120                                                                                                                                                                          | S120                                                                                                          | S110                                                                                                     | S110<br>S120                                                                                             | S120                                                                                                                                         |

#### Using the SINAMICS selection guide

The varying range of demands on modern variable frequency drives requires a large number of different types. Selecting the optimum drive has become a significantly more complex process. The application matrix shown simplifies this selection process considerably, by suggesting the ideal SINAMICS drive for examples of typical applications and requirements.

- The application type is selected from the vertical column
  - Pumping, ventilating, compressing
  - Moving
  - Processing
  - Machining
- The quality of the motion type is selected from the horizontal row
  - Basic
  - Medium
  - High

#### More information












Further information about SINAMICS is available on the Internet at [www.siemens.com/sinamics](http://www.siemens.com/sinamics)

Practical application examples and descriptions are available on the Internet at [www.siemens.com/sinamics-applications](http://www.siemens.com/sinamics-applications)

<sup>1)</sup> Industry-specific inverters.

<sup>2)</sup> Information on the SIMATIC ET 200pro FC-2 frequency converter is available in Catalog D 31.2 and at [www.siemens.com/et200pro-fc](http://www.siemens.com/et200pro-fc)

## Overview

| SIMOTICS                                                                          |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Low-voltage motors for line and converter operation                               |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| General Purpose<br>SIMOTICS GP                                                    | Severe Duty<br>SIMOTICS SD                                                        | Explosion-proof<br>SIMOTICS XP                                                    | Definite Purpose<br>SIMOTICS DP                                                   | Flexible Duty<br>SIMOTICS FD                                                       | Non standard<br>SIMOTICS TN                                                         | High Torque<br>SIMOTICS HT                                                          |
|  |  |  |  |  |  |  |
| DC motors                                                                         |                                                                                   | High-voltage motors                                                               |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| Direct current SIMOTICS DC                                                        |                                                                                   | High Voltage SIMOTICS HV                                                          |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                                                                                   |  |                                                                                   |                                                                                    |  |                                                                                     |
| Motors for motion control                                                         |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| SIMOTICS S servomotors                                                            |                                                                                   | SIMOTICS M main motors                                                            |                                                                                   | SIMOTICS L linear motors                                                           |                                                                                     | SIMOTICS T torque motors                                                            |
| Servomotors                                                                       | Servo geared motors                                                               |  |                                                                                   |  |                                                                                     |  |

D011\_EN\_00491

G\_D011\_EN\_00491

**SIMOTICS stands for**

- 150 years of experience in building electric motors
- The most comprehensive range of motors worldwide
- Optimum solutions in all industries, regions and power/performance classes
- Innovative motor technologies of the highest quality and reliability
- Highest dynamic performance, precision and efficiency together with the optimum degree of compactness
- Our motors can be integrated into the drive train as part of the overall system
- A global network of skill sets and worldwide service around the clock

**A clearly structured portfolio**

The entire SIMOTICS product portfolio is transparently organized according to application-specific criteria in order to help users select the optimum motor for their application.

The product range extends from standard motors for pumps, fans and compressors to highly dynamic, precise motion control motors for positioning tasks and motion control in handling applications, as well as production machinery and machine tools, to DC motors and powerful high-voltage motors. Whatever it is that you want to move – we can supply the right motor for the task.

[www.siemens.com/simotics](http://www.siemens.com/simotics)

**An outstanding performance for any job**

A key characteristic of all SIMOTICS motors is their quality. They are robust, reliable, dynamic and precise to assure the requisite performance level for any process and deliver exactly the capabilities demanded by the application in hand. Thanks to their compact design, they can be integrated as space-saving units into installations. Furthermore, their impressive energy efficiency makes them effective as a means of reducing operating costs and protecting the environment.

**A dense network of skill sets and servicing expertise around the world**

SIMOTICS offers not only a wealth of sound experience gleaned from a development history which stretches back over around 150 years, but also the know-how of hundreds of engineers. This knowledge and our worldwide presence form the basis for a unique proximity to industries which feeds through in tangible terms to the specific motor configuration which is tailored to suit your application.


Our specialists are available to answer all your queries regarding any aspect of motor technology. At any time – wherever you are in the world. When you choose SIMOTICS, therefore, you reap the benefits of a global service network which is continuously accessible, thereby helping to optimize response times and minimize downtimes.

**Perfection of the complete drive train**

SIMOTICS is perfectly coordinated with other Siemens product families. In combination with the SINAMICS integrated drives family and the SIRIUS complete portfolio of industrial controls, SIMOTICS fits seamlessly as part of the complete drive train into automation solutions which are based on the SIMATIC, SIMOTION and SINUMERIK control systems.

## SIMOGEAR geared motors

## Overview

| SIMOGEAR                                                                            |
|-------------------------------------------------------------------------------------|
| SIMOGEAR geared motors                                                              |
|  |

G\_D011\_EN\_00514

The SIMOGEAR range of geared motors covers all common types such as helical, parallel shaft, bevel and worm geared motors and covers a power range from 0.09 kW to 55 kW and gearbox torques up to 19500 Nm. SIMOGEAR geared motors are fully compatible with many other manufacturers thanks to their market-standard connection dimensions.





[www.siemens.com/simogear](http://www.siemens.com/simogear)

# System overview

## SIMOTICS motors for motion control applications

### Overview

#### Overview of motors for motion control applications

| Motion control motors                                                                                                                                                                                                                  |                                                                                                                                       |                                                                                                                                                                                                                 |                                                                                                                                                                                                  |                                                                                                                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SIMOTICS S<br>servomotors                                                                                                                                                                                                              |                                                                                                                                       | SIMOTICS M<br>main motors                                                                                                                                                                                       | SIMOTICS L<br>linear motors                                                                                                                                                                      | SIMOTICS T<br>torque motors                                                                                                                                                         |
| Servomotors                                                                                                                                                                                                                            | Servo-g geared<br>motors                                                                                                              |                                                                                                                                                                                                                 |                                                                                                                                                                                                  |                                                                                                                                                                                     |
|                                                                                                                                                       |                                                      |                                                                                                                                |                                                                                                               |                                                                                                  |
| 1FK7<br>1FT7                                                                                                                                                                                                                           | 1FG1                                                                                                                                  | 1PH8<br>1FE1<br>1FE2                                                                                                                                                                                            | 1FN3                                                                                                                                                                                             | 1FW3<br>1FW6                                                                                                                                                                        |
| 0.05 ... 45.5 kW                                                                                                                                                                                                                       | 0.5 ... 7 kW                                                                                                                          | 2.8 ... 1340 kW                                                                                                                                                                                                 | 1.7 ... 81.9 kW                                                                                                                                                                                  | 1.7 ... 380 kW                                                                                                                                                                      |
| 0.08 ... 250 Nm                                                                                                                                                                                                                        | 14 ... 8100 Nm                                                                                                                        | 13 ... 12435 Nm                                                                                                                                                                                                 | 150 ... 10375 Nm                                                                                                                                                                                 | 10 ... 7000 Nm                                                                                                                                                                      |
| up to 10000 rpm                                                                                                                                                                                                                        | up to 1300 rpm                                                                                                                        | up to 40000 rpm                                                                                                                                                                                                 | up to 836 rpm                                                                                                                                                                                    | up to 1200 rpm                                                                                                                                                                      |
| Applications with high to very high demands regarding dynamic performance and precision, e.g. robots and handling systems, wood, glass, ceramics and stone working, packaging, plastics and textile machines and the machine tool area | In applications such as palletizers, storage and retrieval units with lifting, traversing and fork drives, dosing pumps and actuators | Precise turning, highly dynamic rotary axes, e.g. main drives in presses, printing machines, roller drives and winders in foil machines and other converting applications, main spindle drives in machine tools | Applications with stringent dynamic response and precision requirements for linear movements, e.g. machining centers, turning, grinding, laser machining, handling and machine tool applications | Rotary axis applications with stringent precision and force requirements, e.g. extruders, winders, roller drives, rotary axes in machine tools, rotary index tables, tool magazines |
| D 21.4<br>NC 62<br>NC 81<br>NC 82                                                                                                                                                                                                      | D 41                                                                                                                                  | D 21.4<br>NC 62<br>NC 82                                                                                                                                                                                        | D 21.4<br>NC 62                                                                                                                                                                                  | D 21.4<br>NC 62                                                                                                                                                                     |

G\_D011\_EN\_00492a

**Overview** (continued)

Whether it is a servomotor, a main motor, a torque motor or a linear motor – no other manufacturer anywhere in the world offers such an extensive portfolio of motors for motion control applications. Perfectly coordinated for operation with SINAMICS drives, all products in the portfolio impress with their compact dimensions, precision and dynamic response.

**SIMOTICS S servomotors**  
*Highly dynamic and extremely compact*

Whether they are used for positioning in pick and place applications, as cyclic drives in packaging machines or for path control in handling systems and machine tools: Our permanent-magnet, highly energy efficient SIMOTICS servomotors are the first choice for any application which demands highly dynamic and precise motional sequences. Depending on the application, they are available with various different built-in encoders – from the simple resolver to the high-resolution absolute encoder. The SIMOTICS S product range is rounded off by the SIMOTICS servo geared motors.

**SIMOTICS M main motors**  
*Exact rotation at up to 40000 rpm*

For applications where continuous, precise rotation of the axes is the primary concern. Thus they are ideally suited for the main drives for presses, as roller drives in printing and paper-making machines, textiles and plastics-processing machines. They can also be deployed as winder drives and in machine tool spindles and hoisting gear. With a power spectrum ranging from 2.8 kW to 1340 kW (3.75 to 1797 hp), they cover virtually every application.

**SIMOTICS L linear motors**  
*Improved dynamic response all along the line*

The ideal solution for any application which requires linear movements to be performed with maximum dynamic response and precision. The reason: The effects of elasticity, backlash and friction as well as natural oscillation in the drive train are largely eliminated because no mechanical transmission elements such as ball screw, coupling and belt are needed when linear motors are used. This simplifies the machine design and reduces wear.

**SIMOTICS T torque motors**  
*Outstanding precision for rotary axes*

Optimized for high torques at low rated speeds. With their excellent precision, dynamic response and low wear (they have no mechanical transmission elements), these motors have all the right credentials for use as built-in motors in rotary indexing machines, rotary tables or swivel and rotary axes, e.g. on machine tools. The same also applies to complete torque motors which are typically used as a roller and winder drive in converting applications.

**Individual solutions for special applications**

There is sometimes no other option but to develop an application-specific solution. Based on our many years of experience, we are able to work with our customers to develop and implement application-specific motor solutions – with a design and performance that are perfectly tailored to meet individual requirements. These have the additional useful benefit that they are highly integrated into our inverter and control system environment.

**Optimally coordinated system solutions**

SIMOTICS motors are perfectly coordinated with the drive systems of the SINAMICS family. They provide you with precisely tailored, state-of-the-art motion control solutions in all performance classes created using globally available standard components. Electronic rating plates and the ability to integrate the motors via the DRIVE-CLiQ system interface ensure quick commissioning as well as problem-free operation. Thanks to the integral encoders with redundant encoder tracks and safety functions which are integrated in the drive, modern safety concepts are easy to implement. As a result, external safety components are completely unnecessary. All components can be interconnected simply and reliably by means of pre-assembled MOTION-CONNECT signal and power cables.

**Powerful tools and competent support**

Siemens offers expert advice and efficient tools to help users select the right motor solution. Experienced specialists are always ready to lend a hand in designing mechanically integrated motor solutions.

Focused motor selection and dimensioning:  
SIZER for Siemens Drives engineering tool

The SIZER for Siemens Drives engineering tool is designed to help you configure a complete drive system including options, accessories and connection systems. SIZER for Siemens Drives allows you to handle any kind of drive – from single drives to complex multi-axis drives. Starting from the type of application in question, the software guides the user step by step through the motor dimensioning process. The advantage: SIZER for Siemens Drives not only provides a full list of components with their order data, but also offers an import function for easy transfer of the motor data into the CAD CREATOR.

[www.siemens.com/sizer](http://www.siemens.com/sizer)

Selection and configuring with the Drive Technology  
Configurator

The Drive Technology Configurator (DT Configurator) helps you select the optimum products for an application – from the motors to the converters/inverters and the associated options. You can also generate comprehensive documentation including data sheets, operating instructions, 2D and 3D dimension drawings, and certificates. You can order the products directly by transferring the selected components to the shopping cart of the Industry Mall.

[www.siemens.com/dt-configurator](http://www.siemens.com/dt-configurator)

Integrated: Design planning with the CAD CREATOR

The CAD CREATOR makes the generation of technical data, dimension drawings and CAD data for the motors a quick and simple process. It is easy to transfer the data to the plant documentation and process them further for the mechanical design. The CAD CREATOR is supplied as standard with the SIZER for Siemens Drives engineering tool.

[www.siemens.com/cadcreator](http://www.siemens.com/cadcreator)

## System overview

1

### SIMOTICS low-voltage motors for line and converter operation

#### Overview

| Low-voltage motors for mains and converter operation                                                                                |                                                                                                                                                                       |                                                                                                                                                            |                                                                                                                                                                                     |                                                                                                                                                                                                       |                                                                                                                                                                                      |                                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| General Purpose<br>SIMOTICS GP                                                                                                      | Severe Duty<br>SIMOTICS SD                                                                                                                                            | Explosion Proof<br>SIMOTICS XP                                                                                                                             | Definite Purpose<br>SIMOTICS DP                                                                                                                                                     | Transnorm<br>SIMOTICS TN                                                                                                                                                                              | Flexible Duty<br>SIMOTICS FD                                                                                                                                                         | High Torque<br>SIMOTICS HT                                                                                                                  |
|                                                    |                                                                                      |                                                                           |                                                                                                    |                                                                                                                     |                                                                                                   |                                                          |
| IEC:<br>0.09 ... 45 kW<br><br>Reluctance:<br>0.55 ... 48 kW<br><br>NEMA:<br>1 ... 20 hp                                             | IEC:<br>0.09 ... 315 kW<br><br>Reluctance:<br>0.55 ... 48 kW<br><br>NEMA:<br>1 ... 400 hp                                                                             | IEC:<br>0.09 ... 1 000 kW<br><br>NEMA:<br>1 ... 300 hp                                                                                                     | IEC:<br>0.09 ... 481 kW<br><br>NEMA:<br>1 ... 250 hp                                                                                                                                | 200 ... 3 500 kW                                                                                                                                                                                      | 200 ... 1 800 kW                                                                                                                                                                     | 150 ... 2 100 kW                                                                                                                            |
| IEC:<br>0.61 ... 293.8 Nm<br><br>Reluctance:<br>3.5 ... 191 Nm<br><br>NEMA:<br>1.5 ... 60 lb-ft                                     | IEC:<br>1.3 ... 2 070 Nm<br><br>Reluctance:<br>3.5 ... 191 Nm<br><br>NEMA:<br>1.5 ... 1 483 lb-ft                                                                     | IEC:<br>0.61 ... 8 090 Nm<br><br>NEMA:<br>1.5 ... 1 187 lb-ft                                                                                              | IEC:<br>2.5 ... 3 142 Nm<br><br>NEMA:<br>1.5 ... 1 104 lb-ft                                                                                                                        | 800 ... 22 500 Nm                                                                                                                                                                                     | 610 ... 14 600 Nm                                                                                                                                                                    | 6 000 ... 42 000 Nm                                                                                                                         |
| IEC:<br>750 ... 3 000 rpm<br>(at 50 Hz)<br><br>Reluctance:<br>1 500/1 800/2 610 rpm<br><br>NEMA:<br>900 ... 3 600 rpm<br>(at 60 Hz) | IEC:<br>750 ... 3 000 rpm<br>(at 50 Hz)<br><br>Reluctance:<br>1500/1800/2610<br>/3000/3600 rpm<br><br>NEMA:<br>900 ... 3 600 rpm<br>(at 60 Hz)                        | IEC:<br>750 ... 3 000 rpm<br>(at 50 Hz)<br><br>NEMA:<br>900 ... 3 600 rpm<br>(at 60 Hz)                                                                    | IEC:<br>750 ... 3 000 rpm<br>(at 50 Hz)<br><br>NEMA:<br>900 ... 3 600 rpm<br>(at 60 Hz)                                                                                             | IEC:<br>750 ... 3 000 rpm<br>(at 50 Hz)                                                                                                                                                               | IEC:<br>750 ... 3 000 rpm<br>(at 50 Hz)                                                                                                                                              | IEC:<br>200 ... 800 rpm<br>(at 50 Hz)                                                                                                       |
| Pumps, fans and compressors with especially low weight requirements                                                                 | Pumps, fans, compressors, mixers, mills, extruders and rollers with special demands in terms of ruggedness, particularly in the chemical and petrochemical industries | General industrial applications with special requirements regarding explosion protection for use in Zones 1, 2, 21, and 22 such as in the process industry | Ships, work and transport roller tables, tunnels, multi-story car parks, shopping malls, dockside cranes, container terminals as well as motors customized for special applications | Pumps, fans, compressors, conveyor belts, mixers, extruders in the chem. and petrochem. industry, paper-making machines, mining, cement, steel industry, and marine applications including propulsion | Pumps, fans, compressors, conveyor belts, centrifuges, extruders, winders, hoisting gear in cranes, presses, paper machines, rolling mills, marine applications including propulsion | High-torque gearless motors for paper-making machines, low-speed pumps, mills, steel shears, bow thrusters, winches or main drives on ships |
| IEC: D 81.1<br>NEMA: D 81.2                                                                                                         | IEC: D 81.1<br>NEMA: D 81.2                                                                                                                                           | IEC: D 81.1, D 83.1<br>NEMA: D 81.2                                                                                                                        | IEC: D 81.1<br>NEMA: D 81.2                                                                                                                                                         | D 81.1, D 84.1                                                                                                                                                                                        | D 81.8                                                                                                                                                                               | D 86.2                                                                                                                                      |

G\_D011\_EN\_00516a

#### SIMOTICS GP and SIMOTICS SD

SIMOTICS GP General Purpose motors with an aluminum housing are suitable for a wide range of standard drive tasks in industrial environments. SIMOTICS SD Severe Duty motors with a cast-iron housing are extremely rugged and are therefore the first choice for applications in harsh environmental conditions.

SIMOTICS GP and SIMOTICS SD are fundamentally optimized for line operation. In addition, two converter-optimized motor lines are available for variable-speed converter-fed operation.

##### • Induction technology (VSD10 line)

The VSD10 line converter motors are designed exclusively for use on converters and are specially optimized for SINAMICS frequency converters. In terms of economy, efficiency and reliability, they are perfectly matched to SINAMICS G120 standard converters over the complete life cycle.

##### • Synchronous reluctance technology (VSD4000 line)

VSD4000 line reluctance motors are designed exclusively for use on converters and are specially optimized for SINAMICS G120. Compared to systems with induction motors, synchronous reluctance technology is characterized by particularly high efficiency levels, especially in the partial load range, and by high dynamics. The vector control of the frequency converter ensures optimal operating characteristics. More information on the reluctance drive system is available at

[www.siemens.com/reluctance-drive-system](http://www.siemens.com/reluctance-drive-system)

#### SIMOTICS XP

Our rugged SIMOTICS XP explosion-proof motors are exceptionally durable, even in the harshest conditions, and absolutely fail-safe – in both line and converter-fed operation. SIMOTICS XP motors meet all requirements with maximum safety and maximum efficiency.

## Overview

| Motion Control Encoder measuring systems |                                                                                   |                |          |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |
|------------------------------------------|-----------------------------------------------------------------------------------|----------------|----------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Encoder type                             | Incremental encoders                                                              |                |          | Absolute encoders                                                                 |                                                                                   |                                                                                     |                                                                                     |                                                                                     |
|                                          |  |                |          |  |  |  |  |  |
| Interface                                | sin/cos<br>1 V <sub>pp</sub>                                                      | RS422<br>(TTL) | HTL      | DRIVE-CLIQ                                                                        | SSI                                                                               | EnDat                                                                               | PROFIBUS DP                                                                         | PROFINET IO                                                                         |
| Resolution                               | 1000 S/R                                                                          | 500 S/R        | 100 S/R  | Single-turn 24-bit                                                                | Single-turn 13-bit<br>(8192 steps)                                                | Single-turn 13-bit<br>(8192 steps)                                                  | Single-turn 13-bit<br>(8192 steps)                                                  | Single-turn 13-bit<br>(8192 steps)                                                  |
|                                          | 1024 S/R                                                                          | 1000 S/R       | 500 S/R  | Multi-turn 36-bit<br>(2 <sup>24</sup> steps ×<br>4096 revolutions)                | Multi-turn 25-bit<br>(8192 steps ×<br>4096 revolutions)                           | Multi-turn 25-bit<br>(8192 steps ×<br>4096 revolutions)                             | Multi-turn 27-bit<br>(8192 steps ×<br>16384 revolutions)                            | Multi-turn 27-bit<br>(8192 steps ×<br>16384 revolutions)                            |
|                                          | 2500 S/R                                                                          | 1024 S/R       | 1000 S/R |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |
|                                          |                                                                                   | 1250 S/R       | 2500 S/R |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |
|                                          |                                                                                   | 1500 S/R       |          |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |
|                                          |                                                                                   | 2000 S/R       |          |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |
|                                          |                                                                                   | 2048 S/R       |          |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |
|                                          |                                                                                   | 2500 S/R       |          |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |
|                                          |                                                                                   | 3600 S/R       |          |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |
|                                          |                                                                                   | 5000 S/R       |          |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |
| Catalog                                  | D 21.4                                                                            |                |          |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |

Motion control encoders are optoelectronic built-on encoders that detect the traversing distances, angles of rotation, speeds or positions of machine axes. Motion control encoders are direct measuring systems that are built-on to shafts, axes or motors. They can be used in conjunction with numerical and programmable logic controllers, drives and position displays. Motion control encoders are system-tested, certified components that have been harmonized for use with the following systems:

- SINUMERIK CNC controls
- SIMOTION Motion Control Systems
- SIMATIC programmable logic controllers
- SINAMICS drive systems

Motion control encoders are used with machine tools and production machines as additional external measuring systems. They are available as incremental or absolute encoders.

- In the case of incremental encoders, the machine must travel to a reference point after each power-off state, as the position is not usually stored in the controller, and movements of the machine while the power is off are not recorded.
- Absolute encoders, on the other hand, also record movements while the power is off and return the actual position after power on. Travel to a reference point is not necessary.

All motion control encoders are available as Synchro flange and clamp flange versions. The absolute encoders are also available with a hollow shaft and torque arm.

The motion control encoders are driven via a plug-in coupling or spring disk coupling. Alternatively, pulleys can also be used.

The motor control encoder supply voltage is 5 V DC or alternatively 10 V to 30 V DC. The 10 V to 30 V DC version supports longer cable lengths. Most control systems supply the voltage directly at the measuring circuit connector. With SINAMICS, the measuring systems are provided with power via the inverters or the Sensor Modules.

For motion control encoders with cables, the cable length including the connector is 1 m.

The following bending radii must be observed for the cable to the built-on encoder:

- One-time bending: ≥ 20 mm
- Continuous bending: ≥ 75 mm

#### More information

- Catalogs D 21.4, NC 62, NC 82, PM 21
- Interactive catalog CA 01
- Internet:  
[www.siemens.com/drive-cliq](http://www.siemens.com/drive-cliq)  
[www.siemens.com/industrymall](http://www.siemens.com/industrymall)

## System overview

1

### MOTION-CONNECT connection systems

#### Overview

MOTION-CONNECT includes connection systems and components which are optimally tailored to individual areas of application. MOTION-CONNECT cables feature state-of-the-art connection systems to ensure fast, reliable connection of different components, and offer maximum quality as well as system-tested reliability.



MOTION-CONNECT power cable and signal cable

MOTION-CONNECT cables are available as fully-assembled power and signal cables or sold by the meter. The pre-assembled cables can be ordered in length units of 10 cm (3.94 in) and can be extended, if necessary.

Whatever your machine requirements, MOTION-CONNECT offers the solution.

- **Robust, high-performance and easy to use**  
thanks to pre-assembled cables with a rugged metal connector in degree of protection IP67 and reliable SPEED-CONNECT quick-release lock
- **Outstanding and proven quality**  
achieved by consistent quality management and system-tested cables

Cables are available in two different qualities – MOTION-CONNECT 500 and MOTION-CONNECT 800PLUS.

#### MOTION-CONNECT 500

- Cost-effective solution for predominantly fixed installation
- Tested for travel distances up to 5 m (16.4 ft)


#### MOTION-CONNECT 800PLUS

- Meets requirements for use in cable carriers
- Oil-resistant
- Tested for travel distances of up to 50 m (164 ft)

#### More information

- Catalogs D 21.4, NC 62, NC 82, PM 21
- Interactive Catalog CA 01
- Internet:  
[www.siemens.com/motion-connect](http://www.siemens.com/motion-connect)  
[www.siemens.com/industrymall](http://www.siemens.com/industrymall)

## Firmware functionality

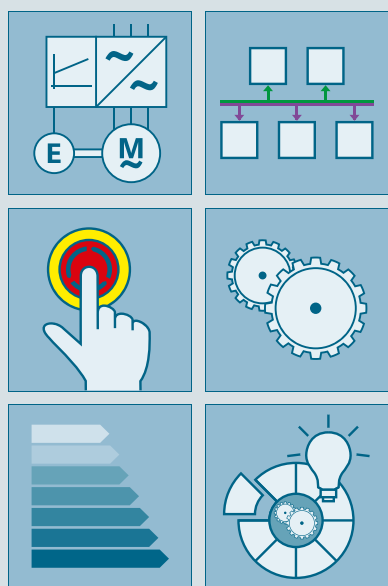

2/2

2/2

2/2

2/4

2/5

2/6

2/6

### Firmware functionality

Introduction

Basic Drive Functions

Standard Technology Functions

Advanced Technology Functions

Common Engineering

Applications &amp; Branch know-how

Further information about firmware functionality can be found on the Internet at [www.siemens.com/sinamics-firmware](http://www.siemens.com/sinamics-firmware)

## Firmware functionality

### Firmware functionality

#### Overview

The major part of the functionality of SINAMICS drives is implemented in software. This "embedded" **software** delivers the function of the product and is therefore a significant component of the overall product. The embedded software is also known as **firmware**, because it is firmly connected to specific hardware.


In the case of SINAMICS drives, the firmware is subdivided into the **operating system (OS)** with drivers for the hardware and the inverter functions, which are also referred to as the **runtime (RT) functions**.

#### Introduction

The available firmware functions are so extensive that the overall functional scope has been structured into function groups corresponding to their main applications.

The 8 main groups are:

- Basic Drive Functions
- Standard Technology Functions
- Advanced Technology Functions
- Communication Functions
- Safety Integrated Functions
- Energy Efficiency Functions
- Common Engineering
- Applications & Branch know-how

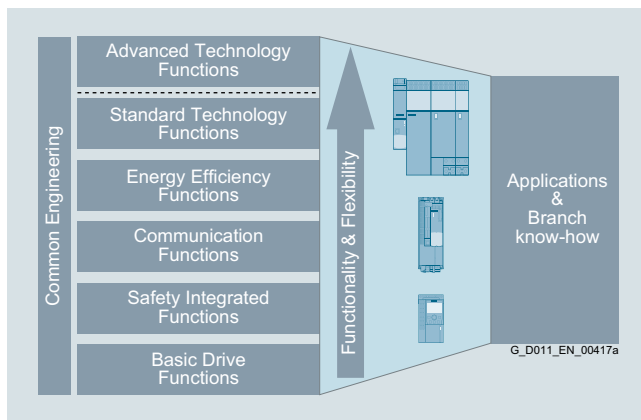


Functionality, including technology and configuration

#### Basic Drive Functions

The main groups, especially the "Basic Drive Functions", are divided up into further subgroups.

- Control modes
- Availability
- Setpoints and commands
- Limiters, timers and monitoring functions
- Diagnostics
- Protection

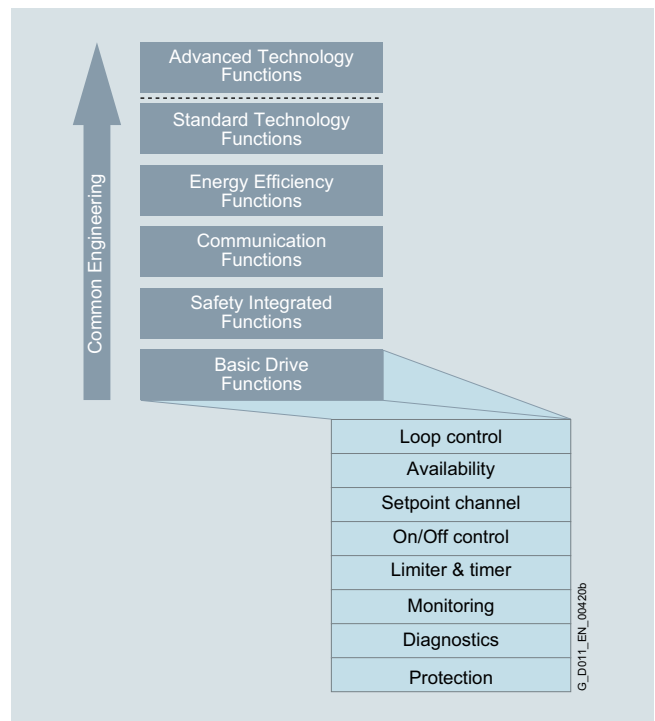

Basic Drive Functions - Control Functions

#### Control modes

The control methods are the core of the entire inverter firmware. They are responsible for optimum movement of the connected motor and the attached machines. The better the control functions, the faster, better and more smoothly the machine operates, thereby significantly enhancing the quality of the production output.

A distinction is made between the following methods:

- V/f control (open-loop control)
- Vector control (closed-loop control)
- Servo control (closed-loop control)

Further classification refers to the control variables:

- Current control
- Speed control
- Torque control
- Position control
- Technological process control (pressure, flow rate, temperature, fill level, etc.)

**Overview** (continued)Availability

Availability refers to the frequency ratio, namely how often or seldom a single device restricts the entire production process due to a problem. That is why it is important in terms of availability that a drive enters the faulty state only when it is essential for self-protection. Moreover, it is important that the cause of the pending problem is identified and eliminated as quickly as possible.

Features and measures to increase availability:

- Parallel connections, for example, to maintain emergency operation (possibly also at a lower rating), if a power unit fails
- Automatic restart
- Flying restart
- $V_{dc}$  control with kinetic buffering
- Redundancy (hardware, communication, etc.)

Setpoints and commands

The setpoint channel is the link between the setpoint source and the motor control. The inverter has a special feature that supports simultaneous input of two setpoints. Generation and subsequent modification of the total setpoint (influencing the direction, skip frequency, up/down ramp) take place in the setpoint channel.

Different sources of command usually result from the requirements to operate a drive from different places (on-site/remote), in different situations (standard/emergency mode) and/or different operating. The BICO binector connector technology allows SINAMICS to configure and combine the command and setpoint sources completely individually.

The following can be used for switching:

- Dataset switchover
- Switching elements among the Free Function Blocks (FFB)
- Fixed values

Limiters and monitoring functions

Limiters or limits are used to constrain input and/or output variables as appropriate to the connected machine; this means that not all positioning variables are used over their full range but are limited judiciously to enhance the safety and quality of the production process.

Timers/runtime counters are used to obtain information or make statements about the temporal course of a process.

- Recording application information for manufacturers
- Recording operating times for users
- Configurable timers for monitoring intervals
- Configurable timers for triggering activities at certain intervals (e.g. maintenance work)

Monitoring is used for early detection of conditions that may be detrimental or even dangerous to the connected machine, so that they can be counteracted expediently. If an appropriate countermeasure is not initiated, a protective response of the inverter with probable fault shutdown will ultimately result.

Diagnostics

The "Diagnostics" subgroup comprises all those functions that provide assistance with determining the possible causes of a problem.

If problems occur in a process, or in the driven machine, further interpretation of the measured variables in the inverter is required. To this end, different signals should be correlated with respect to time and then observed.

This includes:

- Error and alarm buffer
- Diagnostic buffer
- List of missing signals that interrupt operation
- Tracing for temporal assignment of signal profiles
- I/O simulation
- Telegram content diagnoses
- Terminal status

Protection

All protection functions counteract any possible damage to the inverter and/or motor. This is why the shutdown thresholds cannot be parameterized but are factory-tuned and permanently set to match the built-in components. Alarm thresholds may be parameterized as a relative variable for shutdown threshold of some monitoring processes. Thus, a countermeasure that is sensitive to the process may still be initiated upon occurrence of the alarm.

Apart from protection of the hardware, protection of the parameterization and therefore protection of the intellectual expertise of the customer from unauthorized access and copying is also an important part of the protection functions.

- Write protection
- Know-how protection
- Copy protection

## Firmware functionality


### Firmware functionality

#### Overview (continued)

##### Standard Technology Functions

The Standard Technology Functions are not restricted to a specific SINAMICS product family, but they are available in full or at least partially in SINAMICS S120 as well as in SINAMICS G120.

- BICO technology
- Free function blocks (FFB)
- Basic positioner (EPos)
- Technology controller (PID)

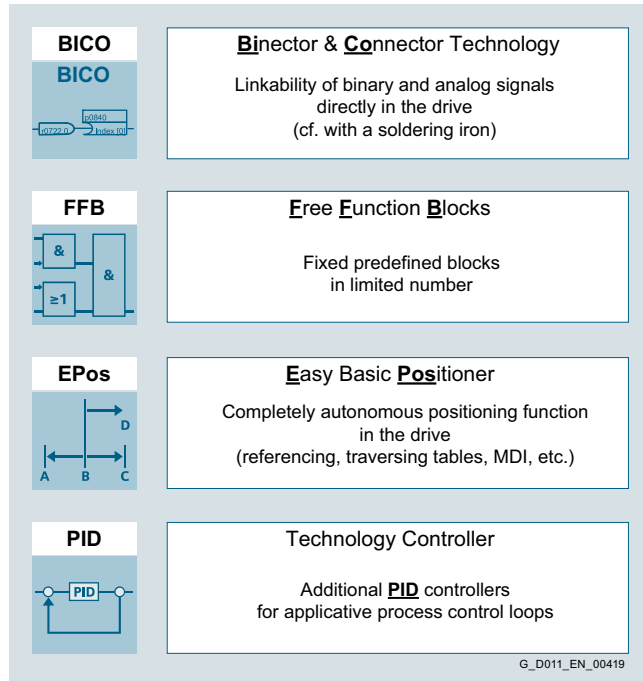

Standard Technology Functions

The Standard Technology Functions significantly expand the application spectrum of the SINAMICS drives because the functions are not permanently and unalterably interconnected; rather, they are interrupted at defined access points and can be connected or wired differently. The BICO technology makes it possible.

The FFBs enable additional, freely interpretable adaptations of the binary and analog signal flow to the given machine application. However, the FFBs are limited in terms of the absolute quantity and the computing intervals (sampling times) that can be selected. These blocks are NOT multi-instance capable.

With Epos, comprehensive positioning tasks are autonomous in SINAMICS (i.e. their solution does not need a higher-level control). And moreover, this integrated functionality is also extremely flexible: It can be used for highly dynamic servo control as well as for simple applications with vector-controlled asynchronous motors. Up to 64 target positions, as well as the respective traversing speeds, can be permanently stored in the drive during commissioning. Axes can be positioned either absolutely or relatively.

It is, however, also possible to transfer these parameters as required from a higher-level controller. This means that target positions and velocities can even be changed on-the-fly during a positioning run.

The technology controller (PID controller) permits all types of simple process controls to be implemented. It can be used, for example, to control the line pressure, fill level, temperature, flow or also tension control or load balancing.

For more information, see [section Technology functions](#).


## Overview (continued)

## Advanced Technology Functions

The Advanced Technology Functions are the clear differentiating feature between the SINAMICS product families of SINAMICS G120 with the CU2xx-2 Control Units and SINAMICS S120 with the CU3x0-2 Control Units. The Advanced Technology Functions are only available for SINAMICS S120:

- SINAMICS Technology Extensions (TEC)
- SINAMICS Drive Control Chart (DCC)

The Advanced Technology Functions are characterized by maximum flexibility and performance whereby extremely individual and, at the same time, efficient solutions can be achieved.

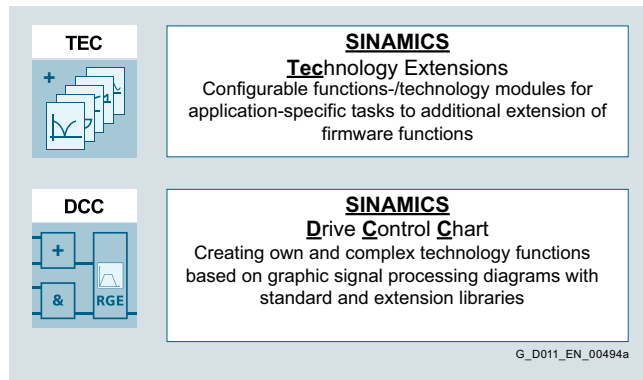

Advanced Technology Functions


SINAMICS DCC comprises the block library, so-called DCB Drive Control Blocks and the DCC Editor for graphical interconnection of blocks. SINAMICS DCC is primarily employed to solve arithmetic and control-related tasks or logic functions associated with complex applications.

In addition to the DCB Standard library, the DCB Extension library can also be used to create applications. The DCB Extension library is comprised of freely programmable blocks which are created for specific applications using DCB Studio and are then graphically interconnected with the DCC Editor in a similar fashion to standard blocks.

SINAMICS Technology Extensions (TECs) are configurable firmware expansions that are specifically created for use in a customized application with special requirements. This functionality can therefore be subsequently installed as an add-on to the standard scope of firmware functions. One example of a SINAMICS TEC is the VIBX vibration extinction for storage and retrieval systems.

For more information, see section Technology functions.

The functional scope of Advanced Technology Functions is scalable and flexible. Depending on the task, you can choose between configurable solutions provided by Siemens or freely created proprietary solutions in the drive.

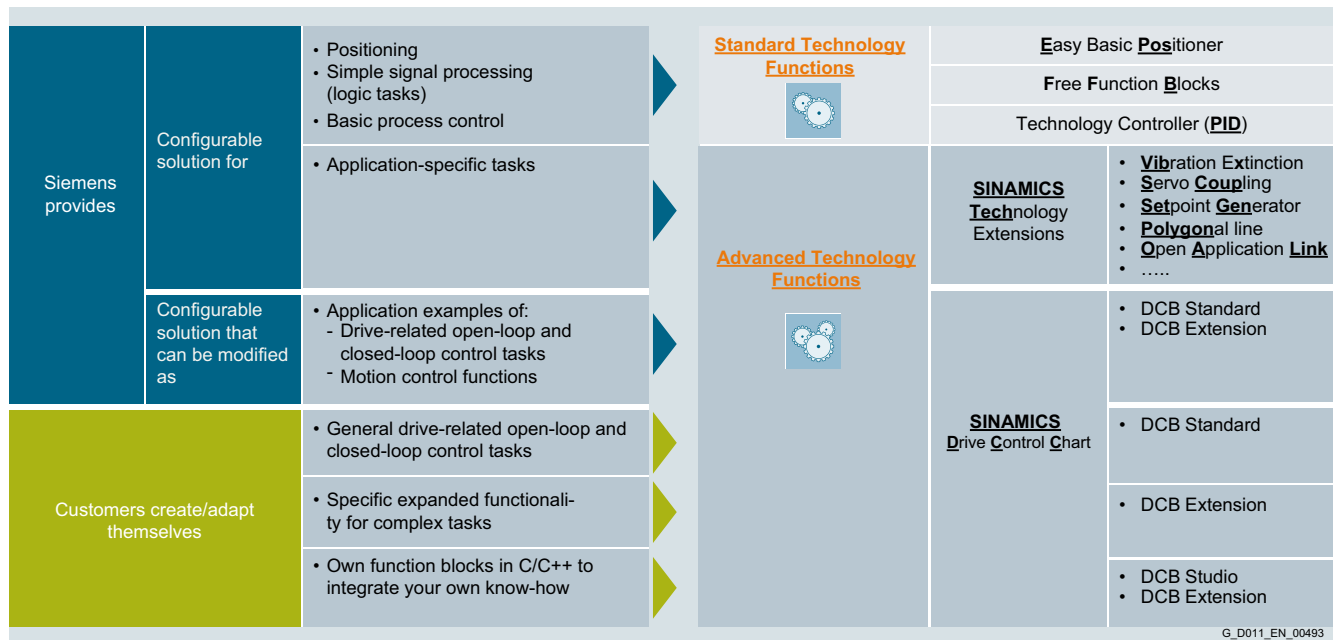

Depending on the technology function, a license may be required for the application.

## Firmware functionality

### Firmware functionality

#### Overview (continued)

##### **Safety Integrated Functions**

See section Safety Integrated

##### **Communication Functions**

See section Communication

##### **Energy Efficiency Functions**

See section Energy efficiency

##### **Common Engineering**

All functions of the inverters are implemented to enable a common engineering approach to their handling no matter which type of drive is selected; i.e. if a function is used in drive x, it can be configured intuitively and commissioned in the same way in drive y. Knowledge gained can therefore be reused easily and efficiently. The configuration and commissioning tools in particular (such as SIZER for Siemens Drives, STARTER and SINAMICS Startdrive) reflect this approach.

For more information, see section Engineering tools.


##### **Applications & Branch know-how**

Siemens has applied these technology functions (standard and/or advanced) to generate numerous application solutions. These applications can be downloaded from the Siemens application support website at [www.siemens.com/sinamics-applications](http://www.siemens.com/sinamics-applications)

The STARTER and SINAMICS Startdrive commissioning tools can then be used to activate and configure the applications and download them to the Control Units.

#### More information

Further information about firmware functionality can be found on the Internet at [www.siemens.com/sinamics-firmware](http://www.siemens.com/sinamics-firmware)

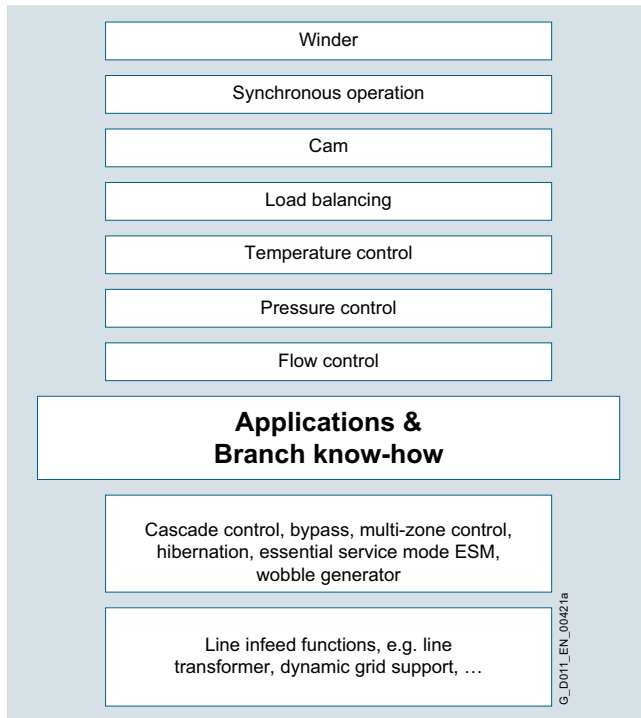


#### Applications & Branch know-how

Depending on the technology function, a license may be required for the application.

In some branch-specific Control Units (e.g. CU230P-2) branch-specific functions are also an integral part of the firmware.

For more information, see section Drive applications.

## Safety Integrated

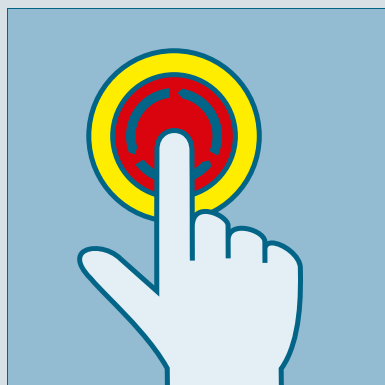

### 3/2 **Safety Integrated**

3/2 Overview

3/3 Function

3/10 More information

### 3/11 **Safety Integrated for SINAMICS G120C**

3/11 Overview

3/11 Function

### 3/12 **Safety Integrated for SINAMICS G120**

3/12 Overview

3/13 Benefits

3/15 Function

### 3/16 **Safety Integrated for SINAMICS S110**

3/16 Overview

3/17 Function

The Safety Integrated Function Manual contains detailed information about the safety functions.

<https://support.industry.siemens.com/cs/document/99668646>


Further manuals pertaining to Safety Integrated in drive systems can be found on the Internet at <https://support.industry.siemens.com/cs/ww/de/ps/13231/man>

Further information about Safety Integrated in SINAMICS can be found on the Internet at [www.siemens.com/safety-drives](http://www.siemens.com/safety-drives)

## Safety Integrated

### Safety Integrated

#### Overview

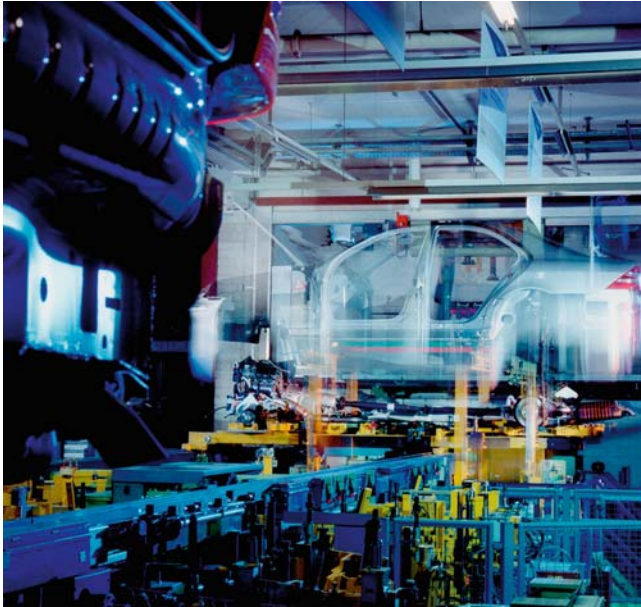

#### Legal framework

Machine manufacturers and manufacturing plants must ensure that their machines or plants cannot cause danger due to malfunctions in addition to the general risks of electric shock, heat or radiation.

In Europe, for example, compliance with the Machinery Directive 2006/42/EC is legally stipulated by the EU work safety directive. In order to ensure compliance with this directive, it is recommended that the corresponding harmonized European standards are applied. This triggers the "assumption of conformity" and gives manufacturers and operators the legal security in terms of compliance with both national regulations and EU directives. The machine manufacturer uses the CE marking to document the compliance with all relevant directives and regulations in the free movement of goods.

#### Safety-related standards

Functional safety is specified in various standards. For example, EN ISO 12100 specifies standards pertaining to machine safety (risk assessment and risk reduction). IEC 61508 specifies basic requirements for electronic and programmable safety-related systems. EN 62061 (only applicable for electrical and electronic control systems) and EN ISO 13849-1, which has replaced EN 954-1, define the functional and safety-related requirements of safety-oriented control systems.

The above-mentioned standards define different safety requirements that the machine has to satisfy in accordance with the risk, frequency of a dangerous situation, probability of occurrence and the opportunities for recognizing impending danger.

- EN ISO 13849-1: Performance Level PL a ... e; Category B, 1 ... 4
- EN 62061: Safety Integrity Level SIL 1 ... 3

#### Trend toward integrated safety systems

The trend toward greater complexity and higher modularity of machines has seen a shift in safety functions away from the classical central safety functions (for example, shutdown of the complete machine using a main disconnecting means) and into the machine control system and the drives. This is often accompanied by a significant increase in productivity because the equipping times are shortened. Depending on the type of machine, it may even be possible to continue manufacturing other parts while equipping is in progress.

Integrated safety functions act much faster than those of a conventional design. The safety of a machine is increased further with Safety Integrated. Furthermore, thanks to the faster method of operation, safety measures controlled by integrated safety systems are perceived as less of a hindrance by the machine operator, therefore significantly reducing the motivation to consciously bypass safety functions.

## Function

The safety functions integrated in SINAMICS drives, including SIMATIC ET 200pro FC-2 frequency converters, are described below.

|           | SINAMICS V |     | SINAMICS G |       |       |                |                 |                 |        |                 |                 | SINAMICS S      |                 |                 | SIMATIC<br>ET 200pro<br>FC-2 |
|-----------|------------|-----|------------|-------|-------|----------------|-----------------|-----------------|--------|-----------------|-----------------|-----------------|-----------------|-----------------|------------------------------|
|           | V20        | V90 | G110       | G110D | G120C | G120P/<br>G120 | G120            |                 | G110M  | G120D           |                 | S110            | S120            |                 |                              |
|           |            |     |            |       |       | CU230P-2       | CU240E-2        | CU250S-2        | CU240M | CU240D-2        | CU250D-2        | CU305           | CU310-2         | CU320-2         |                              |
| Functions |            |     |            |       |       |                |                 |                 |        |                 |                 |                 |                 |                 |                              |
| STO       | –          | ✓   | –          | ✓     | ✓     | –              | ✓               | ✓               | ✓      | ✓               | ✓               | ✓               | ✓               | ✓               | ✓                            |
| SS1       | –          | –   | –          | –     | –     | –              | ✓ <sup>1)</sup> | ✓               | –      | ✓ <sup>1)</sup> | ✓               | ✓               | ✓               | ✓               | –                            |
| SS2       | –          | –   | –          | –     | –     | –              | –               | –               | –      | –               | –               | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | –                            |
| SOS       | –          | –   | –          | –     | –     | –              | –               | –               | –      | –               | –               | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | –                            |
| SBC       | –          | –   | –          | –     | –     | –              | –               | ✓               | –      | –               | –               | ✓               | ✓               | ✓               | –                            |
| SBT       | –          | –   | –          | –     | –     | –              | –               | –               | –      | –               | –               | –               | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | –                            |
| SLS       | –          | –   | –          | –     | –     | –              | ✓ <sup>1)</sup> | ✓ <sup>2)</sup> | –      | ✓ <sup>1)</sup> | ✓ <sup>1)</sup> | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | –                            |
| SSM       | –          | –   | –          | –     | –     | –              | ✓ <sup>1)</sup> | ✓ <sup>2)</sup> | –      | ✓ <sup>1)</sup> | ✓ <sup>1)</sup> | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | –                            |
| SDI       | –          | –   | –          | –     | –     | –              | ✓ <sup>1)</sup> | ✓ <sup>2)</sup> | –      | ✓ <sup>1)</sup> | ✓ <sup>1)</sup> | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | –                            |
| SLP       | –          | –   | –          | –     | –     | –              | –               | –               | –      | –               | –               | –               | ✓ <sup>3)</sup> | ✓ <sup>3)</sup> | –                            |
| SP        | –          | –   | –          | –     | –     | –              | –               | –               | –      | –               | –               | –               | ✓ <sup>3)</sup> | ✓ <sup>3)</sup> | –                            |
| Control   |            |     |            |       |       |                |                 |                 |        |                 |                 |                 |                 |                 |                              |
| PROFIsafe | –          | –   | –          | –     | ✓     | –              | ✓               | ✓               | ✓      | ✓               | ✓               | ✓               | ✓               | ✓               | –                            |
| F-DI      | –          | ✓   | –          | –     | ✓     | –              | ✓               | ✓               | ✓      | ✓               | ✓               | ✓               | ✓               | ✓               | –                            |

### Safety functions integral to the SINAMICS drives

SINAMICS drives are characterized by a large number of integrated safety functions. In combination with the sensors and safety control required for the safety functionality, they ensure that highly-effective protection for persons and machines is implemented in a practice-oriented manner.

They comply with the requirements of the following safety categories:

- PL d and Category 3 according to EN ISO 13849-1
- SIL 2 according to IEC 61508 and IEC 61800-5-2

#### Note:

The Safe Brake Test (SBT) diagnostic function meets the requirements for Category 2 according to EN ISO 13849-1.

The Safety Integrated functions are generally certified by independent institutes. You can obtain the corresponding test certificates and manufacturer's declarations from your Siemens contacts.

The integrated safety functions that are currently available are described below. Their functional safety satisfies the requirements defined in the international standard IEC 61800-5-2 for variable-speed drive systems.

The safety functions integrated into the SINAMICS drive system can be roughly divided into four categories:

- **Functions for safely stopping a drive**
  - Safe Torque Off (STO)
  - Safe Stop 1 (SS1)
  - Safe Stop 2 (SS2)
  - Safe Operating Stop (SOS)
- **Functions for safe brake management**
  - Safe Brake Control (SBC)
  - Safe Brake Test (SBT) (this diagnostic function exceeds the scope of IEC 61800-5-2)
- **Functions for safely monitoring the motion of a drive**
  - Safely-Limited Speed (SLS)
  - Safe Speed Monitor (SSM)
  - Safe Direction (SDI)
- **Functions for safely monitoring the position of a drive**
  - Safely-Limited Position (SLP)
  - Safe Position (SP) (this function exceeds the scope of IEC 61800-5-2)

<sup>1)</sup> With fail-safe Control Unit.

<sup>2)</sup> With Safety Extended license.

<sup>3)</sup> With Safety Advanced license.

## Safety Integrated

### Safety Integrated

#### Function (continued)

##### Safe Torque Off (STO)

The STO function is the most common and basic drive-integrated safety function. It ensures that no torque-generating energy can continue to affect a motor and prevents unintentional start-ups.

##### Effect

This function is a mechanism that prevents the drive from restarting unexpectedly, in accordance with EN 60204-1, Section 5.4. The STO function suppresses the drive pulses (corresponds to Stop Category 0 according to EN 60204-1). The drive is reliably torque-free. This state is monitored internally in the drive.


##### Application

STO has the immediate effect that the drive cannot supply any torque-generating energy. STO can be used wherever the drive will naturally reach a standstill due to load torque or friction in a sufficiently short time or when "coasting down" of the drive will not have any relevance for safety.

STO makes it possible for persons to work safely when the protective door is open (restart interlock) and is used on machines/installations with moving axes, e.g. on handling or conveyor systems.

##### Customer benefits

Some of the advantages of the integrated STO safety function over conventional safety technology with electromechanical switchgear include the elimination of separate components as well as of the work that would be required to wire and service them, i.e. no wearing parts as a result of the electronic shutdown. Because of the fast electronic switching times, the function provides a shorter reaction time than the conventional solution comprising electromechanical components. When STO is triggered, the converter remains connected to the network and can be fully diagnosed.

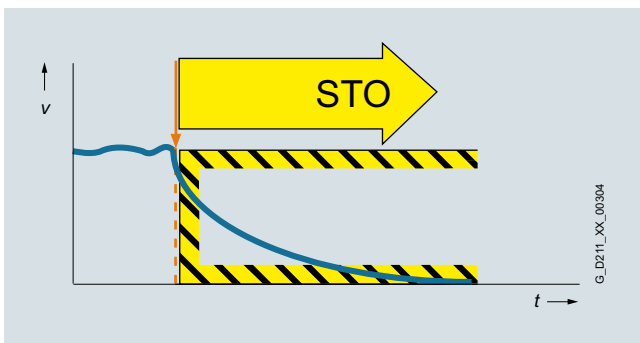

##### Safe Stop 1 (SS1)

The SS1 function causes a motor to stop rapidly and safely and switches the motor to torque-free mode after coming to a standstill by activating STO.

##### Effect

The SS1 function can safely stop the drive in accordance with EN 60204-1, Stop Category 1. When the SS1 function is selected, the drive brakes autonomously along a quick-stop ramp and automatically activates the Safe Torque Off and Safe Brake Control functions (if configured) when the parameterized safety delay time expires.


If the variant "SS1 with external stop (SS1E)" is parameterized, the drive does not brake autonomously when the function is selected. In this case, the higher-level control must bring the drive to a standstill within a parameterized STO transition time. The SBR (Safe Brake Ramp) and SAM (Safe Acceleration Monitor) functions are not active. SS1E is a useful function for drives that need to be stopped as a group by the Motion Control system in order to prevent potential damage to the machine or product.

##### Application

The SS1 function is used when, in the event of a safety-relevant incident, the drive must stop as quickly as possible with a subsequent transition into the STO state (e.g. EMERGENCY STOP). It is thus used to bring large centrifugal masses to a stop as quickly as possible for the safety of the operating personnel, or to brake motors at high speeds as quickly as possible. Examples of typical applications are saws, grinding machine spindles, centrifuges, winders and storage and retrieval machines.

##### Customer benefits

The targeted stopping of a drive by means of SS1 reduces the risk of danger, increases the productivity of a machine, and allows the safety clearances in a machine to be reduced. The principle is to bring the drive actively to a standstill, compared with just using the STO function. Complex mechanical brakes that are susceptible to wear are not normally required to brake the motor.

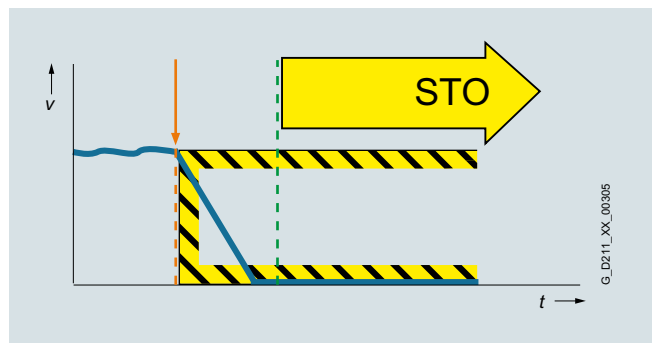

**Function** (continued)**Safe Stop 2 (SS2)**

The SS2 function brings the motor to a standstill quickly and safely and then activates the SOS function once the motor has stopped.

Effect

The Safe Stop 2 function can safely stop the drive in accordance with EN 60204-1, Stop Category 2. When the SS2 function is selected, the drive brakes autonomously along a quick stop ramp. In contrast to SS1, the drive control remains operational afterwards, i.e. the motor can supply the full torque required to maintain zero speed. Standstill is safely monitored (Safe Operating Stop function).

Application

As with SS1, the SS2 function ensures the quickest possible deceleration of the motor. However, the motor power is not switched off. Instead, a control system prevents it from leaving the standstill position – even if it is affected by external forces. Typical applications for SS2 include machine tools, for example.

Customer benefits

The SS2 function ensures a rapid axis stop. Because the control remains active, after the safety function is deselected, productive operation can continue without referencing. This ensures short setup and standstill times and high productivity.

**Safe Operating Stop (SOS)**

With the SOS function, the stopped motor is held in position by the drive control system and its position monitored.

Effect



The SOS function constitutes safe standstill monitoring. The drive control remains in operation. The motor can therefore deliver the full torque to hold the current position. The actual position is reliably monitored. In contrast to safety functions SS1 and SS2, the speed setpoint is not influenced autonomously. After SOS has been activated, the higher-level control must bring the drive to a standstill within a parameterized time and then hold the position setpoint.

Application

SOS is an ideal solution for all those applications for which the machine or parts of the machine must be at a safe standstill for certain steps, but the drive must also supply a holding torque. It is ensured that despite counter torque the drive remains in its current position. In contrast to SS1 and SS2, the drive does not brake autonomously in this case. It expects the higher-level controller to ramp down the relevant axes as a coordinated group within an adjustable delay time. This can be used to prevent any damage to the machine or product. Typical applications for SOS include winders, converting and packaging machines and machine tools.

Customer benefits

No mechanical components are necessary to keep the axis in position despite any counterforce that may occur. Due to the short switching times and the fact that the drive control always remains active, setup and downtimes are reduced. Recalibration of the axis after exiting the SOS function is not necessary. The axis can immediately be moved again after deactivation of the SOS function.

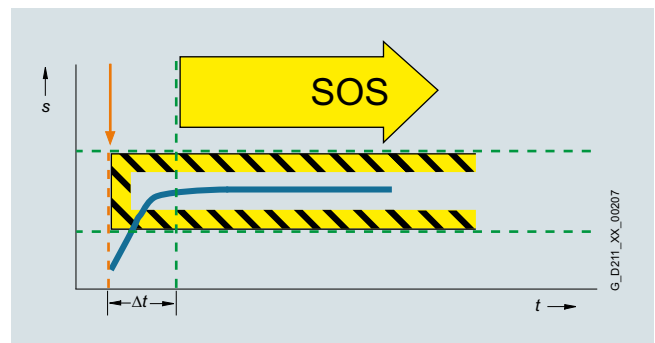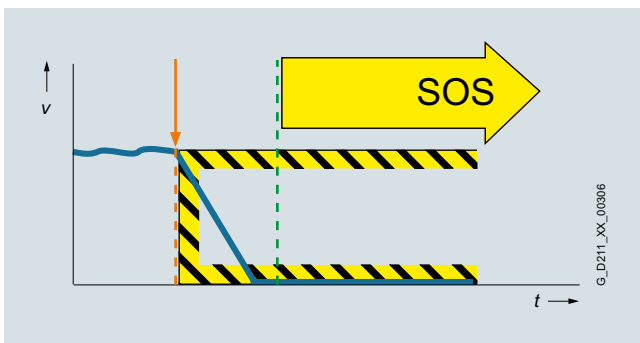

## Safety Integrated

### Safety Integrated

#### Function (continued)

##### Safe Brake Control (SBC)

The SBC function permits the safe control of a holding brake. SBC is always activated in parallel with STO.

##### Effect

A holding brake which is active in a de-energized state is controlled and monitored using safe two-channel technology. Due to the two-channel control, the brake may still be activated in the event of an insulation fault in the control cable. Errors of this kind are detected early by means of test pulses.

##### Note:


Safe Brake Control does not detect mechanical faults in the brake itself, such as worn brake linings. For Motor Modules in booksize format, the terminals for the motor brake are integrated. An additional Safe Brake Relay is required for Power Modules in blocksize format. An additional Safe Brake Adapter is necessary for Power Modules in chassis format.

##### Application

The SBC function is used in conjunction with the functions STO or SS1 to prevent the movement of an axis in the torque-free state, e.g. because of gravity.

##### Customer benefits

Again, the function saves the use of external hardware and the associated wiring.

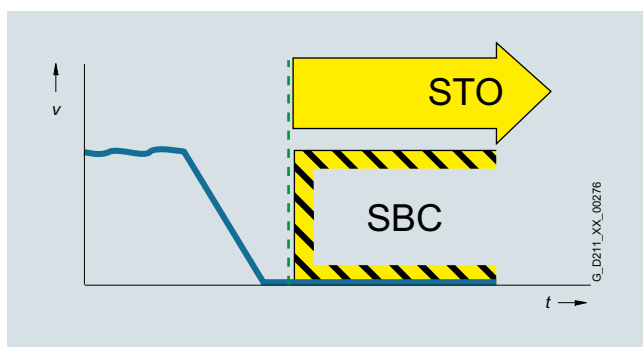

##### Safely-Limited Speed (SLS)

The SLS function monitors the drive to ensure that it does not exceed a preset speed or velocity limit.

##### Effect

The SLS function monitors the drive against a parameterized speed limit. Four different limit values can be selected. As in the case of SOS, the speed setpoint is not influenced independently. After SLS has been selected, the higher-level control must bring the drive down below the selected speed limit within a parameterizable time. If the speed limit is exceeded, a customizable drive-integrated fault reaction occurs.


The SLS limit stage 1 can be multiplied by a factor that is transferred in 16-bit resolution via PROFIsafe. This allows an almost unlimited number of limits to be specified.

##### Application

The SLS function is used if people are in the danger zone of a machine and their safety can only be guaranteed by reduced speed. Typical application cases include those in which an operator must enter the danger zone of the machine for the purposes of maintenance or setting up, such as a winder in which the material is manually threaded by the operator. To prevent injury to the operator, the roller may only spin at a safely reduced speed. SLS is often also used as part of a two-stage safety concept. While a person is in a less critical zone, the SLS function is activated, and the drives are only stopped in a smaller area with higher potential risk. SLS can be used not only for operator protection, but also for machinery protection, e.g. if a maximum speed must not be exceeded.

##### Customer benefits

The SLS function can contribute to a significant reduction in downtime, or greatly simplify or even accelerate setup. The overall effect achieved is a higher availability of the machine. Moreover, external components such as speed monitors can be omitted.

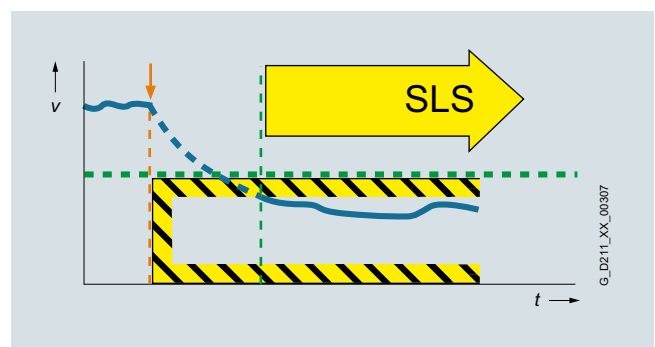

**Function** (continued)**Safe Speed Monitor (SSM)**

The SSM function warns when a drive is working below an adjustable speed limit. As long as it remains below the threshold, the function issues a safety-related signal.

Effect


If a speed value drops below a parameterized limit, a safety-related signal is generated. This can, for example, be processed in a safety controller to respond to the event by programming, depending on the situation.

Application

With the SSM function, in the simplest case, a safety door can be unlocked if the speed drops below a non-critical level. Another typical example is that of a centrifuge that may be filled only when it is operating below a configured speed limit.

Customer benefits

Unlike SLS, there is no drive-integrated fault reaction when the speed limit is exceeded. The safe feedback can be evaluated in a safety control unit, allowing the user to respond appropriately to the situation.

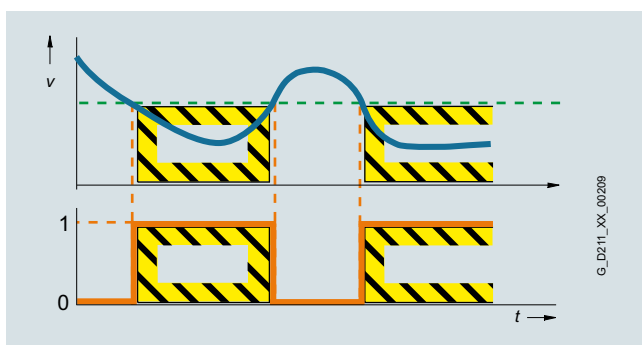**Safe Direction (SDI)**

The SDI function ensures that the drive can only move in the selected direction.

Effect


Deviation from the direction of motion currently being monitored is detected reliably and the configured drive-integrated fault reaction is initiated. It is possible to select which direction of rotation is to be monitored.

Application

The SDI function is used when the drive may only move in one direction. A typical application is to permit the operator access to a danger zone, as long as the machine is rotating in the safe direction, i.e. away from the operator. In this state, the operator can feed material into the work zone / remove material from the work zone without danger.

Customer benefits

The function saves the use of external components such as speed monitors and the associated wiring. The release of a danger zone while the machine is moving away from the operator increases productivity. Without the SDI function, the machine must be safely stopped during material loading and removal.

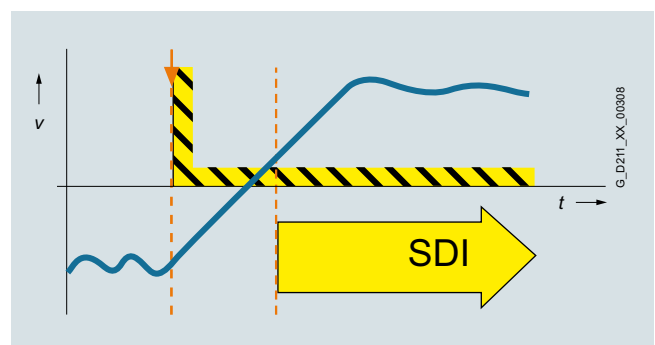

# Safety Integrated

## Safety Integrated

### Function (continued)

#### Basic Functions, Extended Functions, and Advanced Functions

With SINAMICS G inverters, the safety functions are basically implemented without encoders.

With SINAMICS S drives, the safety functions are implemented with encoders – individual safety functions can also be operated without encoders.

The Safety Integrated functions are grouped into Basic Functions, Extended Functions, and Advanced Functions.

The Basic Functions are included in the standard scope of supply.

The Extended Functions must be activated by a license <sup>1)</sup>. The Advanced Functions for SINAMICS S120 must also be activated via a license.

- Basic Functions
  - Safe Torque Off (STO)
  - Safe Brake Control (SBC)
  - Safe Stop 1 (SS1)
- Extended Functions
  - Safe Stop 1 (SS1) with SBR or SAM
  - Safe Stop 2 (SS2) with SBR or SAM
  - Safe Operating Stop (SOS)
  - Safely-Limited Speed (SLS)
  - Safe Speed Monitor (SSM)
  - Safe Direction (SDI)
  - Safe Brake Test (SBT) diagnostic function
- Advanced Functions
  - Safely-Limited Position (SLP)
  - Safe Position (SP)

For the Extended Functions SS1 and SS2 with SAM, safe acceleration monitoring (SAM) is performed during braking to identify any faults already during the braking phase.

With SS1 and SS2, a Safe Brake Ramp (SBR) can be configured as an alternative.

The Basic Functions – activated via on-board terminals on the device, TM54F Terminal Module (only for SINAMICS S) or via PROFIsafe – do not require an encoder.

#### Activation of the integrated safety functions

The safety functions for SINAMICS drives can be activated via terminals, e.g. for use of a conventional safety circuit.

For standalone safety solutions for small to medium sized applications, it is frequently sufficient that the various sensing components are directly hardwired to the drive.

For integrated safety solutions, the safety-relevant sequences are generally processed and coordinated in the fail-safe SIMATIC controller. Here, the system components communicate via the PROFINET or PROFIBUS fieldbus. The safety functions are controlled via the safe PROFIsafe communication protocol.

SINAMICS drives can be easily integrated into the plant or system topology.

#### PROFIsafe

SINAMICS drives support the PROFIsafe profile based on PROFINET as well as on PROFIBUS.

PROFIsafe is an open communications standard that supports standard and safety-related communication over the same communication path (wired or wireless). A second, separate bus system is therefore not necessary. The telegrams that are sent are continually monitored to ensure safety-relevant communication.

Possible errors such as telegrams that have been lost, repeated or received in the incorrect sequence are avoided. This is done by consecutively numbering the telegrams in a safety-relevant fashion, monitoring their reception within a defined time and transferring an ID for transmitter and receiver of a telegram. A CRC (cyclic redundancy check) data security mechanism is also used.

#### The operating principle of Safety Integrated

##### Two independent switch-off signal paths

Two independent switch-off signal paths are available. All switch-off signal paths are low active. This ensures that the system is always switched to a safe state if a component fails or in the event of cable breakage. If a fault is discovered in the switch-off signal paths, the STO or SS1 function (depending on parameter settings) is activated and a system restart inhibited.

##### Two-channel monitoring structure

All the main hardware and software functions for Safety Integrated are implemented in two independent monitoring channels (e.g. switch-off signal paths, data management, data comparison). A cyclic crosswise comparison of the safety-relevant data in the two monitoring channels is carried out.

The monitoring functions in each monitoring channel work on the principle that a defined state must prevail before each action is carried out and a specific acknowledgement must be made after each action. If these expectations of a monitoring channel are not fulfilled, the drive coasts to a standstill (two channel) and an appropriate message is output.

##### Forced dormant error detection using test stop

The functions and switch-off signal paths must be tested at least once within a defined time in order to meet requirements as per EN ISO 13849-1 and IEC 61508 in terms of timely fault detection. This must be implemented either in cyclic manual mode or the test stop must be automatically initiated as part of the process. The test stop cycle is monitored, and after a specific time has been exceeded, an alarm is output. A test stop does not require a POWER ON. The acknowledgment is set by canceling the test stop request.

Examples of when forced dormant error detection must be performed:

- When the drives are at a standstill after the system has been switched on
- Before the protective door is opened
- At defined intervals (e.g. every 8 hours)
- In automatic mode, time and event-driven

<sup>1)</sup> Only applies to SINAMICS G Control Unit CU250S-2 and SINAMICS S. Available for SINAMICS G via hardware versions "-F".

**Function** (continued)**Safe speed/position sensing without/with encoder****Safe actual value sensing without encoder**

A drive monitor with encoder is necessary for operation of a series of safety functions.

For applications with encoderless mode or with encoders that have no safety capability, the safety functions can also be implemented without encoder. It is not possible to use all safety functions in this case.

In operation without encoder, the actual speed values are calculated from the measured electrical actual values. This means that speed monitoring is also possible during operation without an encoder.

Safety Integrated Extended Functions "without encoder" must not be used if the motor, after it has been switched off, can still be accelerated by the mechanical elements of the connected machine component.

**Safe actual value sensing with encoder**

Incremental encoders or absolute encoders can be used for safe sensing of the position values on a drive.

Safe actual value sensing relies on redundant evaluation of the incremental tracks A/B that supply sin/cos signals of 1 V<sub>pp</sub>. Only encoders of the type whose A/B track signals are created and processed using purely analog techniques can be used.

HTL/TTL incremental encoders may also be used. In this case, safe actual value sensing is achieved by using two independent encoders. The minimum possible speed resolution must also be taken into account.

The encoder signals are input via Sensor Modules.

As an alternative, motors with an integrated DRIVE-CLiQ interface can be used. The speed or position actual values are generated directly in the motor as safe values and are transferred to the Control Unit over safe communication via DRIVE-CLiQ.

Certified built-on rotary encoders with DRIVE-CLiQ interface may also be used (see <https://support.industry.siemens.com/cs/document/65402168>).


The encoder must be mechanically attached in such a manner that the encoder shaft is unable to unplug or slide off. For notes on this, see IEC 61800-5-2: 2016, Table D.16.

A list of Siemens motors that fulfill the electrical and mechanical requirements is available at:

<https://support.industry.siemens.com/cs/document/33512621>


The following can be used for safe speed/position sensing:

- Single-encoder systems or
- Dual-encoder systems

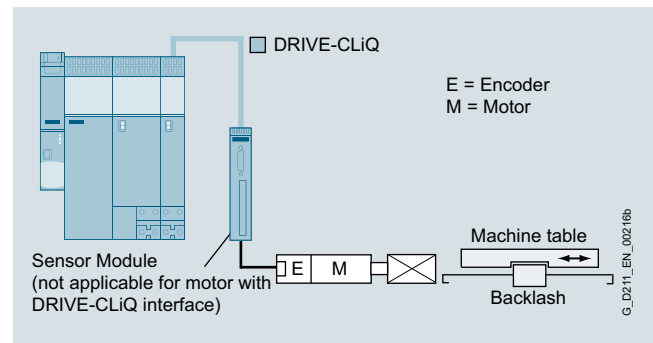**Single-encoder system**

Example: Single-encoder system

In a single-encoder system, the motor encoder is used exclusively for safe actual value sensing.

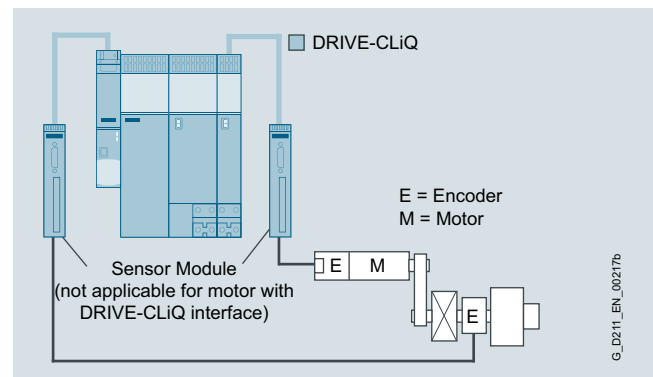**Dual-encoder system**

Example: Dual-encoder system

In the case of the dual-encoder system, the safe actual values for a drive are provided by two separate encoders. The actual values are transferred to the Control Unit over DRIVE-CLiQ. When motors without a DRIVE-CLiQ connection are used, a Sensor Module must be provided.

HTL/TTL incremental encoders can be used as an alternative with a dual-encoder system. Either two HTL/TTL encoders, one dual-HTL/TTL encoder or one HTL/TTL encoder and one sin/cos encoder can be used.

# Safety Integrated

## Safety Integrated

### Function (continued)

The safety functions are listed below with criteria for actual value sensing

|                           | Functions               | Abbreviation | With encoder | Without encoder   | Description                                                                    |
|---------------------------|-------------------------|--------------|--------------|-------------------|--------------------------------------------------------------------------------|
| <b>Basic Functions</b>    | Safe Torque Off         | STO          | Yes          | Yes               | Safe Torque Off                                                                |
|                           | Safe Stop 1             | SS1          | Yes          | Yes <sup>1)</sup> | Safe stopping process in accordance with stop category 1                       |
|                           | Safe Brake Control      | SBC          | Yes          | Yes               | Safe Brake Control                                                             |
| <b>Extended Functions</b> | Safe Torque Off         | STO          | Yes          | Yes               | Safe Torque Off                                                                |
|                           | Safe Stop 1             | SS1          | Yes          | Yes <sup>1)</sup> | Safe stopping process in accordance with stop category 1                       |
|                           | Safe Brake Control      | SBC          | Yes          | Yes               | Safe Brake Control                                                             |
|                           | Safe Operating Stop     | SOS          | Yes          | No                | Safe monitoring of the standstill position                                     |
|                           | Safe Stop 2             | SS2          | Yes          | No                | Safe stopping process in accordance with stop category 2                       |
|                           | Safely-Limited Speed    | SLS          | Yes          | Yes <sup>1)</sup> | Safe monitoring of the maximum speed                                           |
|                           | Safe Speed Monitor      | SSM          | Yes          | Yes <sup>1)</sup> | Safe monitoring of the minimum speed                                           |
|                           | Safe Direction          | SDI          | Yes          | Yes <sup>1)</sup> | Safe monitoring of the direction of motion                                     |
|                           | Safe Brake Test         | SBT          | Yes          | No                | Diagnostic function for safe testing of the required holding torque of a brake |
|                           |                         |              |              |                   |                                                                                |
| <b>Advanced Functions</b> | Safely-Limited Position | SLP          | Yes          | No                | Safely-limited position                                                        |
|                           | Safe Position           | SP           | Yes          | Yes <sup>2)</sup> | Safe transfer of position values                                               |

### More information

The Safety Integrated Function Manual contains detailed information about the safety functions  
<https://support.industry.siemens.com/cs/document/109744795>

Further manuals pertaining to Safety Integrated in drive systems can be found on the Internet at  
<https://support.industry.siemens.com/cs/ww/en/ps/13206/man>

Further information about Safety Integrated in SINAMICS can be found on the Internet at  
[www.siemens.com/safety-drives](http://www.siemens.com/safety-drives)

Further information about Safety Integrated in SIMOTION can be found on the Internet at  
[www.siemens.com/simotion-d-safety-integrated](http://www.siemens.com/simotion-d-safety-integrated)

<sup>1)</sup> The use of this safety function without encoder is permitted for asynchronous (induction) motors or synchronous motors of the SIEMOSYN series.

<sup>2)</sup> Only for the transmission of relative position values. An encoder is required to transmit absolute position values.

Overview



The SINAMICS G120C frequency inverter offers the Safe Torque Off (STO) function as a standard feature.

The Safety Integrated function is completely integrated into the drive system. It can be activated via fail-safe digital inputs on the inverter or via PROFINET or PROFIBUS with PROFIsafe.

The Safety Integrated function is implemented electronically and therefore offers short response times in comparison to solutions with externally implemented monitoring functions.

3

Function

| Function | Control                                                                | Encoder required | License required |
|----------|------------------------------------------------------------------------|------------------|------------------|
| STO      | <ul style="list-style-type: none"><li>F-DI</li><li>PROFIsafe</li></ul> | No               | No               |

## Safety Integrated

### Safety Integrated for SINAMICS G120

#### Overview



The PM240-2 and PM250 Power Modules are prepared for Safety Integrated.

In conjunction with a standard Control Unit, the drive provides the safety function STO.

The PM240-2 Power Modules, frame sizes FSD to FSG additionally offer STO acc. to IEC 61508 SIL 3 and EN ISO 13489-1 PL e and Category 3.

In conjunction with a fail-safe Control Unit, the drive can be turned into a Safety Integrated Drive with comprehensive safety functions.

The Safety Integrated functions are fully integrated in the drive system. They can be activated via fail-safe digital inputs or via PROFINET or PROFIBUS with PROFSafe.

The Safety Integrated functions are implemented electronically and therefore offer short response times compared to solutions with externally implemented monitoring functions.

#### Safety Integrated encoderless

The safety functions do not require a motor encoder; the implementation effort is minimal. Existing machines in particular can be updated with integrated safety technology without the need to change the motor or mechanical system.

The STO function can be used without any restrictions for all applications.

The SS1, SLS, SSM and SDI functions are only permissible for applications where the load can never cause acceleration. An encoder that is used for the purposes of motor control has no significance for the safety functions here.

#### Safety Integrated overview

The availability of Safety Integrated functions depends on the type of Control Unit. Standard Control Units and fail-safe Control Units are available.

The CU240E-2 standard Control Units have STO and the CU250S-2 Control Units have STO, SBC, and SS1 as standard.

The fail-safe Control Units offer Extended Functions (SLS, SDI, SSM) in addition to the Basic Functions (STO, SS1). The Basic Function SBC is currently supported by the CU250S-2.

A license is required for operation of the Extended Functions on the CU250S-2 Control Unit. It is of no consequence here which safety functions are used and how many.

The license can be ordered as an option with the memory card. Alternatively, a single-user license can also be purchased.

#### Safe Brake Relay



The Safe Brake Control (SBC) function requires a Safe Brake Relay. The Safe Brake Relay allows safe control of electro-mechanical motor brakes.

The 24 V DC solenoid of the motor brake is directly connected to the Safe Brake Relay. External surge suppressors are not required. The cable harnesses for connection to the Power Module are included in the scope of supply.

With the Safe Brake Relay function, the brake is controlled in accordance with IEC 61508 SIL 2 and EN ISO 13849-1 PL d and Category 3.


## Benefits

### Comparison between conventional and integrated safety systems

The safety functions integrated into the drive can greatly reduce the effort required to implement safety concepts.


The integrated safety functions provide support when setting up tailored safety concepts. Configurations of safety concepts are given below based on the example of the SINAMICS G120.

#### Safe Torque Off (STO)

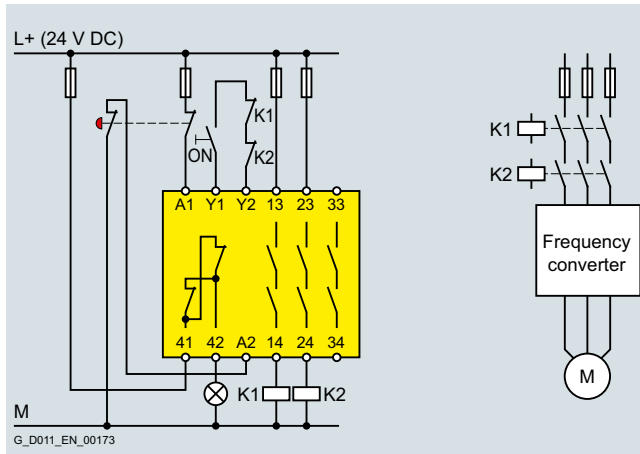


Classic implementation using an external circuit


#### Safe Stop 1 (SS1)

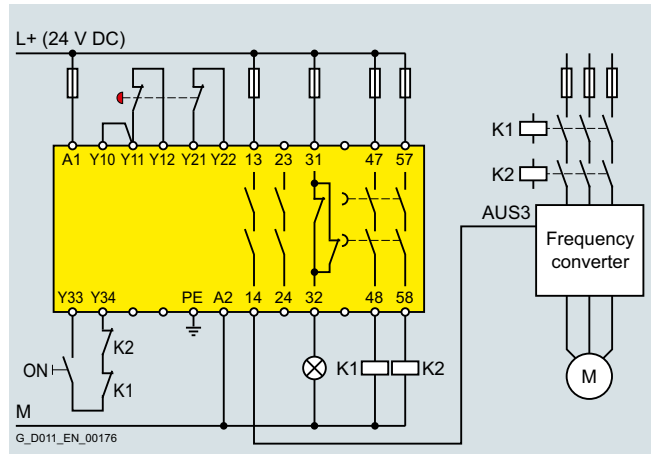


Classic implementation using an external circuit

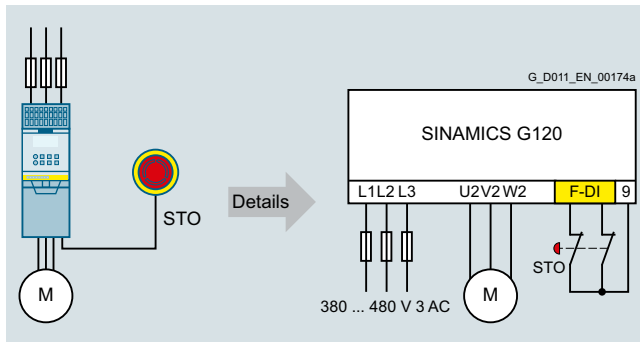


Standalone safety solution via fail-safe inputs

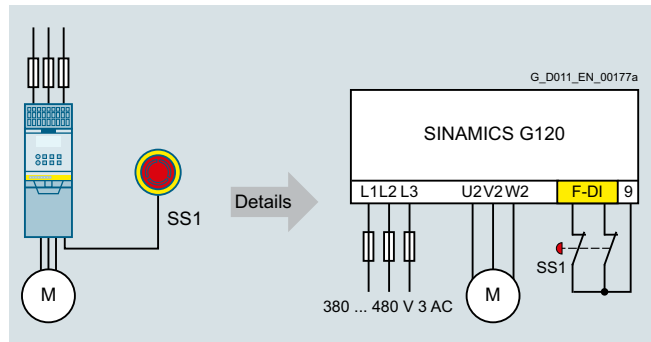

Standalone safety solution via fail-safe inputs

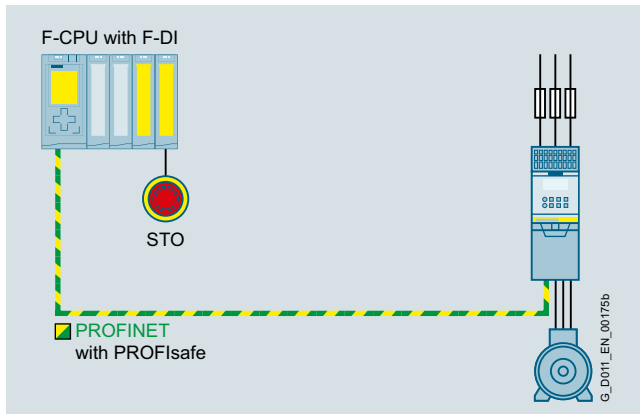

Integrated safety solution via PROFINet

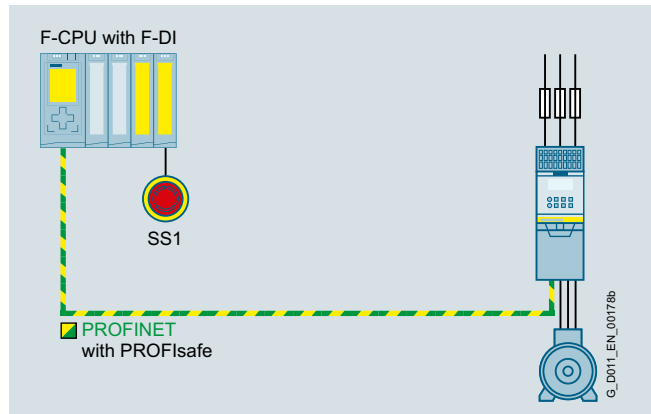


Integrated safety solution via PROFINet

## Safety Integrated


### Safety Integrated for SINAMICS G120

#### Benefits (continued)


##### Safely-Limited Speed (SLS)

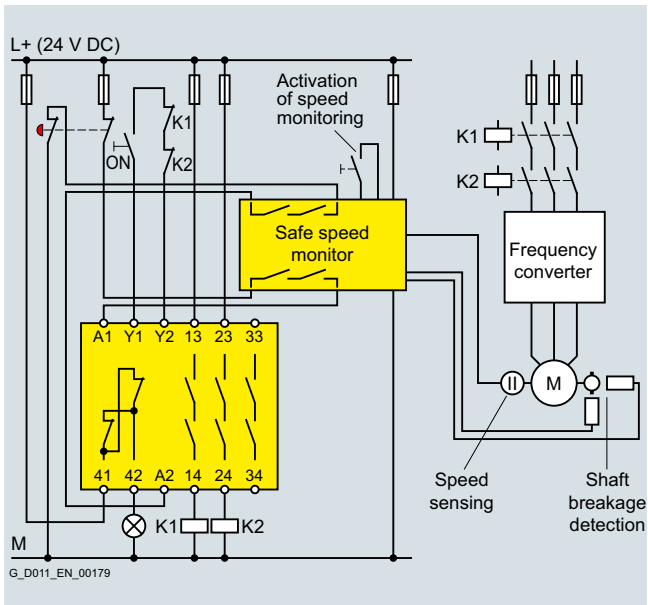

Classic implementation using an external circuit

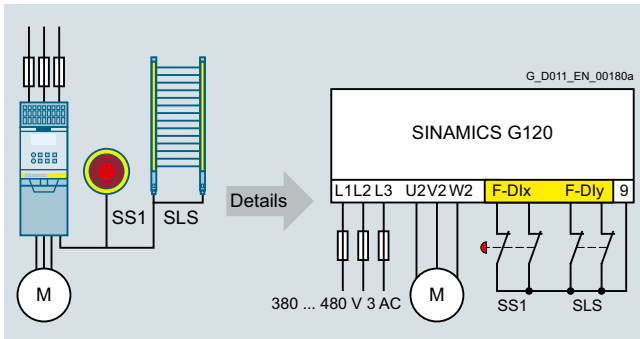

Standalone safety solution via fail-safe inputs

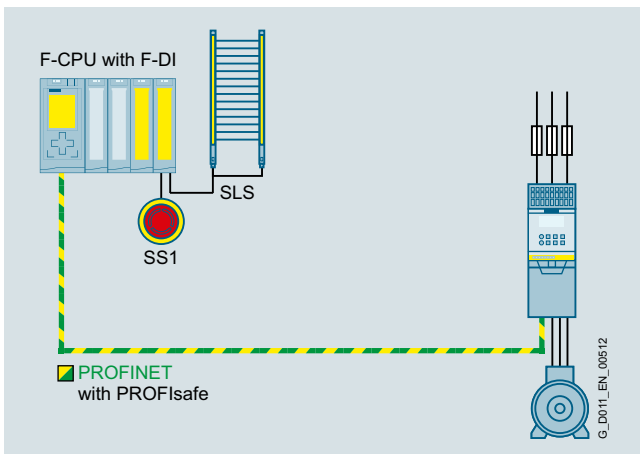

Integrated safety solution via PROFINet

## Function

| Function                   | Control                                                                                                                 | Underlying function                                                                                                                                                                                      | Reaction to limit overshoot                               | Encoder required | License required | Available in                                                                                                                                                                                                                                             |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Basic Functions</b>     |                                                                                                                         |                                                                                                                                                                                                          |                                                           |                  |                  |                                                                                                                                                                                                                                                          |
| <b>STO</b>                 | <ul style="list-style-type: none"> <li>F-DI</li> <li>PROFIsafe</li> </ul>                                               | SBC (if activated)                                                                                                                                                                                       | –                                                         | No               | No               | <ul style="list-style-type: none"> <li>CU240E-2</li> <li>CU240E-2 DP</li> <li>CU240E-2 PN</li> <li>CU240E-2 F</li> <li>CU240E-2 DP-F</li> <li>CU240E-2 PN-F</li> <li>CU250S-2</li> <li>CU250S-2 CAN</li> <li>CU250S-2 DP</li> <li>CU250S-2 PN</li> </ul> |
| <b>SS1 time-controlled</b> | <ul style="list-style-type: none"> <li>F-DI</li> <li>PROFIsafe</li> </ul>                                               | STO and SBC (if activated) following expiry of the parameterized delay time or if the speed falls below the minimum speed limit                                                                          | STO                                                       | No               | No               | <ul style="list-style-type: none"> <li>CU240E-2 F</li> <li>CU240E-2 DP-F</li> <li>CU240E-2 PN-F</li> <li>CU250S-2</li> <li>CU250S-2 CAN</li> <li>CU250S-2 DP</li> <li>CU250S-2 PN</li> </ul>                                                             |
| <b>SBC</b>                 | <ul style="list-style-type: none"> <li>With STO (immediately or following expiry of the delay time with SS1)</li> </ul> | –                                                                                                                                                                                                        | –                                                         | No               | No               | <ul style="list-style-type: none"> <li>CU250S-2</li> <li>CU250S-2 CAN</li> <li>CU250S-2 DP</li> <li>CU250S-2 PN</li> </ul>                                                                                                                               |
| <b>Extended Functions</b>  |                                                                                                                         |                                                                                                                                                                                                          |                                                           |                  |                  |                                                                                                                                                                                                                                                          |
| <b>SS1 with SBR/SAM</b>    | <ul style="list-style-type: none"> <li>F-DI</li> <li>PROFIsafe</li> </ul>                                               | Safe Acceleration Monitor (SAM) or Safe Brake Ramp (SBR) during braking. STO and SBC (if activated) following expiry of the parameterized delay time or if the speed falls below the minimum speed limit | STO                                                       | No               | No               | <ul style="list-style-type: none"> <li>CU240E-2 F</li> <li>CU240E-2 DP-F</li> <li>CU240E-2 PN-F</li> </ul>                                                                                                                                               |
|                            |                                                                                                                         |                                                                                                                                                                                                          |                                                           |                  | Yes              | <ul style="list-style-type: none"> <li>CU250S-2</li> <li>CU250S-2 CAN</li> <li>CU250S-2 DP</li> <li>CU250S-2 PN</li> </ul>                                                                                                                               |
| <b>SLS</b>                 | <ul style="list-style-type: none"> <li>F-DI</li> <li>PROFIsafe</li> </ul>                                               | –                                                                                                                                                                                                        | STO, SS1 (can be parameterized)                           | No               | No               | <ul style="list-style-type: none"> <li>CU240E-2 F</li> <li>CU240E-2 DP-F</li> <li>CU240E-2 PN-F</li> </ul>                                                                                                                                               |
|                            |                                                                                                                         |                                                                                                                                                                                                          |                                                           |                  | Yes              | <ul style="list-style-type: none"> <li>CU250S-2</li> <li>CU250S-2 CAN</li> <li>CU250S-2 DP</li> <li>CU250S-2 PN</li> </ul>                                                                                                                               |
| <b>SDI</b>                 | <ul style="list-style-type: none"> <li>F-DI</li> <li>PROFIsafe</li> </ul>                                               | –                                                                                                                                                                                                        | STO, SS1 (can be parameterized)                           | No               | No               | <ul style="list-style-type: none"> <li>CU240E-2 F</li> <li>CU240E-2 DP-F</li> <li>CU240E-2 PN-F</li> </ul>                                                                                                                                               |
|                            |                                                                                                                         |                                                                                                                                                                                                          |                                                           |                  | Yes              | <ul style="list-style-type: none"> <li>CU250S-2</li> <li>CU250S-2 CAN</li> <li>CU250S-2 DP</li> <li>CU250S-2 PN</li> </ul>                                                                                                                               |
| <b>SSM</b>                 | <ul style="list-style-type: none"> <li>Always active, if configured</li> </ul>                                          | –                                                                                                                                                                                                        | Signals that the speed has fallen below a specified value | No               | No               | <ul style="list-style-type: none"> <li>CU240E-2 DP-F <sup>1)</sup></li> <li>CU240E-2 PN-F <sup>1)</sup></li> </ul>                                                                                                                                       |
|                            |                                                                                                                         |                                                                                                                                                                                                          |                                                           |                  | Yes              | <ul style="list-style-type: none"> <li>CU250S-2</li> <li>CU250S-2 CAN</li> <li>CU250S-2 DP</li> <li>CU250S-2 PN</li> </ul>                                                                                                                               |

<sup>1)</sup> SSM is possible only with PROFIsafe.

## Safety Integrated

### Safety Integrated for SINAMICS S110

#### Overview



The integrated safety functions of SINAMICS S110 provide highly effective application-oriented protection for personnel and machinery.

SINAMICS S110 offers Extended Functions (SS2, SOS, SLS, SDI, SSM) in addition to Basic Functions (STO, SS1, SBC).

The Safety Integrated functions are implemented electronically and therefore offer short response times compared to solutions with externally implemented monitoring functions.

The Safety Integrated functions are fully integrated in the drive system. They can be activated via fail-safe digital inputs on the CU305 Control Unit or via PROFINET or PROFIBUS with PROFIsafe.

As an alternative to controlling via terminals and/or PROFIsafe, there is also the option to parameterize several safety functions without selection. In this mode, after parameterization and a POWER ON, these functions are permanently selected.

Example:

"SLS without selection" can be used, for example, to monitor the maximum velocity to prevent the drive from exceeding a mechanical speed limit. For this purpose, using the "without selection" function, an F-DI does not have to be used; an F-CPU is also not required.

#### Safe speed/position sensing

Incremental encoders or absolute encoders can be used for safe sensing of the position values on a drive. Safe actual value sensing relies on redundant evaluation of the incremental tracks A/B that supply sin/cos signals of  $1 V_{pp}$ . Only encoders of the type whose A/B track signals are created and processed using purely analog techniques can be used.

The encoder signals can be input via the Sensor Modules. As an alternative, motors with an integrated DRIVE-CLiQ interface can be used. The speed or position actual values are generated directly in the motor as safe values and are transferred to the Control Unit over safe communication via DRIVE-CLiQ.

The encoder must be mechanically attached in such a manner that the encoder shaft is unable to unplug or slide off. For notes on this, see IEC 61800-5-2: 2007, Table D.16.

A list of Siemens motors that fulfill the electrical and mechanical requirements is available at:

<https://support.industry.siemens.com/cs/document/33512621>

Motors with DRIVE-CLiQ interface are connected directly to the CU305 Control Unit. A SINAMICS Sensor Module is required to evaluate the encoder signals of motors without a DRIVE-CLiQ interface.

#### Safe actual value sensing without encoder

Some safety functions can also be operated without safety-capable encoders; implementation effort is minimal. Existing systems in particular can be updated with safety technology without the need to change the motor or mechanical system.

The STO function can be used without any restrictions for all applications.

The SS1, SLS, SSM and SDI functions are permissible for applications in conjunction with asynchronous and SIEMOSYN motors where the load can never cause acceleration. An encoder that is used for the purposes of motor control has no significance for the safety functions here.

#### Licensing

The Safety Integrated Basic Functions do not require a license.

The Safety Integrated Extended Functions do require a license. It is of no consequence here which safety functions are used and how many. The license can be ordered as an option with the memory card. Alternatively, a single-user license can also be purchased.

#### Safe Brake Relay



The Safe Brake Control (SBC) function requires a Safe Brake Relay. The Safe Brake Relay allows safe control of electro-mechanical motor brakes.

The 24 V DC solenoid of the motor brake is directly connected to the Safe Brake Relay. External surge suppressors are not required. The cable harnesses for connection to the Power Module are included in the scope of supply.

With the Safe Brake Relay function, the brake is controlled in accordance with IEC 61508 SIL 2 and EN ISO 13849-1 PL d and Category 3.

## Function

| Function                   | Control                                                                                                                 | Underlying function                                                                                                                                                                                       | Reaction to limit overshoot                               | Encoder required | License required |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|------------------|------------------|
| <b>Basic Functions</b>     |                                                                                                                         |                                                                                                                                                                                                           |                                                           |                  |                  |
| <b>STO</b>                 | <ul style="list-style-type: none"> <li>F-DI</li> <li>PROFIsafe</li> </ul>                                               | SBC (if activated)                                                                                                                                                                                        | –                                                         | No               | No               |
| <b>SS1 time-controlled</b> | <ul style="list-style-type: none"> <li>F-DI</li> <li>PROFIsafe</li> </ul>                                               | STO and SBC (if activated) following expiry of the parameterized delay time or if the speed falls below the minimum speed limit                                                                           | STO                                                       | No               | No               |
| <b>SBC</b>                 | <ul style="list-style-type: none"> <li>With STO (immediately or following expiry of the delay time with SS1)</li> </ul> | –                                                                                                                                                                                                         | –                                                         | No               | No               |
| <b>Extended Functions</b>  |                                                                                                                         |                                                                                                                                                                                                           |                                                           |                  |                  |
| <b>SS1 with SBR/SAM</b>    | <ul style="list-style-type: none"> <li>F-DI</li> <li>PROFIsafe</li> </ul>                                               | Safe Acceleration Monitor (SAM) or Safe Brake Ramp (SBR) during braking. STO and SBC (if activated) following expiry of the parameterized delay time or if the speed falls below the minimum speed limit. | STO                                                       | No               | Yes              |
| <b>SS2</b>                 | <ul style="list-style-type: none"> <li>F-DI</li> <li>PROFIsafe</li> </ul>                                               | Safe acceleration monitoring (SBR – Safe Brake Ramp) during braking. SOS following expiry of the parameterized delay time                                                                                 | SS1 → STO                                                 | Yes              | Yes              |
| <b>SOS</b>                 | <ul style="list-style-type: none"> <li>F-DI</li> <li>PROFIsafe</li> </ul>                                               | –                                                                                                                                                                                                         | SS1 → STO                                                 | Yes              | Yes              |
| <b>SLS</b>                 | <ul style="list-style-type: none"> <li>F-DI</li> <li>PROFIsafe</li> </ul>                                               | –                                                                                                                                                                                                         | STO, SS1, SS2 or SOS (can be parameterized)               | Yes              | Yes              |
| <b>SLS encoderless</b>     | <ul style="list-style-type: none"> <li>F-DI</li> <li>PROFIsafe</li> </ul>                                               | –                                                                                                                                                                                                         | STO, SS1 (can be parameterized)                           | No               | Yes              |
| <b>SDI</b>                 | <ul style="list-style-type: none"> <li>F-DI</li> <li>PROFIsafe</li> </ul>                                               | –                                                                                                                                                                                                         | STO, SS1, SS2 or SOS (can be parameterized)               | No               | Yes              |
| <b>SSM</b>                 | <ul style="list-style-type: none"> <li>Always active, if configured</li> </ul>                                          | –                                                                                                                                                                                                         | Signals that the speed has fallen below a specified value | No               | Yes              |

## Safety Integrated

### Notes

3

Energy efficiency




|            |                                                                                                  |
|------------|--------------------------------------------------------------------------------------------------|
| 4/2<br>4/2 | <b>Energy efficiency</b><br>Success factor Energy Efficiency                                     |
| 4/3        | <b>SIMATIC Energy Suite –<br/>integrated energy management</b>                                   |
| 4/4<br>4/5 | <b>Energy-efficient drives</b><br>Overview of the energy-saving functions<br>for SINAMICS drives |
| 4/6        | <b>Energy efficiency classes<br/>in accordance with EN 50598</b>                                 |

Further information about energy efficiency including references from industrial production can be found at [www.siemens.com/energy-efficiency](http://www.siemens.com/energy-efficiency) [www.siemens.com/energysaving](http://www.siemens.com/energysaving)

# Energy efficiency

## Energy efficiency

### Overview

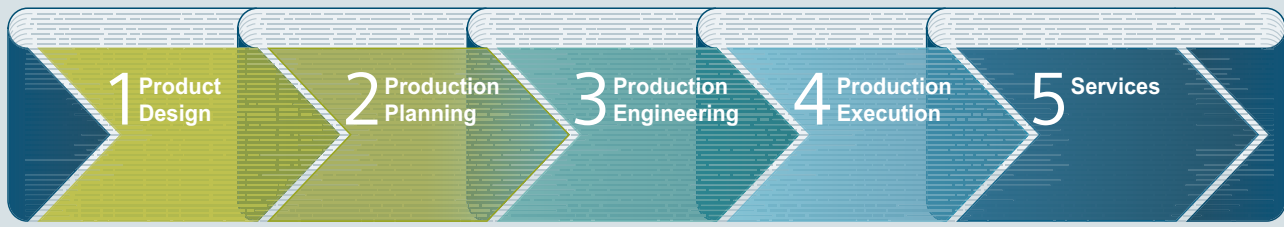

G\_D011\_EN\_00555

### Success factor Energy Efficiency

Siemens helps you to optimize your energy demand, reduce your energy costs and increase your competitive advantage

Industry is facing enormous challenges: Production processes need to be highly productive, energy-efficient, and resource-saving. Siemens is offering an energy efficiency concept that continually and systematically reduces the power consumption of machines and equipment and thereby boosts the competitive advantage of industrial producers. When implementing energy-efficient solutions, Siemens not only assesses the production process as a whole, but also evaluates each individual production step.

#### 1 Product Design

Improve your confidence in planning outcomes! It is important to know the costs associated with the operation of a production machine so that these can be taken into account in the machine design. For example, the SinaSave software application can help you to calculate how soon you will recoup your investment if you purchase an energy-efficient drive. The Mechatronic Support simulation package will also provide you with the means to test and optimize your machine concept, Helping you to save time, energy and operating expenses. See also the SIZER for Siemens Drives engineering tool.

SinaSave: [www.siemens.com/sinasave](http://www.siemens.com/sinasave)

SIZER for Siemens Drives: [www.siemens.com/sizer](http://www.siemens.com/sizer)

#### 2 Production Planning

Make your plant more profitable! It is possible to carry out an on-screen simulation of individual machines and even the entire production process. By doing this, you can optimize the efficiency and productivity of production processes. For example, you can use the digital models and analysis functions provided by the Plant Simulation tool in order to optimize the motion sequences of your machines, prevent load peak overlaps, recover energy and optimize speeds.

Plant Simulation: [www.siemens.com/tecnomatix](http://www.siemens.com/tecnomatix)

#### 3 Production Engineering

Optimize the workflow! The SIMATIC Energy Manager PRO management tool helps you to achieve efficient control of energy and costs. But this requires perfectly coordinated communication and operation between hardware and software. Using the TIA Portal engineering framework, for example, it is easy to set up and optimize every single engineering process. You can then see at a glance the areas in your plant that can be made more productive and environmentally friendly. See also the STARTER commissioning tool and the SINAMICS Startdrive commissioning tool.

SIMATIC Energy Manager PRO:

[www.siemens.com/energymanagerpro](http://www.siemens.com/energymanagerpro)

TIA Portal: [www.siemens.com/tia-portal](http://www.siemens.com/tia-portal)

STARTER: [www.siemens.com/starter](http://www.siemens.com/starter)

SINAMICS Startdrive: [www.siemens.com/startdrive](http://www.siemens.com/startdrive)

#### 4 Production Execution

Use innovative drive technology to reduce your energy consumption! The energy-efficient components and systems developed by Siemens can cut the energy consumption of a plant. Important components in an energy-efficient plant are, for example, frequency inverters with regenerative feedback functions for applications with variable speeds or soft starters for fixed-speed drives. With its PROFlenergy system, Siemens is also offering solutions that permit centralized shutdown of loads or entire production units during production breaks – a vendor- and device-neutral interface for flexible use over short or long production breaks.

#### 5 Services

Improve your productivity and efficiency while reducing total costs! With its Energy & Environmental Services, Siemens is offering a tailored consultancy that will provide you with the necessary support in designing and implementing systematic energy and environmental management solutions. It will give you the satisfaction of achieving maximum energy efficiency throughout your company.

### More information


Further information about energy efficiency including references from industrial production can be found at

[www.siemens.com/energy-efficiency](http://www.siemens.com/energy-efficiency)

[www.siemens.com/energysaving](http://www.siemens.com/energysaving)

## SIMATIC Energy Suite – integrated energy management

## Overview

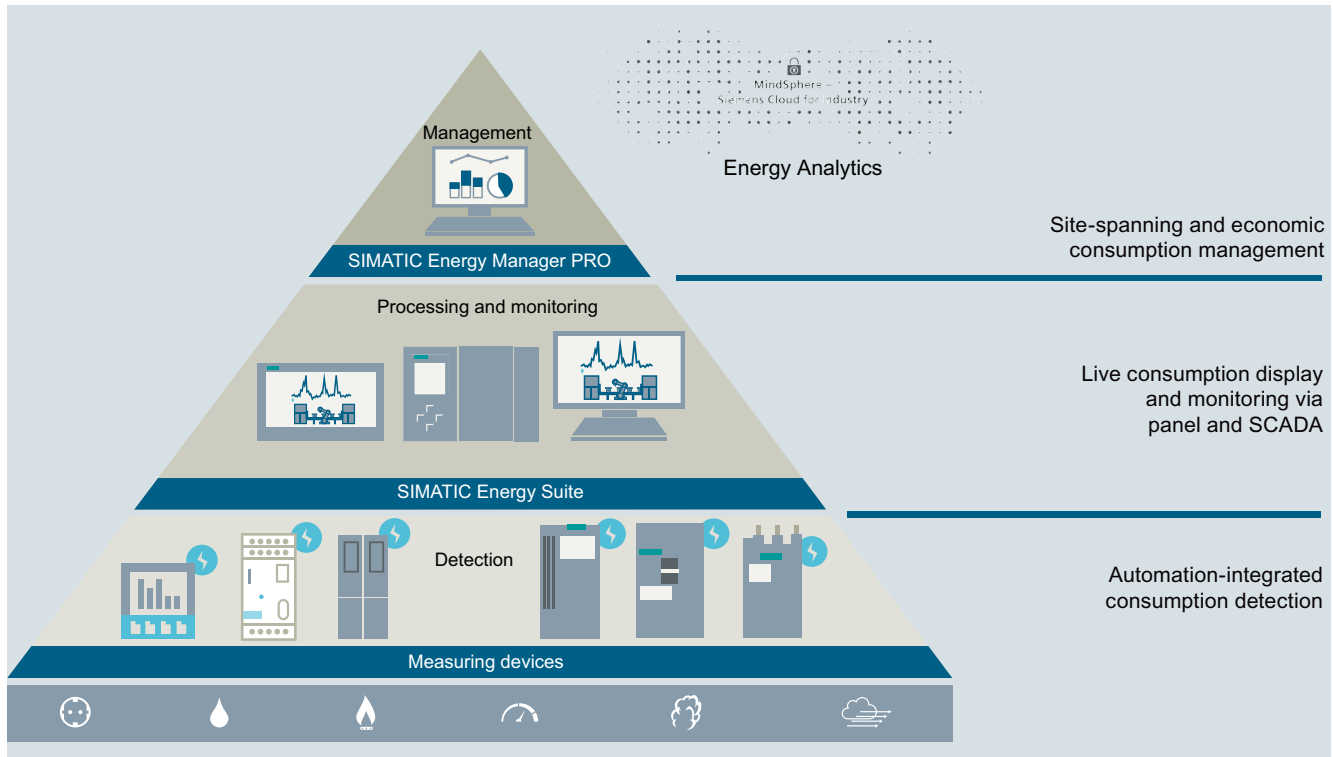

A high energy consumption and automated production are typical for many industries.

If you want to keep your energy costs under control in the long term and you are already focusing on the digital future, you will equip your plant with integrated energy measuring technology, thus anchoring your energy management in the automation of your production processes – which is where most energy is consumed. SIMATIC Energy Suite as an integrated option for the TIA Portal efficiently links energy management with automation, thus creating energy transparency in production. The considerably simplified configuration of energy measuring components from the product families<sup>2)</sup> SIMATIC, SENTRON, SINAMICS, SIRIUS and SIMOCODE significantly reduces the configuration costs. Thanks to the end-to-end connection to SIMATIC Energy Manager PRO<sup>1)</sup> or cloud-based Service Energy Analytics, you can seamlessly expand the recorded energy data to create a cross-site energy management system.


This additionally enables companies to satisfy all the required economic and energy management aspects – from the purchasing of energy and planning all the way to energy controlling.

The advantages at a glance:

- Automatic generation of energy management data
- Integration into TIA Portal and into automation
- Simple configuration

## Highlights

- Simple and intuitive configuration instead of programming
- Automatic generation of the PLC energy program
- Convenient integration of measuring components from the Siemens portfolio and from the portfolio of other vendors
- Integrated into the TIA Portal and automation
- Archiving on WinCC Professional or PLC
- Seamless connection to Energy Manager PRO and Energy Analytics

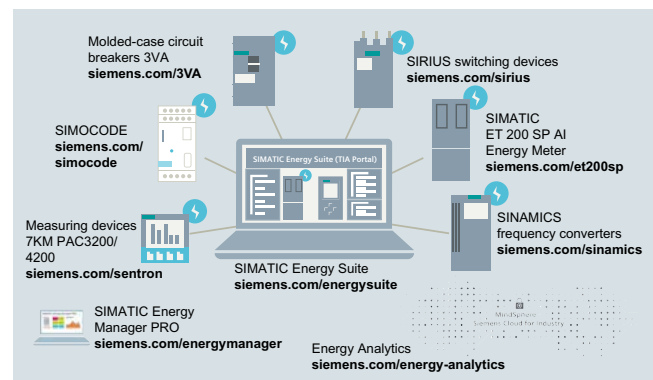

Further information on  
SIMATIC Energy Suite:  
[www.siemens.com/energysuite](http://www.siemens.com/energysuite)

Ready for  
SIMATIC  
Energy Suite

<sup>1)</sup> SIMATIC Energy Manager PRO is the innovative successor to SIMATIC B.Data

<sup>2)</sup> Products of the SIMATIC, SENTRON, SINAMICS, SIRIUS and SIMOCODE product families. You can find details on the currently supported devices here:  
[www.siemens.com/energysuite-hardware](http://www.siemens.com/energysuite-hardware)

# Energy efficiency

## Energy-efficient drives

### Overview

#### *Energy-efficient SINAMICS drives save energy in an intelligent way*

Exploit energy-saving potential and optimize energy consumption: You can – with intelligent SINAMICS drives. Depending on the application in question, energy consumption can be controlled by motor speed adjustment to suit the individual process and achieve the greatest possible energy savings. The energy consumption of drives for turbo machines can be cut by as much as 60 %. Regenerative feedback is also an option for many applications. Our portfolio of frequency inverters is the most comprehensive and standardized range on the market and the first choice for anyone seeking an energy-efficient drive – at low-voltage or medium-voltage level.

#### *Energy-efficient drives with intelligent functions*

Depending on the application and load profile, the intelligent energy-saving functions of SINAMICS drives can cut energy consumption.

#### PROFlenergy



Provides energy-related status data for the system components to create transparency for the energy management; energy savings by selective shut-down of plants or plant sections.

#### ECO mode




In ECO mode, the operating point of the motor in the partial-load range is automatically adjusted and optimized. This reduces motor losses, for example, in machines that do not need a high torque over the entire operating range.

#### Hibernation mode




Variable-speed drives that are not required to operate continuously are switched to standby or "Hibernation mode". The drive is restarted again as soon as it is needed.

#### Bypass mode




In bypass mode it is possible to "bypass" the inverter electrically as soon as the motor is frequently operating close to its rated speed. This solution helps to reduce inverter losses and so increase overall efficiency.

#### Cascading




In pump, fan and compressor applications involving high outputs, the entire power demand is distributed among several motors. Phased connection and disconnection by means of partially or fully controlled cascades in combination with inverters make a drive system more energy-efficient.

#### Energy balancing




Through the use of inverters with coupled drives, energy is exchanged through the common DC link. Through the direct energy exchange from one inverter to the next, it is possible to minimize power losses in the system.

#### Reactive power compensation



The use of SINAMICS inverters with Active Line Modules reduces the capacitive and/or inductive reactive power in the machine. It is then possible to dispense with costly reactive power compensation systems.

#### Kinetic energy buffering



With dynamic reversing operations in single-axis and multi-axis systems, the kinetic energy available in the system is reused. A motor connected to the common DC link is used to buffer kinetic energy.

#### Electrical energy buffering



With dynamic reversing operations in single-axis and multi-axis systems, the kinetic energy available in the system is reused. A capacitor module connected to the common DC link is used to buffer electrical energy.

#### Optimized pulse patterns




Thanks to optimized clock frequency and pulse pattern, SINAMICS G and SINAMICS S are perfectly suited to SIMOTICS motors and SIMOGEAR geared motors. The benefits: Optimization of performance and system efficiency, reduced system losses as well as lower temperature and noise levels.

#### Energy usage counter/Energy saving counter




Actual energy usage can be displayed during operation. Furthermore, an energy saving counter can be installed to indicate the cumulative energy savings during machine operation as compared to a fixed-speed application.

#### Regenerative feedback



In conventional drive systems, the energy produced during braking is converted to heat using braking resistors. SINAMICS G and SINAMICS S inverters with regenerative feedback capability need no braking resistor, and supply the resulting braking energy back into the line.

#### DC link coupling with SINAMICS V20



Applications with two SINAMICS V20 converters with the same power rating can share a common DC link in order to reuse regenerated energy.

## Overview (continued)

## Overview of the energy-saving functions for SINAMICS drives including SIMATIC ET 200pro FC-2 frequency converters

| Energy-saving function                     | SINAMICS V | SINAMICS G |       |       |       |                                 |       |       | SINAMICS S |                                                  | SIMATIC ET 200pro FC-2 |
|--------------------------------------------|------------|------------|-------|-------|-------|---------------------------------|-------|-------|------------|--------------------------------------------------|------------------------|
|                                            | V20        | G110       | G110D | G120C | G120P | G120                            | G110M | G120D | S110       | S120                                             |                        |
| ECO mode                                   | ✓          | –          | –     | ✓     | ✓     | ✓                               | ✓     | ✓     | ✓          | ✓                                                | ✓                      |
| Hibernation mode                           | ✓          | –          | –     | –     | ✓     | ✓<br>with CU230P-2 Control Unit | –     | –     | –          | –                                                | –                      |
| Bypass mode                                | –          | –          | –     | –     | ✓     | ✓<br>with CU230P-2 Control Unit | –     | –     | –          | ✓                                                | –                      |
| Cascading                                  | ✓          | –          | –     | –     | ✓     | ✓<br>with CU230P-2 Control Unit | –     | –     | –          | –                                                | –                      |
| Energy balancing                           | ✓          | –          | –     | –     | –     | –                               | –     | –     | –          | ✓<br>for multi-axis drives only                  | –                      |
| Reactive power compensation                | –          | –          | –     | –     | –     | –                               | –     | –     | –          | ✓<br>with ActiveLine Module                      | –                      |
| Kinetic energy buffering                   | –          | –          | –     | –     | –     | –                               | –     | –     | –          | ✓<br>for multi-axis drives only                  | –                      |
| Electrical energy buffering                | –          | –          | –     | –     | –     | –                               | –     | –     | –          | ✓<br>for multi-axis drives only                  | –                      |
| Optimized pulse patterns                   | –          | –          | –     | –     | –     | –                               | –     | –     | –          | ✓                                                | –                      |
| Energy usage counter/Energy saving counter | ✓          | –          | ✓     | ✓     | ✓     | ✓                               | ✓     | ✓     | –          | ✓                                                | ✓                      |
| Regenerative feedback                      | –          | –          | –     | –     | –     | ✓<br>with PM250 Power Module    | –     | ✓     | –          | ✓<br>with Smart Line Module or ActiveLine Module | ✓                      |
| Communication protocol and profile         |            |            |       |       |       |                                 |       |       |            |                                                  |                        |
| PROFINET                                   | –          | –          | –     | ✓     | ✓     | ✓                               | ✓     | ✓     | ✓          | ✓                                                | ✓                      |
| • PROFINET energy                          | –          | –          | –     | ✓     | ✓     | ✓                               | ✓     | ✓     | –          | ✓                                                | ✓                      |
| Ready for SIMATIC Energy Suite             |            |            |       |       |       |                                 |       |       |            |                                                  |                        |
| Integrated energy management               | –          | ✓          | ✓     | ✓     | ✓     | ✓                               | ✓     | ✓     | –          | ✓<br>with CU310-2 Control Unit                   | –                      |

## Energy efficiency

### Energy efficiency classes in accordance with EN 50598

#### Overview

##### Step by step to more efficiency

One of the core objectives of the European Union is a sustainable power industry. In industrial plants today, around 70 % of the power demand is from electrically driven systems. This high percentage contains huge potential for saving energy in electrical drives. For that reason, the European Union introduced minimum requirements for the energy efficiency of electric motors in the form of a statutory motor regulation as early as 2011.

However, measures aimed solely at the motor are not enough to achieve the mandatory energy-saving targets. The European legislation fills this gap with the standard series EN 50598 and extends the focus from individual drive components to entire drive systems, even enabling consideration of specific use cases.

The European standard series EN 50598 defines the ecodesign requirements for drive systems in the low-voltage range with an electrically driven machine. It consists of definitions for energy efficiency (parts 1 and 2) and an ecobalance calculation (part 3).


To take account of the different use cases, consideration of eight application-relevant operating points has been introduced as mandatory for the first time. Determination of loss values at these eight points and definition of efficiency classes are laid down by the standard in a uniform way. This enables data relevant to operation, such as application-specific load profiles, to now be taken into account more easily in the energy efficiency analysis.

The standard is especially important for variable-speed drives of the following types:


- for AC/AC converters without energy recovery functionality
- for motors with integrated converters
- for supply voltages of 100 V to 1000 V
- for power ratings of 0.12 kW to 1000 kW

To cover all applications of driven machines, the new standard defines operating points in full-load and partial-load operation, at which the losses of the motor and drive systems have to be determined. Based on the loss data at the operating points in partial-load operation, variable-speed drives can be explicitly considered in more detail. This makes their advantages especially clear.


#### Centrifugal pumps, fans

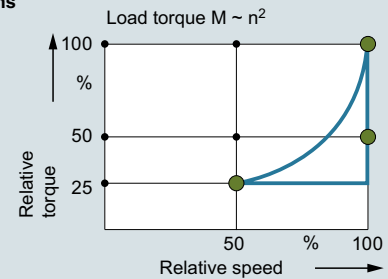

#### Hoisting gear, extruders, conveyor belts

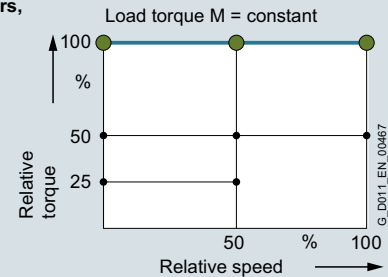

#### Winders, coilers

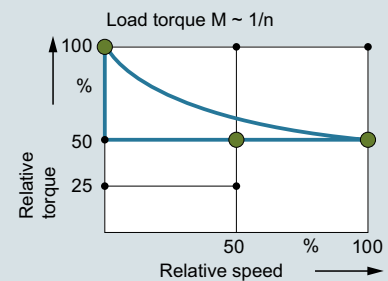

#### Duty cycles for different driven machines

Moreover, frequency converters and motor systems are classified in efficiency classes, which permit an initial rough estimate of the potential saving. Definition of reference systems is a key aspect of this because they provide standard reference values. The positioning of these reference systems defines the efficiency class. The relative distance from the reference system can be used as an absolute measure of the efficiency at the operating point in question.

**Overview** (continued)**Advantages of the detailed loss consideration of EN 50598 over the previous consideration of efficiencies and maximum loss values**

For motors, the efficiency consideration was previously only defined for operation without a converter at 50/60 Hz. It provides a good way of comparing the energy efficiency of motors from different manufacturers for this use case.

The more detailed loss analysis of EN 50598, on the other hand, is aimed at speed-controlled operation and therefore now also includes motors especially designed for converter operation in the energy analysis. These were previously not covered by the applicable standards.

Moreover, a loss analysis over the entire setting and load range of the motor is possible. This is done in accordance with the standard EN 50598 with typical values.


For holistic consideration, it is essential to include all the relevant components of a drive system. The EN 50598 standard defines this in detail. The standardized expression of power loss data as a percentage makes comparison considerably easier and more transparent.

The method also makes it possible to consider a motor that produces a holding torque at speed zero, for example. In this case, the efficiency is zero, but a power loss from current producing magnetization and holding torque does occur. In summary, the key advantage of standard EN 50598 is the ability to perform the energy analysis of an electrical drive system based on standardized load profiles in all operating ranges due to uniform general conditions. This provides the user with complete transparency irrespective of the manufacturer.

**Establishing efficiency classes of frequency converters (Complete Drive Modules CDM)**

To avoid overmodulation and to ensure comparability between makes, which cannot be achieved otherwise, the efficiency classes of CDMs refer to the 90/100 operating point (90 % motor stator frequency, 100 % torque current).

Standard EN 50598-2 defines the relative losses of a CDM in efficiency classes IE0 to IE2. With reference to the value of a CDM of efficiency class IE1 (reference converter), a CDM of efficiency class IE2 has 25 % lower losses and a CDM of efficiency class IE0 has 25 % higher losses.

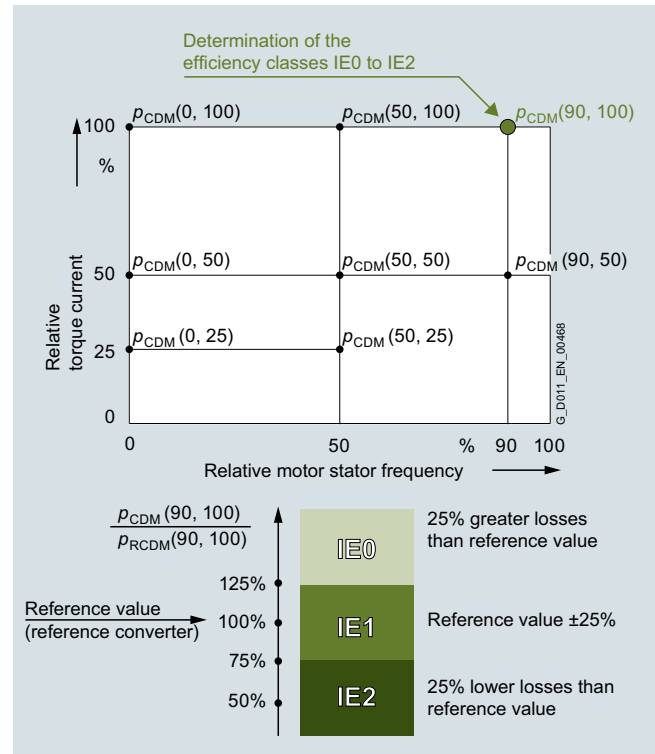**Operating points for CDMs**

Complete Drive Module (CDM) – determining the efficiency class

**Establishing the efficiency classes of drive systems (Power Drive Systems PDS)**

What is possible for the individual systems, of course, also applies to the entire electrical PDS (frequency converter plus motor). Detailed comparisons are now possible at this level, too. The reference values for the reference system provide clear indications of the energy performance of the PDS.

Because targeted matching of the motor and CDM provides additional potential for optimization in electrical drive systems, it is especially important for the user to consider the entire drive system.

For the efficiency class of a PDS, too, a specific load point is defined. In this case, the reference point used is the 100/100 operating point (100 % motor stator frequency, 100 % torque).


Standard EN 50598-2 defines the relative losses of a PDS in efficiency classes IES0 to IES2. With reference to the value of a PDS of efficiency class IES1 (reference drive), a PDS of efficiency class IES2 has 20 % lower losses and a PDS of efficiency class IES0 has 20 % higher losses.

## Energy efficiency

### Energy efficiency classes in accordance with EN 50598

#### Overview (continued)

#### Operating points for PDS

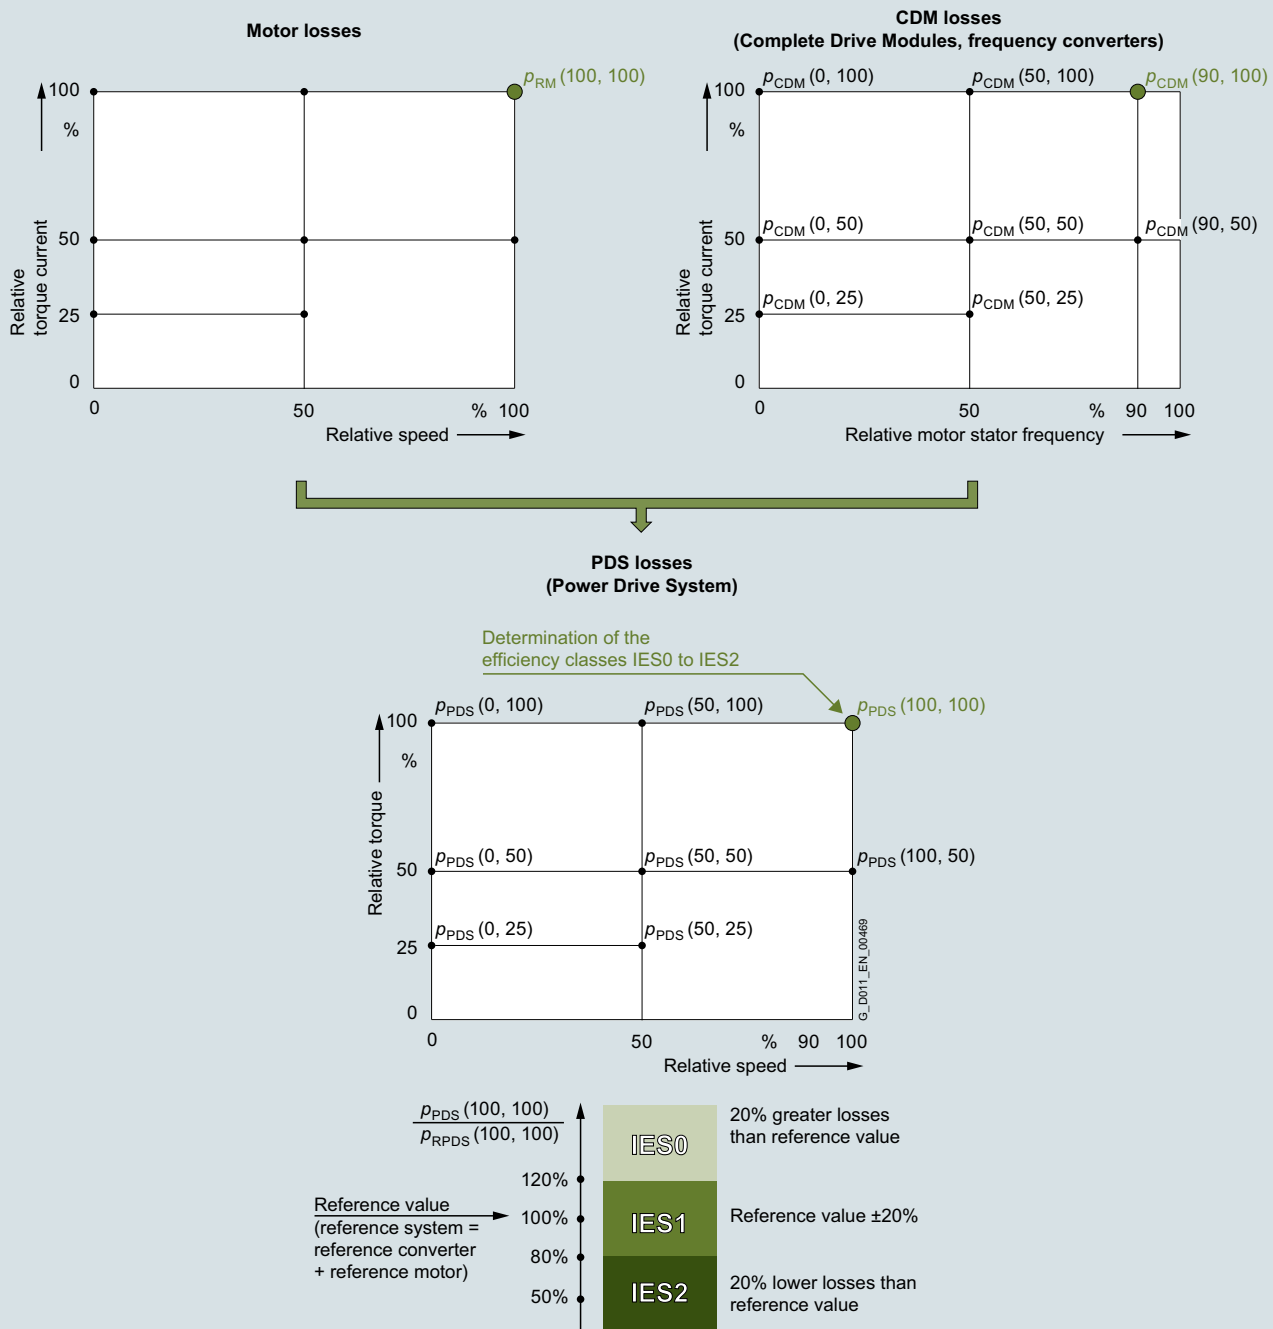

Power Drive System (PDS) – determining the efficiency class


#### More information

An example of a highly efficient drive system with efficiency class IES2 is the new synchronous inductance drive system with SIMOTICS reluctance motors and SINAMICS drives. More information is available on the Internet at [www.siemens.com/drivesystem-reluctance](http://www.siemens.com/drivesystem-reluctance), [www.siemens.com/simotics-gp](http://www.siemens.com/simotics-gp), [www.siemens.com/simotics-sd](http://www.siemens.com/simotics-sd)

Power loss data of SINAMICS inverters for single-axis drives are available on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

More information on current laws and standards, new standards, and mandatory guidelines is available on the Internet at [www.siemens.com/legislation-and-standards](http://www.siemens.com/legislation-and-standards)

Communication

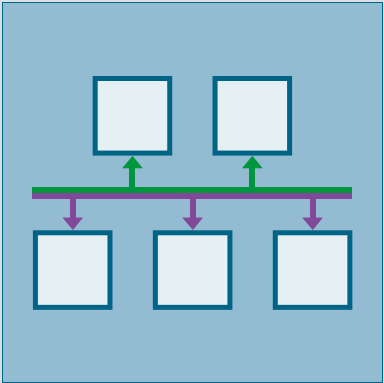

|      |                        |
|------|------------------------|
| 5/2  | Communication          |
| 5/2  | Communication overview |
| 5/3  | PROFINET               |
| 5/7  | PROFIdrive             |
| 5/8  | PROFIBUS               |
| 5/9  | Industrial Ethernet    |
| 5/10 | EtherNet/IP            |
| 5/10 | Modbus RTU             |
| 5/10 | CANopen                |
| 5/10 | USS                    |

Further information regarding PROFINET and PROFIBUS can be found at [www.profibus.com](http://www.profibus.com)

# Communication

## Communication

### Overview

#### Communication overview

Digital bus systems are commonly used in industrial automation today. These handle communication between the control level, the machine control, the sensors and actuators. The SINAMICS product family offers integrated communication interfaces in all product groups – which can be used to connect the most important fieldbus systems in the simplest possible way.

The properties and special application areas of the various bus systems for SINAMICS converters incl. SIMATIC ET 200pro FC-2 frequency converters are briefly described in the following.

| Protocol                                        | SINAMICS V |     | SINAMICS G |       |       |                |          |          |        | SINAMICS S |          |       | SIMATIC ET 200pro FC-2 |         |
|-------------------------------------------------|------------|-----|------------|-------|-------|----------------|----------|----------|--------|------------|----------|-------|------------------------|---------|
|                                                 | V20        | V90 | G110       | G110D | G120C | G120P/<br>G120 | G120     |          | G110M  | G120D      |          | S110  |                        | S120    |
|                                                 |            |     |            |       |       | CU230P-2       | CU240E-2 | CU250S-2 | CU240M | CU240D-2   | CU250D-2 | CU305 | CU310-2                | CU320-2 |
| PROFINET                                        | –          | ✓   | –          | –     | ✓     | ✓              | ✓        | ✓        | ✓      | ✓          | ✓        | ✓     | ✓                      | ✓       |
| - PROFINET RT                                   | –          | ✓   | –          | –     | ✓     | ✓              | ✓        | ✓        | ✓      | ✓          | ✓        | ✓     | ✓                      | ✓       |
| - PROFINET IRT isochronous                      | –          | ✓   | –          | –     | –     | –              | –        | –        | –      | –          | –        | ✓     | ✓                      | ✓       |
| - PROFINET IRT not isochronous                  | –          | ✓   | –          | –     | ✓     | ✓              | ✓        | ✓        | ✓      | ✓          | ✓        | ✓     | ✓                      | ✓       |
| - PROFINET Shared Device                        | –          | –   | –          | –     | ✓     | ✓              | ✓        | ✓        | ✓      | ✓          | ✓        | ✓     | ✓                      | ✓       |
| - PROFINET media redundancy MRP (step-change)   | –          | –   | –          | –     | ✓     | ✓              | ✓        | ✓        | ✓      | ✓          | ✓        | ✓     | ✓                      | ✓       |
| - PROFINET media redundancy MRPD (bumpless)     | –          | –   | –          | –     | ✓     | ✓              | ✓        | ✓        | ✓      | ✓          | ✓        | ✓     | ✓                      | –       |
| - System redundancy S2                          | –          | –   | –          | –     | –     | –              | –        | –        | –      | –          | –        | –     | ✓                      | ✓       |
| - PROFIsafe                                     | –          | –   | –          | –     | ✓     | –              | ✓        | ✓        | ✓      | ✓          | ✓        | ✓     | ✓                      | ✓       |
| - PROFIenergy                                   | –          | –   | –          | –     | ✓     | ✓              | ✓        | ✓        | ✓      | ✓          | ✓        | –     | ✓                      | ✓       |
| - PROFIdrive application class 1                | –          | ✓   | –          | –     | ✓     | ✓              | ✓        | ✓        | ✓      | ✓          | –        | ✓     | ✓                      | ✓       |
| - PROFIdrive application class 3                | –          | ✓   | –          | –     | –     | –              | –        | ✓        | –      | –          | ✓        | ✓     | ✓                      | ✓       |
| - PROFIdrive application class 4                | –          | ✓   | –          | –     | –     | –              | –        | –        | –      | –          | –        | ✓     | ✓                      | ✓       |
| PROFIBUS DP                                     | –          | –   | –          | –     | ✓     | ✓              | ✓        | ✓        | ✓      | ✓          | ✓        | ✓     | ✓                      | ✓       |
| - PROFIBUS DP equidistance and isochronous mode | –          | –   | –          | –     | –     | –              | –        | –        | –      | –          | –        | ✓     | ✓                      | ✓       |
| - PROFIBUS DP slave-to-slave communication      | –          | –   | –          | –     | ✓     | ✓              | ✓        | ✓        | ✓      | ✓          | ✓        | ✓     | ✓                      | –       |
| EtherNet/IP                                     | –          | –   | –          | –     | ✓     | ✓              | ✓        | ✓        | ✓      | ✓          | ✓        | –     | –                      | ✓       |
| Modbus TCP                                      | –          | –   | –          | –     | –     | –              | –        | –        | –      | –          | –        | –     | ✓                      | ✓       |
| Modbus RTU                                      | ✓          | ✓   | –          | –     | ✓     | ✓              | ✓        | ✓        | ✓      | –          | –        | –     | –                      | –       |
| AS-Interface                                    | –          | –   | –          | ✓     | –     | –              | –        | –        | ✓      | –          | –        | –     | –                      | –       |
| BACnet MS/TP                                    | –          | –   | –          | –     | –     | ✓              | –        | –        | –      | –          | –        | –     | –                      | –       |
| CANopen                                         | –          | –   | –          | –     | –     | –              | –        | ✓        | –      | –          | –        | –     | ✓                      | –       |
| USS                                             | ✓          | ✓   | ✓          | ✓     | ✓     | ✓              | ✓        | ✓        | ✓      | –          | –        | ✓     | ✓                      | –       |
| FLN P1                                          | –          | –   | –          | –     | –     | ✓              | –        | –        | –      | –          | –        | –     | –                      | –       |
| Web server                                      | –          | –   | –          | –     | –     | –              | –        | –        | –      | –          | –        | –     | ✓                      | ✓       |

### More information

Further information on SINAMICS V90 can be found in Catalog D 33.

Further information on SINAMICS G110M, SINAMICS G110D, SINAMICS G120D and SIMATIC ET 200pro FC-2 can be found in Catalog D 31.2.

Further information on SINAMICS S120 can be found in Catalog D 21.4.

## Overview

**PROFINET – the Ethernet standard for automation**

PROFINET is the world's leading Industrial Ethernet standard for automation with more than 10 million nodes installed worldwide.

PROFINET makes companies more successful, because it speeds up processes and raises both productivity and plant availability.

## Your advantages at a glance

## Flexibility

Tailor-made plant concepts

- ▶ Industrial Wireless LAN
- ▶ Safety
- ▶ Flexible topologies
- ▶ Open standard
- ▶ Web tools
- ▶ Expandability

## Efficiency

Optimal use of resources

- ▶ One cable for everything
- ▶ Device/network diagnostics
- ▶ Energy efficiency
- ▶ Simple wiring
- ▶ Fast device replacement
- ▶ Ruggedness/stability

## Performance

Increased productivity

- ▶ Speed
- ▶ High precision
- ▶ Large quantity structures
- ▶ High transmission rate
- ▶ Redundancy
- ▶ Fast start-up

G\_IK10\_XX\_10304

## Communication

### PROFINET

#### Overview (continued)

##### Flexibility

Short response times and optimized processes are the basic requirements for competitiveness in global markets because the product lifecycles are becoming shorter and shorter.

PROFINET ensures maximum flexibility in plant structures and production processes, and it enables you to implement innovative machine and plant concepts. For example, mobile devices can also be integrated at locations that are difficult to access.

##### Flexible topologies

In addition to the linear structure characterized by the established fieldbuses, PROFINET also enables the use of star, tree and ring structures. This is made possible by switching technology via active network components, such as Industrial Ethernet switches and media converters, or by integrating switch functionality into the field devices. This results in increased flexibility in the planning of machines and plants, as well as savings in cabling.

The PROFINET network can be installed without any specialist knowledge at all and meets all requirements that are relevant to the industrial environment. The "PROFINET Installations Guidelines" assist manufacturers and users with network planning, installation and commissioning. Symmetrical copper cables or RFI-resistant fiber-optic cables are used, depending on the application. Devices from different manufacturers are easily connected via standardized and rugged plug-in connectors (up to IP65/IP67 degree of protection).

By integrating switch functionality into the devices, linear topologies can be created that are directly oriented toward an existing machine or plant structure. This reduces cabling overhead and cuts down on components such as external switches.

##### IWLAN

PROFINET also supports wireless communication with Industrial Wireless LAN, thus opening up new fields of application. For example, technologies subject to wear, such as trailing cables, can be replaced and automated guided vehicle systems and mobile operator panels can be used.

##### Safety

The PROFIsafe safety profile, which has been tried and tested with PROFIBUS and which permits the transmission of standard and safety-related data on a single bus cable, can also be used with PROFINET. No special network components are necessary for fail-safe communication, which means that standard switches and standard network transitions can continue to be used without any restrictions. In addition, fail-safe communication is equally possible via Industrial Wireless LAN (IWLAN).

##### Open standard

PROFINET, the open multi-vendor standard (IEC 61158/IEC 61784), is supported by PROFIBUS and PROFINET International (PI). It stands for maximum transparency, open IT communication, network security and simultaneous real-time communication.

Thanks to its openness, PROFINET provides the basis for a standardized automation network in the plant, to which all other machines and devices can be connected. Even the integration of existing plant components, for example using PROFIBUS, presents no problems due to the use of network transitions.

##### Use of web tools

Thanks to the unrestricted support of TCP/IP, PROFINET permits the use of standard web services such as web servers. Irrespective of the tool used, information from the automation level can be accessed from virtually any location using a commercially available Internet browser. This considerably simplifies commissioning and diagnostics. Users can then decide for themselves how much openness to the IT world they want to allow for their machine or plant. This means that PROFINET can be used simply as an isolated plant network or connected via appropriate security modules, such as the SCALANCE S modules, to the office network or the Internet. In this way, new remote maintenance concepts or the high-speed exchange of production data become possible.

##### Expandability

On the one hand, PROFINET facilitates the integration of existing systems and networks without any great effort. In this way, PROFINET safeguards investments in existing plant components that communicate via PROFIBUS and other fieldbuses such as AS-Interface. On the other hand, additional PROFINET nodes can be added at any time. By using additional network components, network infrastructures can be expanded using cabling or wireless methods – even while the plant is operating.

**Overview** (continued)**Efficiency**

Greater global competition means that companies must use their resources economically and efficiently. This applies in particular to production. This is where PROFINET ensures greater efficiency. Simple engineering guarantees fast commissioning, while reliable devices ensure a high level of plant availability. Comprehensive diagnostic and maintenance concepts help to reduce plant downtimes and keep maintenance costs to a minimum.

One cable for everything

PROFINET permits simultaneous fieldbus communication with isochronous mode and standard IT communication (TCP/IP) on one cable. This real-time communication for the transmission of user/process data and diagnostic data takes place on a single cable. Specific profile communication (PROFIsafe, PROFIdrive and PROFIenergy) can be integrated without any additional cabling. This solution offers a wide scope of functions at a low level of complexity.

Device and network diagnostics

By retaining the tried and tested PROFIBUS device model, the same diagnostics information is available with PROFINET. In addition, module-specific and channel-specific data can also be read out from the devices during device diagnosis, enabling faults to be located quickly and easily. Apart from the availability of device information, the reliability of network operation has top priority in the network management.

In existing networks the Simple Network Management Protocol (SNMP) has established itself as the de facto standard for the maintenance and monitoring of the network components and their functions. PROFINET uses this standard and gives users the opportunity to maintain their networks with tools that are familiar to them, such as the SINEMA Server network management software.

For easier maintenance of PROFINET devices, both on-site and remotely via a secure VPN connection, application-specific web-sites can be set up on the web server of the field devices using the familiar HTML standard.

Energy efficiency

Moving toward the green factory: PROFIenergy is a profile that provides functions and mechanisms for PROFINET field devices that support energy-efficient production.

The profile, which is defined by the PNO and is independent of any manufacturers or devices, enables energy demand and costs to be significantly reduced: Using PROFIenergy, any specific loads that are not currently being used can be switched off. This achieves a noticeable reduction in energy costs during breaks in production. PROFIenergy permits the simple, automated activation and deactivation of technologically related plant components. It is coordinated centrally by means of a higher-level controller and is networked via PROFINET. This ensures that as much energy as possible is saved during long breaks. Temporarily switching off plant components contributes to the even distribution and most efficient use of energy.

The use of PROFIenergy is made easy for the machine builder by its integration into familiar series of products. In addition, PROFIenergy is defined in such a way that the necessary function blocks can easily be integrated into existing automation systems at a later stage.

Simple wiring

Particularly stringent demands are made on the installation of cables in the industrial environment. In addition, there is a requirement to set up industry-standard networks in the shortest possible time without any special knowledge.

With FastConnect, Siemens offers a high-speed installation system that meets all of these requirements. FastConnect is the standard-compliant, industry-standard cabling system consisting of cables, connectors and assembly tools for PROFINET networks. The time required for connecting terminals is minimized by the simple installation method using just a single tool, while installation errors are prevented by the practical color-coding. Both copper cables and glass fiber optic cables can be easily assembled on site in this way.

Fast device replacement

PROFINET devices are identified by means of a name assigned during configuration. When replacing a defective device, a new device can be recognized from its topology information by the IO controller and a new name can be assigned to it automatically. This means that no engineering tool is necessary for the replacement of equipment.

This mechanism can even be used for the initial commissioning of a complete system. This speeds up commissioning, particularly in the case of series machines.

Ruggedness

An automation network must be able to withstand most external sources of interference. The use of Switched Ethernet prevents faults in one section of the network from affecting the entire plant network. For areas that are particularly prone to radio frequency interference (RFI), PROFINET allows the use of fiber optic cables.

Performance

Productivity and product quality determine the level of success in the market. Precise motion control, dynamic drives, high-speed controllers and the deterministic synchronization of devices are therefore key factors in achieving superior production. They facilitate high production rates and optimum product quality at the same time.

Speed and precision

Fast motion control applications demand precise and deterministic exchange of data. This is implemented by means of drive controllers using isochronous real time (IRT).

With IRT and isochronous mode, PROFINET permits fast and deterministic communication. This synchronizes the various cycles of a system (input, network, CPU processing and output), even in the case of parallel TCP/IP traffic. The short cycle times of PROFINET make it possible to raise the productivity of machines and plants and to guarantee the product quality and high level of precision.

The standardized PROFIdrive profile permits vendor-independent communication between CPUs and drives.



## Overview



### **PROFIdrive – the standardized drive interface for PROFINET and PROFIBUS**

PROFIdrive defines the device behavior and technique to access internal device data for electric drives connected to PROFINET and PROFIBUS – from basic frequency converters up to high-performance servo controllers.

It describes in detail the practical use of communication functions – slave-to-slave communication, equidistance and clock cycle synchronization (isochronous mode) in drive applications. In addition, it specifies all device characteristics which influence interfaces connected to a controller over PROFINET or PROFIBUS. This also includes the state machine (sequence control), the encoder interface, scaling of values, definition of standard telegrams, access to drive parameters etc.

The PROFIdrive profile supports both central as well as distributed motion control concepts.

#### **What are profiles?**

For devices and systems used in automation technology, profiles define properties and modes of behavior. This allows manufacturers and users to define common standards. Devices and systems that comply with such a cross-manufacturer profile, are interoperable on a fieldbus and, to a certain degree, can be interchanged.

#### **Are there different types of profiles?**

A distinction is made between what are known as application profiles (general or specific) and system profiles:

- Application profiles (also device profiles) predominantly refer to devices (e.g. drives) and include an agreed selection regarding bus communication as well as specific device applications.
- System profiles describe classes of systems, including master functionality, program interfaces and integration resources.

#### **Is PROFIdrive fit for the future?**

PROFIdrive has been specified by the PROFIBUS and PROFINET International (PI) user organization, and is specified as a standard that is fit for the future through standard IEC 61800-7.

#### **The basic philosophy: Keep it simple**

The PROFIdrive profile tries to keep the drive interface as simple as possible and free from technology functions. As a result of this philosophy, reference models as well as the functionality and performance of the PROFINET/PROFIBUS master have either no influence or only a low influence on the drive interface.

### **One drive profile – different application classes**

The integration of drives into automation solutions depends very strongly on the particular drive application. In order to be able to address the complete, huge bandwidth of drive applications – from basic frequency converters up to synchronized multi-axis systems with a high dynamic performance – using just one profile, PROFIdrive defines six application classes, to which most drive applications can be assigned:

- Class 1 – standard drives (pumps, fans, agitators, etc.)
- Class 2 – standard drives with technological functions
- Class 3 – positioning drives
- Class 4 – motion control drives with central, higher-level motion control intelligence and the patented "Dynamic Servo Control" positioning concept
- Class 5 – motion control drives with central, higher-level motion control intelligence and position setpoint interface
- Class 6 – motion control drives with distributed motion control intelligence integrated in the drives

## Design


### **The device model of PROFIdrive**

PROFIdrive defines a device model comprising function modules, which interoperate inside the device and which reflect the intelligence of the drive system. These modules have objects assigned to them which are described in the profile and are defined with respect to their functions. The overall functionality of a drive is therefore described through the sum of its parameters.

In contrast to other drive profiles, PROFIdrive defines only the access mechanisms to the parameters as well as a subset of profile parameters (approx. 30) such as the fault buffer, drive control and device identification.

All other parameters are vendor-specific which gives drive manufacturers great flexibility with respect to implementing control functions. The elements of a parameter are accessed acyclically over data records.

As a communication protocol, PROFIdrive uses DP-V0, DP-V1, and the DP-V2 expansions for PROFIBUS including the functions "Slave-to-Slave Communication" and "Isochronous Operation", or PROFINET IO with real-time classes RT and IRT.

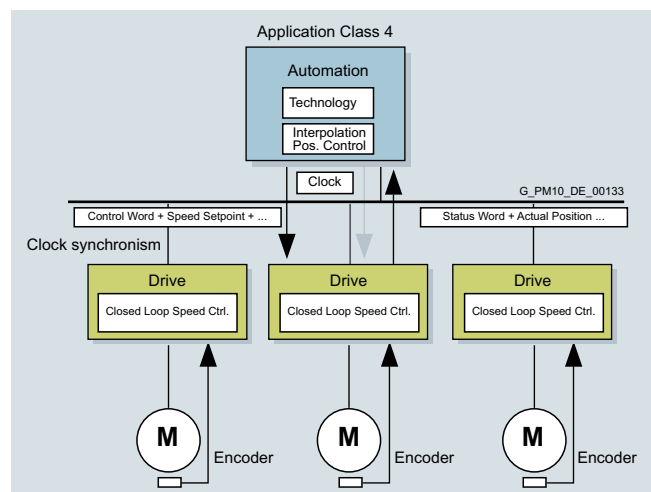

## More information

More information on PROFINET and PROFIBUS is available at [www.profinet.com](http://www.profinet.com)

## Communication

### PROFIBUS

#### Overview



#### **PROFIBUS – the proven, rugged bus system for automation engineering applications**

The requirements of users for an open, non-proprietary communication system have resulted in the specification and standardization of the PROFIBUS protocol.

PROFIBUS defines the technical and functional features of a serial fieldbus system, with which the distributed field automation devices in the lower area (sensor/actuator level) can be networked up to the mid performance range (cell level).

Standardization according to IEC 61158/EN 50170 secures your investments for the future.

Using the conformity and interoperability test performed by the test laboratories authorized by PROFIBUS & PROFINET International (PI) and the certification of the devices by PI, users have the security of knowing that the quality and functionality is guaranteed, even in multi-vendor installations.

#### **PROFIBUS versions**

Two different PROFIBUS versions have been defined in order to comply with the widely varying requirements at field level:

- PROFIBUS PA (Process Automation) – the version for applications in process automation. PROFIBUS PA uses the intrinsically safe transmission technology specified in IEC 61158-2.
- PROFIBUS DP (Distributed Periphery) – this version, which is optimized for speed, is specifically tailored to the communication of automation systems with distributed I/O stations and drives. PROFIBUS DP sets itself apart as a result of very short response times and high noise immunity, and replaces cost-intensive, parallel signal transfer with 24 V and measured value transfer utilizing 0/4 ... 20 mA technology.

#### Design

##### **Bus participants on PROFIBUS DP**

PROFIBUS DP makes a distinction between two different master classes and one slave class:

##### DP master class 1

For PROFIBUS DP, DP master class 1 is the central component. In a defined and continually repeating message cycle the central master station exchanges information with distributed stations (DP slaves).

##### DP master class 2

Devices of this type (programming, configuring or operator control devices) are used during commissioning, for configuring the DP system, for diagnostics or for operating the active plant or system. A DP master class 2 can, for example, read input, output, diagnostic and configuration data of the slaves.

##### DP slave

A DP slave is an I/O device which receives output information or setpoints from the DP master, and as response, returns input information, measured values and actual values to the DP master. A DP slave never sends data automatically, but only when requested by the DP master.

The quantity of input and output information depends on the device, and for each DP slave in each send direction can be a maximum of 244 bytes.

#### Function

##### **Functional scope in DP masters and DP slaves**

The functional scope can differ between DP masters and DP slaves. The different functional scopes are classified as DP-V0, DP-V1 and DP-V2.

##### DP-V0 communication functions

The DP-V0 master functions consist of "Configuration", "Parameter Assignment" and "Reading Diagnostics Data", as well as cyclic reading of input data/actual values and writing output data/setpoints.

##### DP-V1 communication functions

The DP-V1 function expansions make it possible to perform acyclic read and write functions as well as processing cyclic data communication. This type of slave must be supplied with extensive parameterization data during start-up and during normal operation. These acyclically transferred parameterization data are only rarely changed in comparison to the cyclic setpoints, actual values, and measured values, and are transferred at lower priority in parallel with the cyclic high-speed user data transfer. Detailed diagnostic information can be transferred in the same way.

##### DP-V2 communication functions

The extended DP-V2 master functions mainly comprise functions for isochronous operation and slave-to-slave communication between DP slaves.

- Isochronous mode:  
Isochronous mode is implemented by means of an equidistant signal in the bus system. This cyclic, equidistant cycle is sent by the DP master to all bus nodes in the form of a Global Control Telegram. Master and slaves can then synchronize their applications with this signal. The signal jitter between cycles is less than 1 µs.
- Slave-to-slave communication:  
The "publisher/subscriber" model is used to implement slave-to-slave communication. Slaves declared as publishers make their input data/actual values and measured values available to other slaves, the subscribers, for reading. This is performed by sending the response frame to the master as a broadcast. Slave-to-slave communication is therefore a cyclic process.

#### Integration

##### **PROFIBUS with SINAMICS**

SINAMICS uses the PROFIBUS DP protocol. SINAMICS drives can only be used as DP slaves.

## Overview



Ethernet is the basic Internet technology for worldwide networking. The many possibilities of intranet and Internet, which have been available for office applications for a long time, are now utilized for production automation with Industrial Ethernet.

Apart from the use of information technology, the deployment of distributed automation systems is also on the increase. This entails breaking up complex control tasks into smaller, manageable and drive-based control systems. This increases the demand for communication and consequently a comprehensive and powerful communication system.

Industrial Ethernet provides a powerful area and cell network for the industrial field, compliant with the IEEE 802.3 (ETHERNET) standard.

## Benefits

Ethernet enables a very fast data transfer (10/100 Mbit/s, 1/10 Gbit/s) and at the same time has full-duplex capability. It therefore provides an ideal basis for communication tasks in the industrial field. With a share of over 90 %, Ethernet is the number one network worldwide and offers important features which have essential advantages:

- Fast commissioning thanks to the simplest connection method
- High availability since existing networks can be extended without any adverse effects
- Almost unlimited communication performance because scalable performance is available through switching technology and high data rates when required
- Networking of different application areas such as office and production areas
- Company-wide communication based on WAN (Wide Area Network) technology or the Internet
- Investment protection due to continuous compatibility with further developments
- Wireless communication using Industrial Wireless LAN

In order to make Ethernet suitable for industrial applications, considerable expansions with respect to functionality and design are required:

- Network components for use in harsh industrial environments
- Fast assembly of the RJ45 connectors
- Fail-safety through redundancy
- Expanded diagnostics and message concept
- Use of future-oriented network components (e.g. switches)

SIMATIC NET offers corresponding network components and products.

## Integration

### Industrial Ethernet with SINAMICS

SINAMICS provides Control Units and Communication Boards with PROFINET interface based on 100 Mbit/s Ethernet. This means that process communication in real-time, as well as engineering and HMI via standard TCP/IP are simultaneously possible.

It is also possible to access the web server in SINAMICS at the same time that process communication is in progress.

The CU310-2 and CU320-2 Control Units have an additional Ethernet interface at the front so that service and engineering tasks can be performed very easily.

### Communication with SINAMICS over Industrial Ethernet

#### PG/PC/HMI communication

PG/PC/HMI communication is performed using protocols which are based on the basic TCP/IP protocol.

- Engineering and diagnostics with STARTER

#### IT communication

IT communication is performed using protocols which are based on the basic TCP/IP protocol. The most important IT protocols are:

- HTTP/HTTPS: Hypertext Transfer Protocol (Secure)  
Using a standard Internet browser, it is possible to retrieve predefined web pages containing diagnostic information from the device. Furthermore, user-defined web pages containing information defined by the user can be stored in the device.
- SNMP: Simple Network Management Protocol

## Communication

### EtherNet/IP

#### Overview



Ethernet Industrial Protocol (EtherNet/IP) is an open standard for industrial networks. EtherNet/IP is used to transmit cyclic I/O data and acyclic parameter data. EtherNet/IP was developed by the ODVA (Open DeviceNet Vendor Association) and belongs to the international standard series IEC 61158.

### Modbus RTU

#### Overview



As a simple fieldbus protocol, Modbus RTU can be used both cyclically and acyclically. Based on RS485 physical bus characteristics, up to 32 nodes can be networked to one bus segment and connected to a higher-level controller. This protocol is generally used when there are limited demands on data throughput.

### CANopen

#### Overview




CANopen is a communication protocol based on CAN physical characteristics, which is predominantly used in the automation industry and for networking within complex devices. Originally conceived as a fieldbus for networking devices in motion control applications such as handling systems, CANopen has since established itself in the field of medical engineering, vehicle automation, rail and ship networking as well as building automation. Interoperability of CANopen is ensured through the use of application and device profiles, whereby the wide range of options offered by the bus specification enables an appropriate, precise selection to be made for the application or device in question. Furthermore, inverters with CANopen support the "CiA 402 Electrical Drives" device profile.

### USS

#### Overview

As a simple fieldbus protocol, USS (**U**niversal **S**erial **I**nterface protocol of Siemens AG, 1992) can be used both cyclically and acyclically. Based on RS485 physical bus characteristics, up to 32 nodes can be networked to one bus segment and connected to a higher-level controller. This protocol is generally used when there are limited demands on data throughput.

Technology functions

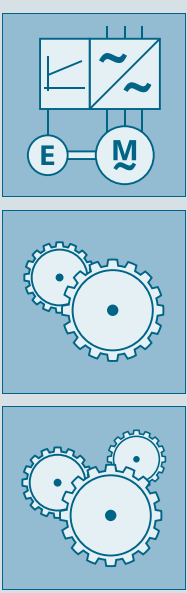

6/2 Free function blocks (FFB)

|     |                                            |
|-----|--------------------------------------------|
| 6/3 | <b>Basic positioner EPos</b>               |
| 6/3 | Function module basic positioner EPos      |
| 6/4 | Functionality of the EPos basic positioner |

## Technology functions

### Free function blocks (FFB)

#### Overview

On specific SINAMICS devices, free function blocks (FFB) are available as a standard technology function, which can be called up as an additively activatable function module. The FFB can be used to connect simple binary states or several input signals to a control signal (e.g. ON command). Furthermore, analog signals can also be adapted.

In addition to logical operations such as AND/OR, arithmetic functions as well as more complex blocks such as smoothing elements, limit monitors, or storing elements are also available. All of the blocks can be flexibly interconnected with one another using BICO (Binector-Connector technology).

In the SINAMICS Startdrive engineering tool, the FFB can be comfortably parameterized via screens.


#### Supported functions in the function module of the free function blocks (FFB)

|                      |                                                                |
|----------------------|----------------------------------------------------------------|
| Logical functions    | Programming of Boolean logic and logic operations              |
| Arithmetic functions | Programming of mathematical functions                          |
| Timer functions      | Generating of pulses and switching delays                      |
| Memory functions     | Programming of binary flip-flops                               |
| Switch functions     | Programming of binary and numerical switches                   |
| Control functions    | Programming of functions for open-loop and closed-loop control |
| Complex functions    | Programming of threshold value monitors and control units      |

The table above shows an overview of the supported functions of the FFB. Depending on the SINAMICS inverter, up to 25 different block types are available. The number of available blocks per module type is limited. The blocks are not multi-instance-capable.

The sequence and calculation intervals (sampling times) can be selected for each block, but the calculation intervals are limited by the performance of the Control Unit.

The user-friendly overview for parameter assignment is shown below, based on the example of the SINAMICS G120 inverter. In this example, three digital inputs which are linked to each other via a logical AND function block are acquired. The drive can only be released when all inputs have a HIGH signal.

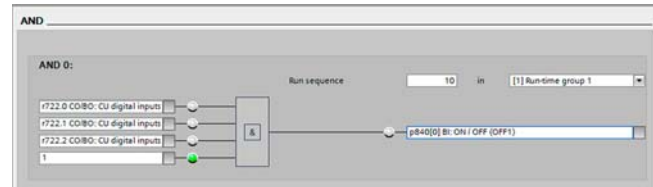

## Overview



### Function module basic positioner EPos

The basic positioner EPos is available as a standard technology function for the following SINAMICS Control Units and can be called as a function module that can be activated additionally.

- SINAMICS S120 CU310-2 and CU320-2 Control Units
- SINAMICS S110 CU305 Control Units
- SINAMICS G120 CU250S-2 Control Units
- SINAMICS G120D CU250D-2 Control Units

The basic positioner can be used to resolve basic motion control tasks without additional external technological outlay from the drive itself.

Integrated functionality for absolute and relative positioning of linear and rotary axes with motor encoders or machine encoders.

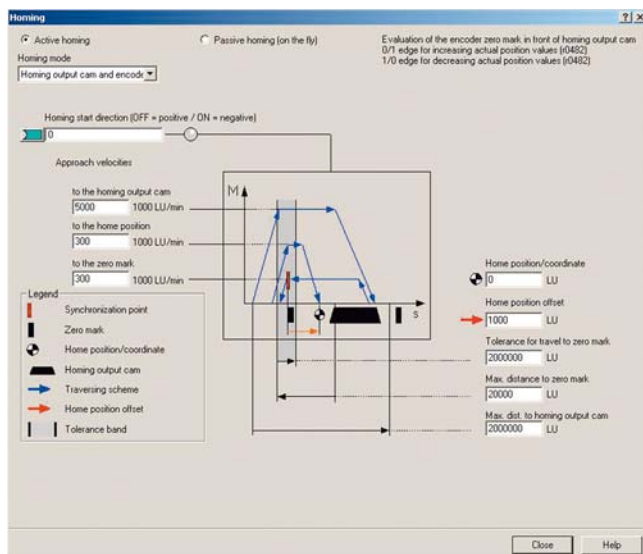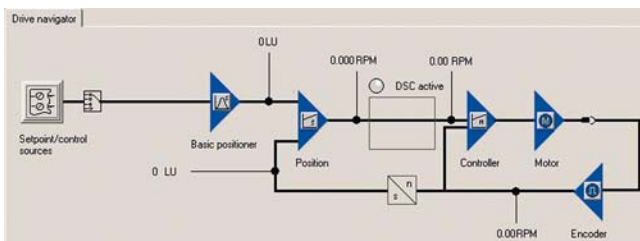

The EPos basic positioner in the SINAMICS drive system provides powerful and precise positioning functions. Due to its flexibility and adaptability, the basic positioner can be used for a wide range of positioning tasks.

The functions are easy to handle both during commissioning and during operation, and the comprehensive monitoring functions are outstanding.

Many applications can be carried out without external position controllers.

The EPos basic positioner is used to position linear and rotary axes (modulo) in absolute/relative terms with rotary as well as linear motor encoder or machine encoder (indirect or direct measuring system).

EPos is a function module that can be activated additionally in Servo Control and in Vector Control.

User-friendly configuring and commissioning, including control panel (operation using PC) and diagnostics, are possible with the STARTER and SINAMICS Startdrive commissioning tools.

In addition to extremely flexible positioning functions, EPos offers a high degree of user-friendliness and reliability thanks to integral monitoring and compensation functions.

Different operating modes and their functionality increase flexibility and plant productivity, for example, by means of "on-the-fly" and bumpless correction of the motion control.

Preconfigured PROFIdrive positioning frames are available which, when selected, automatically establish the internal "connection" to the basic positioner.

## Technology functions

### Basic positioner EPos

#### Overview (continued)

##### *Functionality of the EPos basic positioner*

##### Lower-level closed-loop position control with the following essential components

- Position actual value sensing (including the lower-level measuring probe evaluation and reference mark search)
- Position controller (including limits, adaptation and pre-control calculation)
- Monitoring functions (standstill, positioning and dynamic following error monitoring, cam signals)

##### Mechanical system

- Backlash compensation
- Modulo offset

##### Limitations

- Speed/acceleration/delay/jerk limitation
- Software limit switches (traversing range limitation by means of position setpoint evaluation)
- Stop cams (traversing range limitation using hardware limit switch evaluation)

##### Referencing or adjustment

- Set reference point (for an axis at standstill)
- Search for reference (separate mode including reversing cam functionality, automatic reversal of direction, homing to "output cam and encoder zero mark" or only "encoder zero mark" or "external zero mark (BERO)")
- Flying referencing (seamless referencing possible during "normal" traversing with the aid of the measuring input evaluation; generally evaluation, e.g. of a BERO. Subordinate function for the modes "jog", "direct setpoint input/MDI" and "traversing blocks")
- Absolute encoder alignment

##### Traversing block mode

- 64 traversing blocks for
  - SINAMICS S120 CU310-2 and CU320-2 Control Units
- 16 traversing blocks for
  - SINAMICS S110 CU305 Control Units
  - SINAMICS G120 CU250S-2 Control Units
  - SINAMICS G120D CU250D-2 Control Units
- Positioning using traversing blocks that can be stored in the drive unit including continuation conditions and specific jobs for a previously homed axis.
- Configuring traversing blocks using the traversing block editor in the relevant commissioning tool of the SINAMICS drive family
- A traversing block contains the following information:
  - Job number and job (e.g. positioning, waiting, GOTO block jump, setting of binary outputs, travel to fixed stop)
  - Motion parameters (target position, velocity, override for acceleration and deceleration)
  - Mode (e.g.: hide block, continuation conditions such as "Continue\_with\_stop", "Continue\_flying" and "Continue\_externally using high-speed measuring inputs")
  - Job parameters (e.g. wait time, block step conditions)

##### Direct setpoint specification (MDI) mode

- Positioning (absolute, relative) and setting-up (endless closed-loop position control) using direct setpoint inputs (e.g. via the PLC using process data)
- It is always possible to influence the motion parameters during traversing (on-the-fly setpoint acceptance) as well as for on-the-fly changes between the setup and positioning modes.
- The direct setpoint specification mode (MDI) can also be used in the relative positioning or setup mode if the axis is not referenced. This means that on-the-fly synchronization and re-referencing can be carried out using "flying referencing".

##### Jog mode

- Closed-loop position controlled traversing of the axis with "endless position controlled" or "jog incremental" modes (traverse through a "step width"), which can be toggled between

# SINAMICS V20 basic converters

## 0.12 kW to 30 kW (0.16 hp to 40 hp)



|             |                                                      |
|-------------|------------------------------------------------------|
| <b>7/2</b>  | <b>Introduction</b>                                  |
| 7/2         | Application                                          |
| 7/2         | More information                                     |
| <b>7/3</b>  | <b>SINAMICS V20 basic converters</b>                 |
| 7/3         | Overview                                             |
| 7/3         | Benefits                                             |
| 7/5         | Application                                          |
| 7/6         | Design                                               |
| 7/7         | Function                                             |
| 7/9         | Integration                                          |
| 7/10        | Selection and ordering data                          |
| 7/11        | Technical specifications                             |
| 7/15        | Dimensional drawings                                 |
| 7/15        | More information                                     |
| <b>7/16</b> | <b>SINAMICS V20 Starter Kit</b>                      |
| <b>7/17</b> | <b>Line-side components</b>                          |
| 7/17        | Line filters                                         |
| 7/20        | Line reactors                                        |
| 7/22        | Recommended line-side overcurrent protection devices |
| <b>7/23</b> | <b>DC link components</b>                            |
| 7/23        | Braking resistors                                    |
| 7/25        | SINAMICS V20 Braking Module                          |
| <b>7/26</b> | <b>Load-side power components</b>                    |
| 7/26        | Output reactors                                      |
| <b>7/28</b> | <b>Supplementary system components</b>               |
| 7/28        | SINAMICS V20 Parameter Loader                        |
| 7/29        | SINAMICS V20 BOP and                                 |
|             | SINAMICS V20 BOP Interface                           |
| 7/30        | SINAMICS V20 Smart Access                            |
| 7/31        | SINAMICS V20 I/O Extension Module                    |
| 7/32        | SINAMICS V20 shield connection kits                  |
| 7/32        | SINAMICS V20 replacement fans                        |

# SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

## Introduction

### Application

| Use                                          | Requirements for torque accuracy/speed accuracy/position accuracy/coordination of axes/functionality |                                                                                                                                                                                  |                                                                                                               |                                                                                                          |                                                                                                          |                                                                                                                                             |
|----------------------------------------------|------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
|                                              | Continuous motion                                                                                    |                                                                                                                                                                                  |                                                                                                               | Non-continuous motion                                                                                    |                                                                                                          |                                                                                                                                             |
|                                              | Basic<br>                                                                                            | Medium<br>                                                                                                                                                                       | High<br>                                                                                                      | Basic<br>                                                                                                | Medium<br>                                                                                               | High<br>                                                                                                                                    |
| <b>Pumping, ventilating, compressing</b><br> | Centrifugal pumps<br>Radial / axial fans<br>Compressors                                              | Centrifugal pumps<br>Radial / axial fans<br>Compressors                                                                                                                          | Eccentric screw pumps                                                                                         | Hydraulic pumps<br>Metering pumps                                                                        | Hydraulic pumps<br>Metering pumps                                                                        | Descaling pumps<br>Hydraulic pumps                                                                                                          |
|                                              | <b>V20</b><br>G120C<br>G120P                                                                         | G120P<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                         | S120                                                                                                          | G120                                                                                                     | S110                                                                                                     | S120                                                                                                                                        |
| <b>Moving</b><br>                            | Conveyor belts<br>Roller conveyors<br>Chain conveyors                                                | Conveyor belts<br>Roller conveyors<br>Chain conveyors<br>Lifting/lowering devices<br>Elevators<br>Escalators/moving walkways<br>Indoor cranes<br>Marine drives<br>Cable railways | Elevators<br>Container cranes<br>Mining hoists<br>Excavators for open-cast mining<br>Test bays                | Acceleration conveyors<br>Storage and retrieval machines                                                 | Acceleration conveyors<br>Storage and retrieval machines<br>Cross cutters<br>Reel changers               | Storage and retrieval machines<br>Robotics<br>Pick & place<br>Rotary indexing tables<br>Cross cutters<br>Roll feeds<br>Engagers/disengagers |
|                                              | <b>V20</b><br>G110D<br>G110M<br>G120C<br>ET 200pro FC-2 <sup>2)</sup>                                | G120<br>G120D<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                 | S120<br>S150<br>DCM                                                                                           | V90<br>G120<br>G120D                                                                                     | S110<br>S210<br>DCM                                                                                      | S120<br>S210<br>DCM                                                                                                                         |
| <b>Processing</b><br>                        | Mills<br>Mixers<br>Kneaders<br>Crushers<br>Agitators<br>Centrifuges                                  | Mills<br>Mixers<br>Kneaders<br>Crushers<br>Agitators<br>Centrifuges<br>Extruders<br>Rotary furnaces                                                                              | Extruders<br>Winders/unwinders<br>Lead/follower drives<br>Calenders<br>Main press drives<br>Printing machines | Tubular bagging machines<br>Single-axis motion control such as<br>• Position profiles<br>• Path profiles | Tubular bagging machines<br>Single-axis motion control such as<br>• Position profiles<br>• Path profiles | Servo presses<br>Rolling mill drives<br>Multi-axis motion control such as<br>• Multi-axis positioning<br>• Cams<br>• Interpolations         |
|                                              | <b>V20</b><br>G120C                                                                                  | G120<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                          | S120<br>S150<br>DCM                                                                                           | V90<br>G120                                                                                              | S110<br>S210                                                                                             | S120<br>S210<br>DCM                                                                                                                         |
| <b>Machining</b><br>                         | Main drives for<br>• Turning<br>• Milling<br>• Drilling                                              | Main drives for<br>• Drilling<br>• Sawing                                                                                                                                        | Main drives for<br>• Turning<br>• Milling<br>• Drilling<br>• Gear cutting<br>• Grinding                       | Axis drives for<br>• Turning<br>• Milling<br>• Drilling                                                  | Axis drives for<br>• Drilling<br>• Sawing                                                                | Axis drives for<br>• Turning<br>• Milling<br>• Drilling<br>• Lasering<br>• Gear cutting<br>• Grinding<br>• Nibbling and punching            |
|                                              | S110                                                                                                 | S110<br>S120                                                                                                                                                                     | S120                                                                                                          | S110                                                                                                     | S110<br>S120                                                                                             | S120                                                                                                                                        |

With the compact SINAMICS V20 converter, Siemens offers a simple and economical drive solution for applications with simple motion sequences and basic requirements.

SINAMICS V20 sets itself apart with its quick commissioning times, ease of operation, robustness and cost-efficiency.

Practical application examples and descriptions are available on the Internet at

[www.siemens.com/sinamics-applications](http://www.siemens.com/sinamics-applications)

### More information

You may also be interested in these drives:

- More performance for the control cabinet in IP20 degree of protection ⇒ SINAMICS G120C
- With positioning function in the control cabinet in IP20 degree of protection ⇒ SINAMICS G120
- With positioning function for distributed drive solutions in IP65 degree of protection ⇒ SINAMICS G120D ([Catalog D 31.2](#))

<sup>1)</sup> Industry-specific inverters.

<sup>2)</sup> Information on the SIMATIC ET 200pro FC-2 frequency converter is available in Catalog D 31.2 and at [www.siemens.com/et200pro-fc](http://www.siemens.com/et200pro-fc)

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### SINAMICS V20 basic converters

#### Overview



SINAMICS V20 converters, frame sizes: FSAA, FSAB, FSAC, FSA, FSB, FSC, FSD and FSE

#### **SINAMICS V20 – The cost-effective, reliable and easy-to-use converter for basic applications**

Today, in an increasing number of applications in plant and machinery construction, individual automation and drive solutions are demanded that automate simple motion sequences with low associated requirements.

The compact SINAMICS V20, the basic performance converter, offers a simple and cost-effective drive solution for these types of applications. SINAMICS V20 sets itself apart with its quick commissioning times, ease of operation, robustness and cost-efficiency.

With eight frame sizes, it covers a power range extending from 0.12 kW to 30 kW (0.16 hp to 40 hp).

#### **Minimizing costs**

SINAMICS V20 keeps engineering and commissioning costs as well as those in operation as low as possible. To increase energy efficiency, the converter is equipped with a control technique to achieve optimum energy efficiency through automatic flux reduction. Not only this, it displays the actual energy consumption and has additional, integrated energy-saving functions. This allows energy consumption to be slashed drastically.

7

#### Benefits

##### **Easy to install**

- Push-through and wall mounting
  - Side-by-side mounting possible for both
  - Compact installation allows smaller cabinets to be used
  - Push-through mounting allows the cabinet to be cooled more easily
  - Frame sizes FSAA, FSAB and FSAC (230 V 1 AC) are significantly smaller compared to the previous frame sizes FSA and FSB within the same power range
- Plug & Play
  - Can be run "out-of-the-box" without other options
  - Basic operator actions at a built-in BOP (Basic Operator Panel)
- Connection of SINAMICS V20 with USS or Modbus RTU via terminals
  - Easy integration into existing systems
  - Easier commissioning through standard libraries and connection macros
  - Full flexibility of Modbus RTU settings widens communication with controller
  - Simple connection to a control system (e.g. SIMATIC S7 PLC via Modbus RTU/USS)

- Integrated Braking Module
  - Converters  $\geq 7.5$  kW (frame sizes FSD and FSE) have an integrated Braking Module. In this case, the braking resistor can be directly connected. The dynamic energy is dissipated as heat in a braking resistor with an adjustable duty cycle of between 5 % and 100 %.
  - Possible to use dynamic braking to increase braking performance
- EMC category C1
  - The devices are optionally available with an integrated RFI suppression filter, enabling compliance with the radio interference limit values laid out in IEC 61800-3 category C1 when installed in the control cabinet in an EMC-compliant manner. Frame sizes FSAA, FSAB and FSAC therefore satisfy the radio interference requirements for industrial applications as well as for use in residential and business environments, including commercial applications such as refrigerated counters, fitness equipment, ventilation systems, industrial washing machines, etc.

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### SINAMICS V20 basic converters

#### Benefits (continued)

##### Easy to use

- Parameter settings can be easily transferred from one unit to another using the battery-operated parameter loader.
  - Less technical support required
  - Short commissioning time
  - The product is delivered to the customer already preset
- Integrated connection and application macros
  - To simplify I/O configuration and make the appropriate settings
  - Shorter commissioning time
  - Integrated and optimized application setting
  - Simple connection and application macros can be selected instead of configuring long, complicated parameter lists
  - Errors caused by wrong parameter settings can be avoided
- Keep Running Mode allows uninterrupted operation
  - This function provides higher productivity in production by automatic adaptation in the case of unstable line supplies
  - Stable operation under difficult line supply conditions
  - Higher productivity through prevention of interruptions to the production line
  - Adaptation to application-relevant reactions through flexible definition in case of faults/alarms
- Wide voltage range, advanced cooling design and coated PCBs increase robustness of the drive in difficult environments
  - Operation possible when the line supply voltage fluctuates
  - Reliable operation at line voltages:
    - 200 V ... 240 V 1 AC (-15 %/+10 %) <sup>1)</sup>
    - 380 V ... 480 V 3 AC (-15 %/+10 %)
  - Operating and ambient temperatures between -10 °C and +40 °C (max. +60 °C with derating)
- Wireless commissioning, operation and diagnostics via mobile device or laptop thanks to the optional web server module SINAMICS V20 Smart Access
  - Enables easy access to the converter, even when it is installed in difficult-to-access areas
  - Simple operation thanks to intuitive user interface and commissioning wizard
  - Flexible choice of terminal devices as the web server works with every HTML5-compatible web browser
- Expansion of the 400 V converters with two digital inputs and two digital outputs (relay outputs) thanks to optional SINAMICS V20 I/O Extension Module
  - Higher flexibility of the frequency converter without additional outlay for installation, hardware and software
  - Additional functionalities such as multi-pump control, with which up to four pumps can be controlled with a frequency converter

##### Easy to save money

Energy reduction during operation and standby

- ECO mode for V/f, V<sup>2</sup>/f
  - The integrated ECO mode for V/f, V<sup>2</sup>/f control automatically adapts the magnetic flux in the motor to save energy. The energy consumption can be shown in kWh, CO<sub>2</sub> or even in the local currency.
  - Energy saving during low dynamic load cycles
  - Specifies the actual energy that has been saved
- Hibernation mode
  - Converter and motor are only activated when used by the plant or machine
  - Smart hibernation saves energy
  - Motor service life is extended
  - Reduced pump wear at low speed
  - Less time needed to program PLC code for pump/fan applications (PLC)
- DC link coupling
  - Applications that use SINAMICS V20 drives with the same power rating can share a common DC bus to reuse the regenerative energy
  - Generate and save energy in applications that use coupled motors
  - The converters can then optimally share the load mutually.
  - Reduce the need for dynamic braking and external components

##### Integrated energy flow monitoring

- Energy consumption and savings are monitored without the need for power measurement equipment
  - Intuitive values of power consumption and savings without additional investments for measurement equipment
  - Values can be shown as kWh, CO<sub>2</sub> or as a currency

##### Cost-savings for low-overload applications with SINAMICS V20 converters, frame size FSE

SINAMICS V20 frame size FSE converters feature two different load cycles:

- Low overload (LO):  $110 \% \times I_L^{(2)}$  for 60 s (cycle time: 300 s)
- High overload (HO):  $150 \% \times I_H^{(3)}$  for 60 s (cycle time: 300 s)

With the low-overload cycle, the converter can reach a higher output current and power.

A smaller converter can be used. Optimally designed for variable applications:

- Low overload for applications with a low dynamic response (continuous duty)
- High overload for applications with a high dynamic response (cyclic duty)

##### Complete motion control solutions from Siemens – SINAMICS V20 and SIMATIC

Siemens offers comprehensive solutions from a single source for general motion control applications with a selection of different SINAMICS application examples:

- Ready-to-run application examples, including wiring diagrams, parameter descriptions
- Sample configurations for connecting SINAMICS with SIMATIC, including hardware, software and wiring examples, installation instructions for the supplied S7 project, drive parameterization, and HMI sample projects
  - Correctly configured project, ready for operation
  - Optimal leveraging of TIA advantages
  - Free download via the Online Support portal: [www.siemens.com/sinamics-applications](http://www.siemens.com/sinamics-applications)

<sup>1)</sup> Single-phase devices can also be connected to two phases of a three-phase 120/240 V power supply system. The voltage between L1 and L2 should be within the range of 200 V to 240 V, -15 % to +10 % (phase-phase or phase-neutral conductor). Further information can be found at: <https://support.industry.siemens.com/cs/document/109476260>

<sup>2)</sup> The output current  $I_L$  is based on the duty cycle for low overload (LO).

<sup>3)</sup> The output current  $I_H$  is based on the duty cycle for high overload (HO).

# SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

## SINAMICS V20 basic converters

### Application

#### Typical applications

##### Pumping, ventilating, compressing




- Centrifugal pumps
- Radial/axial fans
- Compressors

##### Advantages

- High availability through automatic restart and flying restart after power failures
- Broken belt detection by monitoring the load torque
- Pump protection against cavitation
- Hammer start and blockage clearing modes for clogged pumps
- PID controller for process values (e.g. temperature, pressure, level, flow)
- PID auto tuning to optimize controller parameters
- Hibernation mode stops the motor when demand is low
- Motor staging extends the flow range by adding two more fixed-speed drives (cascade)
- Frost and condensation protection prevents moisture in motors under extreme environmental conditions
- With optional SINAMICS V20 I/O Extension Module for 400 V converters: Multi-pump control <sup>1)</sup>, with which up to four pumps can be controlled with a frequency converter and applications that require additional digital inputs and digital outputs (e.g. in water supply systems for buildings)

##### Moving




- Conveyor belts
- Roller conveyors
- Chain conveyors
- Moving walkways
- Bucket conveyors

##### Advantages

- Soft, jerk-free acceleration reduces the stress on the gear units, bearings, drums and rollers
- Super torque start for conveyor belts with high breakaway torque
- Dynamic behavior by using braking resistor or DC braking
- Direct control of mechanical holding brake
- Broken belt detection by monitoring the load torque
- Precise stopping with Quick Stop (switch-off positioning) independently of the control cycle

##### Processing



- Single drives in the processing industry such as mills, mixers, kneaders, crushers, agitators, centrifuges
- Single drives in commercial applications such as ovens, mixers, industrial washing machines
- Main drives in machines with mechanically coupled axes such as spinning machines, braiding machines for textiles, ropes and wires

##### Advantages

- Frost and condensation protection prevents moisture in motors under extreme environmental conditions
- Higher productivity with uninterrupted production due to Keep Running Mode
- Exchange of regenerative energy via the DC link
- Super torque start for machines with a high breakaway torque


<sup>1)</sup> Further information on the multi-pump control can be found in the operating instructions and on the Internet at:  
[www.siemens.com/sinamics-v20/documentation](http://www.siemens.com/sinamics-v20/documentation)

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### SINAMICS V20 basic converters

#### Design

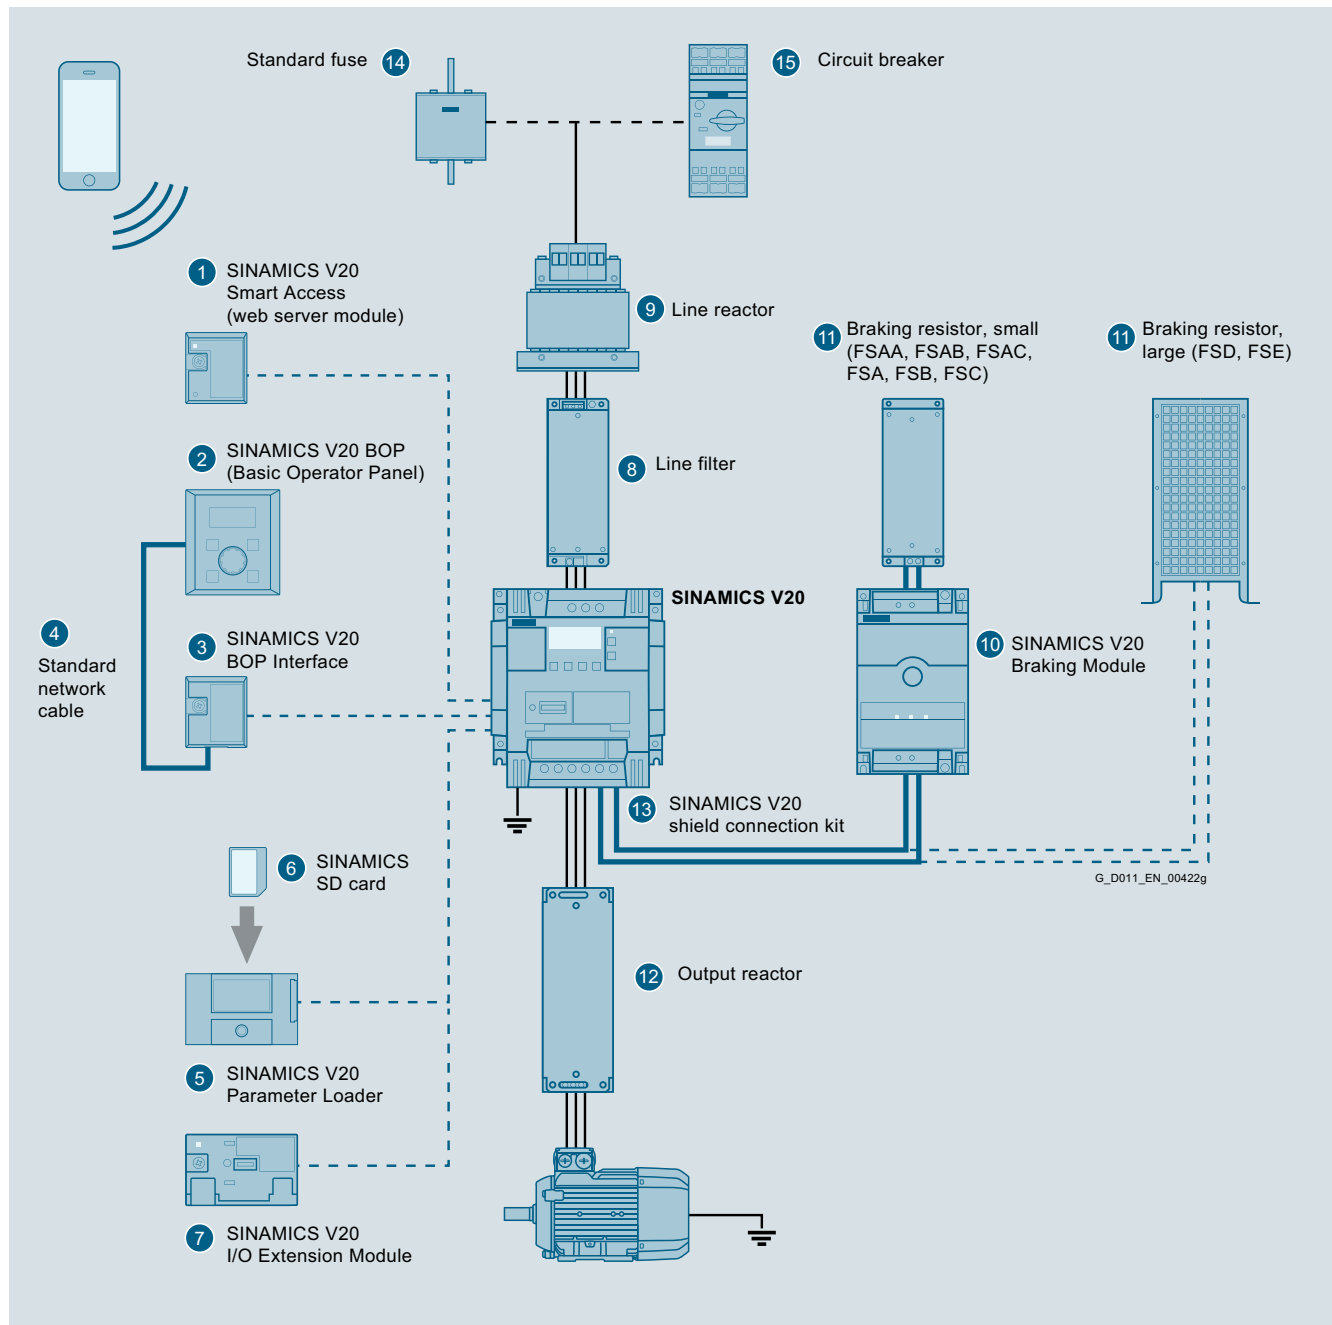

SINAMICS V20 converter and accessories

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### SINAMICS V20 basic converters

#### Design (continued)

| Accessories |                                          |                                                                                                                                                                                                                                                                                                                                     |
|-------------|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ①           | <b>SINAMICS V20 Smart Access</b>         | Wireless commissioning, operation, and diagnostics with mobile device or laptop using web server module                                                                                                                                                                                                                             |
| ②           | <b>SINAMICS V20 BOP</b>                  | <ul style="list-style-type: none"> <li>Same function as the integrated BOP (Basic Operator Panel)</li> <li>Can also be used for remote mounting</li> <li>Values and setpoints are changed by rotating the wheel</li> <li>For distributed mounting with IP54 and UL Type 1 enclosure rating</li> </ul>                               |
| ③           | <b>SINAMICS V20 BOP Interface</b>        | <ul style="list-style-type: none"> <li>Connection between converter and BOP</li> <li>RJ45 interface is compatible with standard network cable</li> </ul>                                                                                                                                                                            |
| ④           | <b>Standard network cable</b>            | <ul style="list-style-type: none"> <li>Cable not included in delivery</li> <li>You can use any standard network cable with standard RJ45 connector</li> </ul>                                                                                                                                                                       |
| ⑤           | <b>SINAMICS V20 Parameter Loader</b>     | <ul style="list-style-type: none"> <li>Up to 100 parameter sets with parameter settings can be written from the memory card to the converter, or saved from the converter to the memory card</li> <li>The converter does not have to be connected to the line supply</li> </ul>                                                     |
| ⑥           | <b>SINAMICS SD card</b>                  | <ul style="list-style-type: none"> <li>Memory card, 512 MB</li> <li>Standard SD cards up to 32 GB are supported</li> </ul>                                                                                                                                                                                                          |
| ⑦           | <b>SINAMICS V20 I/O Extension Module</b> | Expansion of the 400 V converters with two digital inputs and two digital outputs (relay outputs)                                                                                                                                                                                                                                   |
| ⑧           | <b>Line filter</b>                       | Improved EMC characteristics                                                                                                                                                                                                                                                                                                        |
| ⑨           | <b>Line reactor</b>                      | <ul style="list-style-type: none"> <li>Reduces the harmonic current</li> <li>Improves the power factor</li> <li>Recommended if input current (rms value) is higher than the rated current of the converter</li> </ul>                                                                                                               |
| ⑩           | <b>SINAMICS V20 Braking Module</b>       | <ul style="list-style-type: none"> <li>Shortens the deceleration ramp time</li> <li>Suitable for 230 V 1 AC and 400 V 3 AC</li> <li>Adjustable duty cycle from 5 % to 100 %</li> <li>For frame sizes FSAA, FSAB, FSAC, FSA, FSB and FSC</li> <li>FSD and FSE already have an integrated braking unit</li> </ul>                     |
| ⑪           | <b>Braking resistor</b>                  | <ul style="list-style-type: none"> <li>Dissipates regenerative energy as heat</li> <li>5 % duty cycle as default setting</li> </ul>                                                                                                                                                                                                 |
| ⑫           | <b>Output reactor</b>                    | For longer motor cable <ul style="list-style-type: none"> <li>230 V 1 AC: 200 m (shielded and unshielded)</li> <li>400 V 3 AC:               <ul style="list-style-type: none"> <li>for frame sizes FSA to FSD: 150 m (shielded and unshielded)</li> <li>for frame size FSE: 200/300 m (shielded/unshielded)</li> </ul> </li> </ul> |
| ⑬           | <b>Shield connection kit</b>             | <ul style="list-style-type: none"> <li>Shield connection</li> <li>Strain relief</li> </ul>                                                                                                                                                                                                                                          |
| ⑭           | <b>Standard fuse</b>                     | Recommended fuse corresponding to the IEC/UL standard                                                                                                                                                                                                                                                                               |
| ⑮           | <b>Circuit breaker</b>                   | Recommended circuit breaker corresponding to the IEC/UL standard                                                                                                                                                                                                                                                                    |

#### Function

| Feature                                  | Comment                                                                                                                                                                                                                                                                | Feature                                                  | Comment                                                                             |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Connection and application macros</b> | Sets groups of parameters to simplify commissioning <ul style="list-style-type: none"> <li>Connection macros for connections</li> <li>Application macros for applications</li> </ul>                                                                                   | <b>ECO mode</b>                                          | Economy mode – searches for most efficient rated point                              |
| <b>Keep Running Mode</b>                 | Single-parameter setting for a mode which keeps the motor going – enables <ul style="list-style-type: none"> <li>V<sub>dc_max</sub> controller</li> <li>Kinetic buffering</li> <li>Restart after fault</li> <li>Flying start.</li> <li>Disables alarms etc.</li> </ul> | <b>Hibernation mode</b>                                  | Intelligent economy mode in idle state                                              |
|                                          |                                                                                                                                                                                                                                                                        | <b>PID controller</b>                                    | Integrated PID controller with auto-tuning function                                 |
|                                          |                                                                                                                                                                                                                                                                        | <b>Kinetic buffering (V<sub>dc_min</sub> controller)</b> | Retention of minimal DC voltage through regenerative energy for continued operation |
|                                          |                                                                                                                                                                                                                                                                        | <b>V<sub>dc_max</sub> controller</b>                     | Automatic change of ramp down time/braking time                                     |
|                                          |                                                                                                                                                                                                                                                                        | <b>I<sub>max</sub> controller</b>                        | Automatic change of ramp up time to avoid overcurrent                               |

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### SINAMICS V20 basic converters

#### Function (continued)

| Feature                                                         | Comment                                                                                                                                                                                                                                      |
|-----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Automatic restart</b>                                        | Automatic restart of drive once the power has been restored following a power failure. All faults are acknowledged automatically and the drive is switched on again                                                                          |
| <b>Flying restart</b>                                           | Allows the converter to be switched to a rotating motor                                                                                                                                                                                      |
| <b>Energy consumption monitoring</b>                            | Displays a simple estimate of energy or cost saved against use of a line-connected motor                                                                                                                                                     |
| <b>50/60 Hz adaptation</b>                                      | Easy selection of operation with 50 Hz (Europe, Asia) / 60 Hz (USA)                                                                                                                                                                          |
| <b>V/f and V<sup>2</sup>/f</b>                                  | V/f: perfectly suitable for almost any application in which the speed of asynchronous (induction) motors is to be changed<br>V <sup>2</sup> /f: suited to loads with quadratic load curves, e.g. turbo machines such as pumps and fans       |
| <b>FCC</b>                                                      | Maintains motor flux current for improved efficiency                                                                                                                                                                                         |
| <b>Programmable V/f coordinates</b>                             | Freely adjusts the V/f characteristics, e.g. torque behavior of the synchronous motor                                                                                                                                                        |
| <b>JOG</b>                                                      | Moves the motor to test the direction or moves the load to specific position. When the BOP switches to JOG mode, pressing the start button of the BOP will run the motor up to the JOG frequency. Releasing the start button stops the motor |
| <b>DC braking</b>                                               | Stops the motor which runs at constant speed and only comes to a standstill in longer time intervals, e.g. centrifuges, saws, grinding machines and conveyor belts                                                                           |
| <b>Mechanical holding brake control</b>                         | The motor holding brake prevents the motor from undesirable turning when the converter is switched off. The converter has an internal logic to control an external motor holding brake                                                       |
| <b>USS</b>                                                      | Universal Serial Interface Protocol                                                                                                                                                                                                          |
| <b>Modbus RTU</b>                                               | Modbus RTU communication available via the RS485 link                                                                                                                                                                                        |
| <b>Super torque mode</b>                                        | Big torque boost for starting high-inertia applications                                                                                                                                                                                      |
| <b>Hammer start mode</b>                                        | A number of torque pulses at start-up to start difficult or "stuck" loads                                                                                                                                                                    |
| <b>Blockage clearing mode</b>                                   | Multiple-reverse function to clear blocked pumps                                                                                                                                                                                             |
| <b>Simple parameter-based menu on internal or external BOPs</b> | Easy selection for displaying values, editing parameters, converter setup                                                                                                                                                                    |
| <b>Simple text menu for setup</b>                               | The parameter number will be shown as short text in the 7-segment LED display                                                                                                                                                                |
| <b>Motor frequency display scaling</b>                          | User settable display scaling for special applications i.e. rather than Hz, it shows application-specific values like "gallons per minute", "potatoes per hour", etc.                                                                        |

| Feature                                      | Comment                                                                                                                                                                                                                            |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Customization of parameter defaults</b>   | Customers or OEMs can set their own special "permanent" defaults which can only be deleted in special mode                                                                                                                         |
| <b>Converter status in case of a fault</b>   | Record the fault with running data <ul style="list-style-type: none"> <li>• Fault code</li> <li>• Drive setpoint</li> <li>• Drive status</li> <li>• DC link voltage</li> <li>• Output current</li> <li>• Output voltage</li> </ul> |
| <b>List of modified parameters</b>           | When this filter is activated, the parameter list only displays the parameters which were modified by users                                                                                                                        |
| <b>Load torque monitoring</b>                | Detects the load torque to establish failure of the mechanical connection between motor and load machine, overload, motor blocking or no-load operation, e.g. in the event of a V-belt tear in a fan or when a load machine jams   |
| <b>Phase loss detection</b>                  | Detects and protects against phase loss                                                                                                                                                                                            |
| <b>Cavitation protection</b>                 | Protects against cavitation damage to pumps                                                                                                                                                                                        |
| <b>Condensation protection</b>               | Automatic application of DC current to motor to protect from condensation                                                                                                                                                          |
| <b>Frost protection</b>                      | Automatically rotates motor to stop fluids freezing when temperature falls near or below freezing e.g. for the sequential connection of multiple pumps working in one system                                                       |
| <b>Motor staging</b>                         | Automatic control and staging of several motors                                                                                                                                                                                    |
| <b>Multi-pump control <sup>1)</sup></b>      | Control of up to four pumps with a frequency converter by means of optional SINAMICS V20 I/O Extension Module                                                                                                                      |
| <b>Dual ramp parameterizable</b>             | Switchable ramps for specific applications                                                                                                                                                                                         |
| <b>Programmable fixed frequency setpoint</b> | 16 fixed frequencies can be defined and switched by digital inputs or communication                                                                                                                                                |
| <b>Drive data sets (DDS)</b>                 | 3 parameter sets for the motor and load. The user can switch the parameter set to suit the motors and applications                                                                                                                 |
| <b>Command data sets (CDS)</b>               | 3 parameter sets for the setpoint and command. The user can switch the parameter set to suit the control system                                                                                                                    |
| <b>Flexible voltage boost</b>                | Increases the output voltage to compensate resistive losses or increase the output torque                                                                                                                                          |
| <b>Skippable frequency bandwidth</b>         | Defines 1 to 4 frequencies to avoid effects of mechanical resonance and suppress frequencies within an adjustable skip frequency bandwidth                                                                                         |
| <b>2-wire/3-wire control</b>                 | The wide range of setting options is especially intended to allow emulation of existing control methods on the plant or system side if the converter has to be integrated into an existing application                             |


<sup>1)</sup> Further information on the multi-pump control can be found in the operating instructions and on the Internet at:  
[www.siemens.com/sinamics-v20/documentation](http://www.siemens.com/sinamics-v20/documentation)

# SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

## SINAMICS V20 basic converters

### Integration

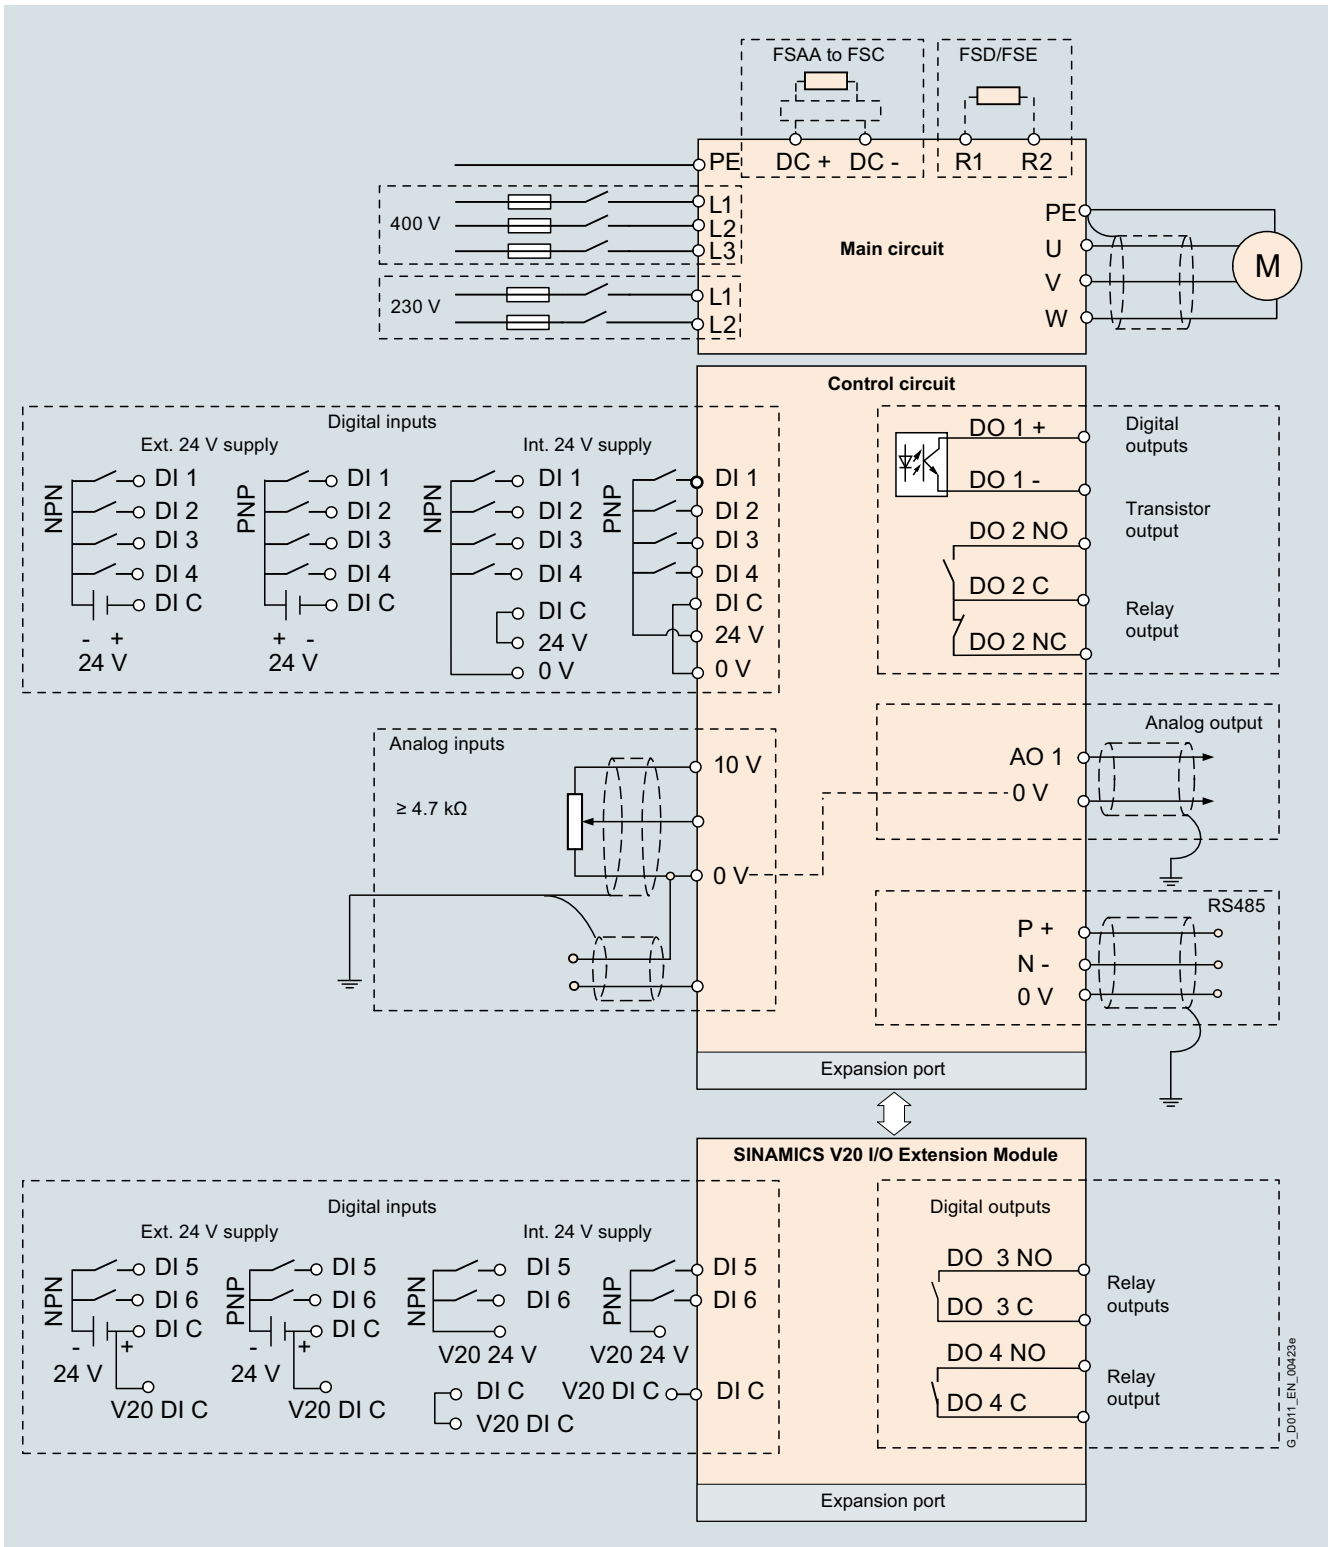

Connection example for SINAMICS V20

# SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

## SINAMICS V20 basic converters

### Selection and ordering data

| Rated power <sup>1)</sup>               |      | Rated input current | Output current $I_H$ <sup>2)</sup> | Fan | Frame size      | SINAMICS V20 without integrated line filter | SINAMICS V20 with integrated line filter Category C1 <sup>3)</sup> |
|-----------------------------------------|------|---------------------|------------------------------------|-----|-----------------|---------------------------------------------|--------------------------------------------------------------------|
| kW                                      | hp   | A                   | A                                  |     |                 | Article No.                                 | Article No.                                                        |
| <b>200 ... 240 V 1 AC <sup>4)</sup></b> |      |                     |                                    |     |                 |                                             |                                                                    |
| 0.12                                    | 0.16 | 2.3                 | 0.9                                | –   | FSAA            | 6SL3210-5BB11-2UV1                          | 6SL3210-5BB11-2BV1                                                 |
| 0.25                                    | 0.33 | 4.5                 | 1.7                                | –   | FSAA            | 6SL3210-5BB12-5UV1                          | 6SL3210-5BB12-5BV1                                                 |
| 0.37                                    | 0.5  | 6.2                 | 2.3                                | –   | FSAA            | 6SL3210-5BB13-7UV1                          | 6SL3210-5BB13-7BV1                                                 |
| 0.55                                    | 0.75 | 7.7                 | 3.2                                | –   | FSAB            | 6SL3210-5BB15-5UV1                          | 6SL3210-5BB15-5BV1                                                 |
| 0.75                                    | 1    | 10                  | 4.2                                | –   | FSAB            | 6SL3210-5BB17-5UV1                          | 6SL3210-5BB17-5BV1                                                 |
| 1.1                                     | 1.5  | 14.7                | 6                                  | 1   | FSAC <b>NEW</b> | 6SL3210-5BB21-1UV1                          | <b>NEW</b> 6SL3210-5BB21-1BV1                                      |
| 1.5                                     | 2    | 19.7                | 7.8                                | 1   | FSAC <b>NEW</b> | 6SL3210-5BB21-5UV1                          | <b>NEW</b> 6SL3210-5BB21-5BV1                                      |

| Rated power <sup>1)</sup>               |    | Rated input current | Output current $I_H$ <sup>2)</sup> | Fan | Frame size | SINAMICS V20 without integrated line filter | SINAMICS V20 with integrated line filter Category C2 <sup>5)</sup> |
|-----------------------------------------|----|---------------------|------------------------------------|-----|------------|---------------------------------------------|--------------------------------------------------------------------|
| kW                                      | hp | A                   | A                                  |     |            | Article No.                                 | Article No.                                                        |
| <b>200 ... 240 V 1 AC <sup>4)</sup></b> |    |                     |                                    |     |            |                                             |                                                                    |
| 2.2                                     | 3  | 27.2                | 11                                 | 1   | FSC        | 6SL3210-5BB22-2UV0                          | 6SL3210-5BB22-2AV0                                                 |
| 3                                       | 4  | 32                  | 13.6                               | 1   | FSC        | 6SL3210-5BB23-0UV0                          | 6SL3210-5BB23-0AV0                                                 |

| Rated power <sup>6)</sup> |      | Rated input current | Output current $I_L$ <sup>7)</sup> | Power based on the output current $I_H$ <sup>2)</sup> | Output current $I_H$ <sup>2)</sup> | Fan       | Frame size | SINAMICS V20 without integrated line filter | SINAMICS V20 with integrated line filter Category C3 <sup>8)</sup> |
|---------------------------|------|---------------------|------------------------------------|-------------------------------------------------------|------------------------------------|-----------|------------|---------------------------------------------|--------------------------------------------------------------------|
| kW                        | hp   | A                   | At 400 V/480 V                     | kW                                                    | hp                                 | A         |            | Article No.                                 | Article No.                                                        |
| <b>380 ... 480 V 3 AC</b> |      |                     |                                    |                                                       |                                    |           |            |                                             |                                                                    |
| 0.37                      | 0.5  | 1.7                 | 1.3/1.3                            | 0.37                                                  | 0.5                                | 1.3/1.3   | –          | FSA                                         | 6SL3210-5BE13-7UV0                                                 |
| 0.55                      | 0.75 | 2.1                 | 1.7/1.7                            | 0.55                                                  | 0.75                               | 1.7/1.7   | –          | FSA                                         | 6SL3210-5BE15-5UV0                                                 |
| 0.75                      | 1    | 2.6                 | 2.2/2.2                            | 0.75                                                  | 1                                  | 2.2/2.2   | –          | FSA                                         | 6SL3210-5BE17-5UV0                                                 |
| 1.1                       | 1.5  | 4                   | 3.1/3.1                            | 1.1                                                   | 1.5                                | 3.1/3.1   | 1          | FSA                                         | 6SL3210-5BE21-1UV0                                                 |
| 1.5                       | 2    | 5                   | 4.1/4.1                            | 1.5                                                   | 2                                  | 4.1/4.1   | 1          | FSA                                         | 6SL3210-5BE21-5UV0                                                 |
| 2.2                       | 3    | 6.4                 | 5.6/4.8                            | 2.2                                                   | 3                                  | 5.6/4.8   | 1          | FSA                                         | 6SL3210-5BE22-2UV0                                                 |
| 3                         | 4    | 8.6                 | 7.3/7.3                            | 3                                                     | 4                                  | 7.3/7.3   | 1          | FSB                                         | 6SL3210-5BE23-0UV0                                                 |
| 4                         | 5    | 11.3                | 8.8/8.24                           | 4                                                     | 5                                  | 8.8/8.24  | 1          | FSB                                         | 6SL3210-5BE24-0UV0                                                 |
| 5.5                       | 7.5  | 15.2                | 12.5/11                            | 5.5                                                   | 7.5                                | 12.5/11   | 1          | FSC                                         | 6SL3210-5BE25-5UV0                                                 |
| 7.5                       | 10   | 20.7                | 16.5/16.5                          | 7.5                                                   | 10                                 | 16.5/16.5 | 2          | FSD                                         | 6SL3210-5BE27-5UV0                                                 |
| 11                        | 15   | 30.4                | 25/21                              | 11                                                    | 15                                 | 25/21     | 2          | FSD                                         | 6SL3210-5BE31-1UV0                                                 |
| 15                        | 20   | 38.1                | 31/31                              | 15                                                    | 20                                 | 31/31     | 2          | FSD                                         | 6SL3210-5BE31-5UV0                                                 |
| 22                        | 30   | 54/45 <sup>9)</sup> | 45/40                              | 18.5                                                  | 25                                 | 38/34     | 2          | FSE                                         | 6SL3210-5BE31-8UV0                                                 |
| 30                        | 40   | 72/54 <sup>9)</sup> | 60/52                              | 22                                                    | 30                                 | 45/40     | 2          | FSE                                         | 6SL3210-5BE32-2UV0                                                 |

<sup>1)</sup> Rated power of the 230 V 1 AC devices based on the output current  $I_H$ . The output current  $I_H$  is based on the duty cycle for high overload (HO): 150 %  $I_H$  for 60 s within a cycle time of 300 s.

<sup>2)</sup> The output current  $I_H$  is based on the duty cycle for high overload (HO): 150 %  $I_H$  for 60 s within a cycle time of 300 s.

<sup>3)</sup> EN 61800-3 category C1, 1st environment (residential, commercial). Max. shielded motor cable length 5 m for frame sizes FSAA and FSAB, and 10 m for frame size FSAC – with or without external line filter.

<sup>4)</sup> Single-phase devices can also be connected to two phases of a 3-phase 230 V power supply system. You can find detailed information here: <https://support.industry.siemens.com/cs/document/109476260>

<sup>5)</sup> EN 61800-3 Category C2, 1st environment (residential, commercial). Max. shielded motor cable length 25 m for frame size FSC.

<sup>6)</sup> Rated power of the 400 V 3 AC devices based on the output current  $I_L$ . The output current  $I_L$  is based on the duty cycle for low overload (LO): 110 %  $I_L$  for 60 s within a cycle time of 300 s.

<sup>7)</sup> The output current  $I_L$  is based on the duty cycle for low overload (LO): 110 %  $I_L$  for 60 s within a cycle time of 300 s.

<sup>8)</sup> EN 61800-3 Category C3, 2nd environment (industrial). Shielded motor cable length for frame size FSA max. 10 m, for frame sizes FSB to FSD max. 25 m and for frame size FSE max. 50 m. To achieve 25 m of shielded motor cable length, even for C2 category FSA converters, unfiltered converters with external line filters must be used.

<sup>9)</sup> Regarding the first value, the rated input current for frame size FSE is based on the duty cycle for low overload (LO), regarding the second value, the current is based on the duty cycle for high overload (HO).

# SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

## SINAMICS V20 basic converters

### Selection and ordering data (continued)

#### Accessories

| Description                                                                                                                                                                                                                                                                                        | Article No.                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| <b>RS485 terminating resistor</b><br>Content: 50 units                                                                                                                                                                                                                                             | <b>6SL3255-0VC00-0HA0</b>                                  |
| <b>DIN rail mounting set</b><br>• For frame sizes FSAA, FSAB, FSAC and FSA<br>- For frame sizes FSAA, FSAB and FSAC, a migration mounting set is also required for installation<br>- For frame size FSA with fan, the operating instructions must be followed for assembly<br>• For frame size FSB | <b>6SL3261-1BA00-0AA0</b><br><br><b>6SL3261-1BB00-0AA0</b> |
| <b>Migration mounting set</b><br>Required in addition to the DIN rail mounting set for installing frame sizes FSAA, FSAB and FSAC<br>• For frame sizes FSAA and FSAB<br>• For frame size FSAC                                                                                                      | <b>6SL3266-1ER00-0VA0</b><br><b>NEW 6SL3266-1EB00-0VA0</b> |

### Technical specifications

|                                                                   | SINAMICS V20                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power range</b>                                                | 230 V 1 AC: 0.12 ... 3 kW (0.16 ... 4 hp)<br>400 V 3 AC: 0.37 ... 30 kW (0.5 ... 40 hp)                                                                                                                                                                            |
| <b>Offset factor <math>\cos \varphi</math></b>                    | $\geq 0.95$                                                                                                                                                                                                                                                        |
| <b>Power factor <math>\lambda</math></b>                          | 0.72                                                                                                                                                                                                                                                               |
| <b>Line voltage</b>                                               | 230 V 1 AC: 200 ... 240 V 1 AC (-15 ... +10 %) <sup>1)</sup><br>400 V 3 AC: 380 ... 480 V 3 AC (-15 ... +10 %)                                                                                                                                                     |
| <b>Maximum output voltage</b>                                     | 100 % of input voltage                                                                                                                                                                                                                                             |
| <b>Line frequency</b>                                             | 50 Hz/60 Hz                                                                                                                                                                                                                                                        |
| <b>Line supply type</b>                                           | <ul style="list-style-type: none"> <li>• TN, TT, TT grounded line supply</li> <li>• IT for <ul style="list-style-type: none"> <li>- 230 V 1 AC unfiltered devices, frame sizes FSAA, FSAB and FSAC</li> <li>- 400 V 3 AC unfiltered devices</li> </ul> </li> </ul> |
| <b>Overload capability</b><br>• Up to 15 kW<br><br>• From 18.5 kW | High overload (HO):<br>150 % $I_H$ for 60 s within a cycle time of 300 s.<br><br>Low overload (LO):<br>110 % $I_L$ for 60 s within a cycle time of 300 s.<br>High overload (HO):<br>110 % $I_H$ for 60 s within a cycle time of 300 s.                             |
| <b>Output frequency</b>                                           | 0 ... 550 Hz, resolution: 0.01 Hz                                                                                                                                                                                                                                  |
| <b>Pulse frequency</b>                                            | 2 ... 16 kHz                                                                                                                                                                                                                                                       |
| <b>Efficiency</b>                                                 | 98 %                                                                                                                                                                                                                                                               |
| <b>Programmable fixed frequency setpoints</b>                     | 16                                                                                                                                                                                                                                                                 |
| <b>Analog inputs</b><br><br>• Resolution                          | AI1: bipolar current/voltage mode<br>AI2: unipolar current/voltage mode can be used as digital inputs<br><br>12 bit                                                                                                                                                |
| <b>Analog output</b>                                              | AO1 current output<br>0 ... 20 mA                                                                                                                                                                                                                                  |
| <b>Digital inputs</b><br><br>• Input current, max.                | DI1 ... DI4: isolated; for 400 V converters with optional SINAMICS V20 I/O Extension Module<br>two additional digital inputs DI5 and DI6<br>PNP/NPN selectable via terminal<br><br>15 mA                                                                           |
| <b>Digital outputs</b>                                            | DO1: transistor output<br>DO2: relay output; for 400 V converters with optional SINAMICS V20 I/O Extension Module<br>two additional digital outputs (relay outputs) DO3 and DO4<br>250 V AC 0.5 A with resistive load<br>30 V DC 0.5 A with resistive load         |
| <b>Integrated interface</b><br>• Type<br>• Protocols              | RS485<br><br>USS, Modbus RTU                                                                                                                                                                                                                                       |
| <b>Extension interface</b>                                        | SINAMICS V20 BOP Interface, SINAMICS V20 Smart Access, SINAMICS V20 Parameter Loader, SINAMICS V20 I/O Extension Module (cannot be operated simultaneously with SINAMICS V20 Parameter Loader)                                                                     |

<sup>1)</sup> Single-phase devices can also be connected to two phases of a 3-phase 230 V power supply system. You can find detailed information at: <https://support.industry.siemens.com/cs/document/109476260>

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### SINAMICS V20 basic converters

#### Technical specifications (continued)

| SINAMICS V20                                                                                               |       |
|------------------------------------------------------------------------------------------------------------|-------|
| <b>Control modes</b>                                                                                       |       |
| • V/f linear/square/multi-point                                                                            | ✓     |
| • V/f with flux current control (FCC)                                                                      | ✓     |
| <b>Functions</b>                                                                                           |       |
| <b>Easy to use</b>                                                                                         |       |
| Automatic restart                                                                                          | ✓     |
| Parameter cloning                                                                                          | ✓     |
| Drive data sets (DDS)                                                                                      | ✓ (3) |
| Command data sets (CDS)                                                                                    | ✓ (3) |
| JOG                                                                                                        | ✓     |
| Pre-configured connection macros and application macros                                                    | ✓     |
| Simple parameter-based menu on internal or external SINAMICS V20 BOP                                       | ✓     |
| Simple text menu for setup                                                                                 | ✓     |
| USS                                                                                                        | ✓     |
| Modbus RTU                                                                                                 | ✓     |
| Motor frequency display scaling                                                                            | ✓     |
| Customization of parameter defaults                                                                        | ✓     |
| Energy consumption monitoring                                                                              | ✓     |
| List of modified parameters                                                                                | ✓     |
| Converter status in case of a fault                                                                        | ✓     |
| <b>Application</b>                                                                                         |       |
| Keep Running Mode                                                                                          | ✓     |
| Flying restart                                                                                             | ✓     |
| PID controller                                                                                             | ✓     |
| Kinetic buffering ( $V_{dc\_min}$ controller)                                                              | ✓     |
| Skippable frequency bandwidth                                                                              | 4     |
| <b>Braking functions</b>                                                                                   |       |
| • DC braking                                                                                               | ✓     |
| • Compound braking                                                                                         | ✓     |
| • Dynamic braking                                                                                          | ✓     |
| 2-wire/3-wire control                                                                                      | ✓     |
| Mechanical holding brake control                                                                           | ✓     |
| Super torque mode                                                                                          | ✓     |
| Hammer start mode                                                                                          | ✓     |
| Blockage clearing mode                                                                                     | ✓     |
| Hibernation mode                                                                                           | ✓     |
| Motor staging                                                                                              | ✓     |
| Multi-pump control <sup>1)</sup><br>(for 400 V converters with optional SINAMICS V20 I/O Extension Module) | ✓     |
| Dual ramp parameterizable                                                                                  | ✓     |
| Wobble function                                                                                            | ✓     |
| BICO function                                                                                              | ✓     |
| Slip compensation                                                                                          | ✓     |

| SINAMICS V20                 |   |
|------------------------------|---|
| <b>Functions (continued)</b> |   |
| <b>Protection</b>            |   |
| DC link voltage control      | ✓ |
| Load torque monitoring       | ✓ |
| Phase loss detection         | ✓ |
| Cavitation protection        | ✓ |
| Condensation protection      | ✓ |
| Frost protection             | ✓ |
| <b>Control</b>               |   |
| ECO mode                     | ✓ |
| $V_{dc\_max}$ controller     | ✓ |
| $I_{max}$ controller         | ✓ |
| Programmable V/f coordinates | ✓ |
| Flexible voltage boost       | ✓ |
| 50/60 Hz adaptation          | ✓ |

<sup>1)</sup> Further information on the multi-pump control can be found in the operating instructions and on the Internet at:  
[www.siemens.com/sinamics-v20/documentation](http://www.siemens.com/sinamics-v20/documentation)

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### SINAMICS V20 basic converters

#### Technical specifications (continued)

| SINAMICS V20                                            |                                                                                                                                                                                                        |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>General technical specifications</b>                 |                                                                                                                                                                                                        |
| <b>Degree of protection</b>                             | IP20                                                                                                                                                                                                   |
| <b>Mounting</b>                                         | Wall mounting, side-by-side mounting, push-through mounting for FSB, FSC, FSD, and FSE                                                                                                                 |
| <b>Ambient temperature</b>                              |                                                                                                                                                                                                        |
| • Operation                                             | -10 ... +40 °C (14 ... 104 °F) without derating<br>40 ... 60 °C (104 ... 140 °F) with derating                                                                                                         |
| • Storage                                               | -40 ... +70 °C (-40 ... +158 °F)                                                                                                                                                                       |
| <b>Relative humidity</b>                                | 95 % (non-condensing)                                                                                                                                                                                  |
| <b>Cooling</b>                                          |                                                                                                                                                                                                        |
| • FSAA, FSAB, FSA up to 0.75 kW                         | Convection cooling                                                                                                                                                                                     |
| • FSAC, FSA, FSB, FSC, FSD, FSE                         | Power electronics cooled using heat sinks with external fan                                                                                                                                            |
| <b>Installation altitude</b>                            | Up to 4000 m (13124 ft) above sea level<br>1000 ... 4000 m: (3281 ... 13124 ft): output current derating<br>2000 ... 4000 m (6562 ... 13124 ft): input voltage derating                                |
| <b>Motor cable length</b>                               |                                                                                                                                                                                                        |
| • Unshielded                                            |                                                                                                                                                                                                        |
| - FSAA to FSD                                           | 50 m (164 ft)                                                                                                                                                                                          |
| - FSE                                                   | 100 m (328 ft)                                                                                                                                                                                         |
| • Shielded                                              |                                                                                                                                                                                                        |
| - FSA                                                   | 10 m (32.8 ft) for converter size FSA with integrated line filter category C3<br>To achieve 25 m (82 ft) shielded motor cable length, unfiltered converters with external line filters have to be used |
| - FSAA to FSD                                           | 25 m (82 ft)                                                                                                                                                                                           |
| - FSE                                                   | 50 m (164 ft)                                                                                                                                                                                          |
| • Longer motor cables with an additional output reactor |                                                                                                                                                                                                        |
| - 230 V 1 AC                                            | 200 m (656 ft) (shielded and unshielded)                                                                                                                                                               |
| - 400 V 3 AC                                            | 150 m (492 ft) (shielded and unshielded) for frame sizes FSA to FSD<br>200/300 m (656 ft/984 ft) (shielded/unshielded) for frame size FSE                                                              |
| <b>Vibration load</b>                                   |                                                                                                                                                                                                        |
| • Transport                                             | 5 ... 9 Hz: Deflection, 3.5 mm<br>9 ... 200 Hz: Vibration $1 \times g$<br>Vibration class: 2M3                                                                                                         |
| • Operation                                             | Area of application IIa<br>10 ... 58 Hz: Deflection, 0.075 mm<br>58 ... 200 Hz: Vibration $1 \times g$                                                                                                 |
| <b>Shock load</b>                                       |                                                                                                                                                                                                        |
| • Operation                                             | Area of application II<br>Peak acceleration: $5 \times g$<br>Duration of shock: 30 ms                                                                                                                  |

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### SINAMICS V20 basic converters

#### Technical specifications (continued)

| SINAMICS V20                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------------|--------------------|-------------------|-------------------|-------------------|--------------------|--------------------|
| General technical specifications (continued)                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
|                                                                                                                                                                                                                                                                                                                   | FSAA<br>without fan                                                                                                                                                                                                      | FSAB<br>without fan | FSAC<br>with 1 fan | FSA<br>without fan | FSA<br>with 1 fan | FSB<br>with 1 fan | FSC<br>with 1 fan | FSD<br>with 2 fans | FSE<br>with 2 fans |
| <b>Dimensions</b>                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| • Width in mm (in)                                                                                                                                                                                                                                                                                                | 68 (2.68)                                                                                                                                                                                                                | 68 (2.68)           | 90.8 (3.57)        | 90 (3.54)          | 90 (3.54)         | 140 (5.51)        | 184 (7.24)        | 240 (9.45)         | 245 (9.65)         |
| • Height in mm (in)                                                                                                                                                                                                                                                                                               | 142 (5.59)                                                                                                                                                                                                               | 142 (5.59)          | 160.9 (6.33)       | 150 (5.91)         | 166 (6.54)        | 160 (6.3)         | 182 (7.17)        | 206.5 (8.13)       | 264.5 (10.41)      |
| • Depth in mm (in)                                                                                                                                                                                                                                                                                                | 107.8 (4.24)                                                                                                                                                                                                             | 127.8 (5.03)        | 147 (5.79)         | 145.5 (5.73)       | 145.5 (5.73)      | 164.5 (6.48)      | 169 (6.65)        | 172.5 (6.79)       | 209 (8.23)         |
| <b>Weight, approx.</b>                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| • 230 V 1 AC                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| - Without integrated line filter                                                                                                                                                                                                                                                                                  | 0.6 kg (1.32 lb)                                                                                                                                                                                                         | 0.8 kg (1.76 lb)    | 1.2 kg (2.65 lb)   | –                  | –                 | –                 | 2.5 kg (5.51 lb)  | –                  | –                  |
| - With integrated line filter category C1                                                                                                                                                                                                                                                                         | 0.7 kg (1.54 lb)                                                                                                                                                                                                         | 0.9 kg (1.98 lb)    | 1.4 kg (3.09 lb)   | –                  | –                 | –                 | –                 | –                  | –                  |
| - With integrated line filter category C2                                                                                                                                                                                                                                                                         | –                                                                                                                                                                                                                        | –                   | –                  | –                  | –                 | –                 | 2.8 kg (6.17 lb)  | –                  | –                  |
| • 400 V 3 AC                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| - Without integrated line filter                                                                                                                                                                                                                                                                                  | –                                                                                                                                                                                                                        | –                   | –                  | 0.9 kg (1.98 lb)   | 1 kg (2.21 lb)    | 1.6 kg (3.53 lb)  | 2.4 kg (5.29 lb)  | 3.9 kg (8.60 lb)   | 6.4 kg (14.1 lb)   |
| - With integrated line filter category C3                                                                                                                                                                                                                                                                         | –                                                                                                                                                                                                                        | –                   | –                  | 1 kg (2.21 lb)     | 1.1 kg (2.43 lb)  | 1.8 kg (3.97 lb)  | 2.6 kg (5.73 lb)  | 4.3 kg (9.48 lb)   | 7 kg (15.4 lb)     |
| <b>Mounting clearance, min.</b>                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| • Top                                                                                                                                                                                                                                                                                                             | 100 mm (3.94 in)                                                                                                                                                                                                         |                     |                    |                    |                   |                   |                   |                    |                    |
| • Bottom                                                                                                                                                                                                                                                                                                          | 100 mm (3.94 in)<br>85 mm (3.35 in) for fan-cooled FSA                                                                                                                                                                   |                     |                    |                    |                   |                   |                   |                    |                    |
| • Side                                                                                                                                                                                                                                                                                                            | 0 mm                                                                                                                                                                                                                     |                     |                    |                    |                   |                   |                   |                    |                    |
| <b>Certificates of suitability</b>                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| cULus, CE, RCM, KC                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| <b>Environmental classes</b>                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| Pollution class: 3S2<br>Gas class: 3C2 (SO <sub>2</sub> , H <sub>2</sub> S)<br>Climate class: 3K3                                                                                                                                                                                                                 |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| <b>CE marking, according to</b>                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| European Low Voltage Directive (EN 61800-5-1/EN 60204-1) and European EMC Directive (EN 61800-3)                                                                                                                                                                                                                  |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| <b>UL marking, according to</b>                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| UL508C                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| <b>EMC standards, radiated emissions and disturbance voltage (conducted emissions)</b>                                                                                                                                                                                                                            |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| • EN 61800-3 category C1, 1st environment (residential, commercial)                                                                                                                                                                                                                                               | • 230 V 1 AC with integrated line filter or unfiltered with external line filter, shielded cables<br>- FSAA and FSAB: ≤5 m (16.4 ft)<br>- FSAC: ≤10 m (32.8 ft)                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| • EN 61800-3 category C2, 1st environment (residential, commercial)                                                                                                                                                                                                                                               | • 230 V 1 AC with integrated line filter, shielded cables<br>- FSC: ≤25 m (82 ft)<br>• 400 V 3 AC without integrated line filter, with external line filter, shielded cables<br>- FSA <sup>1)</sup> to FSE ≤25 m (82 ft) |                     |                    |                    |                   |                   |                   |                    |                    |
| • EN 61800-3 category C3, 2nd environment (industrial)                                                                                                                                                                                                                                                            | • 400 V 3 AC with integrated line filter, shielded cables<br>- FSA: ≤10 m (32.8 ft)<br>- FSB to FSD: ≤25 m (82 ft)<br>- FSE: ≤50 m (164 ft)                                                                              |                     |                    |                    |                   |                   |                   |                    |                    |
| <b>Note</b>                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |
| The EMC product standard EN 61800-3 does not apply directly to a frequency converter but to a PDS (Power Drive System), which covers the complete circuitry, motor and cables in addition to the converter. The converters themselves are in general not subject to marking in accordance with the EMC directive. |                                                                                                                                                                                                                          |                     |                    |                    |                   |                   |                   |                    |                    |


<sup>1)</sup> To achieve 25 m (82 ft) shielded motor cable lengths with FSA frame size converters, unfiltered converters with external line filters have to be used.

# SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

## SINAMICS V20 basic converters

### Dimensional drawings

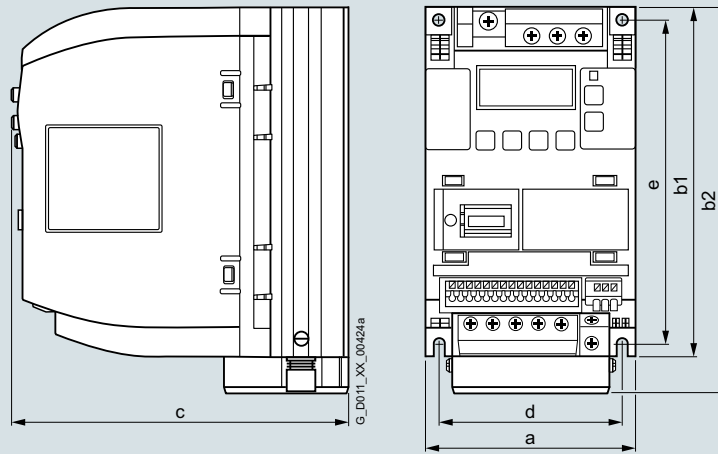

| Frame size | Dimensions in mm (inches) |                         |                      |              | Drilling dimensions in mm (inches) |            |
|------------|---------------------------|-------------------------|----------------------|--------------|------------------------------------|------------|
|            | a (width)                 | b1 (height) without fan | b2 (height) with fan | c (depth)    | d                                  | e          |
| FSAA       | 68 (2.68)                 | 142 (5.59)              | –                    | 107.8 (4.24) | 58 (2.28)                          | 132 (5.2)  |
| FSAB       | 68 (2.68)                 | 142 (5.59)              | –                    | 127.8 (5.03) | 58 (2.28)                          | 132 (5.2)  |
| FSAC       | 90.8 (3.57)               | –                       | 160.9 (6.33)         | 147 (5.79)   | 79 (3.11)                          | 140 (5.51) |
| FSA        | 90 (3.54)                 | 150 (5.91)              | 166 (6.54)           | 145.5 (5.73) | 79 (3.11)                          | 140 (5.51) |
| FSB        | 140 (5.51)                | –                       | 160 (6.3)            | 164.5 (6.48) | 127 (5)                            | 135 (5.31) |
| FSC        | 184 (7.24)                | –                       | 182 (7.17)           | 169 (6.65)   | 170 (6.69)                         | 140 (5.51) |
| FSD        | 240 (9.45)                | –                       | 206.5 (8.13)         | 172.5 (6.79) | 223 (8.78)                         | 166 (6.54) |
| FSE        | 245 (9.65)                | –                       | 264.5 (10.41)        | 209 (8.23)   | 228 (8.98)                         | 206 (8.11) |

| Frame size       | Mounting clearance, min. in mm (inches) |            |      |
|------------------|-----------------------------------------|------------|------|
|                  | Top                                     | Bottom     | Side |
| FSAA, FSAB, FSAC | 100 (3.94)                              | 100 (3.94) | 0    |
| FSA without fan  | 100 (3.94)                              | 100 (3.94) | 0    |
| FSA with fan     | 100 (3.94)                              | 85 (3.35)  | 0    |
| FSB to FSE       | 100 (3.94)                              | 100 (3.94) | 0    |

### More information

A Getting Started Manual is supplied in hard copy form with every SINAMICS V20. Further documentation, such as Operating Instructions and List Manuals, is available for download free of charge from the Internet at:

[www.siemens.com/sinamics-v20/documentation](http://www.siemens.com/sinamics-v20/documentation)

Detailed information on SINAMICS V20, the latest technical documentation (brochures, dimensional drawings, certificates, manuals and operating instructions) is available on the Internet at:

[www.siemens.com/sinamics-v20](http://www.siemens.com/sinamics-v20)

In addition, the Drive Technology Configurator (DT Configurator) can be used on the Internet. The DT Configurator can be found in the Siemens Industry Mall at the following address:

[www.siemens.com/dt-configurator](http://www.siemens.com/dt-configurator)

Furthermore, the SINAMICS SELECTOR app is a practical tool that helps you find article numbers for SINAMICS V20, SINAMICS G120C, SINAMICS G120P and SINAMICS G120 converters in the output range from 0.12 kW to 630 kW quickly and easily. You will find the free downloads for Android and for iOS at the following link:

[www.siemens.com/sinamics-selector](http://www.siemens.com/sinamics-selector)

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### SINAMICS V20 Starter Kit

#### Overview



SINAMICS V20  
BOP  
(Basic Operator Panel)

SINAMICS V20  
BOP Interface

SINAMICS V20  
FSAA

SINAMICS V20  
Smart Access  
(Webserver Module)

SINAMICS V20  
Parameter Loader

#### SINAMICS V20 Starter Kit

A SINAMICS V20 Starter Kit comprises the following components:

- SINAMICS V20 converter (230 V 1 AC with integrated filter, frame size FSAA, 0.37 kW)
- SINAMICS V20 BOP (Basic Operator Panel)
- SINAMICS V20 BOP Interface
- SINAMICS V20 Parameter Loader
- SINAMICS V20 Smart Access

The delivery quantity is limited to three per customer.

#### Selection and ordering data

| Description                     | Article No.               |
|---------------------------------|---------------------------|
| <b>SINAMICS V20 Starter Kit</b> | <b>6SL3200-0AE50-0AA0</b> |

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

Line-side components > Line filters

### Overview



Line filter for frame size FSA

230 V converters without integrated line filters can satisfy EN 61800-3 category C1 with the specified line filters class B when used with a shielded output cable with a maximum length of 5 m for frame sizes FSAA and FSAB, and 10 m for frame size FSAC.

230 V converters with integrated line filters frame size FSC satisfy the requirements of EN 61800-3 category C2 even without an external line filter when they are used with a shielded output cable with a maximum length of 25 m.

400 V converters with or without integrated line filters can satisfy EN 61800-3 category C2 with the specified line filters class B if they are used with a shielded output cable with a maximum length of 25 m.

**SINAMICS V20 basic converters**

0.12 kW to 30 kW (0.16 hp to 40 hp)

Line-side components &gt; Line filters

**Selection and ordering data**

| Rated power               |      | <b>SINAMICS V20</b> |            | Line filter class B for category C1, shielded motor cable length max. 5 m (FSAA and FSAB) max. 10 m (FSAC) |
|---------------------------|------|---------------------|------------|------------------------------------------------------------------------------------------------------------|
| kW                        | hp   | 6SL3210-            | Frame size | Article No.                                                                                                |
| <b>200 ... 240 V 1 AC</b> |      |                     |            |                                                                                                            |
| 0.12                      | 0.16 | 5BB11-2UV1          | FSAA       | <b>6SL3203-0BB21-8VA0</b>                                                                                  |
| 0.25                      | 0.33 | 5BB12-5UV1          | FSAA       |                                                                                                            |
| 0.37                      | 0.5  | 5BB13-7UV1          | FSAA       |                                                                                                            |
| 0.55                      | 0.75 | 5BB15-5UV1          | FSAB       |                                                                                                            |
| 0.75                      | 1    | 5BB17-5UV1          | FSAB       |                                                                                                            |
| 1.1                       | 1.5  | 5BB21-1UV1          | FSAC       |                                                                                                            |
| 1.5                       | 2    | 5BB21-5UV1          | FSAC       |                                                                                                            |
| Rated power               |      | <b>SINAMICS V20</b> |            | Line filter class B for category C2, shielded motor cable length max. 25 m                                 |
| kW                        | hp   | 6SL3210-            | Frame size | Article No.                                                                                                |
| <b>200 ... 240 V 1 AC</b> |      |                     |            |                                                                                                            |
| 2.2                       | 3    | 5BB22-2 . V0        | FSC        | <b>6SE6400-2FL02-6BB0</b>                                                                                  |
| Rated power               |      | <b>SINAMICS V20</b> |            | Line filter class B for category C2, shielded motor cable length max. 25 m                                 |
| kW                        | hp   | 6SL3210-            | Frame size | Article No.                                                                                                |
| <b>380 ... 480 V 3 AC</b> |      |                     |            |                                                                                                            |
| 0.37                      | 0.5  | 5BE13-7UV0          | FSA        | <b>6SL3203-0BE17-7BA0</b>                                                                                  |
| 0.55                      | 0.75 | 5BE15-5UV0          | FSA        |                                                                                                            |
| 0.75                      | 1    | 5BE17-5UV0          | FSA        |                                                                                                            |
| 1.1                       | 1.5  | 5BE21-1UV0          | FSA        |                                                                                                            |
| 1.5                       | 2    | 5BE21-5UV0          | FSA        |                                                                                                            |
| 2.2                       | 3    | 5BE22-2UV0          | FSA        |                                                                                                            |
| 3                         | 4    | 5BE23-0UV0          | FSB        | <b>6SL3203-0BE21-8BA0</b>                                                                                  |
| 4                         | 5    | 5BE24-0UV0          | FSB        |                                                                                                            |
| 5.5                       | 7.5  | 5BE25-5UV0          | FSC        | <b>6SL3203-0BE23-8BA0</b>                                                                                  |
| 7.5                       | 10   | 5BE27-5UV0          | FSD        |                                                                                                            |
| 11                        | 15   | 5BE31-1UV0          | FSD        |                                                                                                            |
| 15                        | 20   | 5BE31-5UV0          | FSD        |                                                                                                            |
| 22                        | 30   | 5BE31-8UV0          | FSE        |                                                                                                            |
| 30                        | 40   | 5BE32-2UV0          | FSE        | <b>6SL3203-0BE27-5BA0</b>                                                                                  |

# SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

Line-side components > Line filters

## Technical specifications

| Line voltage 200 ... 240 V 1 AC  |                 | Line filter class B                                                                                                                                                            |                           |
|----------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
|                                  |                 | 6SL3203-0BB21-8VA0                                                                                                                                                             | 6SE6400-2FL02-6BB0        |
| <b>Rated current</b>             | A               | 18                                                                                                                                                                             | 26                        |
| <b>Line supply connection</b>    |                 | Screw terminal                                                                                                                                                                 | Screw terminal            |
| • Conductor cross-section        | mm <sup>2</sup> | 0.25 ... 10                                                                                                                                                                    | 1.5 ... 6                 |
| <b>Load connection</b>           |                 | Shielded cable                                                                                                                                                                 | Shielded cable            |
| • Length                         | m (ft)          | 20 (65.6)                                                                                                                                                                      | 0.43 (1.41)               |
| <b>PE connection</b>             |                 | M5 stud                                                                                                                                                                        | M5 stud                   |
| <b>Degree of protection</b>      |                 | IP20                                                                                                                                                                           | IP20                      |
| <b>Dimensions</b>                |                 |                                                                                                                                                                                |                           |
| • Width                          | mm (in)         | 59 (2.32)                                                                                                                                                                      | 149 (5.87)                |
| • Height                         | mm (in)         | 155 (6.10)                                                                                                                                                                     | 213 (8.39)                |
| • Depth                          | mm (in)         | 53 (2.09)                                                                                                                                                                      | 50.5 (1.99)               |
| <b>Weight, approx.</b>           | kg (lb)         | 0.9 (1.98)                                                                                                                                                                     | 1 (2.21)                  |
| <b>Suitable for SINAMICS V20</b> | Type            | 6SL3210-5BB11-2UV1<br>6SL3210-5BB12-5UV1<br>6SL3210-5BB13-7UV1<br>FSAA<br>6SL3210-5BB15-5UV1<br>6SL3210-5BB17-5UV1<br>FSAB<br>6SL3210-5BB21-1UV1<br>6SL3210-5BB21-5UV1<br>FSAC | 6SL3210-5BB22-2UV0<br>FSC |

| Line voltage 380 ... 480 V 3 AC             |                 | Line filter class B                                                                                                                     |                                                                              |                                                                                                    |                                  |
|---------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------|
|                                             |                 | 6SL3203-0BE17-7BA0                                                                                                                      | 6SL3203-0BE21-8BA0                                                           | 6SL3203-0BE23-8BA0                                                                                 | 6SL3203-0BE27-5BA0               |
| <b>Rated current</b>                        | A               | 11.4                                                                                                                                    | 23.5                                                                         | 49.4                                                                                               | 72                               |
| <b>Line supply connection</b><br>L1, L2, L3 |                 | Screw terminals                                                                                                                         | Screw terminals                                                              | Screw terminals                                                                                    | Screw terminals                  |
| • Conductor cross-section                   | mm <sup>2</sup> | 1 ... 2.5                                                                                                                               | 2.5 ... 6                                                                    | 6 ... 16                                                                                           | 16 ... 50                        |
| <b>Load connection</b><br>U, V, W           |                 | Shielded cable                                                                                                                          | Shielded cable                                                               | Shielded cable                                                                                     | Shielded cable                   |
| • Cable cross-section                       | mm <sup>2</sup> | 1.5                                                                                                                                     | 4                                                                            | 10                                                                                                 | 16                               |
| • Length                                    | m (ft)          | 0.45 (1.48)                                                                                                                             | 0.5 (1.64)                                                                   | 0.54 (1.77)                                                                                        | 1 (3.28)                         |
| <b>PE connection</b>                        |                 | On housing via<br>M5 screw studs                                                                                                        | On housing via<br>M5 screw studs                                             | On housing via<br>M6 screw studs                                                                   | On housing via<br>M6 screw studs |
| • Conductor cross-section                   | mm <sup>2</sup> | 1 ... 2.5                                                                                                                               | 1.5 ... 6                                                                    | 6 ... 16                                                                                           | 16 ... 50                        |
| <b>Degree of protection</b>                 |                 | IP20                                                                                                                                    | IP20                                                                         | IP20                                                                                               | IP20                             |
| <b>Dimensions</b>                           |                 |                                                                                                                                         |                                                                              |                                                                                                    |                                  |
| • Width                                     | mm (in)         | 73 (2.87)                                                                                                                               | 100 (3.94)                                                                   | 140 (5.51)                                                                                         | 100 (3.94)                       |
| • Height                                    | mm (in)         | 202 (7.95)                                                                                                                              | 297 (11.69)                                                                  | 359 (14.13)                                                                                        | 400 (15.75)                      |
| • Depth                                     | mm (in)         | 65 (2.56)                                                                                                                               | 85 (3.35)                                                                    | 95 (3.74)                                                                                          | 140 (5.51)                       |
| <b>Weight, approx.</b>                      | kg (lb)         | 1.75 (3.86)                                                                                                                             | 4 (8.82)                                                                     | 7.3 (16.1)                                                                                         | 7.6 (16.8)                       |
| <b>Suitable for SINAMICS V20</b>            | Type            | 6SL3210-5BE13-7UV0<br>6SL3210-5BE15-5UV0<br>6SL3210-5BE17-5UV0<br>6SL3210-5BE21-1UV0<br>6SL3210-5BE21-5UV0<br>6SL3210-5BE22-2UV0<br>FSA | 6SL3210-5BE23-0UV0<br>6SL3210-5BE24-0UV0<br>FSB<br>6SL3210-5BE25-5UV0<br>FSC | 6SL3210-5BE27-5UV0<br>6SL3210-5BE31-1UV0<br>6SL3210-5BE31-5UV0<br>FSD<br>6SL3210-5BE31-8UV0<br>FSE | 6SL3210-5BE32-2UV0<br>FSE        |

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

Line-side components > Line reactors

### Overview



Line reactors are used to smooth voltage peaks or to bridge commutating dips. Line reactors also reduce the effects of harmonics on the converter and the line supply.

Line reactors for frame sizes FSA to FSE

### Selection and ordering data

| Rated power        |      | SINAMICS V20 |            | Line reactor       |
|--------------------|------|--------------|------------|--------------------|
| kW                 | hp   | 6SL3210-     | Frame size | Article No.        |
| 200 ... 240 V 1 AC |      |              |            |                    |
| 0.12               | 0.16 | 5BB11-2 . V1 | FSAA       | 6SE6400-3CC00-4AB3 |
| 0.25               | 0.33 | 5BB12-5 . V1 | FSAA       |                    |
| 0.37               | 0.5  | 5BB13-7 . V1 | FSAA       | 6SE6400-3CC01-0AB3 |
| 0.55               | 0.75 | 5BB15-5 . V1 | FSAB       |                    |
| 0.75               | 1    | 5BB17-5 . V1 | FSAB       | 6SE6400-3CC02-6BB3 |
| 1.1                | 1.5  | 5BB21-1 . V1 | FSAC       |                    |
| 1.5                | 2    | 5BB21-5 . V1 | FSAC       |                    |
| 2.2                | 3    | 5BB22-2 . V0 | FSC        |                    |
| 3                  | 4    | 5BB23-0 . V0 | FSC        | 6SE6400-3CC03-5CB3 |

| Rated power        |      | SINAMICS V20 |            | Line reactor       |
|--------------------|------|--------------|------------|--------------------|
| kW                 | hp   | 6SL3210-     | Frame size | Article No.        |
| 380 ... 480 V 3 AC |      |              |            |                    |
| 0.37               | 0.5  | 5BE13-7 . V0 | FSA        | 6SL3203-0CE13-2AA0 |
| 0.55               | 0.75 | 5BE15-5 . V0 | FSA        |                    |
| 0.75               | 1    | 5BE17-5 . V0 | FSA        |                    |
| 1.1                | 1.5  | 5BE21-1 . V0 | FSA        |                    |
| 1.5                | 2    | 5BE21-5 . V0 | FSA        | 6SL3203-0CE21-0AA0 |
| 2.2                | 3    | 5BE22-2 . V0 | FSA        |                    |
| 3                  | 4    | 5BE23-0 . V0 | FSB        |                    |
| 4                  | 5    | 5BE24-0 . V0 | FSB        |                    |
| 5.5                | 7.5  | 5BE25-5 . V0 | FSC        | 6SL3203-0CE21-8AA0 |
| 7.5                | 10   | 5BE27-5 . V0 | FSD        |                    |
| 11                 | 15   | 5BE31-1 . V0 | FSD        | 6SL3203-0CE23-8AA0 |
| 15                 | 20   | 5BE31-5 . V0 | FSD        |                    |
| 22                 | 30   | 5BE31-8 . V0 | FSE        | 6SL3203-0CJ24-5AA0 |
| 30                 | 40   | 5BE32-2 . V0 | FSE        | 6SL3203-0CD25-3AA0 |

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

Line-side components > Line reactors

### Technical specifications

| Line voltage 200 ... 240 V 1 AC |                 | Line reactor                                         |                                                                                      |                                                                                     |                             |
|---------------------------------|-----------------|------------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------|
|                                 |                 | 6SE6400-3CC00-4AB3                                   | 6SE6400-3CC01-0AB3                                                                   | 6SE6400-3CC02-6BB3                                                                  | 6SE6400-3CC03-5CB3          |
| Rated current                   | A               | 3.4                                                  | 8.1                                                                                  | 22.8                                                                                | 29.5                        |
| Line supply/load connection     |                 | Screw terminals                                      | Screw terminals                                                                      | Screw terminals                                                                     | Screw terminals             |
| • Conductor cross-section       | mm <sup>2</sup> | 1 ... 2.5                                            | 1 ... 2.5                                                                            | 1.5 ... 6                                                                           | 2.5 ... 10                  |
| PE connection                   |                 | M5 stud bolts                                        | M5 stud bolts                                                                        | M5 stud bolts                                                                       | M5 stud bolts               |
| Degree of protection            |                 | IP20                                                 | IP20                                                                                 | IP20                                                                                | IP20                        |
| Dimensions                      |                 |                                                      |                                                                                      |                                                                                     |                             |
| • Width                         | mm (in)         | 75.5 (2.97)                                          | 75.5 (2.97)                                                                          | 150 (5.91)                                                                          | 185 (7.28)                  |
| • Height                        | mm (in)         | 200 (7.87)                                           | 200 (7.87)                                                                           | 213 (8.39)                                                                          | 245 (9.65)                  |
| • Depth                         | mm (in)         | 50 (1.97)                                            | 50 (1.97)                                                                            | 50 (1.97)                                                                           | 50 (1.97)                   |
| Weight, approx.                 | kg (lb)         | 0.5 (1.10)                                           | 0.5 (1.10)                                                                           | 1.2 (2.65)                                                                          | 3.05 (6.73)                 |
| Suitable for SINAMICS V20       | Type            | 6SL3210-5BB11-2 . V1<br>6SL3210-5BB12-5 . V1<br>FSAA | 6SL3210-5BB13-7 . V1<br>FSAA<br>6SL3210-5BB15-5 . V1<br>6SL3210-5BB17-5 . V1<br>FSAB | 6SL3210-5BB21-1 . V1<br>6SL3210-5BB21-5 . V1<br>FSAC<br>6SL3210-5BB22-2 . V0<br>FSC | 6SL3210-5BB23-0 . V0<br>FSC |

| Line voltage 380 ... 480 V 3 AC |                 | Line reactor                                                                                                        |                                                                                                                            |                                                                    |                                                             |                                 |                                 |
|---------------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------|---------------------------------|
|                                 |                 | 6SL3203-<br>OCE13-2AA0                                                                                              | 6SL3203-<br>OCE21-0AA0                                                                                                     | 6SL3203-<br>OCE21-8AA0                                             | 6SL3203-<br>OCE23-8AA0                                      | 6SL3203-<br>OCJ24-5AA0          | 6SL3203-<br>OCD25-3AA0          |
| Rated current                   | A               | 4                                                                                                                   | 11.3                                                                                                                       | 22.3                                                               | 47                                                          | 47                              | 63                              |
| Power loss<br>at 50/60 Hz       | W               | 23/26                                                                                                               | 36/40                                                                                                                      | 53/59                                                              | 88/97                                                       | 90/115                          | 90/115                          |
| Line supply/load connection     |                 | Screw terminals                                                                                                     | Screw terminals                                                                                                            | Screw terminals                                                    | Screw terminals                                             | Screw terminals                 | Screw terminals                 |
| 1L1, 1L2, 1L3<br>2L1, 2L2, 2L3  |                 |                                                                                                                     |                                                                                                                            |                                                                    |                                                             |                                 |                                 |
| • Conductor cross-section       | mm <sup>2</sup> | 4                                                                                                                   | 4                                                                                                                          | 10                                                                 | 16                                                          | 16                              | 16                              |
| PE connection                   |                 | M4 × 8;<br>U washer;<br>spring lock<br>washer                                                                       | M4 × 8;<br>U washer;<br>spring lock<br>washer                                                                              | M5 × 10;<br>U washer;<br>spring lock<br>washer                     | M5 × 10;<br>U washer;<br>spring lock<br>washer              | M8 screw                        | M8 screw                        |
| Degree of protection            |                 | IP20                                                                                                                | IP20                                                                                                                       | IP20                                                               | IP20                                                        | IP20                            | IP20                            |
| Dimensions                      |                 |                                                                                                                     |                                                                                                                            |                                                                    |                                                             |                                 |                                 |
| • Width                         | mm (in)         | 125 (4.92)                                                                                                          | 125 (4.92)                                                                                                                 | 125 (4.92)                                                         | 190 (7.48)                                                  | 275 (10.83)                     | 275 (10.83)                     |
| • Height                        | mm (in)         | 120 (4.72)                                                                                                          | 140 (5.51)                                                                                                                 | 145 (5.71)                                                         | 220 (8.66)                                                  | 455 (17.91)                     | 455 (17.91)                     |
| • Depth                         | mm (in)         | 71 (2.8)                                                                                                            | 71 (2.8)                                                                                                                   | 91 (3.58)                                                          | 91 (3.58)                                                   | 84 (3.31)                       | 84 (3.31)                       |
| Weight, approx.                 | kg (lb)         | 1.1 (2.43)                                                                                                          | 2.1 (4.63)                                                                                                                 | 2.95 (6.5)                                                         | 7.8 (17.2)                                                  | 13 (28.7)                       | 13 (28.7)                       |
| Suitable for SINAMICS V20       | Type            | 6SL3210-<br>5BE13-7 . V0<br>6SL3210-<br>5BE15-5 . V0<br>6SL3210-<br>5BE17-5 . V0<br>6SL3210-<br>5BE21-1 . V0<br>FSA | 6SL3210-<br>5BE21-5 . V0<br>6SL3210-<br>5BE22-2 . V0<br>FSA<br>6SL3210-<br>5BE23-0 . V0<br>6SL3210-<br>5BE24-0 . V0<br>FSB | 6SL3210-<br>5BE25-5 . V0<br>FSC<br>6SL3210-<br>5BE27-5 . V0<br>FSD | 6SL3210-<br>5BE31-1 . V0<br>6SL3210-<br>5BE31-5 . V0<br>FSD | 6SL3210-<br>5BE31-8 . V0<br>FSE | 6SL3210-<br>5BE32-2 . V0<br>FSE |

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### Line-side components > Recommended line-side overcurrent protection devices

#### Selection and ordering data

Overcurrent protection devices are absolutely necessary for the operation of the converters. The following table lists recommendations for fuses.

- Siemens fuses of type 3NA3 for use in the area of validity of IEC
- UL-listed fuses Class J for use in USA and Canada

Recommendations on further overcurrent protection devices are available at:

<https://support.industry.siemens.com/cs/document/109755266>

The Short Circuit Current Rating (SCCR) according to UL for industrial control panel installations to NEC Article 409 or UL 508A/508C or UL 61800-5-1 is as follows for Class J fuses for

- SINAMICS V20: 65 kA

SCCR and ICC values for combination with further overcurrent protection devices are available at:

<https://support.industry.siemens.com/cs/document/109755266>

#### Notes for installations in Canada:

The converters are intended for line supply systems with overvoltage category III. More information is available in the technical documentation on the Internet at:

[www.siemens.com/sinamics-v20/documentation](http://www.siemens.com/sinamics-v20/documentation)

More information about the listed Siemens fuses is available in Catalog LV 10 as well as in the Industry Mall.

| Rated power               |      |              |            | IEC-compliant |             | UL/cUL-compliant       |              |
|---------------------------|------|--------------|------------|---------------|-------------|------------------------|--------------|
| SINAMICS V20              |      |              |            | Fuse          |             | Fuse type              |              |
|                           |      |              |            |               |             | Rated voltage 600 V AC |              |
| kW                        | hp   | 6SL3210-     | Frame size | Current<br>A  | Article No. | Class                  | Current<br>A |
| <b>200 ... 240 V 1 AC</b> |      |              |            |               |             |                        |              |
| 0.12                      | 0.16 | 5BB11-2 . V1 | FSAA       | 10            | 3NA3803     | J                      | 15           |
| 0.25                      | 0.33 | 5BB12-5 . V1 | FSAA       | 10            | 3NA3803     | J                      | 15           |
| 0.37                      | 0.5  | 5BB13-7 . V1 | FSAA       | 10            | 3NA3803     | J                      | 15           |
| 0.55                      | 0.75 | 5BB15-5 . V1 | FSAB       | 10            | 3NA3803     | J                      | 15           |
| 0.75                      | 1    | 5BB17-5 . V1 | FSAB       | 16            | 3NA3805     | J                      | 15           |
| 1.1                       | 1.5  | 5BB21-1 . V1 | FSAC       | 20            | 3NA3807     | J                      | 30           |
| 1.5                       | 2    | 5BB21-5 . V1 | FSAC       | 32            | 3NA3812     | J                      | 30           |
| 2.2                       | 3    | 5BB22-2 . V0 | FSC        | 35            | 3NA3814     | J                      | 50           |
| 3                         | 4    | 5BB23-0 . V0 | FSC        | 50            | 3NA3820     | J                      | 50           |
| <b>380 ... 480 V 3 AC</b> |      |              |            |               |             |                        |              |
| 0.37                      | 0.5  | 5BE13-7 . V0 | FSA        | 6             | 3NA3801     | J                      | 15           |
| 0.55                      | 0.75 | 5BE15-5 . V0 | FSA        | 6             | 3NA3801     | J                      | 15           |
| 0.75                      | 1    | 5BE17-5 . V0 | FSA        | 6             | 3NA3801     | J                      | 15           |
| 1.1                       | 1.5  | 5BE21-1 . V0 | FSA        | 6             | 3NA3801     | J                      | 15           |
| 1.5                       | 2    | 5BE21-5 . V0 | FSA        | 10            | 3NA3803     | J                      | 15           |
| 2.2                       | 3    | 5BE22-2 . V0 | FSA        | 16            | 3NA3805     | J                      | 15           |
| 3                         | 4    | 5BE23-0 . V0 | FSB        | 16            | 3NA3805     | J                      | 20           |
| 4                         | 5    | 5BE24-0 . V0 | FSB        | 20            | 3NA3807     | J                      | 20           |
| 5.5                       | 7.5  | 5BE25-5 . V0 | FSC        | 32            | 3NA3812     | J                      | 20           |
| 7.5                       | 10   | 5BE27-5 . V0 | FSD        | 63            | 3NA3822     | J                      | 60           |
| 11                        | 15   | 5BE31-1 . V0 | FSD        | 63            | 3NA3822     | J                      | 60           |
| 15                        | 20   | 5BE31-5 . V0 | FSD        | 63            | 3NA3822     | J                      | 60           |
| 22                        | 30   | 5BE31-8 . V0 | FSE        | 63            | 3NA3822     | J                      | 80           |
| 30                        | 40   | 5BE32-2 . V0 | FSE        | 80            | 3NA3824     | J                      | 90           |

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

DC link components > Braking resistors

### Overview



Braking resistors for frame sizes FSA and FSC

An external braking resistor can be used to dissipate the regenerative energy produced by the motor, thus giving greatly improved braking and deceleration capabilities.

A braking resistor which is required for dynamic braking can be used with all frame sizes of converters. Frame sizes FSD and FSE have an internal braking chopper, allowing you to connect the braking resistor directly to the converter. For frame sizes FSAA to FSC, an additional Braking Module is required for connecting the braking resistor to the converter.

### Selection and ordering data

| Rated power        |      | SINAMICS V20 |            | Braking resistor   |
|--------------------|------|--------------|------------|--------------------|
| kW                 | hp   | 6SL3210-     | Frame size | Article No.        |
| 200 ... 240 V 1 AC |      |              |            |                    |
| 0.12               | 0.16 | 5BB11-2 . V1 | FSAA       | 6SE6400-4BC05-0AA0 |
| 0.25               | 0.33 | 5BB12-5 . V1 | FSAA       |                    |
| 0.37               | 0.5  | 5BB13-7 . V1 | FSAA       |                    |
| 0.55               | 0.75 | 5BB15-5 . V1 | FSAB       |                    |
| 0.75               | 1    | 5BB17-5 . V1 | FSAB       |                    |
| 1.1                | 1.5  | 5BB21-1 . V1 | FSAC       | 6SE6400-4BC11-2BA0 |
| 1.5                | 2    | 5BB21-5 . V1 | FSAC       |                    |
| 2.2                | 3    | 5BB22-2 . V0 | FSC        |                    |
| 3                  | 4    | 5BB23-0 . V0 | FSC        | 6SE6400-4BC12-5CA0 |

| Rated power        |      | SINAMICS V20 |            | Braking resistor   |
|--------------------|------|--------------|------------|--------------------|
| kW                 | hp   | 6SL3210-     | Frame size | Article No.        |
| 380 ... 480 V 3 AC |      |              |            |                    |
| 0.37               | 0.5  | 5BE13-7 . V0 | FSA        | 6SL3201-0BE14-3AA0 |
| 0.55               | 0.75 | 5BE15-5 . V0 | FSA        |                    |
| 0.75               | 1    | 5BE17-5 . V0 | FSA        |                    |
| 1.1                | 1.5  | 5BE21-1 . V0 | FSA        |                    |
| 1.5                | 2    | 5BE21-5 . V0 | FSA        |                    |
| 2.2                | 3    | 5BE22-2 . V0 | FSA        | 6SL3201-0BE21-0AA0 |
| 3                  | 4    | 5BE23-0 . V0 | FSB        |                    |
| 4                  | 5    | 5BE24-0 . V0 | FSB        |                    |
| 5.5                | 7.5  | 5BE25-5 . V0 | FSC        | 6SL3201-0BE21-8AA0 |
| 7.5                | 10   | 5BE27-5 . V0 | FSD        | 6SL3201-0BE23-8AA0 |
| 11                 | 15   | 5BE31-1 . V0 | FSD        |                    |
| 15                 | 20   | 5BE31-5 . V0 | FSD        | 6SE6400-4BD21-2DA0 |
| 22                 | 30   | 5BE31-8 . V0 | FSE        |                    |
| 30                 | 40   | 5BE32-2 . V0 | FSE        |                    |

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### DC link components > Braking resistors

#### Technical specifications

| DC link voltage 240 ... 360 V DC                   |                 | Braking resistor                                                                                                                     |                                                                                     |                                    |
|----------------------------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------|
|                                                    |                 | 6SE6400-4BC05-0AA0                                                                                                                   | 6SE6400-4BC11-2BA0                                                                  | 6SE6400-4BC12-5CA0                 |
| Resistance                                         | Ω               | 180                                                                                                                                  | 68                                                                                  | 39                                 |
| Rated power $P_{DB}$<br>(Continuous braking power) | kW              | 0.05                                                                                                                                 | 0.12                                                                                | 0.25                               |
| Peak power $P_{max}$                               | kW              | 1                                                                                                                                    | 2.4                                                                                 | 4.5                                |
| Degree of protection <sup>1)</sup>                 |                 | IP20                                                                                                                                 | IP20                                                                                | IP20                               |
| Power connections                                  |                 | 3 × 1.5 mm <sup>2</sup> (shielded)                                                                                                   | 3 × 1.5 mm <sup>2</sup> (shielded)                                                  | 3 × 1.5 mm <sup>2</sup> (shielded) |
| • Length                                           | m (ft)          | 0.5 (1.64)                                                                                                                           | 0.5 (1.64)                                                                          | 0.9 (2.95)                         |
| Thermostatic switch (NC contact)                   |                 |                                                                                                                                      |                                                                                     |                                    |
| • Switching capacity                               |                 | 250 V AC/max. 2.5 A                                                                                                                  | 250 V AC/max. 2.5 A                                                                 | 250 V AC/max. 2.5 A                |
| • Conductor cross-section                          | mm <sup>2</sup> | 0.5 ... 2.5                                                                                                                          | 0.5 ... 2.5                                                                         | 0.5 ... 2.5                        |
| Dimensions                                         |                 |                                                                                                                                      |                                                                                     |                                    |
| • Width                                            | mm (in)         | 72 (2.83)                                                                                                                            | 149 (5.87)                                                                          | 185 (7.28)                         |
| • Height                                           | mm (in)         | 230 (9.06)                                                                                                                           | 239 (9.41)                                                                          | 285 (11.22)                        |
| • Depth                                            | mm (in)         | 43.5 (1.71)                                                                                                                          | 43.5 (1.71)                                                                         | 150 (5.91)                         |
| Weight, approx.                                    | kg (lb)         | 1 (2.21)                                                                                                                             | 1.6 (3.53)                                                                          | 3.8 (8.38)                         |
| Certificates of suitability                        |                 | cURus                                                                                                                                | cURus                                                                               | cURus                              |
| Suitable for SINAMICS V20                          | Type            | 6SL3210-5BB11-2 . V1<br>6SL3210-5BB12-5 . V1<br>6SL3210-5BB13-7 . V1<br>FSAA<br>6SL3210-5BB15-5 . V1<br>6SL3210-5BB17-5 . V1<br>FSAB | 6SL3210-5BB21-1 . V1<br>6SL3210-5BB21-5 . V1<br>FSAC<br>6SL3210-5BB22-2 . V0<br>FSC | 6SL3210-5BB23-0 . V0<br>FSC        |

| DC link voltage 510 ... 720 V DC                   |                 | Braking resistor                                                                                                            |                                                                                    |                                                            |                                                     |                                                     |
|----------------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
|                                                    |                 | 6SL3201-0BE14-3AA0                                                                                                          | 6SL3201-0BE21-0AA0                                                                 | 6SL3201-0BE21-8AA0                                         | 6SL3201-0BE23-8AA0                                  | 6SE6400-4BD21-2DA0                                  |
| Resistance                                         | Ω               | 370                                                                                                                         | 140                                                                                | 75                                                         | 30                                                  | 27                                                  |
| Rated power $P_{DB}$<br>(Continuous braking power) | kW              | 0.075                                                                                                                       | 0.2                                                                                | 0.375                                                      | 0.925                                               | 1.2                                                 |
| Peak power $P_{max}$                               | kW              | 1.5                                                                                                                         | 4                                                                                  | 7.5                                                        | 18.5                                                | 24                                                  |
| Degree of protection <sup>1)</sup>                 |                 | IP20                                                                                                                        | IP20                                                                               | IP20                                                       | IP20                                                | IP20                                                |
| Power connections                                  |                 | M4 screw studs                                                                                                              | M4 screw studs                                                                     | M4 screw studs                                             | M4 screw studs                                      | M6 screw studs                                      |
| Thermostatic switch (NC contact)                   |                 |                                                                                                                             |                                                                                    |                                                            |                                                     |                                                     |
| • Switching capacity                               |                 | 250 V AC/<br>max. 2.5 A                                                                                                     | 250 V AC/<br>max. 2.5 A                                                            | 250 V AC/<br>max. 2.5 A                                    | 250 V AC/<br>max. 2.5 A                             | 250 V AC/<br>max. 2.5 A                             |
| • Conductor cross-section                          | mm <sup>2</sup> | 0.5 ... 2.5                                                                                                                 | 0.5 ... 2.5                                                                        | 0.5 ... 2.5                                                | 0.5 ... 2.5                                         | 0.5 ... 2.5                                         |
| Dimensions                                         |                 |                                                                                                                             |                                                                                    |                                                            |                                                     |                                                     |
| • Width                                            | mm (in)         | 105 (4.13)                                                                                                                  | 105 (4.13)                                                                         | 175 (6.89)                                                 | 250 (9.84)                                          | 270 (10.63)                                         |
| • Height                                           | mm (in)         | 295 (11.61)                                                                                                                 | 345 (13.58)                                                                        | 345 (13.58)                                                | 490 (19.29)                                         | 515 (20.28)                                         |
| • Depth                                            | mm (in)         | 100 (3.94)                                                                                                                  | 100 (3.94)                                                                         | 100 (3.94)                                                 | 140 (5.51)                                          | 175 (6.89)                                          |
| Weight, approx.                                    | kg (lb)         | 1.48 (3.26)                                                                                                                 | 1.8 (3.97)                                                                         | 2.73 (6.02)                                                | 6.2 (13.67)                                         | 7.4 (16.3)                                          |
| Certificates of suitability                        |                 | cURus                                                                                                                       | cURus                                                                              | cURus                                                      | cURus                                               | cURus                                               |
| Suitable for SINAMICS V20                          | Type            | 6SL3210-5BE13-7 . V0<br>6SL3210-5BE15-5 . V0<br>6SL3210-5BE17-5 . V0<br>6SL3210-5BE21-1 . V0<br>6SL3210-5BE21-5 . V0<br>FSA | 6SL3210-5BE22-2 . V0<br>FSA<br>6SL3210-5BE23-0 . V0<br>6SL3210-5BE24-0 . V0<br>FSB | 6SL3210-5BE25-5 . V0<br>FSC<br>6SL3210-5BE27-5 . V0<br>FSD | 6SL3210-5BE31-1 . V0<br>6SL3210-5BE31-5 . V0<br>FSD | 6SL3210-5BE31-8 . V0<br>6SL3210-5BE32-2 . V0<br>FSE |

<sup>1)</sup> With correctly connected load connection cable.

SINAMICS V20 basic converters  
0.12 kW to 30 kW (0.16 hp to 40 hp)

DC link components > SINAMICS V20 Braking Module

Overview



SINAMICS V20 Braking Module

A Braking Module and the matching external braking resistor are required to bring drives to a controlled standstill in the event of a power failure.

The Braking Module is applicable for frame sizes FSAA to FSC only; FSD and FSE already have an integrated braking chopper.

Selection and ordering data

| Description                 | Article No.        |
|-----------------------------|--------------------|
| SINAMICS V20 Braking Module | 6SL3201-2AD20-8VA0 |

Technical specifications

|                                         | SINAMICS V20 Braking Module<br>6SL3201-2AD20-8VA0          |
|-----------------------------------------|------------------------------------------------------------|
| <b>Maximum power rating</b>             |                                                            |
| • 230 V converters                      | 3 kW with 8 A                                              |
| • 400 V converters                      | 5.5 kW with 7 A                                            |
| <b>Braking chopper duty cycle, max.</b> | 100 %                                                      |
| <b>Cable length, max.</b>               |                                                            |
| • Braking Module to converter           | 1 m (3.28 ft)                                              |
| • Braking Module to braking resistor    | 10 m (32.8 ft)                                             |
| <b>Mounting</b>                         | Cabinet mounting<br>(4 × M4 screws)                        |
| <b>Protective functions</b>             | • Short-circuit protection<br>• Overtemperature protection |
| <b>Dimensions</b>                       |                                                            |
| • Width                                 | 90 mm (3.54 in)                                            |
| • Height                                | 150 mm (5.91 in)                                           |
| • Depth                                 | 88 mm (3.46 in)                                            |
| <b>Weight, approx.</b>                  | 0.71 kg (1.57 lb)                                          |
| <b>Suitable for SINAMICS V20</b>        | Frame sizes FSAA, FSAB, FSAC, FSA, FSB, FSC                |

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### Load-side power components > Output reactors

#### Overview



Output reactors reduce the voltage stress on the motor windings. At the same time, the capacitive charging/discharging currents, which place an additional load on the power unit when long motor cables are used, are reduced.

Output reactors for frame sizes FSA and FSB

#### Selection and ordering data

| Rated power               |      | SINAMICS V20 |            | Output reactor            |
|---------------------------|------|--------------|------------|---------------------------|
| kW                        | hp   | 6SL3210-     | Frame size | Article No.               |
| <b>200 ... 240 V 1 AC</b> |      |              |            |                           |
| 0.12                      | 0.16 | 5BB11-2 . V1 | FSA        | <b>6SE6400-3TC00-4AD3</b> |
| 0.25                      | 0.33 | 5BB12-5 . V1 | FSA        |                           |
| 0.37                      | 0.5  | 5BB13-7 . V1 | FSA        |                           |
| 0.55                      | 0.75 | 5BB15-5 . V1 | FSAB       |                           |
| 0.75                      | 1    | 5BB17-5 . V1 | FSAB       |                           |
| 1.1                       | 1.5  | 5BB21-1 . V1 | FSAC       | <b>6SE6400-3TC01-0BD3</b> |
| 1.5                       | 2    | 5BB21-5 . V1 | FSAC       |                           |
| 2.2                       | 3    | 5BB22-2 . V0 | FSC        |                           |
| 3                         | 4    | 5BB23-0 . V0 | FSC        | <b>6SE6400-3TC03-2CD3</b> |
| <b>380 ... 480 V 3 AC</b> |      |              |            |                           |
| 0.37                      | 0.5  | 5BE13-7 . V0 | FSA        | <b>6SL3202-0AE16-1CA0</b> |
| 0.55                      | 0.75 | 5BE15-5 . V0 | FSA        |                           |
| 0.75                      | 1    | 5BE17-5 . V0 | FSA        |                           |
| 1.1                       | 1.5  | 5BE21-1 . V0 | FSA        |                           |
| 1.5                       | 2    | 5BE21-5 . V0 | FSA        |                           |
| 2.2                       | 3    | 5BE22-2 . V0 | FSA        | <b>6SL3202-0AE18-8CA0</b> |
| 3                         | 4    | 5BE23-0 . V0 | FSB        |                           |
| 4                         | 5    | 5BE24-0 . V0 | FSB        | <b>6SL3202-0AE21-8CA0</b> |
| 5.5                       | 7.5  | 5BE25-5 . V0 | FSC        | <b>6SL3202-0AE23-8CA0</b> |
| 7.5                       | 10   | 5BE27-5 . V0 | FSD        |                           |
| 11                        | 15   | 5BE31-1 . V0 | FSD        |                           |
| 15                        | 20   | 5BE31-5 . V0 | FSD        |                           |
| 22                        | 30   | 5BE31-8 . V0 | FSE        |                           |
| 30                        | 40   | 5BE32-2 . V0 | FSE        | <b>6SE6400-3TC05-4DD0</b> |

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

Load-side power components > Output reactors

### Technical specifications

| Line voltage 200 ... 240 V 1 AC                        |                 | Output reactor (for a 4 kHz pulse frequency)                                                                                         |                                                                                     |                             |
|--------------------------------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------|
|                                                        |                 | 6SE6400-3TC00-4AD3                                                                                                                   | 6SE6400-3TC01-0BD3                                                                  | 6SE6400-3TC03-2CD3          |
| Rated current                                          | A               | 4                                                                                                                                    | 10                                                                                  | 26                          |
| Power loss, max.                                       | kW              | 0.0104                                                                                                                               | 0.0498                                                                              | 0.0653                      |
| Connection to the Power Module/<br>motor connection    |                 | Screw terminals                                                                                                                      | Screw terminals                                                                     | Screw terminals             |
| • Conductor cross-section                              | mm <sup>2</sup> | 1 ... 2.5                                                                                                                            | 1.5 ... 6                                                                           | 2.5 ... 10                  |
| PE connection                                          |                 | M5 stud bolts                                                                                                                        | M5 stud bolts                                                                       | M5 stud bolts               |
| Cable length, max.<br>between output reactor and motor |                 |                                                                                                                                      |                                                                                     |                             |
| • Shielded                                             | m (ft)          | 200 (656)                                                                                                                            | 200 (656)                                                                           | 200 (656)                   |
| • Unshielded                                           | m (ft)          | 200 (656)                                                                                                                            | 200 (656)                                                                           | 200 (656)                   |
| Dimensions                                             |                 |                                                                                                                                      |                                                                                     |                             |
| • Width                                                | mm (in)         | 75.5 (2.97)                                                                                                                          | 150 (5.91)                                                                          | 185 (7.28)                  |
| • Height                                               | mm (in)         | 200 (7.87)                                                                                                                           | 213 (8.39)                                                                          | 245 (9.65)                  |
| • Depth                                                | mm (in)         | 50 (1.97)                                                                                                                            | 80 (3.15)                                                                           | 80 (3.15)                   |
| Degree of protection                                   |                 | IP20                                                                                                                                 | IP20                                                                                | IP20                        |
| Weight, approx.                                        | kg (lb)         | 1.3 (2.87)                                                                                                                           | 4.1 (9.04)                                                                          | 6.6 (14.6)                  |
| Suitable for SINAMICS V20                              | Type            | 6SL3210-5BB11-2 . V1<br>6SL3210-5BB12-5 . V1<br>6SL3210-5BB13-7 . V1<br>FSAA<br>6SL3210-5BB15-5 . V1<br>6SL3210-5BB17-5 . V1<br>FSAB | 6SL3210-5BB21-1 . V1<br>6SL3210-5BB21-5 . V1<br>FSAC<br>6SL3210-5BB22-2 . V0<br>FSC | 6SL3210-5BB23-0 . V0<br>FSC |

| Line voltage 380 ... 480 V 3 AC                        |                 | Output reactor (for a 4 kHz pulse frequency)                                                                                |                                                            |                                                            |                                                                             |                                                     |
|--------------------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------|
|                                                        |                 | 6SL3202-0AE16-1CA0                                                                                                          | 6SL3202-0AE18-8CA0                                         | 6SL3202-0AE21-8CA0                                         | 6SL3202-0AE23-8CA0                                                          | 6SE6400-3TC05-4DD0                                  |
| Rated current                                          | A               | 6.1                                                                                                                         | 9                                                          | 18.5                                                       | 39                                                                          | 54                                                  |
| Power loss, max.                                       | kW              | 0.09                                                                                                                        | 0.08                                                       | 0.08                                                       | 0.11                                                                        | 0.2                                                 |
| Connection to the Power Module/<br>motor connection    |                 | Screw terminals                                                                                                             | Screw terminals                                            | Screw terminals                                            | Screw terminals                                                             | Flat connector for cable lug                        |
| • Conductor cross-section                              | mm <sup>2</sup> | 4                                                                                                                           | 4                                                          | 10                                                         | 16                                                                          | M6                                                  |
| PE connection                                          |                 | M4 screw stud                                                                                                               | M4 screw stud                                              | M5 screw stud                                              | M5 screw stud                                                               | M6 screw                                            |
| Cable length, max.<br>between output reactor and motor |                 |                                                                                                                             |                                                            |                                                            |                                                                             |                                                     |
| • Shielded                                             | m (ft)          | 150 (492)                                                                                                                   | 150 (492)                                                  | 150 (492)                                                  | 150 (492)                                                                   | 200 (656)                                           |
| • Unshielded                                           | m (ft)          | 150 (492)                                                                                                                   | 150 (492)                                                  | 150 (492)                                                  | 150 (492)                                                                   | 300 (984)                                           |
| Dimensions                                             |                 |                                                                                                                             |                                                            |                                                            |                                                                             |                                                     |
| • Width                                                | mm (in)         | 207 (8.15)                                                                                                                  | 207 (8.15)                                                 | 247 (9.72)                                                 | 257 (10.12)                                                                 | 225 (8.86)                                          |
| • Height                                               | mm (in)         | 175 (6.89)                                                                                                                  | 180 (7.09)                                                 | 215 (8.46)                                                 | 235 (9.25)                                                                  | 210 (8.27)                                          |
| • Depth                                                | mm (in)         | 72.5 (2.85)                                                                                                                 | 72.5 (2.85)                                                | 100 (3.94)                                                 | 114.7 (4.52)                                                                | 150 (5.91)                                          |
| Degree of protection                                   |                 | IP20                                                                                                                        | IP20                                                       | IP20                                                       | IP20                                                                        | IP00                                                |
| Weight, approx.                                        | kg (lb)         | 3.4 (7.50)                                                                                                                  | 3.9 (8.60)                                                 | 10.1 (22.3)                                                | 11.2 (24.7)                                                                 | 10.7 (23.6)                                         |
| Suitable for SINAMICS V20                              | Type            | 6SL3210-5BE13-7 . V0<br>6SL3210-5BE15-5 . V0<br>6SL3210-5BE17-5 . V0<br>6SL3210-5BE21-1 . V0<br>6SL3210-5BE21-5 . V0<br>FSA | 6SL3210-5BE22-2 . V0<br>FSA<br>6SL3210-5BE23-0 . V0<br>FSB | 6SL3210-5BE24-0 . V0<br>FSB<br>6SL3210-5BE25-5 . V0<br>FSC | 6SL3210-5BE27-5 . V0<br>6SL3210-5BE31-1 . V0<br>6SL3210-5BE31-5 . V0<br>FSD | 6SL3210-5BE31-8 . V0<br>6SL3210-5BE32-2 . V0<br>FSE |

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### Supplementary system components > SINAMICS V20 Parameter Loader

#### Overview



SINAMICS V20 Parameter Loader

Up to 100 parameter sets with parameter settings can be written from the memory card to the converter or saved from the converter to the memory card without connecting the converter to the line supply.

#### Design

- SD card socket
- 5 V DC socket for connection to an external DC power supply
- Battery supply (2 × AA) integrated  
Enables the SINAMICS V20 Parameter Loader to be operated and data uploaded and downloaded even when mains power is not available. If the converter is being supplied from the mains power, the battery power can be omitted for the SINAMICS V20 Parameter Loader.

#### Function

With the SINAMICS V20 Parameter Loader, parameter sets can be uploaded and downloaded between the converter and an SD card.


#### Integration

The SINAMICS V20 Parameter Loader and the SINAMICS V20 I/O Extension Module cannot be operated simultaneously.

#### Selection and ordering data

| Description                                                                                                           | Article No.               |
|-----------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>SINAMICS V20 Parameter Loader</b><br>For uploading/downloading parameter sets between the converter and an SD card | <b>6SL3255-0VE00-0UA1</b> |
| <b>Accessories</b>                                                                                                    |                           |
| <b>SINAMICS SD card</b>                                                                                               | <b>6SL3054-4AG00-2AA0</b> |

#### Dimensional drawings

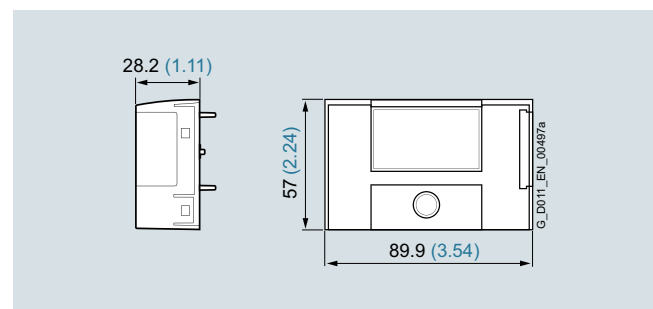

SINAMICS V20 Parameter Loader

All dimensions in mm (values in brackets are in inches).

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### Supplementary system components > SINAMICS V20 BOP and SINAMICS V20 BOP Interface

#### Overview



SINAMICS V20 BOP

The SINAMICS V20 supports an external SINAMICS V20 BOP (Basic Operator Panel) for remote control of the converter.



SINAMICS V20 BOP Interface

The SINAMICS V20 BOP Interface is used for connecting the SINAMICS V20 BOP to enable remote control of the converter.

The SINAMICS V20 BOP Interface has an RS232 interface for connecting the SINAMICS V20 BOP to the converter, and a plug connector for connection to the expansion port of the converter.


#### Integration

The SINAMICS V20 BOP is connected to the converter via the optional SINAMICS V20 BOP Interface.


#### Selection and ordering data

| Description                                                                                                                                                                                                                                                 | Article No.               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>SINAMICS V20 BOP (Basic Operator Panel)</b><br>For remote control of the converter<br><br>To connect the SINAMICS V20 BOP to the converter, the SINAMICS V20 BOP Interface must be ordered together with a network cable with a standard RJ45 connector. | <b>6SL3255-0VA00-4BA1</b> |
| <b>SINAMICS V20 BOP Interface</b><br>incl. plug connector for connection to converter<br><br>The BOP Interface connects the SINAMICS V20 BOP to the converter.                                                                                              | <b>6SL3255-0VA00-2AA1</b> |

#### Dimensional drawings

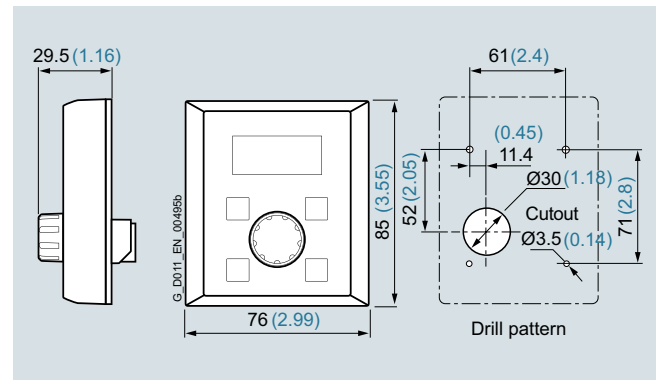

SINAMICS V20 BOP

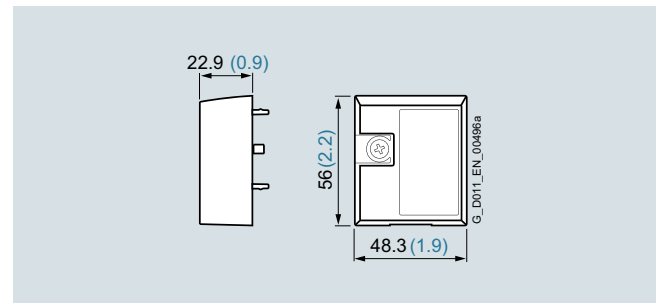

SINAMICS V20 BOP Interface

All dimensions in mm (values in brackets are in inches).

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

Supplementary system components > SINAMICS V20 Smart Access

### Overview



SINAMICS V20 Smart Access

It is also easy and convenient to commission and operate the SINAMICS V20 frequency converter using a smartphone, tablet, or laptop and the web server module SINAMICS V20 Smart Access.

### Function

- Commissioning using commissioning wizard
- Setting and saving parameters
- Testing motor in JOG mode
- Monitoring of converter data
- Quick diagnostics
- Saving the settings and restoring to factory settings

### Integration




SINAMICS V20 with Smart Access

The optional SINAMICS V20 Smart Access is simply plugged onto the converter.

### Selection and ordering data

| Description                                                                                                                                      | Article No.               |
|--------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>SINAMICS V20 Smart Access</b><br>For wireless commissioning, operation and diagnostics of the converter using a smartphone, tablet, or laptop | <b>6SL3255-0VA00-5AA0</b> |

### Dimensional drawings

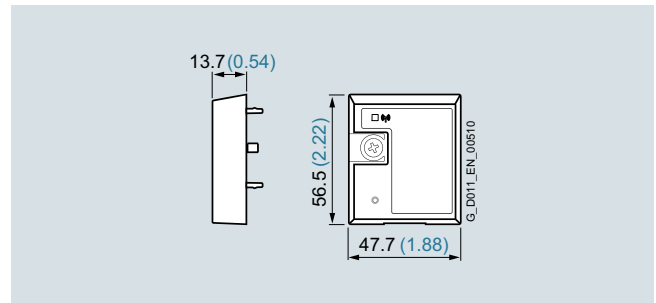

SINAMICS V20 Smart Access

All dimensions in mm (values in brackets are in inches).

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

### Supplementary system components > SINAMICS V20 I/O Extension Module

#### Overview



SINAMICS V20 I/O Extension Module

The SINAMICS V20 I/O Extension Module can be directly mounted on the 400 V converters and thus provides two additional digital inputs and two additional digital outputs (relay outputs).

Use of the SINAMICS V20 I/O Extension Module enhances the flexibility of the 400 V converter without additional outlay for installation, hardware and software. This provides additional functionalities such as multi-pump control, with which up to four pumps can be controlled with a frequency converter <sup>1)</sup>.

Typical areas of use are pump, fan and compressor applications or applications that require additional digital inputs and digital outputs.

#### Integration




The optional SINAMICS V20 I/O Extension Module is simply plugged onto the converter. Equipped with connections at the front and rear, the SINAMICS V20 I/O Extension Module can be used in combination with other accessories of the SINAMICS V20 converter such as the Smart Access or the BOP and the BOP Interface.

The SINAMICS V20 I/O Extension Module and the SINAMICS V20 Parameter Loader cannot be operated simultaneously.

#### Selection and ordering data

| Description                                                                                                                                                 | Article No.               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>SINAMICS V20<br/>I/O Extension Module</b><br>For expansion of the 400 V converters with<br>two digital inputs and two digital outputs<br>(relay outputs) | <b>6SL3256-0VE00-6AA0</b> |

#### Dimensional drawings

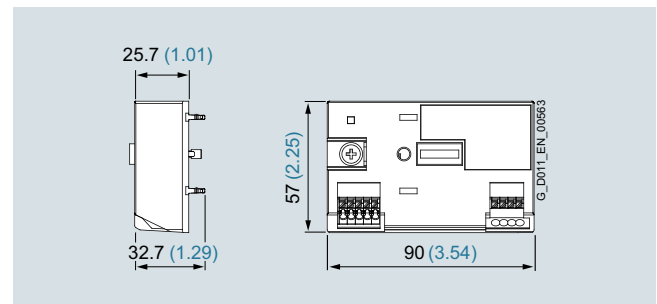

SINAMICS V20 I/O Extension Module

All dimensions in mm (values in brackets are in inches).


<sup>1)</sup> Further information on the multi-pump control can be found in the operating instructions and on the Internet at:  
[www.siemens.com/sinamics-v20/documentation](http://www.siemens.com/sinamics-v20/documentation)

## SINAMICS V20 basic converters

0.12 kW to 30 kW (0.16 hp to 40 hp)

Supplementary system components > SINAMICS V20 shield connection kits

### Overview

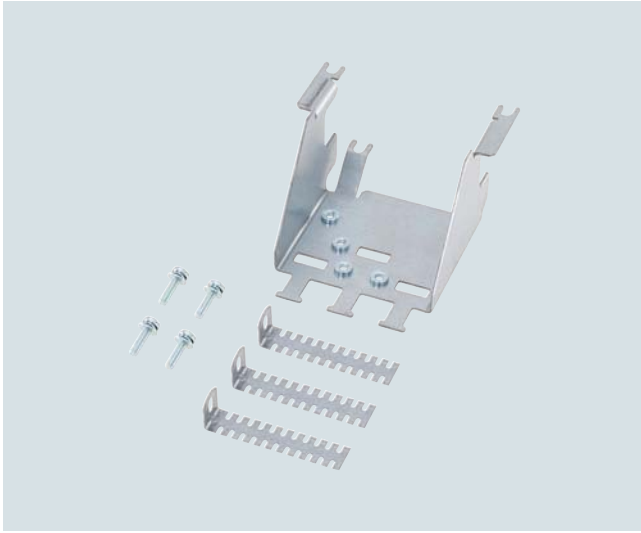

SINAMICS V20 shield connection kit

The shield connection kit offers


- Shield connection
- Strain relief

### Selection and ordering data

| Description                               | Article No.                   |
|-------------------------------------------|-------------------------------|
| <b>SINAMICS V20 shield connection kit</b> |                               |
| • For frame sizes FSAA and FSAB           | <b>6SL3266-1AR00-0VA0</b>     |
| • For frame size FSAC                     | <b>NEW 6SL3266-1AU00-0VA0</b> |
| • For frame size FSA                      | <b>6SL3266-1AA00-0VA0</b>     |
| • For frame size FSB                      | <b>6SL3266-1AB00-0VA0</b>     |
| • For frame size FSC                      | <b>6SL3266-1AC00-0VA0</b>     |
| • For frame size FSD                      | <b>6SL3266-1AD00-0VA0</b>     |
| • For frame size FSE                      | <b>6SL3266-1AE00-0VA0</b>     |

Supplementary system components > SINAMICS V20 replacement fans

### Overview

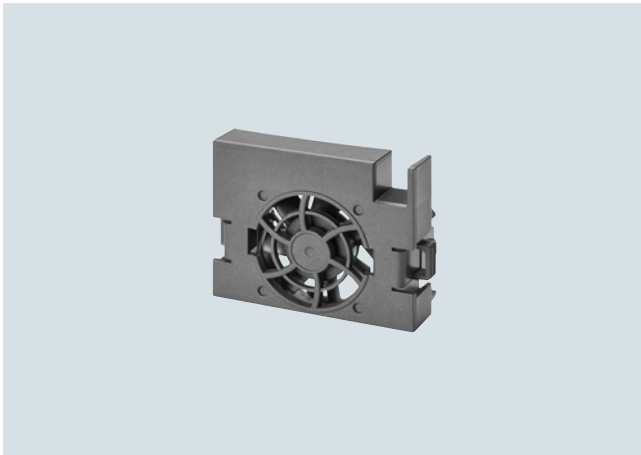

SINAMICS V20 replacement fan for frame size FSA



SINAMICS V20 replacement fans for frame size FSD

The fans are designed for extra long service life. Replacement fans can be ordered.

### Selection and ordering data

| Description                          | Article No.                   |
|--------------------------------------|-------------------------------|
| <b>SINAMICS V20 replacement fans</b> |                               |
| • For frame size FSAC                | <b>NEW 6SL3200-0UF06-0AA0</b> |
| • For frame size FSA                 | <b>6SL3200-0UF01-0AA0</b>     |
| • For frame size FSB                 | <b>6SL3200-0UF02-0AA0</b>     |
| • For frame size FSC                 | <b>6SL3200-0UF03-0AA0</b>     |
| • For frame size FSD                 | <b>6SL3200-0UF04-0AA0</b>     |
| • For frame size FSE                 | <b>6SL3200-0UF05-0AA0</b>     |

# SINAMICS G120C compact inverters 0.55 kW to 132 kW (0.75 hp to 150 hp)












|             |                                                      |
|-------------|------------------------------------------------------|
| <b>8/2</b>  | <b>Introduction</b>                                  |
| 8/2         | Application                                          |
| 8/2         | More information                                     |
| <b>8/3</b>  | <b>SINAMICS G120C compact inverters</b>              |
| 8/3         | Overview                                             |
| 8/3         | Benefits                                             |
| 8/3         | Design                                               |
| 8/5         | Configuration                                        |
| 8/6         | Integration                                          |
| 8/9         | Selection and ordering data                          |
| 8/11        | Technical specifications                             |
| 8/20        | Characteristic curves                                |
| 8/22        | Dimensional drawings                                 |
| 8/24        | More information                                     |
| <b>8/25</b> | <b>Line-side components</b>                          |
| 8/25        | Line filters                                         |
| 8/26        | Line reactors                                        |
| 8/27        | Recommended line-side overcurrent protection devices |
| <b>8/28</b> | <b>DC link components</b>                            |
| 8/28        | Braking resistors                                    |
| <b>8/30</b> | <b>Load-side power components</b>                    |
| 8/30        | Output reactors                                      |
| 8/32        | Sine-wave filters                                    |
| <b>8/33</b> | <b>Supplementary system components</b>               |
| 8/33        | Operator panels                                      |
| 8/34        | IOP-2 Intelligent Operator Panel                     |
| 8/37        | BOP-2 Basic Operator Panel                           |
| 8/38        | Memory cards                                         |
| 8/39        | SINAMICS G120 Smart Access                           |
| 8/41        | PC inverter connection kit 2                         |
| 8/41        | Shield connection kits                               |
| <b>8/42</b> | <b>Spare parts</b>                                   |

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Introduction

## Application

| Use                                                                                                                           | Requirements for torque accuracy/speed accuracy/position accuracy/coordination of axes/functionality |                                                                                                                                                                                  |                                                                                                               |                                                                                                          |                                                                                                          |                                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                               | Continuous motion                                                                                    |                                                                                                                                                                                  |                                                                                                               | Non-continuous motion                                                                                    |                                                                                                          |                                                                                                                                             |
|                                                                                                                               | Basic<br>           | Medium<br>                                                                                      | High<br>                     | Basic<br>               | Medium<br>            | High<br>                                                 |
| <b>Pumping, ventilating, compressing</b><br> | Centrifugal pumps<br>Radial / axial fans<br>Compressors                                              | Centrifugal pumps<br>Radial / axial fans<br>Compressors                                                                                                                          | Eccentric screw pumps                                                                                         | Hydraulic pumps<br>Metering pumps                                                                        | Hydraulic pumps<br>Metering pumps                                                                        | Descaling pumps<br>Hydraulic pumps                                                                                                          |
|                                                                                                                               | V20<br><b>G120C</b><br>G120P                                                                         | G120P<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                         | S120                                                                                                          | G120                                                                                                     | S110                                                                                                     | S120                                                                                                                                        |
| <b>Moving</b><br>                            | Conveyor belts<br>Roller conveyors<br>Chain conveyors                                                | Conveyor belts<br>Roller conveyors<br>Chain conveyors<br>Lifting/lowering devices<br>Elevators<br>Escalators/moving walkways<br>Indoor cranes<br>Marine drives<br>Cable railways | Elevators<br>Container cranes<br>Mining hoists<br>Excavators for open-cast mining<br>Test bays                | Acceleration conveyors<br>Storage and retrieval machines                                                 | Acceleration conveyors<br>Storage and retrieval machines<br>Cross cutters<br>Reel changers               | Storage and retrieval machines<br>Robotics<br>Pick & place<br>Rotary indexing tables<br>Cross cutters<br>Roll feeds<br>Engagers/disengagers |
|                                                                                                                               | V20<br>G110D<br>G110M<br><b>G120C</b><br>ET 200pro FC-2 <sup>2)</sup>                                | G120<br>G120D<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                 | S120<br>S150<br>DCM                                                                                           | V90<br>G120<br>G120D                                                                                     | S110<br>S210<br>DCM                                                                                      | S120<br>S210<br>DCM                                                                                                                         |
| <b>Processing</b><br>                      | Mills<br>Mixers<br>Kneaders<br>Crushers<br>Agitators<br>Centrifuges                                  | Mills<br>Mixers<br>Kneaders<br>Crushers<br>Agitators<br>Centrifuges<br>Extruders<br>Rotary furnaces                                                                              | Extruders<br>Winders/unwinders<br>Lead/follower drives<br>Calenders<br>Main press drives<br>Printing machines | Tubular bagging machines<br>Single-axis motion control such as<br>• Position profiles<br>• Path profiles | Tubular bagging machines<br>Single-axis motion control such as<br>• Position profiles<br>• Path profiles | Servo presses<br>Rolling mill drives<br>Multi-axis motion control such as<br>• Multi-axis positioning<br>• Cams<br>• Interpolations         |
|                                                                                                                               | V20<br><b>G120C</b>                                                                                  | G120<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                          | S120<br>S150<br>DCM                                                                                           | V90<br>G120                                                                                              | S110<br>S210                                                                                             | S120<br>S210<br>DCM                                                                                                                         |
| <b>Machining</b><br>                       | Main drives for<br>• Turning<br>• Milling<br>• Drilling                                              | Main drives for<br>• Drilling<br>• Sawing                                                                                                                                        | Main drives for<br>• Turning<br>• Milling<br>• Drilling<br>• Gear cutting<br>• Grinding                       | Axis drives for<br>• Turning<br>• Milling<br>• Drilling                                                  | Axis drives for<br>• Drilling<br>• Sawing                                                                | Axis drives for<br>• Turning<br>• Milling<br>• Drilling<br>• Lasering<br>• Gear cutting<br>• Grinding<br>• Nibbling and punching            |
|                                                                                                                               | S110                                                                                                 | S110<br>S120                                                                                                                                                                     | S120                                                                                                          | S110                                                                                                     | S110<br>S120                                                                                             | S120                                                                                                                                        |

SINAMICS G120C compact inverters continuously control the speed of three-phase asynchronous (induction) motors and can be used in a wide range of industrial areas. They are generally suitable for applications involving conveyor belts, mixers, extruders, pumps, fans, compressors and basic handling machines.

Practical application examples and descriptions are available on the Internet at

[www.siemens.com/sinamics-applications](http://www.siemens.com/sinamics-applications)

## More information

You may also be interested in these drives:

- More performance for the control cabinet in IP20 degree of protection ⇒ SINAMICS G120
- Higher degree of protection for power ratings up to 7.5 kW ⇒ SINAMICS G110M, SINAMICS G110D, SINAMICS G120D (Catalog D 31.2)
- With positioning function in the control cabinet in IP20 degree of protection ⇒ SINAMICS G120, SINAMICS S110
- With positioning function for distributed drive solutions in IP65 degree of protection ⇒ SINAMICS G120D (Catalog D 31.2)

<sup>1)</sup> Industry-specific inverters.

<sup>2)</sup> Information on the SIMATIC ET 200pro FC-2 frequency converter is available in Catalog D 31.2 and at [www.siemens.com/et200pro-fc](http://www.siemens.com/et200pro-fc)

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### SINAMICS G120C compact inverters

#### Overview



SINAMICS G120C, frame sizes FSAA to FSF, with Intelligent Operator Panel IOP-2

SINAMICS G120C compact inverters offer a well-balanced combination of features to address a wide range of applications. They are compact, rugged devices that are easy to operate and can be optionally equipped with a basic or advanced operator panel.

SINAMICS G120C inverters are especially suitable when it comes to meeting the requirements of system integrators, OEMs and distributors regarding high productivity and tailored performance.

#### Benefits

- Compact design
- Frame size FSAA allows easy DIN rail mounting
- Side-by-side design
- High power density, low envelope dimensions
- Simple installation in the tightest space
- Low space requirement
- Use in small control cabinets, close to the machine
- Optimized parameter set
- Optimized commissioning
- Compact Operating Instructions
- BOP-2 or IOP-2 operator panels can be used
- Integrated USB connection
- Simple and fast software parameter assignment
- Simple to use during commissioning and in operation
- Minimized training costs, existing SINAMICS know-how can be used
- High degree of service friendliness, simple maintenance
- Plug-in terminals
- Cloning function using BOP-2, IOP-2, or memory card
- Operating hours counter for "drive on" and "motor on"
- Fast mechanical installation
- Intuitive standard commissioning
- Component of Totally Integrated Automation
- Energy-efficient, sensorless vector control
- Automatic flux reduction with V/f ECO
- Integrated energy saving computer
- Safety Integrated (STO)
- Communication versions with PROFINET / EtherNet/IP, PROFIBUS DP, USS/Modbus RTU
- Wireless commissioning, operation and diagnostics via mobile device or laptop thanks to the optional SINAMICS G120 Smart Access
- Coated modules
- Operation up to an ambient temperature of 60 °C

#### Design

SINAMICS G120C is a compact inverter for control cabinet mounting in IP20 degree of protection where the Control Unit (CU) and Power Module (PM) function units are combined in one device.

The compact mechanical design and the high power density allow these devices to be installed in machine control enclosures and control cabinets for maximum space utilization. The SINAMICS G120C compact inverter can be butt-mounted directly, without derating at temperatures up to 40 °C (104 °F).



SINAMICS G120C, frame size FSAA with BOP-2

SINAMICS G120C can be integrated into the widest range of applications, either using the integrated digital and analog inputs or via the integrated fieldbus interface (available in USS, Modbus RTU, PROFIBUS, PROFINET, EtherNet/IP versions). Especially the product versions with integrated PROFIBUS/PROFINET interface make full integration into the Siemens TIA family possible, therefore allowing the advantages of the seamless TIA product family to be fully utilized. SINAMICS G120C devices are preset in the factory so that they can be immediately connected to PROFIBUS or PROFINET fieldbus systems without parameterization.

Wireless commissioning, operation and diagnostics via mobile device or laptop thanks to the optional web server module SINAMICS G120 Smart Access enabling user-friendly operation and easy access to the inverter, even if this is installed in areas difficult to access.

SINAMICS G120C is also equipped with the safety function STO (Safe Torque Off) as standard, which is used to safely stop drives. As a consequence, machine manufacturers can simply comply with current machinery directives with minimum associated costs.


SINAMICS G120C can control asynchronous (induction) motors in the power range from 0.37 kW up to 132 kW (0.5 hp to 200 hp). Reliable and efficient motor operation is achieved by using state-of-the-art IGBT technology combined with vector control. The extensive range of functions integrated in the SINAMICS G120C also offers a high degree of protection for the inverter and motor.

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### SINAMICS G120C compact inverters

#### Design (continued)

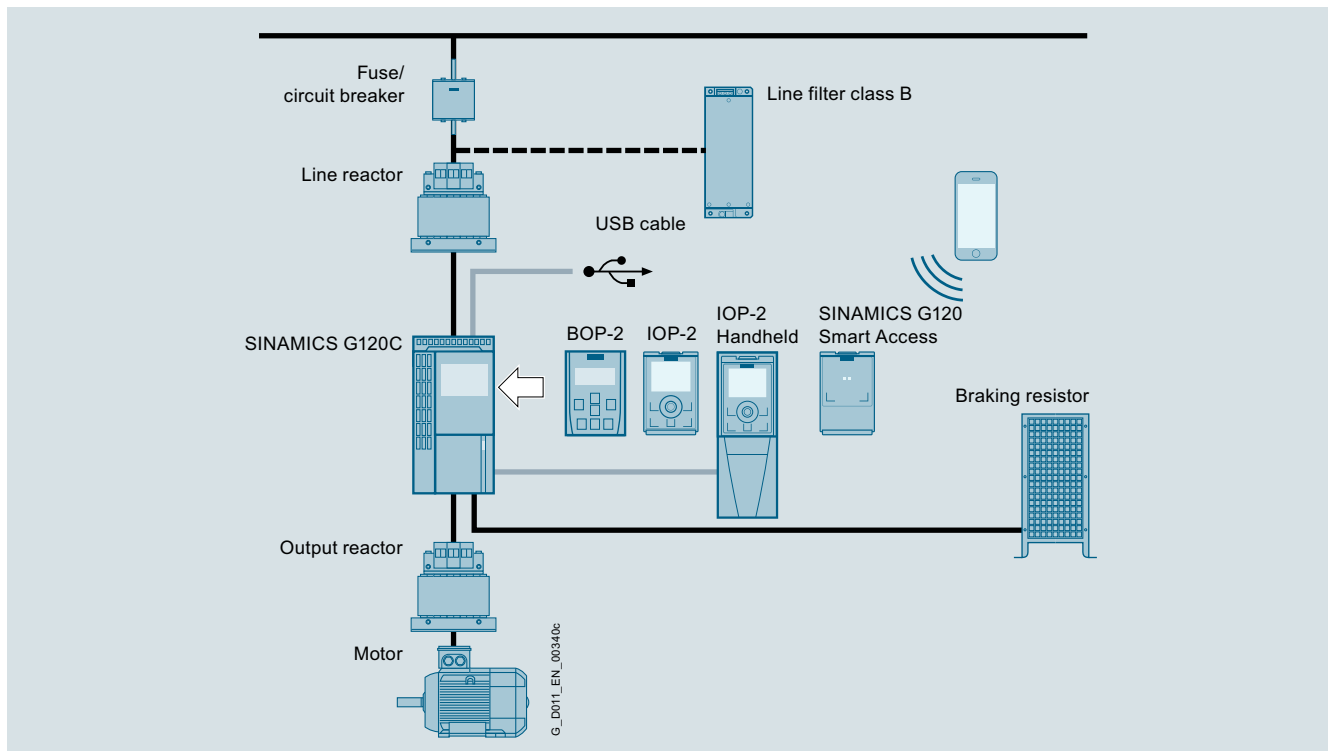

#### Line-side components

##### Line filters

SINAMICS G120C can be ordered with or without integrated Class A line filters. Optionally, an external Class B line filter can be used for classifying in a higher interference class.

##### Line reactors

Line reactors smooth the current drawn by the inverter and thus reduce harmonic components in the line current. Through the reduction of the current harmonics, the thermal load on the power components in the rectifier and in the DC link capacitors is reduced as well as the harmonic effects on the supply. The use of a line reactor increases the service life of the inverter. A DC link reactor is integrated in frame sizes FSD to FSF, and therefore no line reactor is required.

##### Recommended line-side overcurrent protection devices

Overcurrent protection devices are absolutely necessary for the operation of the inverters. The table listed in the section "Recommended line-side overcurrent protection devices" provides recommendations according to IEC and UL regulations, depending on the area of application. Recommendations on further overcurrent protection devices are available at: <https://support.industry.siemens.com/cs/document/109750343>

More information about the listed Siemens fuses is available in Catalog LV 10 as well as in the Industry Mall.

#### DC link components

##### Braking resistors

Excess energy in the DC link is dissipated in the braking resistor. The braking resistors are designed for use with the SINAMICS G120C. This has an integrated braking chopper (electronic switch). For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSF.

#### Load-side power components

##### Output reactors

Output reactors reduce the rate of voltage rise ( $dv/dt$ ) and the height of the current peaks, and enable longer motor cables to be connected.

##### Sine-wave filter (for frame size FSAA)

Sine-wave filters limit the rate of voltage rise ( $dv/dt$ ) and the peak voltages on the motor winding. Similar to an output reactor, they enable the connection of longer motor cables. A sine-wave filter 6SE6400-3TD00-4AD0, suitable for base mounting, is available for SINAMICS G120C, frame size FSAA, 0.55 kW to 2.2 kW. For 2.2 kW, operation of the sine-wave filter that is suitable for base mounting is only permitted for operating the inverter with rated power of 1.5 kW based on high overload (HO).

For technical specifications, see the datasheet on the Internet: <https://support.industry.siemens.com/cs/document/24479847>

Additional information is available in the Operating Instructions on the Internet at: [www.siemens.com/sinamics-g120c/documentation](http://www.siemens.com/sinamics-g120c/documentation)

#### Supplementary system components

##### IOP-2 Intelligent Operator Panel

Graphics-based, user-friendly and powerful operator panel for commissioning and diagnostics as well as local operator control and monitoring of SINAMICS G120C.

##### BOP-2 Basic Operator Panel

A 2-line display to provide support when commissioning and troubleshooting the drive. The drive can be locally controlled.

##### Memory card

The parameter settings for an inverter can be stored on the SINAMICS SD memory card. When service is required, e.g. after the inverter has been replaced and the data have been downloaded from the memory card, the drive system is immediately ready for use again. The associated memory card holder is integrated in the inverter.

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS G120C compact inverters

### Design (continued)

#### Supplementary system components (continued)

##### SINAMICS G120 Smart Access

Wireless commissioning, operation and diagnostics via mobile device or laptop thanks to the optional web server module SINAMICS G120 Smart Access enabling user-friendly operation and easy access to the inverter, even if this is installed in areas difficult to access.

##### PC inverter connection kit 2

For controlling and commissioning an inverter directly from a PC if the STARTER commissioning tool or SINAMICS Startdrive has been installed on the PC.

##### Shield connection kits

A shield connection kit is included in the scope of delivery for frame sizes FSAA to FSC.

A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size for the frame sizes FSD to FSF. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSF.

#### Additional options

Further selected accessories are available from "Siemens Product Partner for Drives Options":

[www.siemens.com/drives-options-partner](http://www.siemens.com/drives-options-partner)

#### Spare parts

##### Shield connection kits

A shield connection kit is supplied as standard with frame sizes FSAA to FSC. These shield connection kits can also be ordered as spare parts.

A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size for the frame sizes FSD to FSF. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSF.

##### Spare parts kit

This kit comprises four I/O terminals, one RS485 terminal, two pairs of Control Unit doors (1 × PN and 1 × other communication versions) and one blanking cover.

##### Set of connectors

A set of connectors for the line feeder cable, braking resistor and motor cable can be ordered corresponding to the frame size of the SINAMICS G120C inverter.

##### Roof-mounted fan

A roof-mounted fan (at the top of the device) comprising a pre-assembled unit with holder and fan can be ordered corresponding to the frame size of the SINAMICS G120C.

##### Fan unit

A replacement fan (at the rear of the device; heat sink) comprising a pre-assembled unit with holder and fan can be ordered corresponding to the frame size of the SINAMICS G120C.

### Configuration

The following electronic configuring aids and engineering tools are available for SINAMICS G120C compact inverters:

#### Drive Technology Configurator (DT Configurator) within the CA 01

The interactive catalog CA 01 – the offline Industry Mall of Siemens – contains over 100000 products with approximately 5 million possible drive system product variants. The Drive

Technology Configurator (DT Configurator) has been developed to facilitate selection of the correct motor and/or inverter from the wide spectrum of drives. It is integrated as a selection tool in Catalog CA 01.

#### Online DT Configurator

In addition, the DT Configurator can be used on the Internet without requiring any installation. The DT Configurator can be found in the Siemens Industry Mall at the following address:

[www.siemens.com/dt-configurator](http://www.siemens.com/dt-configurator)

#### SIZER for Siemens Drives engineering tool

The SIZER for Siemens Drives engineering tool makes it easy to configure the SINAMICS drive family. It provides support when selecting the hardware and firmware components necessary to implement a drive task. SIZER for Siemens Drives is designed to support configuring of the entire drive system.

You can find further information on the SIZER for Siemens Drives engineering tool in the section Engineering tools.

The SIZER for Siemens Drives engineering tool is available free on the Internet at

[www.siemens.com/sizer](http://www.siemens.com/sizer)

#### STARTER commissioning tool

The STARTER commissioning tool allows menu-prompted commissioning, optimization and diagnostics. Apart from the SINAMICS drives, STARTER is also suitable for MICROMASTER 4 devices.

You can find further information about the STARTER commissioning tool in the section Engineering tools.

Additional information about the STARTER commissioning tool is available on the Internet at

[www.siemens.com/starter](http://www.siemens.com/starter)

#### SINAMICS Startdrive commissioning tool

SINAMICS Startdrive is a tool for configuring, commissioning, and diagnosing the SINAMICS family of drives and is integrated into the TIA Portal. SINAMICS Startdrive can be used to implement drive tasks with the SINAMICS G110M, SINAMICS G120, SINAMICS G120C, SINAMICS G120D and SINAMICS G120P inverter series. The commissioning tool has been optimized with regard to user friendliness and consistent use of the TIA Portal benefits of a common working environment for PLC, HMI and drives.

You can find further information on the SINAMICS Startdrive commissioning tool in the section Engineering tools.

The SINAMICS Startdrive commissioning tool is available free on the Internet at

[www.siemens.com/startdrive](http://www.siemens.com/startdrive)

#### Drive ES engineering system

Drive ES is the engineering system that can be used to integrate the communication, configuration and data management functions of Siemens drive technology into the SIMATIC automation world easily, efficiently and cost-effectively. Two software packages are available for SINAMICS – Drive ES Basic Maintenance and Drive ES PCS.

You can find further information about the Drive ES engineering system in the section Engineering tools.

Additional information about the Drive ES engineering system is available on the Internet at


[www.siemens.com/drive-es](http://www.siemens.com/drive-es)

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS G120C compact inverters

### Integration

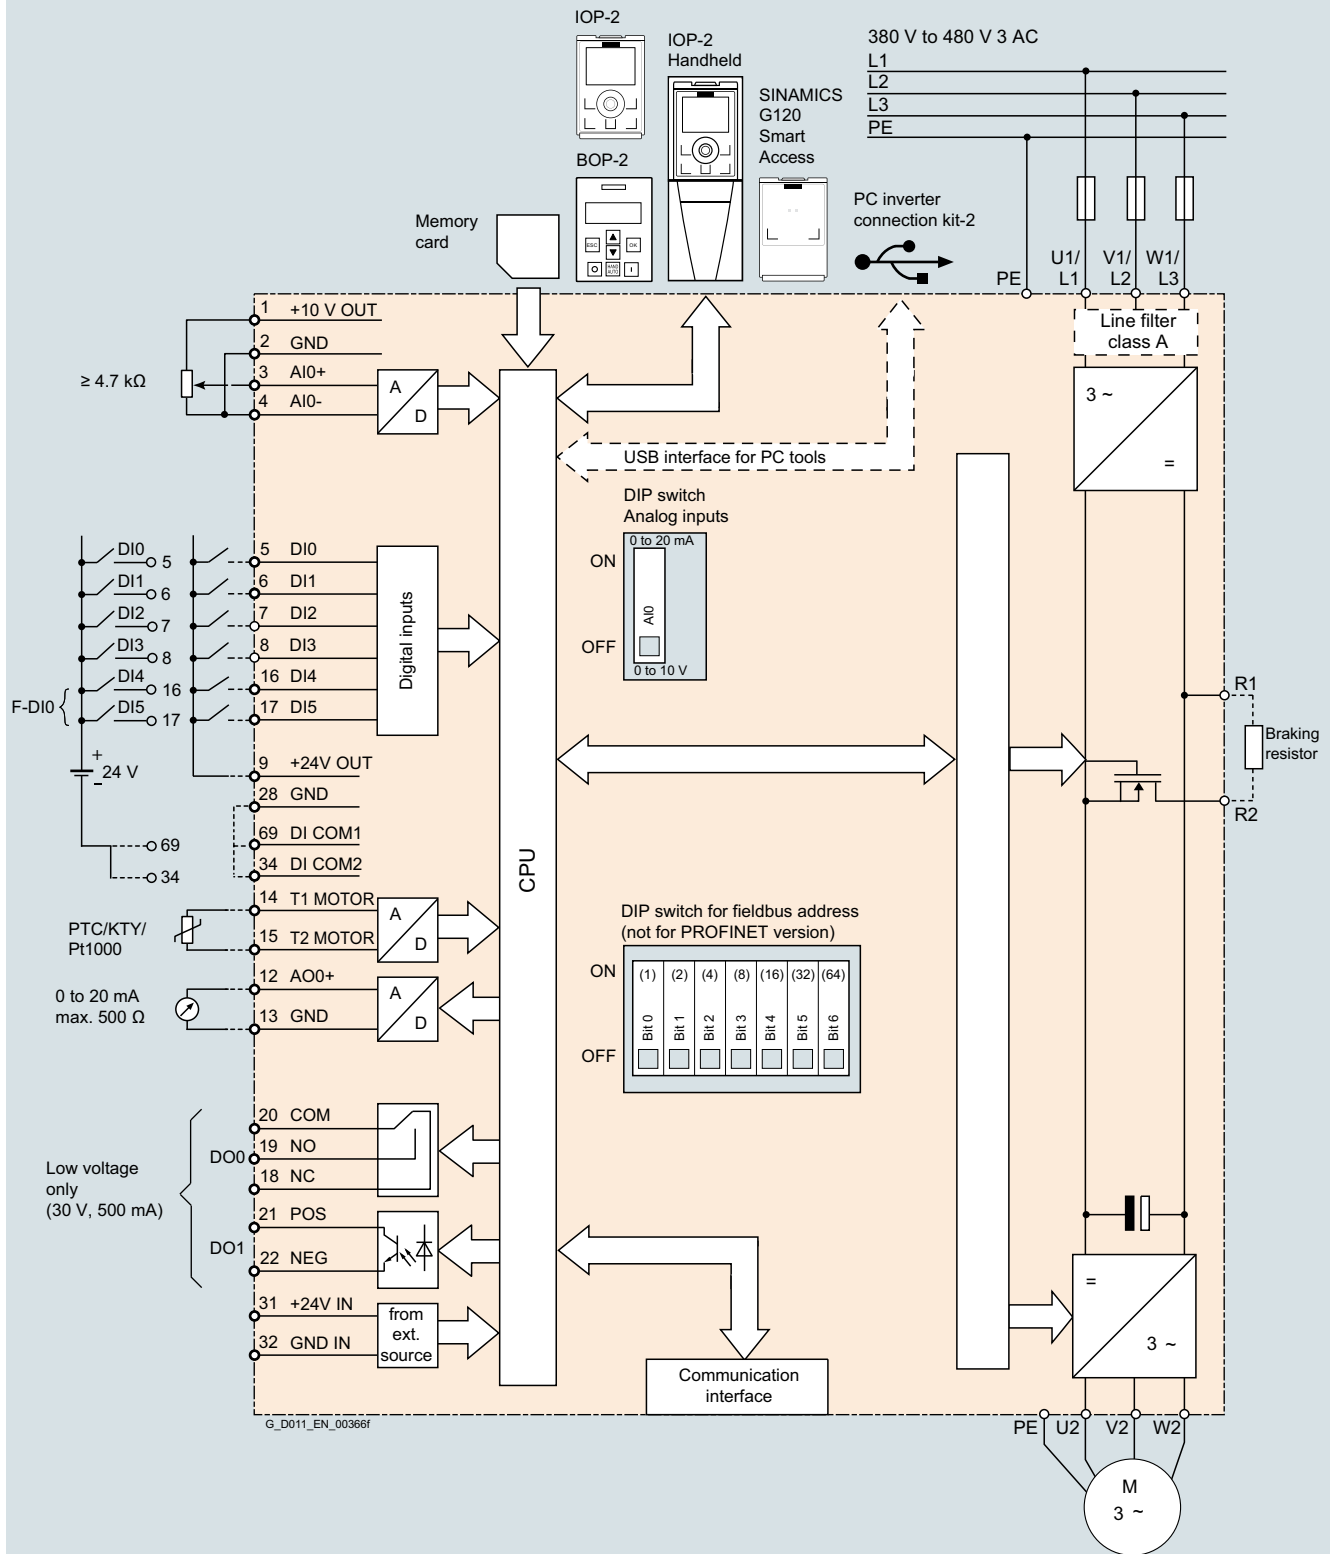


# SINAMICS G120C compact inverters


0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS G120C compact inverters


### Integration (continued)

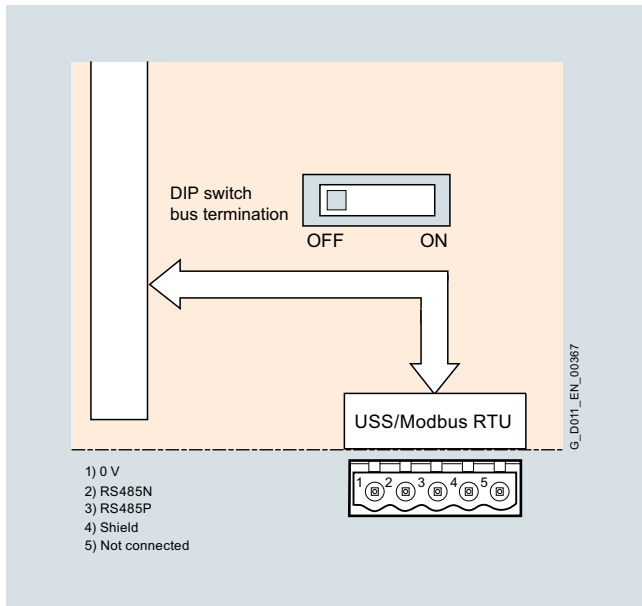

USS/Modbus RTU communication interface

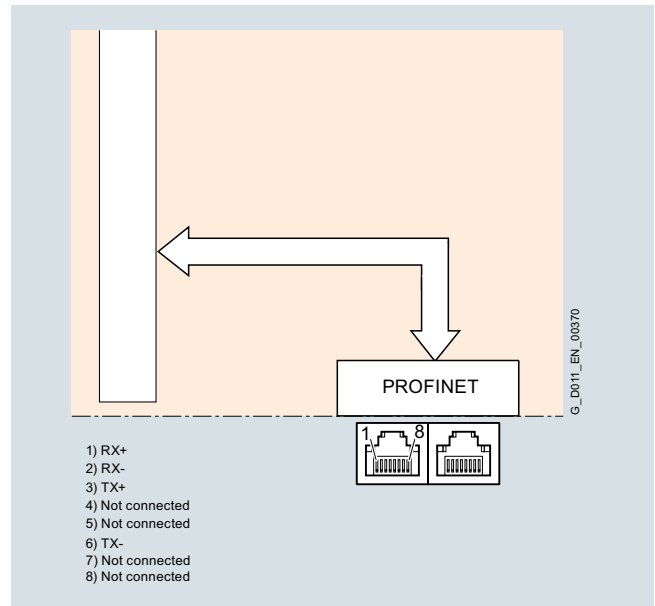

PROFINET, EtherNet/IP communication interface

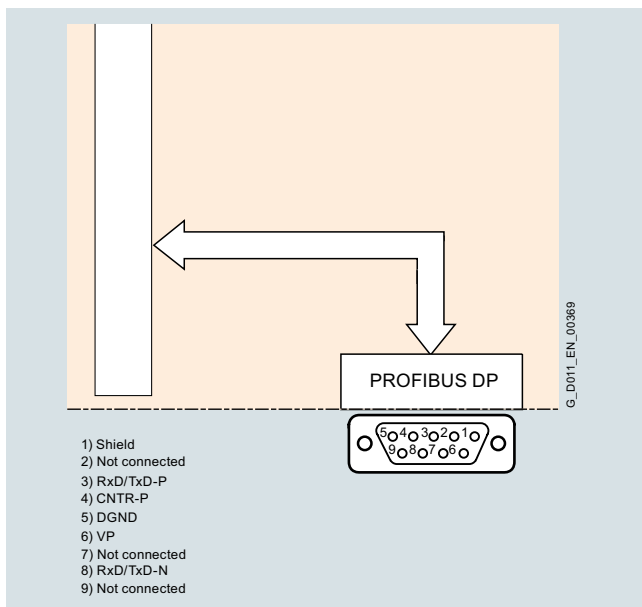

PROFIBUS DP communication interface

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS G120C compact inverters

### Integration (continued)

#### Available optional power and DC link components

The following line-side components, DC link components and load-side power components are optionally available in the appropriate frames sizes:

|                                   | Frame size      |     |     |     |     |     |
|-----------------------------------|-----------------|-----|-----|-----|-----|-----|
|                                   | FSAA, FSA       | FSB | FSC | FSD | FSE | FSF |
| <b>Line-side components</b>       |                 |     |     |     |     |     |
| Line filter class A               | F               | F   | F   | F   | F   | F   |
| Line filter class B               | U <sup>1)</sup> | U   | U   | –   | –   | –   |
| Line reactor                      | S <sup>1)</sup> | S   | S   | I   | I   | I   |
| <b>DC link components</b>         |                 |     |     |     |     |     |
| Braking resistor                  | S <sup>1)</sup> | S   | S   | S   | S   | S   |
| <b>Load-side power components</b> |                 |     |     |     |     |     |
| Output reactor                    | S <sup>1)</sup> | S   | S   | S   | S   | S   |
| Sine-wave filter                  | <sup>1)</sup>   | –   | –   | –   | –   | –   |

U = Base component

I = Integrated

S = Lateral mounting

F = Inverter available with and without integrated filter class A

– = Not possible

#### Maximum permissible cable lengths from the motor to the inverter when using output reactors or line filters

The following load-side power components are optionally available in the appropriate frame sizes and result in the following maximum cable lengths, if necessary in combination with line filters for complying with EMC requirements:

|                                                                                                                                                                                                                                                                  | Maximum permissible motor cable lengths (shielded/unshielded) in m (ft) |                                           |                                           |                                           |                                    |                                    |                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------|------------------------------------|------------------------------------|-------------------------------------|
|                                                                                                                                                                                                                                                                  | FSAA                                                                    | FSA                                       | FSB                                       | FSC                                       | FSD                                | FSE                                | FSF                                 |
| <b>Without optional power components</b>                                                                                                                                                                                                                         |                                                                         |                                           |                                           |                                           |                                    |                                    |                                     |
| • Versions without integrated line filter                                                                                                                                                                                                                        | 150 <sup>2)</sup> /150<br>(492 <sup>2)</sup> /492)                      | 150/150<br>(492/492)                      | 150/150<br>(492/492)                      | 150/150<br>(492/492)                      | 200/300<br>(656/984)               | 200/300<br>(656/984)               | 300/450<br>(984/1476)               |
| • Versions with integrated line filter class A                                                                                                                                                                                                                   | 50/100<br>(164/328)                                                     | 50/100<br>(164/328)                       | 50/100<br>(164/328)                       | 50/100<br>(164/328)                       | 200/300<br>(656/984)               | 200/300<br>(656/984)               | 300/450<br>(984/1476)               |
| <b>With optional output reactor</b>                                                                                                                                                                                                                              |                                                                         |                                           |                                           |                                           |                                    |                                    |                                     |
| • At 380 ... 415 V 3 AC                                                                                                                                                                                                                                          | 150/225<br>(492/738)                                                    | 150/225<br>(492/738)                      | 150/225<br>(492/738)                      | 150/225<br>(492/738)                      | 200/300<br>(656/984) <sup>5)</sup> | 200/300<br>(656/984) <sup>5)</sup> | 300/450<br>(984/1476) <sup>5)</sup> |
| • At 440 ... 480 V 3 AC                                                                                                                                                                                                                                          | 100/150<br>(328/492)                                                    | 100/150<br>(328/492)                      | 100/150<br>(328/492)                      | 100/150<br>(328/492)                      | 200/300<br>(656/984) <sup>5)</sup> | 200/300<br>(656/984) <sup>5)</sup> | 300/450<br>(984/1476) <sup>5)</sup> |
| <b>With integrated line filter class A</b><br>According to EN 55011 to comply with radio interference emissions according to EN 61800-3 EMC Category C2                                                                                                          | 25 <sup>3)</sup> /– (82 <sup>3)</sup> /–)                               | 25 <sup>3)</sup> /– (82 <sup>3)</sup> /–) | 25 <sup>3)</sup> /– (82 <sup>3)</sup> /–) | 25 <sup>4)</sup> /– (82 <sup>4)</sup> /–) | 150/– (492/–)                      | 150/– (492/–)                      | 150/– (492/–)                       |
| <b>With optional, external line filter class B</b><br>According to EN 55011 to comply with cable-conducted radio interference emissions according to EN 61800-3 EMC Category C1 <sup>6)</sup> , <b>together with versions without integrated line filters</b>    | 50/– (164/–)                                                            | 25/– (82/–)                               | 50/– (164/–)                              | 50/– (164/–)                              | –                                  | –                                  | –                                   |
| <b>With optional, external line filter class B</b><br>According to EN 55011 and output reactor to comply with radio interference emissions according to EN 61800-3 EMC Category C2 <sup>6)</sup> , <b>together with versions without integrated line filters</b> |                                                                         |                                           |                                           |                                           |                                    |                                    |                                     |
| • At 380 ... 415 V 3 AC                                                                                                                                                                                                                                          | 150/– (492/–)                                                           | 150/– (492/–)                             | 150/– (492/–)                             | 150/– (492/–)                             | –                                  | –                                  | –                                   |
| • At 440 ... 480 V 3 AC                                                                                                                                                                                                                                          | 100/– (328/–)                                                           | 100/– (328/–)                             | 100/– (328/–)                             | 100/– (328/–)                             | –                                  | –                                  | –                                   |

<sup>1)</sup> Line filters, line reactors, braking resistors, output reactors and sine-wave filters that are suitable for base mounting are also available for SINAMICS G120C, frame size FSAA, 0.55 kW to 2.2 kW. For 2.2 kW, operation of the line reactors, braking resistors, output reactors and sine-wave filters that are suitable for base mounting is only permitted for operating the inverter with rated power of 1.5 kW based on high overload (HO). More information is available in the operating instructions on the Internet at: [www.siemens.com/sinamics-g120c/documentation](http://www.siemens.com/sinamics-g120c/documentation)

<sup>2)</sup> For SINAMICS G120C frame size FSAA 2.2 kW with low-capacitance CY cable 150 m (492 ft) (shielded) – otherwise 125 m (410 ft) (shielded).

<sup>3)</sup> With low-capacitance CY cable 50 m (164 ft) (shielded).

<sup>4)</sup> With low-capacitance CY cable 100 m (328 ft) (shielded).

<sup>5)</sup> For frame sizes FSD to FSF the maximum permissible cable lengths are not increased with an output reactor. By means of the output reactor, the loading of the motor windings is reduced by lower rates of voltage rise ( $dv/dt$ ). By means of two output reactors connected in series, the maximum permissible cable lengths for frame sizes FSD and FSE are increased to 350 m (1148 ft) (shielded) and 525 m (1723 ft) (unshielded), and for frame size FSF to 525 m (1723 ft) (shielded) and 800 m (2625 ft) (unshielded).

<sup>6)</sup> More information is available in the operating instructions on the Internet at: [www.siemens.com/sinamics-g120c/documentation](http://www.siemens.com/sinamics-g120c/documentation)

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS G120C compact inverters

### Selection and ordering data

The article number is selected corresponding to

- the required motor power or the motor current required and the overload requirements of the application,
- the necessary EMC classification and
- the required integrated fieldbus interface

| Rated power <sup>1)</sup> |      | Base-load current $I_L$ <sup>2)</sup> | Base-load current $I_H$ <sup>3)</sup> | Frame size | Version               | SINAMICS G120C<br>without line filter | SINAMICS G120C<br>with integrated line filter<br>class A |
|---------------------------|------|---------------------------------------|---------------------------------------|------------|-----------------------|---------------------------------------|----------------------------------------------------------|
| kW                        | hp   | A                                     | A                                     |            |                       | Article No.                           | Article No.                                              |
| <b>380 ... 480 V 3 AC</b> |      |                                       |                                       |            |                       |                                       |                                                          |
| 0.55                      | 0.75 | 1.7                                   | 1.3                                   | FSA        | USS, Modbus RTU       | 6SL3210-1KE11-8UB2                    | 6SL3210-1KE11-8AB2                                       |
|                           |      |                                       |                                       |            | PROFIBUS DP           | 6SL3210-1KE11-8UP2                    | 6SL3210-1KE11-8AP2                                       |
|                           |      |                                       |                                       |            | PROFINET, EtherNet/IP | 6SL3210-1KE11-8UF2                    | 6SL3210-1KE11-8AF2                                       |
| 0.75                      | 1    | 2.2                                   | 1.7                                   | FSA        | USS, Modbus RTU       | 6SL3210-1KE12-3UB2                    | 6SL3210-1KE12-3AB2                                       |
|                           |      |                                       |                                       |            | PROFIBUS DP           | 6SL3210-1KE12-3UP2                    | 6SL3210-1KE12-3AP2                                       |
|                           |      |                                       |                                       |            | PROFINET, EtherNet/IP | 6SL3210-1KE12-3UF2                    | 6SL3210-1KE12-3AF2                                       |
| 1.1                       | 1.5  | 3.1                                   | 2.2                                   | FSA        | USS, Modbus RTU       | 6SL3210-1KE13-2UB2                    | 6SL3210-1KE13-2AB2                                       |
|                           |      |                                       |                                       |            | PROFIBUS DP           | 6SL3210-1KE13-2UP2                    | 6SL3210-1KE13-2AP2                                       |
|                           |      |                                       |                                       |            | PROFINET, EtherNet/IP | 6SL3210-1KE13-2UF2                    | 6SL3210-1KE13-2AF2                                       |
| 1.5                       | 2    | 4.1                                   | 3.1                                   | FSA        | USS, Modbus RTU       | 6SL3210-1KE14-3UB2                    | 6SL3210-1KE14-3AB2                                       |
|                           |      |                                       |                                       |            | PROFIBUS DP           | 6SL3210-1KE14-3UP2                    | 6SL3210-1KE14-3AP2                                       |
|                           |      |                                       |                                       |            | PROFINET, EtherNet/IP | 6SL3210-1KE14-3UF2                    | 6SL3210-1KE14-3AF2                                       |
| 2.2                       | 3    | 5.6                                   | 4.1                                   | FSA        | USS, Modbus RTU       | 6SL3210-1KE15-8UB2                    | 6SL3210-1KE15-8AB2                                       |
|                           |      |                                       |                                       |            | PROFIBUS DP           | 6SL3210-1KE15-8UP2                    | 6SL3210-1KE15-8AP2                                       |
|                           |      |                                       |                                       |            | PROFINET, EtherNet/IP | 6SL3210-1KE15-8UF2                    | 6SL3210-1KE15-8AF2                                       |
| 3                         | 4    | 7.3                                   | 5.6                                   | FSA        | USS, Modbus RTU       | 6SL3210-1KE17-5UB1                    | 6SL3210-1KE17-5AB1                                       |
|                           |      |                                       |                                       |            | PROFIBUS DP           | 6SL3210-1KE17-5UP1                    | 6SL3210-1KE17-5AP1                                       |
|                           |      |                                       |                                       |            | PROFINET, EtherNet/IP | 6SL3210-1KE17-5UF1                    | 6SL3210-1KE17-5AF1                                       |
| 4                         | 5    | 8.8                                   | 7.3                                   | FSA        | USS, Modbus RTU       | 6SL3210-1KE18-8UB1                    | 6SL3210-1KE18-8AB1                                       |
|                           |      |                                       |                                       |            | PROFIBUS DP           | 6SL3210-1KE18-8UP1                    | 6SL3210-1KE18-8AP1                                       |
|                           |      |                                       |                                       |            | PROFINET, EtherNet/IP | 6SL3210-1KE18-8UF1                    | 6SL3210-1KE18-8AF1                                       |
| 5.5                       | 7.5  | 12.5                                  | 8.8                                   | FSB        | USS, Modbus RTU       | 6SL3210-1KE21-3UB1                    | 6SL3210-1KE21-3AB1                                       |
|                           |      |                                       |                                       |            | PROFIBUS DP           | 6SL3210-1KE21-3UP1                    | 6SL3210-1KE21-3AP1                                       |
|                           |      |                                       |                                       |            | PROFINET, EtherNet/IP | 6SL3210-1KE21-3UF1                    | 6SL3210-1KE21-3AF1                                       |
| 7.5                       | 10   | 16.5                                  | 12.5                                  | FSB        | USS, Modbus RTU       | 6SL3210-1KE21-7UB1                    | 6SL3210-1KE21-7AB1                                       |
|                           |      |                                       |                                       |            | PROFIBUS DP           | 6SL3210-1KE21-7UP1                    | 6SL3210-1KE21-7AP1                                       |
|                           |      |                                       |                                       |            | PROFINET, EtherNet/IP | 6SL3210-1KE21-7UF1                    | 6SL3210-1KE21-7AF1                                       |
| 11                        | 15   | 25                                    | 16.5                                  | FSC        | USS, Modbus RTU       | 6SL3210-1KE22-6UB1                    | 6SL3210-1KE22-6AB1                                       |
|                           |      |                                       |                                       |            | PROFIBUS DP           | 6SL3210-1KE22-6UP1                    | 6SL3210-1KE22-6AP1                                       |
|                           |      |                                       |                                       |            | PROFINET, EtherNet/IP | 6SL3210-1KE22-6UF1                    | 6SL3210-1KE22-6AF1                                       |
| 15                        | 20   | 31                                    | 25                                    | FSC        | USS, Modbus RTU       | 6SL3210-1KE23-2UB1                    | 6SL3210-1KE23-2AB1                                       |
|                           |      |                                       |                                       |            | PROFIBUS DP           | 6SL3210-1KE23-2UP1                    | 6SL3210-1KE23-2AP1                                       |
|                           |      |                                       |                                       |            | PROFINET, EtherNet/IP | 6SL3210-1KE23-2UF1                    | 6SL3210-1KE23-2AF1                                       |
| 18.5                      | 25   | 37                                    | 31                                    | FSC        | USS, Modbus RTU       | 6SL3210-1KE23-8UB1                    | 6SL3210-1KE23-8AB1                                       |
|                           |      |                                       |                                       |            | PROFIBUS DP           | 6SL3210-1KE23-8UP1                    | 6SL3210-1KE23-8AP1                                       |
|                           |      |                                       |                                       |            | PROFINET, EtherNet/IP | 6SL3210-1KE23-8UF1                    | 6SL3210-1KE23-8AF1                                       |
| 22                        | 25   | 43                                    | 37                                    | FSD        | PROFINET, EtherNet/IP | 6SL3210-1KE24-4UF1                    | 6SL3210-1KE24-4AF1                                       |
| 30                        | 30   | 58                                    | 43                                    | FSD        | PROFINET, EtherNet/IP | 6SL3210-1KE26-0UF1                    | 6SL3210-1KE26-0AF1                                       |
| 37                        | 40   | 68                                    | 58                                    | FSD        | PROFINET, EtherNet/IP | 6SL3210-1KE27-0UF1                    | 6SL3210-1KE27-0AF1                                       |
| 45                        | 50   | 82.5                                  | 68                                    | FSD        | PROFINET, EtherNet/IP | 6SL3210-1KE28-4UF1                    | 6SL3210-1KE28-4AF1                                       |
| 55                        | 60   | 103                                   | 83                                    | FSE        | PROFINET, EtherNet/IP | 6SL3210-1KE31-1UF1                    | 6SL3210-1KE31-1AF1                                       |
| 75                        | 75   | 136                                   | 103                                   | FSF        | PROFINET, EtherNet/IP | 6SL3210-1KE31-4UF1                    | 6SL3210-1KE31-4AF1                                       |
| 90                        | 100  | 164                                   | 136                                   | FSF        | PROFINET, EtherNet/IP | 6SL3210-1KE31-7UF1                    | 6SL3210-1KE31-7AF1                                       |
| 110                       | 125  | 201                                   | 164                                   | FSF        | PROFINET, EtherNet/IP | 6SL3210-1KE32-1UF1                    | 6SL3210-1KE32-1AF1                                       |
| 132                       | 150  | 237                                   | 201                                   | FSF        | PROFINET, EtherNet/IP | 6SL3210-1KE32-4UF1                    | 6SL3210-1KE32-4AF1                                       |

<sup>1)</sup> The rated power of the device based on the rated output current  $I_L$  and a rated input voltage of 400 V 3 AC. The rated power is specified on the device rating plate.

<sup>2)</sup> The base-load current  $I_L$  is based on the duty cycle for low overload (LO). The current value is specified on the device rating plate.

<sup>3)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO). The current value is not specified on the device rating plate.

**SINAMICS G120C compact inverters**

0.55 kW to 132 kW (0.75 hp to 150 hp)

**SINAMICS G120C compact inverters****Selection and ordering data** (continued)**Optional firmware memory cards for SINAMICS G120C**

| Description                                                                            | Article No.                   |
|----------------------------------------------------------------------------------------|-------------------------------|
| <b>SINAMICS SD card</b><br><b>512 MB + firmware V4.7 SP10</b><br>(Multicard V4.7 SP10) | <b>NEW 6SL3054-7TF00-2BA0</b> |

For an overview and more information on all available firmware versions, see

<https://support.industry.siemens.com/cs/document/67364620>

Notes:

SINAMICS G120C compact inverters with frame size FSAA can be operated as of firmware V4.7 SP3.

SINAMICS G120C compact inverters with frame sizes FSD to FSF can be operated as of firmware V4.7 SP6.

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS G120C compact inverters

### Technical specifications

Unless explicitly specified otherwise, the following technical specifications are valid for all SINAMICS G120C compact inverters.

| General technical specifications                                                           |                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mechanical specifications                                                                  |                                                                                                                                                                                                                                                                                                                                           |
| <b>Vibratory load</b>                                                                      |                                                                                                                                                                                                                                                                                                                                           |
| • Transport acc. to EN 60721-3-2 <sup>1)</sup>                                             | Class 1M2                                                                                                                                                                                                                                                                                                                                 |
| • Operation acc. to EN 60721-3-3                                                           | Class 3M1                                                                                                                                                                                                                                                                                                                                 |
| <b>Shock load</b>                                                                          |                                                                                                                                                                                                                                                                                                                                           |
| • Transport acc. to EN 60721-3-2 <sup>1)</sup>                                             | Class 1M2                                                                                                                                                                                                                                                                                                                                 |
| • Operation acc. to EN 60721-3-3                                                           | Class 3M2                                                                                                                                                                                                                                                                                                                                 |
| <b>Degree of protection</b>                                                                | IP20/ UL open type                                                                                                                                                                                                                                                                                                                        |
| <b>Permissible mounting position</b>                                                       | Vertical wall mounting                                                                                                                                                                                                                                                                                                                    |
| Ambient conditions                                                                         |                                                                                                                                                                                                                                                                                                                                           |
| <b>Protection class</b><br>According to EN 61800-5-1                                       | Class III (PELV1)                                                                                                                                                                                                                                                                                                                         |
| <b>Touch protection</b><br>According to EN 61800-5-1                                       | Class I (with protective conductor system)                                                                                                                                                                                                                                                                                                |
| <b>Humidity, max.</b>                                                                      | 95 % at 40 °C (104 °F), condensation and icing not permissible                                                                                                                                                                                                                                                                            |
| <b>Ambient temperature</b>                                                                 |                                                                                                                                                                                                                                                                                                                                           |
| • Storage <sup>1)</sup> acc. to EN 60068-2-1                                               | -40 ... +70 °C (-40 ... +158 °F)                                                                                                                                                                                                                                                                                                          |
| • Transport <sup>1)</sup> acc. to EN 60068-2-1                                             | -40 ... +70 °C (-40 ... +158 °F)                                                                                                                                                                                                                                                                                                          |
| • Operation acc. to EN 60068-2-2                                                           |                                                                                                                                                                                                                                                                                                                                           |
| - Frame sizes FSAA to FSC                                                                  | -10 ... +40 °C (14 ... 104 °F) without derating                                                                                                                                                                                                                                                                                           |
| - Frame sizes FSD to FSF                                                                   | -20 ... +40 °C (-4 ... +104 °F) without derating                                                                                                                                                                                                                                                                                          |
| - All frame sizes                                                                          | >40 ... 50 °C (104 ... 122 °F) <a href="#">see derating characteristics</a>                                                                                                                                                                                                                                                               |
| - All frame sizes with operator panel                                                      | 0 ... 50 °C (32 ... 122 °F) <a href="#">see also derating characteristics</a>                                                                                                                                                                                                                                                             |
| <b>Environmental class in operation</b>                                                    |                                                                                                                                                                                                                                                                                                                                           |
| • Harmful chemical substances                                                              | Class 3C2 to EN 60721-3-3                                                                                                                                                                                                                                                                                                                 |
| • Organic/biological pollutants                                                            | Class 3B1 to EN 60721-3-3                                                                                                                                                                                                                                                                                                                 |
| • Degree of pollution                                                                      | 2 acc. to EN 61800                                                                                                                                                                                                                                                                                                                        |
| Standards                                                                                  |                                                                                                                                                                                                                                                                                                                                           |
| <b>Compliance with standards <sup>2)</sup></b>                                             | CE, UL, cUL, RCM, SEMI F47, RoHS, EAC                                                                                                                                                                                                                                                                                                     |
| <b>Fail-safe certification</b>                                                             | Function: Safe Torque Off (STO)                                                                                                                                                                                                                                                                                                           |
| • According to IEC 61508                                                                   | SIL 2                                                                                                                                                                                                                                                                                                                                     |
| • According to EN ISO 13849-1                                                              | PL d and Category 3                                                                                                                                                                                                                                                                                                                       |
| <b>CE marking, according to</b>                                                            | EMC Directive 2014/30/EU<br>Low Voltage Directive 2014/35/EU                                                                                                                                                                                                                                                                              |
| <b>EMC Directive <sup>2)</sup></b><br>According to EN 61800-3                              |                                                                                                                                                                                                                                                                                                                                           |
| <u>Interference immunity</u>                                                               | The SINAMICS G120C compact inverters are tested according to the interference immunity requirements for environments according to Category C3.                                                                                                                                                                                            |
| <u>Interference emissions</u>                                                              |                                                                                                                                                                                                                                                                                                                                           |
| • Frame sizes FSAA to FSF without integrated line filter                                   | <sup>3)</sup>                                                                                                                                                                                                                                                                                                                             |
| • Frame sizes FSAA to FSC with integrated line filter class A                              | Observance of the limit values according to Category C3<br>Observance of the limit values for conducted interferences and field-conducted interference emissions according to Category C2 <sup>4)5)</sup>                                                                                                                                 |
| • Frame sizes FSAA to FSC without integrated line filter with optional line filter class B | Observance of the limit values for conducted interferences according to Category C1 and field-conducted interference emissions according to Category C2 <sup>4)5)</sup>                                                                                                                                                                   |
| • Frame sizes FSD to FSF with integrated line filter class A                               | Observance of the limit values according to Category C3 and C2 <sup>4)</sup>                                                                                                                                                                                                                                                              |
|                                                                                            | <b>Note:</b><br>The EMC product standard EN 61800-3 does not apply directly to a frequency inverter but to a PDS (Power Drive System), which comprises the complete circuitry, motor and cables in addition to the inverter. The frequency inverters on their own do not generally require identification according to the EMC Directive. |

<sup>1)</sup> In product packaging.

<sup>2)</sup> More information is available in the operating instructions on the Internet at: [www.siemens.com/sinamics-g120c/documentation](http://www.siemens.com/sinamics-g120c/documentation)

<sup>3)</sup> Non-filtered devices are designed for operation in IT systems or in conjunction with an RCD. The customer must provide suitable RI suppression equipment to ensure that these devices comply with the limits defined for Category C3 or C2.

<sup>4)</sup> Max. permissible cable lengths [see Technical specifications for power electronics](#).

<sup>5)</sup> SINAMICS G120C compact inverters, frame size FSB, with PROFINET interface (Article No.: 6SL3210-1KE21-.AF1) additionally require a line reactor.

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### SINAMICS G120C compact inverters

#### Technical specifications (continued)

| SINAMICS G120C compact inverter                                                                               | USS, Modbus RTU version                                                                                                                                                                                                                                                                                           | PROFIBUS DP version                                                                          | PROFINET, EtherNet/IP version                                                                                                                                              |
|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                               | 6SL3210-1KE...-B1<br>6SL3210-1KE...-B2                                                                                                                                                                                                                                                                            | 6SL3210-1KE...-P1<br>6SL3210-1KE...-P2                                                       | 6SL3210-1KE...-F1<br>6SL3210-1KE...-F2                                                                                                                                     |
| Integrated bus interface                                                                                      |                                                                                                                                                                                                                                                                                                                   |                                                                                              |                                                                                                                                                                            |
| Fieldbus protocols                                                                                            | <ul style="list-style-type: none"><li>USS</li><li>Modbus RTU (switchable using a parameter)</li></ul>                                                                                                                                                                                                             | PROFIBUS DP                                                                                  | <ul style="list-style-type: none"><li>PROFINET</li><li>EtherNet/IP<ul style="list-style-type: none"><li>- ODVA AC/DC drive</li><li>- SINAMICS profiles</li></ul></li></ul> |
| Profiles                                                                                                      | –                                                                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"><li>PROFIdrive Profile V4.1</li><li>PROFIsafe</li></ul>    | <ul style="list-style-type: none"><li>PROFIdrive Profile V4.1</li><li>PROFIsafe</li><li>PROFInergy</li></ul>                                                               |
| Hardware                                                                                                      | Plug-in terminal, insulated, USS: max. 187.5 kBaud<br>Modbus RTU: 19.2 kBaud,<br>Bus terminating resistor that can be switched in                                                                                                                                                                                 | 9-pin SUB-D socket, insulated, max. 12 Mbit/s<br>Slave address can be set using DIP switches | 2 × RJ45, max. 100 Mbit/s (full duplex), device name can be stored on the device                                                                                           |
| I/O interfaces                                                                                                |                                                                                                                                                                                                                                                                                                                   |                                                                                              |                                                                                                                                                                            |
| Signal cable cross-section                                                                                    | 0.15 ... 1.5 mm <sup>2</sup> (28 ... 16 AWG)                                                                                                                                                                                                                                                                      |                                                                                              |                                                                                                                                                                            |
| Digital inputs – Standard                                                                                     | 6 isolated inputs<br>Optically isolated;<br>Free reference potential (own potential group)<br>NPN/PNP logic can be selected using the wiring                                                                                                                                                                      |                                                                                              |                                                                                                                                                                            |
| <ul style="list-style-type: none"><li>Switching level: 0 → 1</li><li>Switching level: 1 → 0</li></ul>         | 11 V<br>5 V                                                                                                                                                                                                                                                                                                       |                                                                                              |                                                                                                                                                                            |
| Digital inputs, fail-safe                                                                                     | 1<br>When using the standard digital inputs (DI4+DI5)<br>Safety function: Safe Torque Off (STO)                                                                                                                                                                                                                   |                                                                                              |                                                                                                                                                                            |
| Digital outputs                                                                                               | 1 relay changeover contact<br>30 V DC, 0.5 A (ohmic load)<br>1 transistor<br>30 V DC, 0.5 A (ohmic load)                                                                                                                                                                                                          |                                                                                              |                                                                                                                                                                            |
| Analog inputs                                                                                                 | 1 analog input<br>Differential input<br>Switchable between voltage (-10 ... +10 V) and current (0/4 ... 20 mA) using a DIP switch<br>10-bit resolution<br>Can be used as additional digital input<br>Analog inputs are protected in a voltage range of ± 30 V and have a common-mode voltage in the ± 15 V range. |                                                                                              |                                                                                                                                                                            |
| <ul style="list-style-type: none"><li>Switching threshold: 0 → 1</li><li>Switching threshold: 1 → 0</li></ul> | 4 V<br>1.6 V                                                                                                                                                                                                                                                                                                      |                                                                                              |                                                                                                                                                                            |
| Analog outputs                                                                                                | 1 analog output<br>Non-isolated output<br>Switchable between voltage (0 ... 10 V) and current (0/4 ... 20 mA) using a parameter<br>Voltage mode: 10 V, min. burden 10 kΩ<br>Current mode: 20 mA, max. burden 500 Ω<br>The analog outputs have short-circuit protection                                            |                                                                                              |                                                                                                                                                                            |
| PTC/KTY interface                                                                                             | 1 motor temperature sensor input<br>Connectable sensors PTC, Pt1000, KTY and bimetal, accuracy ±5 °C                                                                                                                                                                                                              |                                                                                              |                                                                                                                                                                            |
| Voltage supply for the integrated Control Unit                                                                | 24 V DC via the Power Module or by connecting to an external 20.4 ... 28.8 V DC power supply<br>Typical input current: 500 mA at 24 V DC                                                                                                                                                                          |                                                                                              |                                                                                                                                                                            |
| Tool interfaces                                                                                               |                                                                                                                                                                                                                                                                                                                   |                                                                                              |                                                                                                                                                                            |
| Memory card                                                                                                   | Optional<br>SINAMICS SD card                                                                                                                                                                                                                                                                                      |                                                                                              |                                                                                                                                                                            |
| Operator panels                                                                                               | Optional<br>BOP-2 Basic Operator Panel or Intelligent Operator Panel IOP-2 or SINAMICS G120 Smart Access                                                                                                                                                                                                          |                                                                                              |                                                                                                                                                                            |
| PC interface                                                                                                  | USB                                                                                                                                                                                                                                                                                                               |                                                                                              |                                                                                                                                                                            |

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS G120C compact inverters

### Technical specifications (continued)

|                                                                        |                                                 |
|------------------------------------------------------------------------|-------------------------------------------------|
| <b>SINAMICS G120C compact inverter</b>                                 |                                                 |
| <b>Open-loop/closed-loop control techniques</b>                        |                                                 |
| V/f linear/quadratic/parameterizable                                   | ✓                                               |
| V/f with flux current control (FCC)                                    | ✓                                               |
| V/f ECO; linear/quadratic                                              | ✓                                               |
| Vector control, sensorless                                             | ✓                                               |
| Vector control, with sensor                                            | –                                               |
| Torque control, sensorless                                             | –                                               |
| Torque control, with sensor                                            | –                                               |
| <b>Software functions</b>                                              |                                                 |
| Setpoint input                                                         | ✓                                               |
| Fixed frequencies                                                      | 16, parameterizable                             |
| JOG                                                                    | ✓                                               |
| Digital motorized potentiometer (MOP)                                  | ✓                                               |
| Ramp smoothing                                                         | ✓                                               |
| Extended ramp-function generator (with ramp smoothing Off3)            | ✓                                               |
| Positioning down ramp                                                  | –                                               |
| Slip compensation                                                      | ✓                                               |
| Signal interconnection with BICO technology                            | ✓                                               |
| Free function blocks (FFB)<br>for logical and arithmetic operations    | ✓                                               |
| Switchable drive data sets (DDS)                                       | ✓ (2)                                           |
| Switchable command data sets (CDS)                                     | ✓ (2)                                           |
| Flying restart                                                         | ✓                                               |
| Automatic restart<br>after line supply failure or operating fault (AR) | ✓                                               |
| Technology controller (internal PID)                                   | ✓                                               |
| Energy consumption counter                                             | ✓                                               |
| Energy saving computer                                                 | ✓                                               |
| Thermal motor protection                                               | ✓ ( $R_t$ sensor: PTC, Pt1000, KTY and bimetal) |
| Thermal inverter protection                                            | ✓                                               |
| Motor identification                                                   | ✓                                               |
| Motor holding brake                                                    | ✓                                               |
| Auto-ramping ( $V_{dc\_max}$ controller)                               | ✓                                               |
| Kinetic buffering ( $V_{dc\_min}$ controller)                          | ✓                                               |
| <b>Braking functions</b>                                               |                                                 |
| • DC braking                                                           | ✓                                               |
| • Compound braking                                                     | ✓                                               |
| • Dynamic braking with integrated braking chopper                      | ✓                                               |

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### SINAMICS G120C compact inverters

#### Technical specifications (continued)

##### General technical specifications of the power electronics

|                                                                                            |                                                                                                                                                                                                                                                                                                    |
|--------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>System operating voltage</b>                                                            | 380 ... 480 V 3 AC +10 % -20 %                                                                                                                                                                                                                                                                     |
| <b>Line supply requirements</b><br><b>Short-circuit power ratio <math>R_{SC}</math></b>    | No restriction                                                                                                                                                                                                                                                                                     |
| <b>Input frequency</b>                                                                     | 47 ... 63 Hz                                                                                                                                                                                                                                                                                       |
| <b>Output frequency</b>                                                                    |                                                                                                                                                                                                                                                                                                    |
| • Control mode V/f                                                                         | 0 ... 550 Hz                                                                                                                                                                                                                                                                                       |
| • Control mode Vector                                                                      | 0 ... 240 Hz                                                                                                                                                                                                                                                                                       |
| <b>Pulse frequency</b>                                                                     | 4 kHz, 2 kHz for inverters with a rated power $\geq 75$ kW<br>Higher pulse frequencies up to 16 kHz <a href="#">see derating data</a>                                                                                                                                                              |
| <b>Power factor <math>\lambda</math></b>                                                   |                                                                                                                                                                                                                                                                                                    |
| • Frame sizes FSAA to FSC                                                                  | 0.7 ... 0.85                                                                                                                                                                                                                                                                                       |
| • Frame sizes FSD to FSF                                                                   | >0.9                                                                                                                                                                                                                                                                                               |
| <b>Offset factor <math>\cos \varphi</math></b>                                             | $\geq 0.95$                                                                                                                                                                                                                                                                                        |
| <b>Output voltage, max.</b><br>as % of input voltage                                       | 95 %                                                                                                                                                                                                                                                                                               |
| <b>Overload capability</b>                                                                 |                                                                                                                                                                                                                                                                                                    |
| • Low overload LO<br>Note:<br>No reduction in base-load current $I_L$ for use of overload  | 1.5 $\times$ base-load current $I_L$ (i. e. 150 % overload) for 3 s plus<br>1.1 $\times$ base-load current $I_L$ (i. e. 110 % overload) for 57 s within a cycle time of 300 s                                                                                                                      |
| • High overload HO<br>Note:<br>No reduction in base-load current $I_H$ for use of overload | 2 $\times$ base-load current $I_H$ (i. e. 200 % overload) for 3 s plus<br>1.5 $\times$ base-load current $I_H$ (i. e. 150 % overload) for 57 s within a cycle time of 300 s                                                                                                                        |
| <b>Cooling</b>                                                                             | Air cooling using an integrated fan                                                                                                                                                                                                                                                                |
| <b>Installation altitude</b>                                                               | Up to 1000 m (3281 ft) above sea level without derating,<br>> 1000 m (3281 ft) <a href="#">see derating characteristics</a>                                                                                                                                                                        |
| <b>Short Circuit Current Rating (SCCR) <sup>1)</sup>, max. acc. to UL</b>                  | 100 kA <a href="#">See Recommended line-side overcurrent protection devices</a> – the value depends on the fuses and circuit breakers used                                                                                                                                                         |
| <b>Protection functions</b>                                                                | <ul style="list-style-type: none"> <li>• Undervoltage</li> <li>• Overvoltage</li> <li>• Overload</li> <li>• Ground fault</li> <li>• Short-circuit</li> <li>• Stall protection</li> <li>• Motor blocking protection</li> <li>• Motor overtemperature</li> <li>• Inverter overtemperature</li> </ul> |

<sup>1)</sup> Applies to industrial control panel installations to NEC Article 409 or UL 508A.

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS G120C compact inverters

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                          |                                        | SINAMICS G120C power electronics       |                                        |                                        |                                        |
|----------------------------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
|                                                          |                                        | 6SL3210-1KE11-8..2                     | 6SL3210-1KE12-3..2                     | 6SL3210-1KE13-2..2                     | 6SL3210-1KE14-3..2                     |
| <b>Output current</b><br>at 400 V 3 AC                   |                                        |                                        |                                        |                                        |                                        |
| • Rated current $I_{rated}^{1)}$                         | A                                      | 1.8                                    | 2.3                                    | 3.2                                    | 4.3                                    |
| • Base-load current $I_L^{2)}$                           | A                                      | 1.7                                    | 2.2                                    | 3.1                                    | 4.1                                    |
| • Base-load current $I_H^{3)}$                           | A                                      | 1.3                                    | 1.7                                    | 2.2                                    | 3.1                                    |
| • Maximum current $I_{max}$                              | A                                      | 2.6                                    | 3.4                                    | 4.4                                    | 6.2                                    |
| <b>Rated power</b>                                       |                                        |                                        |                                        |                                        |                                        |
| • Based on $I_L$                                         | kW (hp)                                | 0.55 (0.75)                            | 0.75 (1)                               | 1.1 (1.5)                              | 1.5 (2)                                |
| • Based on $I_H$                                         | kW                                     | 0.37                                   | 0.55                                   | 0.75                                   | 1.1                                    |
| <b>Rated pulse frequency</b>                             | kHz                                    | 4                                      | 4                                      | 4                                      | 4                                      |
| <b>Efficiency <math>\eta</math></b>                      | %                                      | 97                                     | 97                                     | 97                                     | 97                                     |
| <b>Power loss <math>^{4)}</math></b><br>at rated current | kW                                     | 0.034                                  | 0.039                                  | 0.049                                  | 0.062                                  |
| <b>Cooling air requirement</b>                           | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.005 (0.18)                           | 0.005 (0.18)                           | 0.005 (0.18)                           | 0.005 (0.18)                           |
| <b>Sound pressure level <math>L_{pA}</math> (1 m)</b>    | dB                                     | <49                                    | <49                                    | <49                                    | <49                                    |
| <b>Rated input current <math>^{5)}</math></b>            |                                        |                                        |                                        |                                        |                                        |
| • Based on $I_L$                                         | A                                      | 2.3                                    | 2.9                                    | 4.1                                    | 5.5                                    |
| • Based on $I_H$                                         | A                                      | 1.9                                    | 2.5                                    | 3.2                                    | 4.5                                    |
| <b>Length of cable to braking resistor, max.</b>         | m (ft)                                 | 15 (49)                                | 15 (49)                                | 15 (49)                                | 15 (49)                                |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3     |                                        | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                |
| • Conductor cross-section                                | mm <sup>2</sup>                        | 1 ... 2.5<br>(18 ... 14 AWG)           | 1 ... 2.5<br>(18 ... 14 AWG)           | 1 ... 2.5<br>(18 ... 14 AWG)           | 1 ... 2.5<br>(18 ... 14 AWG)           |
| <b>Motor connection</b><br>U2, V2, W2                    |                                        | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                |
| • Conductor cross-section                                | mm <sup>2</sup>                        | 1 ... 2.5<br>(18 ... 14 AWG)           | 1 ... 2.5<br>(18 ... 14 AWG)           | 1 ... 2.5<br>(18 ... 14 AWG)           | 1 ... 2.5<br>(18 ... 14 AWG)           |
| <b>Connection for braking resistor</b><br>R1, R2         |                                        | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                |
| • Conductor cross-section                                | mm <sup>2</sup>                        | 1 ... 2.5<br>(18 ... 14 AWG)           | 1 ... 2.5<br>(18 ... 14 AWG)           | 1 ... 2.5<br>(18 ... 14 AWG)           | 1 ... 2.5<br>(18 ... 14 AWG)           |
| <b>PE connection</b>                                     |                                        | On housing with<br>M4 screw            | On housing with<br>M4 screw            | On housing with<br>M4 screw            | On housing with<br>M4 screw            |
| <b>Motor cable length, max. <math>^{6)}</math></b>       |                                        |                                        |                                        |                                        |                                        |
| • Without filter, shielded/unshielded                    | m (ft)                                 | 150/150 (492/492)                      | 150/150 (492/492)                      | 150/150 (492/492)                      | 150/150 (492/492)                      |
| • With integrated filter class A, shielded/unshielded    | m (ft)                                 | 50/100 (164/328)                       | 50/100 (164/328)                       | 50/100 (164/328)                       | 50/100 (164/328)                       |
| <b>Dimensions</b>                                        |                                        |                                        |                                        |                                        |                                        |
| • Width                                                  | mm (in)                                | 73 (2.87)                              | 73 (2.87)                              | 73 (2.87)                              | 73 (2.87)                              |
| • Height                                                 | mm (in)                                | 173 (6.81)                             | 173 (6.81)                             | 173 (6.81)                             | 173 (6.81)                             |
| • Depth                                                  |                                        |                                        |                                        |                                        |                                        |
| - Without operator panel                                 | mm (in)                                | 155 (6.10)<br>(PN version: 178 (7.01)) | 155 (6.10)<br>(PN version: 178 (7.01)) | 155 (6.10)<br>(PN version: 178 (7.01)) | 155 (6.10)<br>(PN version: 178 (7.01)) |
| - With BOP-2/IOP-2                                       | mm (in)                                | 166 (6.54)<br>(PN version: 189 (7.44)) | 166 (6.54)<br>(PN version: 189 (7.44)) | 166 (6.54)<br>(PN version: 189 (7.44)) | 166 (6.54)<br>(PN version: 189 (7.44)) |
| <b>Frame size</b>                                        |                                        | FSA                                    | FSA                                    | FSA                                    | FSA                                    |
| <b>Weight, approx.</b>                                   |                                        |                                        |                                        |                                        |                                        |
| • Without filter                                         | kg (lb)                                | 1.1 (2.43)<br>(PN version: 1.2 (2.65)) | 1.1 (2.43)<br>(PN version: 1.2 (2.65)) | 1.1 (2.43)<br>(PN version: 1.2 (2.65)) | 1.1 (2.43)<br>(PN version: 1.2 (2.65)) |
| • With integrated filter class A                         | kg (lb)                                | 1.3 (2.87)<br>(PN version: 1.4 (3.09)) | 1.3 (2.87)<br>(PN version: 1.4 (3.09)) | 1.3 (2.87)<br>(PN version: 1.4 (3.09)) | 1.3 (2.87)<br>(PN version: 1.4 (3.09)) |

<sup>1)</sup> The rated output current  $I_{rated}$  can be used up to 100 %; however, without overload.

<sup>2)</sup> The base-load current  $I_L$  is based on the duty cycle for low overload (LO).

<sup>3)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>4)</sup> Typical values. More information can be found on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

<sup>5)</sup> The rated input currents are valid for an input voltage of 400 V 3 AC and a line impedance corresponding to  $u_K = 1\%$  (without line reactor). The rated input current based on  $I_L$  is stamped on the inverter rating plate. In the particular application, the input current depends on the motor load and line impedance. The input current is reduced when using a line reactor.

<sup>6)</sup> The maximum motor cable lengths are valid for an input voltage of 400 V 3 AC and operation with a 4 kHz pulse frequency. When an inverter with an integrated line filter class A is used to comply with the limits of EN 61800-3 Category C2 for line-conducted interference emission, the maximum permissible motor cable length is 25 m (82 ft) (shielded) as standard – and 50 m (164 ft) with low-capacitance CY cable (shielded).

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS G120C compact inverters

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                              |                 | SINAMICS G120C power electronics                |                                        |                                        |                                        |
|--------------------------------------------------------------|-----------------|-------------------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
|                                                              |                 | 6SL3210-1KE15-8..2                              | 6SL3210-1KE17-5..1                     | 6SL3210-1KE18-8..1                     | 6SL3210-1KE21-3..1                     |
| <b>Output current</b><br>at 400 V 3 AC                       |                 |                                                 |                                        |                                        |                                        |
| • Rated current $I_{\text{rated}}$ <sup>1)</sup>             | A               | 5.8                                             | 7.5                                    | 9                                      | 13                                     |
| • Base-load current $I_{\text{L}}$ <sup>2)</sup>             | A               | 5.6                                             | 7.3                                    | 8.8                                    | 12.5                                   |
| • Base-load current $I_{\text{H}}$ <sup>3)</sup>             | A               | 4.1                                             | 5.6                                    | 7.3                                    | 8.8                                    |
| • Maximum current $I_{\text{max}}$                           | A               | 8.2                                             | 11.2                                   | 14.6                                   | 17.6                                   |
| <b>Rated power</b>                                           |                 |                                                 |                                        |                                        |                                        |
| • Based on $I_{\text{L}}$                                    | kW (hp)         | 2.2 (3)                                         | 3 (4)                                  | 4 (5)                                  | 5.5 (7.5)                              |
| • Based on $I_{\text{H}}$                                    | kW              | 1.5                                             | 2.2                                    | 3                                      | 4                                      |
| <b>Rated pulse frequency</b>                                 |                 | kHz                                             | 4                                      | 4                                      | 4                                      |
| <b>Efficiency <math>\eta</math></b>                          |                 | %                                               | 97                                     | 97                                     | 97                                     |
| <b>Power loss</b> <sup>4)</sup><br>at rated current          |                 | kW                                              | 0.073                                  | 0.099                                  | 0.122                                  |
| <b>Cooling air requirement</b>                               |                 | m <sup>3</sup> /s (ft <sup>3</sup> /s)          | 0.005 (0.18)                           | 0.005 (0.18)                           | 0.005 (0.18)                           |
| <b>Sound pressure level <math>L_{\text{pA}}</math> (1 m)</b> |                 | dB                                              | <49                                    | <52                                    | <52                                    |
| <b>Rated input current</b> <sup>5)</sup>                     |                 |                                                 |                                        |                                        |                                        |
| • Based on $I_{\text{L}}$                                    | A               | 7.4                                             | 9.5                                    | 11.4                                   | 16.5                                   |
| • Based on $I_{\text{H}}$                                    | A               | 6                                               | 8.2                                    | 10.6                                   | 12.8                                   |
| <b>Length of cable to braking resistor, max.</b>             |                 | m (ft)                                          | 15 (49)                                | 15 (49)                                | 15 (49)                                |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3         |                 |                                                 | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                |
| • Conductor cross-section                                    | mm <sup>2</sup> | 1 ... 2.5<br>(18 ... 14 AWG)                    | 1 ... 2.5<br>(18 ... 14 AWG)           | 1 ... 2.5<br>(18 ... 14 AWG)           | 4 ... 6<br>(12 ... 10 AWG)             |
| <b>Motor connection</b><br>U2, V2, W2                        |                 |                                                 | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                |
| • Conductor cross-section                                    | mm <sup>2</sup> | 1 ... 2.5<br>(18 ... 14 AWG)                    | 1 ... 2.5<br>(18 ... 14 AWG)           | 1 ... 2.5<br>(18 ... 14 AWG)           | 4 ... 6<br>(12 ... 10 AWG)             |
| <b>Connection for braking resistor</b><br>R1, R2             |                 |                                                 | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                |
| • Conductor cross-section                                    | mm <sup>2</sup> | 1 ... 2.5<br>(18 ... 14 AWG)                    | 1 ... 2.5<br>(18 ... 14 AWG)           | 1 ... 2.5<br>(18 ... 14 AWG)           | 4 ... 6<br>(12 ... 10 AWG)             |
| <b>PE connection</b>                                         |                 |                                                 | On housing with<br>M4 screw            | On housing with<br>M4 screw            | On housing with<br>M4 screw            |
| <b>Motor cable length, max.</b> <sup>6)</sup>                |                 |                                                 |                                        |                                        |                                        |
| • Without filter, shielded/unshielded                        | m (ft)          | 125 <sup>7)</sup> /150 (410 <sup>7)</sup> /492) | 150/150 (492/492)                      | 150/150 (492/492)                      | 150/150 (492/492)                      |
| • With integrated filter class A, shielded/unshielded        | m (ft)          | 50/100 (164/328)                                | 50/100 (164/328)                       | 50/100 (164/328)                       | 50/100 (164/328)                       |
| <b>Dimensions</b>                                            |                 |                                                 |                                        |                                        |                                        |
| • Width                                                      | mm (in)         | 73 (2.87)                                       | 73 (2.87)                              | 73 (2.87)                              | 100 (3.94)                             |
| • Height                                                     | mm (in)         | 173 (6.81)                                      | 196 (7.72)                             | 196 (7.72)                             | 196 (7.72)                             |
| • Depth                                                      |                 |                                                 |                                        |                                        |                                        |
| - Without operator panel                                     | mm (in)         | 155 (6.10)<br>(PN version: 178 (7.01))          | 203 (7.99)<br>(PN version: 226 (8.90)) | 203 (7.99)<br>(PN version: 226 (8.90)) | 203 (7.99)<br>(PN version: 226 (8.90)) |
| - With BOP-2/IOP-2                                           | mm (in)         | 166 (6.54)<br>(PN version: 189 (7.44))          | 214 (8.43)<br>(PN version: 237 (9.33)) | 214 (8.43)<br>(PN version: 237 (9.33)) | 214 (8.43)<br>(PN version: 237 (9.33)) |
| <b>Frame size</b>                                            |                 | FSA                                             | FSA                                    | FSA                                    | FSB                                    |
| <b>Weight, approx.</b>                                       |                 |                                                 |                                        |                                        |                                        |
| • Without filter                                             | kg (lb)         | 1.1 (2.43)<br>(PN version: 1.2 (2.65))          | 1.7 (3.75)                             | 1.7 (3.75)                             | 2.3 (5.07)                             |
| • With integrated filter class A                             | kg (lb)         | 1.3 (2.87)<br>(PN version: 1.4 (3.09))          | 1.9 (4.19)                             | 1.9 (4.19)                             | 2.5 (5.51)                             |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  can be used up to 100 %; however, without overload.

<sup>2)</sup> The base-load current  $I_{\text{L}}$  is based on the duty cycle for low overload (LO).

<sup>3)</sup> The base-load current  $I_{\text{H}}$  is based on the duty cycle for high overload (HO).

<sup>4)</sup> Typical values. More information can be found on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

<sup>5)</sup> The rated input currents are valid for an input voltage of 400 V 3 AC and a line impedance corresponding to  $u_K = 1\%$  (without line reactor). The rated input current based on  $I_{\text{L}}$  is stamped on the inverter rating plate. In the particular application, the input current depends on the motor load and line impedance. The input current is reduced when using a line reactor.

<sup>6)</sup> The maximum motor cable lengths are valid for an input voltage of 400 V 3 AC and operation with a 4 kHz pulse frequency. When an inverter with an integrated line filter class A is used to comply with the limits of EN 61800-3 Category C2 for line-conducted interference emissions, the maximum permissible motor cable length is 25 m (82 ft) (shielded) as standard – for frame sizes FSA to FSB with low-capacitance CY cable (shielded) it is 50 m (164 ft).

<sup>7)</sup> With low-capacitance CY cable 150 m (492 ft) (shielded).

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS G120C compact inverters

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                          |                                        | SINAMICS G120C power electronics       |                                        |                                        |                                        |
|----------------------------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
|                                                          |                                        | 6SL3210-1KE21-7..1                     | 6SL3210-1KE22-6..1                     | 6SL3210-1KE23-2..1                     | 6SL3210-1KE23-8..1                     |
| <b>Output current</b><br>at 400 V 3 AC                   |                                        |                                        |                                        |                                        |                                        |
| • Rated current $I_{rated}^{1)}$                         | A                                      | 17                                     | 26                                     | 32                                     | 38                                     |
| • Base-load current $I_L^{2)}$                           | A                                      | 16.5                                   | 25                                     | 31                                     | 37                                     |
| • Base-load current $I_H^{3)}$                           | A                                      | 12.5                                   | 16.5                                   | 25                                     | 31                                     |
| • Maximum current $I_{max}$                              | A                                      | 25                                     | 33                                     | 50                                     | 62                                     |
| <b>Rated power</b>                                       |                                        |                                        |                                        |                                        |                                        |
| • Based on $I_L$                                         | kW (hp)                                | 7.5 (10)                               | 11 (15)                                | 15 (20)                                | 18.5 (25)                              |
| • Based on $I_H$                                         | kW                                     | 5.5                                    | 7.5                                    | 11                                     | 15                                     |
| <b>Rated pulse frequency</b>                             | kHz                                    | 4                                      | 4                                      | 4                                      | 4                                      |
| <b>Efficiency <math>\eta</math></b>                      | %                                      | 97                                     | 97                                     | 97                                     | 97                                     |
| <b>Power loss <math>^{4)}</math></b><br>at rated current | kW                                     | 0.236                                  | 0.301                                  | 0.373                                  | 0.45                                   |
| <b>Cooling air requirement</b>                           | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.009 (0.32)                           | 0.018 (0.64)                           | 0.018 (0.64)                           | 0.018 (0.64)                           |
| <b>Sound pressure level <math>L_{pA}</math> (1 m)</b>    | dB                                     | <63                                    | <66                                    | <66                                    | <66                                    |
| <b>Rated input current <math>^{5)}</math></b>            |                                        |                                        |                                        |                                        |                                        |
| • Based on $I_L$                                         | A                                      | 21.5                                   | 33                                     | 40.6                                   | 48.2                                   |
| • Based on $I_H$                                         | A                                      | 18.2                                   | 24.1                                   | 36.4                                   | 45.2                                   |
| <b>Length of cable to braking resistor, max.</b>         | m (ft)                                 | 15 (49)                                | 15 (49)                                | 15 (49)                                | 15 (49)                                |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3     |                                        | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                |
| • Conductor cross-section                                | mm <sup>2</sup>                        | 4 ... 6<br>(12 ... 10 AWG)             | 6 ... 16<br>(10 ... 5 AWG)             | 10 ... 16<br>(7 ... 5 AWG)             | 10 ... 16<br>(7 ... 5 AWG)             |
| <b>Motor connection</b><br>U2, V2, W2                    |                                        | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                |
| • Conductor cross-section                                | mm <sup>2</sup>                        | 4 ... 6<br>(12 ... 10 AWG)             | 6 ... 16<br>(10 ... 5 AWG)             | 10 ... 16<br>(7 ... 5 AWG)             | 10 ... 16<br>(7 ... 5 AWG)             |
| <b>Connection for braking resistor</b><br>R1, R2         |                                        | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                | Plug-in screw terminals                |
| • Conductor cross-section                                | mm <sup>2</sup>                        | 4 ... 6<br>(12 ... 10 AWG)             | 6 ... 16<br>(10 ... 5 AWG)             | 10 ... 16<br>(7 ... 5 AWG)             | 10 ... 16<br>(7 ... 5 AWG)             |
| <b>PE connection</b>                                     |                                        | On housing with<br>M4 screw            | On housing with<br>M4 screw            | On housing with<br>M4 screw            | On housing with<br>M4 screw            |
| <b>Motor cable length, max. <math>^{6)}</math></b>       |                                        |                                        |                                        |                                        |                                        |
| • Without filter, shielded/unshielded                    | m (ft)                                 | 150/150 (492/492)                      | 150/150 (492/492)                      | 150/150 (492/492)                      | 150/150 (492/492)                      |
| • With integrated filter class A, shielded/unshielded    | m (ft)                                 | 50/100 (164/328)                       | 50/100 (164/328)                       | 50/100 (164/328)                       | 50/100 (164/328)                       |
| <b>Dimensions</b>                                        |                                        |                                        |                                        |                                        |                                        |
| • Width                                                  | mm (in)                                | 100 (3.94)                             | 140 (5.51)                             | 140 (5.51)                             | 140 (5.51)                             |
| • Height                                                 | mm (in)                                | 196 (7.72)                             | 295 (11.61)                            | 295 (11.61)                            | 295 (11.61)                            |
| • Depth                                                  |                                        |                                        |                                        |                                        |                                        |
| - Without operator panel                                 | mm (in)                                | 203 (7.99)<br>(PN version: 226 (8.90)) | 203 (7.99)<br>(PN version: 226 (8.90)) | 203 (7.99)<br>(PN version: 226 (8.90)) | 203 (7.99)<br>(PN version: 226 (8.90)) |
| - With BOP-2/IOP-2                                       | mm (in)                                | 214 (8.43)<br>(PN version: 237 (9.33)) | 214 (8.43)<br>(PN version: 237 (9.33)) | 214 (8.43)<br>(PN version: 237 (9.33)) | 214 (8.43)<br>(PN version: 237 (9.33)) |
| <b>Frame size</b>                                        |                                        | FSB                                    | FSC                                    | FSC                                    | FSC                                    |
| <b>Weight, approx.</b>                                   |                                        |                                        |                                        |                                        |                                        |
| • Without filter                                         | kg (lb)                                | 2.3 (5.07)                             | 4.4 (9.70)                             | 4.4 (9.70)                             | 4.4 (9.70)                             |
| • With integrated filter class A                         | kg (lb)                                | 2.5 (5.51)                             | 4.7 (10.4)                             | 4.7 (10.4)                             | 4.7 (10.4)                             |

<sup>1)</sup> The rated output current  $I_{rated}$  can be used up to 100 %; however, without overload.

<sup>2)</sup> The base-load current  $I_L$  is based on the duty cycle for low overload (LO).

<sup>3)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>4)</sup> Typical values. More information can be found on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

<sup>5)</sup> The rated input currents are valid for an input voltage of 400 V 3 AC and a line impedance corresponding to  $u_K = 1$  % (without line reactor). The rated input current based on  $I_L$  is stamped on the inverter rating plate. In the particular application, the input current depends on the motor load and line impedance. The input current is reduced when using a line reactor.

<sup>6)</sup> The maximum motor cable lengths are valid for an input voltage of 400 V 3 AC and operation with a 4 kHz pulse frequency. When an inverter with an integrated line filter class A is used to comply with the limits of EN 61800-3 Category C2 for line-conducted interference emission, the maximum permissible motor cable length is 25 m (82 ft) (shielded) as standard – with low-capacitance CY cable for frame size FSB 50 m (164 ft) (shielded), for FSC 100 m (328 ft) (shielded).

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS G120C compact inverters

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                          |                                        | SINAMICS G120C power electronics |                              |                              |                              |
|----------------------------------------------------------|----------------------------------------|----------------------------------|------------------------------|------------------------------|------------------------------|
|                                                          |                                        | 6SL3210-1KE24-4.F1               | 6SL3210-1KE26-0.F1           | 6SL3210-1KE27-0.F1           | 6SL3210-1KE28-4.F1           |
| <b>Output current</b><br>at 400 V 3 AC                   |                                        |                                  |                              |                              |                              |
| • Rated current $I_{rated}^{1)}$                         | A                                      | 43                               | 58                           | 68                           | 82.5                         |
| • Base-load current $I_L^{2)}$                           | A                                      | 43                               | 58                           | 68                           | 82.5                         |
| • Base-load current $I_H^{3)}$                           | A                                      | 37                               | 43                           | 58                           | 68                           |
| • Maximum current $I_{max}$                              | A                                      | 74                               | 87                           | 116                          | 136                          |
| <b>Rated power</b>                                       |                                        |                                  |                              |                              |                              |
| • Based on $I_L$                                         | kW (hp)                                | 22 (25)                          | 30 (30)                      | 37 (40)                      | 45 (50)                      |
| • Based on $I_H$                                         | kW                                     | 18.5                             | 22                           | 30                           | 37                           |
| <b>Rated pulse frequency</b>                             | kHz                                    | 4                                | 4                            | 4                            | 4                            |
| <b>Efficiency <math>\eta</math></b>                      | %                                      | 98                               | 98                           | 98                           | 98                           |
| <b>Power loss <math>^{4)}</math></b><br>at rated current | kW                                     | 0.65                             | 0.933                        | 1.032                        | 1.304                        |
| <b>Cooling air requirement</b>                           | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.055 (1.94)                     | 0.055 (1.94)                 | 0.055 (1.94)                 | 0.055 (1.94)                 |
| <b>Sound pressure level <math>L_{pA}</math> (1 m)</b>    | dB                                     | 71.6                             | 71.6                         | 71.6                         | 71.6                         |
| <b>Rated input current <math>^{5)}</math></b>            |                                        |                                  |                              |                              |                              |
| • Based on $I_L$                                         | A                                      | 41                               | 53                           | 64                           | 76                           |
| • Based on $I_H$                                         | A                                      | 39                               | 44                           | 61                           | 69                           |
| <b>Length of cable to braking resistor, max.</b>         | m (ft)                                 | 10 (32.8)                        | 10 (32.8)                    | 10 (32.8)                    | 10 (32.8)                    |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3     |                                        | Screw terminals                  | Screw terminals              | Screw terminals              | Screw terminals              |
| • Conductor cross-section                                | mm <sup>2</sup>                        | 10 ... 35<br>(20 ... 10 AWG)     | 10 ... 35<br>(20 ... 10 AWG) | 10 ... 35<br>(20 ... 10 AWG) | 10 ... 35<br>(20 ... 10 AWG) |
| <b>Motor connection</b><br>U2, V2, W2                    |                                        | Screw terminals                  | Screw terminals              | Screw terminals              | Screw terminals              |
| • Conductor cross-section                                | mm <sup>2</sup>                        | 10 ... 35<br>(20 ... 10 AWG)     | 10 ... 35<br>(20 ... 10 AWG) | 10 ... 35<br>(20 ... 10 AWG) | 10 ... 35<br>(20 ... 10 AWG) |
| <b>Connection for braking resistor</b><br>R1, R2         |                                        | Screw terminals                  | Screw terminals              | Screw terminals              | Screw terminals              |
| • Conductor cross-section                                | mm <sup>2</sup>                        | 10 ... 35<br>(20 ... 10 AWG)     | 10 ... 35<br>(20 ... 10 AWG) | 10 ... 35<br>(20 ... 10 AWG) | 10 ... 35<br>(20 ... 10 AWG) |
| <b>PE connection</b>                                     |                                        | On housing with<br>M4 screw      | On housing with<br>M4 screw  | On housing with<br>M4 screw  | On housing with<br>M4 screw  |
| <b>Motor cable length, max. <math>^{6)}</math></b>       |                                        |                                  |                              |                              |                              |
| • Without filter, shielded/unshielded                    | m (ft)                                 | 200/300 (656/984)                | 200/300 (656/984)            | 200/300 (656/984)            | 200/300 (656/984)            |
| • With integrated filter class A, shielded/unshielded    | m (ft)                                 | 200/300 (656/984)                | 200/300 (656/984)            | 200/300 (656/984)            | 200/300 (656/984)            |
| <b>Dimensions</b>                                        |                                        |                                  |                              |                              |                              |
| • Width                                                  | mm (in)                                | 200 (7.87)                       | 200 (7.87)                   | 200 (7.87)                   | 200 (7.87)                   |
| • Height                                                 | mm (in)                                | 472 (18.58)                      | 472 (18.58)                  | 472 (18.58)                  | 472 (18.58)                  |
| • Depth                                                  |                                        |                                  |                              |                              |                              |
| - Without operator panel                                 | mm (in)                                | 237 (9.33)                       | 237 (9.33)                   | 237 (9.33)                   | 237 (9.33)                   |
| - With BOP-2/IOP-2                                       | mm (in)                                | 248 (9.76)                       | 248 (9.76)                   | 248 (9.76)                   | 248 (9.76)                   |
| <b>Frame size</b>                                        |                                        | FSD                              | FSD                          | FSD                          | FSD                          |
| <b>Weight, approx.</b>                                   |                                        |                                  |                              |                              |                              |
| • Without filter                                         | kg (lb)                                | 17 (37.5)                        | 17 (37.5)                    | 18 (39.7)                    | 18 (39.7)                    |
| • With integrated filter class A                         | kg (lb)                                | 19 (41.9)                        | 19 (41.9)                    | 20 (44.1)                    | 20 (44.1)                    |

<sup>1)</sup> The rated output current  $I_{rated}$  can be used up to 100 %; however, without overload.

<sup>2)</sup> The base-load current  $I_L$  is based on the duty cycle for low overload (LO).

<sup>3)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>4)</sup> Typical values. More information can be found on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

<sup>5)</sup> The rated input currents are valid for an input voltage of 400 V 3 AC and a line impedance corresponding to  $u_K = 1\%$ . The rated input current based on  $I_L$  is stamped on the inverter rating plate. In the particular application, the input current depends on the motor load and line impedance.

<sup>6)</sup> The maximum motor cable lengths are valid for an input voltage of 400 V 3 AC and operation with a 4 kHz pulse frequency. When an inverter with an integrated line filter class A is used to comply with the limits of EN 61800-3 Category C2 for line-conducted interference emissions, the maximum permissible motor cable length is 150 m (492 ft) (shielded) as standard.

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS G120C compact inverters

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                       |                                        | SINAMICS G120C power electronics |                                   |                                   |                                   |                                   |
|-------------------------------------------------------|----------------------------------------|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
|                                                       |                                        | 6SL3210-1KE31-1.F1               | 6SL3210-1KE31-4.F1                | 6SL3210-1KE31-7.F1                | 6SL3210-1KE32-1.F1                | 6SL3210-1KE32-4.F1                |
| <b>Output current</b><br>at 400 V 3 AC                |                                        |                                  |                                   |                                   |                                   |                                   |
| • Rated current $I_{rated}$ <sup>1)</sup>             | A                                      | 103                              | 136                               | 164                               | 201                               | 237                               |
| • Base-load current $I_L$ <sup>2)</sup>               | A                                      | 103                              | 136                               | 164                               | 201                               | 237                               |
| • Base-load current $I_H$ <sup>3)</sup>               | A                                      | 83                               | 103                               | 136                               | 164                               | 201                               |
| • Maximum current $I_{max}$                           | A                                      | 165                              | 206                               | 272                               | 328                               | 402                               |
| <b>Rated power</b>                                    |                                        |                                  |                                   |                                   |                                   |                                   |
| • Based on $I_L$                                      | kW (hp)                                | 55 (60)                          | 75 (75)                           | 90 (100)                          | 110 (125)                         | 132 (150)                         |
| • Based on $I_H$                                      | kW                                     | 45                               | 55                                | 75                                | 90                                | 110                               |
| <b>Rated pulse frequency</b>                          | kHz                                    | 4                                | 2                                 | 2                                 | 2                                 | 2                                 |
| <b>Efficiency <math>\eta</math></b>                   | %                                      | 98                               | 99                                | 99                                | 99                                | 99                                |
| <b>Power loss</b> <sup>4)</sup><br>at rated current   | kW                                     | 1.476                            | 1.474                             | 1.885                             | 2.245                             | 2.803                             |
| <b>Cooling air requirement</b>                        | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.083 (2.93)                     | 0.153 (5.40)                      | 0.153 (5.40)                      | 0.153 (5.40)                      | 0.153 (5.40)                      |
| <b>Sound pressure level <math>L_{pA}</math> (1 m)</b> | dB                                     | 70.6                             | 67.7                              | 67.7                              | 67.7                              | 67.7                              |
| <b>Rated input current</b> <sup>5)</sup>              |                                        |                                  |                                   |                                   |                                   |                                   |
| • Based on $I_L$                                      | A                                      | 96                               | 134                               | 156                               | 187                               | 221                               |
| • Based on $I_H$                                      | A                                      | 85                               | 112                               | 144                               | 169                               | 207                               |
| <b>Length of cable to braking resistor, max.</b>      | m (ft)                                 | 10 (32.8)                        | 10 (32.8)                         | 10 (32.8)                         | 10 (32.8)                         | 10 (32.8)                         |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3  |                                        | Screw terminals                  | Screw terminals                   | Screw terminals                   | Screw terminals                   | Screw terminals                   |
| • Conductor cross-section                             | mm <sup>2</sup>                        | 25 ... 70<br>(6 ... 3/0 AWG)     | 35 ... 2×120<br>(1 ... 2×4/0 AWG) | 35 ... 2×120<br>(1 ... 2×4/0 AWG) | 35 ... 2×120<br>(1 ... 2×4/0 AWG) | 35 ... 2×120<br>(1 ... 2×4/0 AWG) |
| <b>Motor connection</b><br>U2, V2, W2                 |                                        | Screw terminals                  | Screw terminals                   | Screw terminals                   | Screw terminals                   | Screw terminals                   |
| • Conductor cross-section                             | mm <sup>2</sup>                        | 25 ... 70<br>(6 ... 3/0 AWG)     | 35 ... 2×120<br>(1 ... 2×4/0 AWG) | 35 ... 2×120<br>(1 ... 2×4/0 AWG) | 35 ... 2×120<br>(1 ... 2×4/0 AWG) | 35 ... 2×120<br>(1 ... 2×4/0 AWG) |
| <b>Connection for braking resistor</b><br>R1, R2      |                                        | Screw terminals                  | Screw terminals                   | Screw terminals                   | Screw terminals                   | Screw terminals                   |
| • Conductor cross-section                             | mm <sup>2</sup>                        | 25 ... 70<br>(6 ... 3/0 AWG)     | 35 ... 2×120<br>(1 ... 2×4/0 AWG) | 35 ... 2×120<br>(1 ... 2×4/0 AWG) | 35 ... 2×120<br>(1 ... 2×4/0 AWG) | 35 ... 2×120<br>(1 ... 2×4/0 AWG) |
| <b>PE connection</b>                                  |                                        | On housing with M4 screw         | On housing with M4 screw          | On housing with M4 screw          | On housing with M4 screw          | On housing with M4 screw          |
| <b>Motor cable length, max.</b> <sup>6)</sup>         |                                        |                                  |                                   |                                   |                                   |                                   |
| • Without filter, shielded/unshielded                 | m (ft)                                 | 200/300 (656/984)                | 300/450 (984/1476)                | 300/450 (984/1476)                | 300/450 (984/1476)                | 300/450 (984/1476)                |
| • With integrated filter class A, shielded/unshielded | m (ft)                                 | 200/300 (656/984)                | 300/450 (984/1476)                | 300/450 (984/1476)                | 300/450 (984/1476)                | 300/450 (984/1476)                |
| <b>Dimensions</b>                                     |                                        |                                  |                                   |                                   |                                   |                                   |
| • Width                                               | mm (in)                                | 275 (10.83)                      | 305 (12.01)                       | 305 (12.01)                       | 305 (12.01)                       | 305 (12.01)                       |
| • Height                                              | mm (in)                                | 551 (21.69)                      | 708 (27.87)                       | 708 (27.87)                       | 708 (27.87)                       | 708 (27.87)                       |
| • Depth                                               |                                        |                                  |                                   |                                   |                                   |                                   |
| - Without operator panel                              | mm (in)                                | 237 (9.33)                       | 357 (14.06)                       | 357 (14.06)                       | 357 (14.06)                       | 357 (14.06)                       |
| - With BOP-2/IOP-2                                    | mm (in)                                | 248 (9.76)                       | 368 (14.49)                       | 368 (14.49)                       | 368 (14.49)                       | 368 (14.49)                       |
| <b>Frame size</b>                                     |                                        | FSE                              | FSF                               | FSF                               | FSF                               | FSF                               |
| <b>Weight, approx.</b>                                |                                        |                                  |                                   |                                   |                                   |                                   |
| • Without filter                                      | kg (lb)                                | 27 (59.5)                        | 59 (130)                          | 59 (130)                          | 64 (141)                          | 64 (141)                          |
| • With integrated filter class A                      | kg (lb)                                | 29 (63.9)                        | 62 (137)                          | 62 (137)                          | 66 (146)                          | 66 (146)                          |

<sup>1)</sup> The rated output current  $I_{rated}$  can be used up to 100 %; however, without overload.

<sup>2)</sup> The base-load current  $I_L$  is based on the duty cycle for low overload (LO).

<sup>3)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>4)</sup> Typical values. More information can be found on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

<sup>5)</sup> The rated input currents are valid for an input voltage of 400 V 3 AC and a line impedance corresponding to  $u_K = 1$  %. The rated input current based on  $I_L$  is stamped on the inverter rating plate. In the particular application, the input current depends on the motor load and line impedance.

<sup>6)</sup> The maximum motor cable lengths are valid for an input voltage of 400 V 3 AC and operation with a 4 kHz pulse frequency. When an inverter with an integrated line filter class A is used to comply with the limits of EN 61800-3 Category C2 for line-conducted interference emissions, the maximum permissible motor cable length is 150 m (492 ft) (shielded) as standard.

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### SINAMICS G120C compact inverters

#### Characteristic curves

##### Derating data

##### Pulse frequency

| Rated power<br>based on low overload (LO) |      | Rated output current in A<br>for a pulse frequency of |       |       |       |        |        |        |        |
|-------------------------------------------|------|-------------------------------------------------------|-------|-------|-------|--------|--------|--------|--------|
| kW                                        | hp   | 2 kHz                                                 | 4 kHz | 6 kHz | 8 kHz | 10 kHz | 12 kHz | 14 kHz | 16 kHz |
| 0.55                                      | 0.75 | 1.7                                                   | 1.7   | 1.4   | 1.2   | 1      | 0.9    | 0.8    | 0.7    |
| 0.75                                      | 1    | 2.2                                                   | 2.2   | 1.9   | 1.5   | 1.3    | 1.1    | 1      | 0.9    |
| 1.1                                       | 1.5  | 3.1                                                   | 3.1   | 2.6   | 2.2   | 1.9    | 1.6    | 1.4    | 1.2    |
| 1.5                                       | 2    | 4.1                                                   | 4.1   | 3.5   | 2.9   | 2.5    | 2.1    | 1.8    | 1.6    |
| 2.2                                       | 3    | 5.6                                                   | 5.6   | 4.8   | 3.9   | 3.4    | 2.8    | 2.5    | 2.2    |
| 3                                         | 4    | 7.3                                                   | 7.3   | 6.2   | 5.1   | 4.4    | 3.7    | 3.3    | 2.9    |
| 4                                         | 5    | 8.8                                                   | 8.8   | 7.5   | 6.2   | 5.3    | 4.4    | 4      | 3.5    |
| 5.5                                       | 7.5  | 12.5                                                  | 12.5  | 10.6  | 8.8   | 7.5    | 6.3    | 5.6    | 5      |
| 7.5                                       | 10   | 16.5                                                  | 16.5  | 14    | 11.6  | 9.9    | 8.3    | 7.4    | 6.6    |
| 11                                        | 15   | 25                                                    | 25    | 21.3  | 17.5  | 15     | 12.5   | 11.3   | 10     |
| 15                                        | 20   | 31                                                    | 31    | 26.4  | 21.7  | 18.6   | 15.5   | 14     | 12.4   |
| 18.5                                      | 25   | 37                                                    | 37    | 31.5  | 25.9  | 22.2   | 18.5   | 16.7   | 14.8   |
| 22                                        | 25   | 43                                                    | 43    | 36.6  | 30.1  | 25.8   | 21.5   | 19.4   | 17.2   |
| 30                                        | 30   | 58                                                    | 58    | 49.3  | 40.6  | 34.8   | 29     | 26.1   | 23.2   |
| 37                                        | 40   | 68                                                    | 68    | 57.8  | 47.6  | 40.8   | 34     | 30.6   | 27.2   |
| 45                                        | 50   | 82.5                                                  | 82.5  | 70.1  | 57.8  | 49.5   | 41.3   | 37.1   | 33     |
| 55                                        | 60   | 103                                                   | 103   | 87.6  | 72.1  | –      | –      | –      | –      |
| 75                                        | 75   | 136                                                   | 136   | 115.6 | 95.2  | –      | –      | –      | –      |
| 90                                        | 100  | 164                                                   | 164   | 139.4 | 114.8 | –      | –      | –      | –      |
| 110                                       | 125  | 201                                                   | 140.7 | –     | –     | –      | –      | –      | –      |
| 132                                       | 150  | 237                                                   | 165.9 | –     | –     | –      | –      | –      | –      |

The permissible motor cable length depends on the cable type and the pulse frequency.


# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)


## SINAMICS G120C compact inverters

### Characteristic curves (continued)

#### Ambient temperature

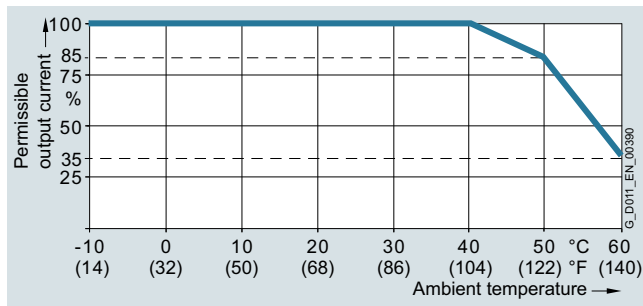

Permissible output current as a function of the ambient temperature, frame sizes FSAA to FSC

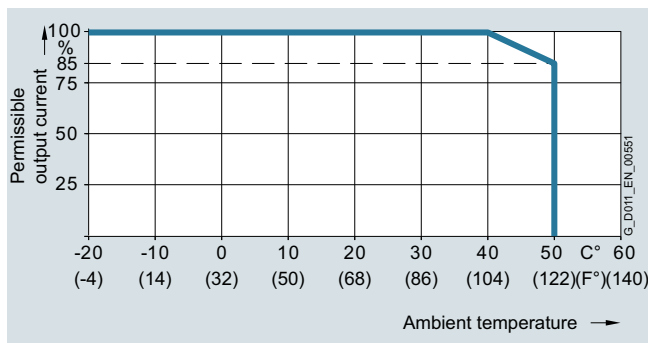

Permissible output current as a function of the ambient temperature, frame sizes FSD to FSF


For the frame sizes FSA to FSC, the PROFINET version can be butt-mounted at temperatures up to 55 °C. The frame sizes FSAA and FSD to FSF can be butt-mounted at temperatures up to 50 °C.

#### Installation altitude

Permissible line supplies as a function of the installation altitude

- Installation altitude up to 2000 m (6562 ft) above sea level
  - Connection to every supply system permitted for the inverter
- Installation altitudes between 2000 m (6562 ft) and 4000 m (13124 ft) above sea level
  - Connection only to a TN system with grounded neutral point
  - TN systems with grounded line conductor are not permitted
  - The TN line system with grounded neutral point can also be supplied using an isolation transformer
  - The phase-to-phase voltage does not have to be reduced


The connected motors, power elements and components must be considered separately.

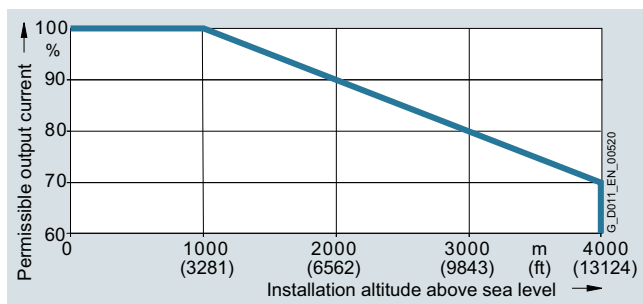

Permissible output current as a function of the installation altitude, frame sizes FSAA to FSF at 40 °C for low overload (LO)

#### Current/power derating as a function of the line voltage

The SINAMICS G120C compact inverter supplies a constant power in the line voltage range 380 V to 480 V 3 AC. The constant power results in current derating as a function of the line voltage.

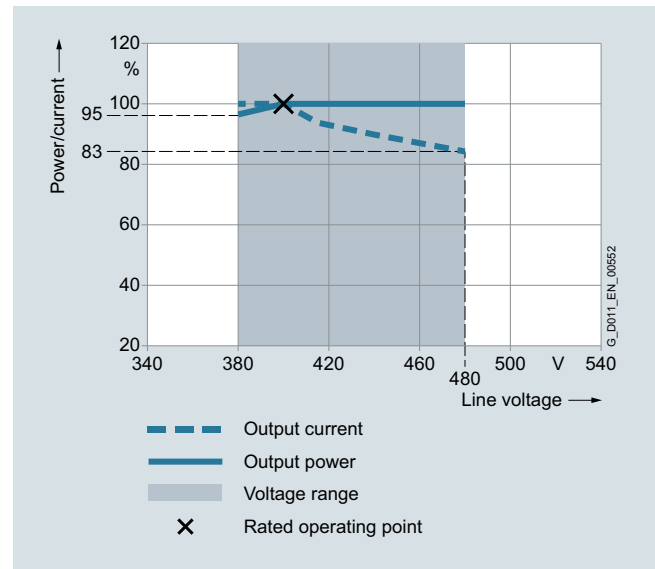


Current derating as a function of the line voltage

More information on the derating data of the SINAMICS G120C compact inverter can be found in the operating instructions on the Internet at:

[www.siemens.com/sinamics-g120c/documentation](http://www.siemens.com/sinamics-g120c/documentation)

**SINAMICS G120C compact inverters**

0.55 kW to 132 kW (0.75 hp to 150 hp)

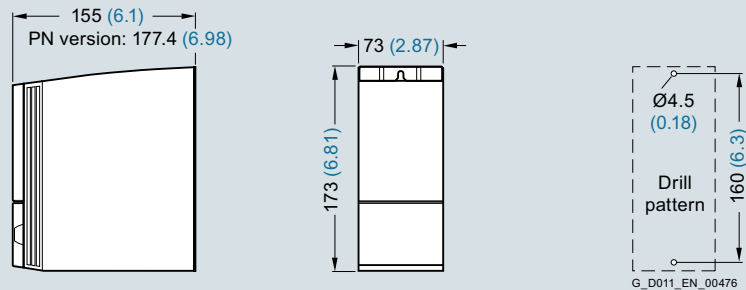**SINAMICS G120C compact inverters****Dimensional drawings**

SINAMICS G120C, frame size FSAA

Mounted with 2 M4 bolts, 2 M4 nuts, 2 M4 washers.

When the shield plate is mounted, the drilling pattern is compatible with frame size FSA.

Ventilation clearance required at the top: 80 mm (3.15 inches).


Ventilation clearance required at the bottom: 100 mm (3.94 inches).

Ventilation clearance required at the side: 0 mm (0 inches).

When the BOP-2/IOP-2 is plugged on, the overall depth increases by 11 mm (0.43 inches).

All dimensions in mm (values in brackets are in inches).

8

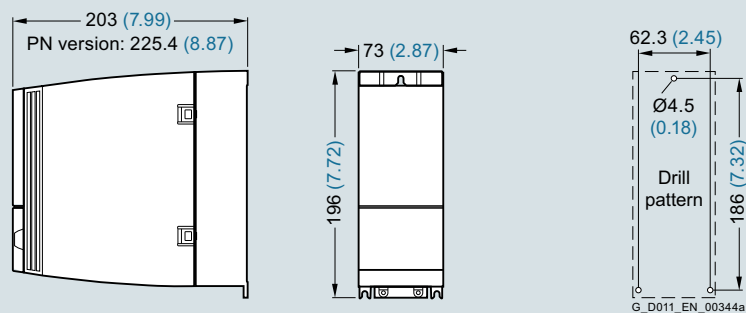

SINAMICS G120C, frame size FSA

Mounted with 3 M4 bolts, 3 M4 nuts, 3 M4 washers.

Ventilation clearance required at the top: 80 mm (3.15 inches).

Ventilation clearance required at the bottom: 100 mm (3.94 inches).

Ventilation clearance required at the side: 0 mm (0 inches).

When the BOP-2/IOP-2 is plugged on, the overall depth increases by 11 mm (0.43 inches).


All dimensions in mm (values in brackets are in inches).

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS G120C compact inverters

### Dimensional drawings (continued)

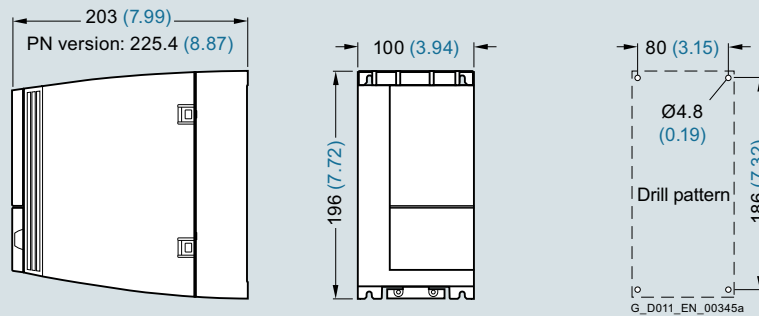

SINAMICS G120C, frame size FSB

Mounted with 4 M4 bolts, 4 M4 nuts, 4 M4 washers.


Ventilation clearance required at the top: 80 mm (3.15 inches).

Ventilation clearance required at the bottom: 100 mm (3.94 inches).

Ventilation clearance required at the side: 0 mm (0 inches).

When the BOP-2/IOP-2 is plugged on, the overall depth increases by 11 mm (0.43 inches).

All dimensions in mm (values in brackets are in inches).

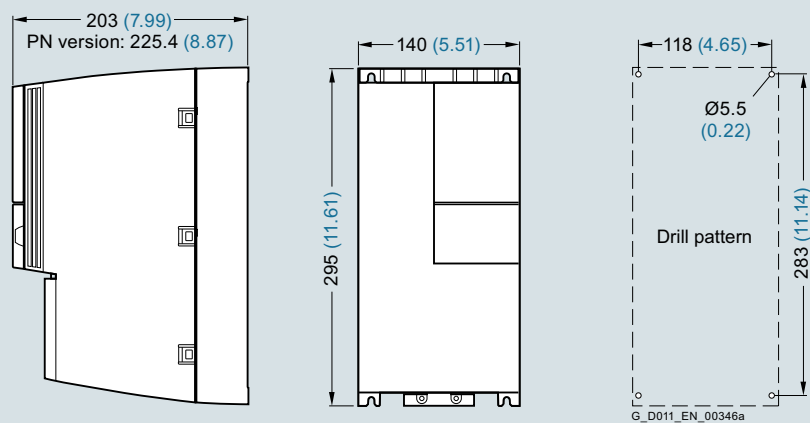

SINAMICS G120C, frame size FSC

Mounted with 4 M5 bolts, 4 M5 nuts, 4 M5 washers.

Ventilation clearance required at the top: 80 mm (3.15 inches).

Ventilation clearance required at the bottom: 100 mm (3.94 inches).

Ventilation clearance required at the side: 0 mm (0 inches).

When the BOP-2/IOP-2 is plugged on, the overall depth increases by 11 mm (0.43 inches).


All dimensions in mm (values in brackets are in inches).

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### SINAMICS G120C compact inverters

#### Dimensional drawings (continued)

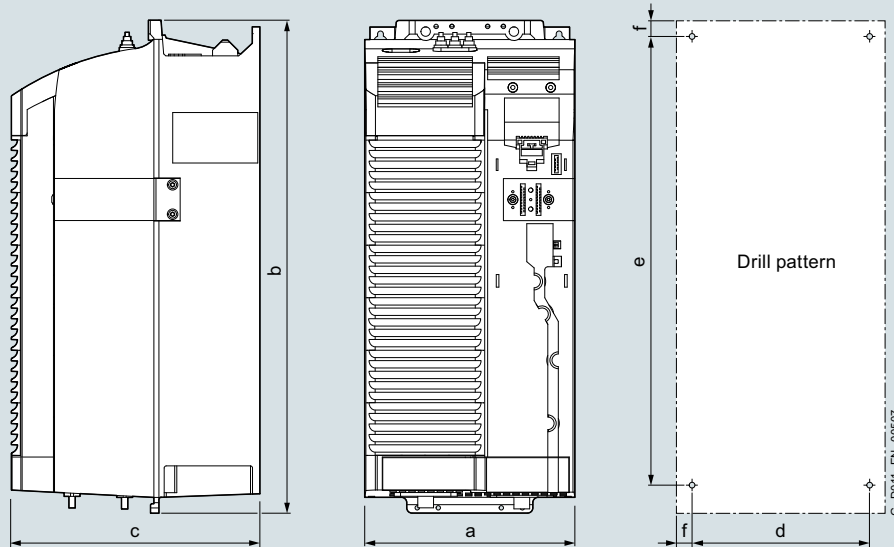

SINAMICS G120C frame sizes FSD to FSF

| SINAMICS G120C<br>Frame size | Dimensions<br>in mm (inches) |                |                | Drilling dimensions<br>in mm (inches) |                |              | Cooling clearance<br>in mm (inches) |                |               | Mounting<br>With bolts |
|------------------------------|------------------------------|----------------|----------------|---------------------------------------|----------------|--------------|-------------------------------------|----------------|---------------|------------------------|
|                              | a<br>(width)                 | b<br>(height)  | c<br>(depth)   | d                                     | e              | f            | top                                 | bottom         | front         |                        |
| FSD                          | 200<br>(7.87)                | 472<br>(18.58) | 237<br>(9.33)  | 170<br>(6.69)                         | 430<br>(16.93) | 15<br>(0.59) | 300<br>(11.81)                      | 350<br>(13.78) | 100<br>(3.94) | 4 × M5                 |
| FSE                          | 275<br>(10.83)               | 551<br>(21.69) | 237<br>(9.33)  | 230<br>(9.06)                         | 509<br>(20.04) | 11<br>(0.43) | 300<br>(11.81)                      | 350<br>(13.78) | 100<br>(3.94) | 4 × M6                 |
| FSF                          | 305<br>(12.01)               | 708<br>(27.87) | 357<br>(14.06) | 270<br>(10.63)                        | 680<br>(26.77) | 13<br>(0.51) | 300<br>(11.81)                      | 350<br>(13.78) | 100<br>(3.94) | 4 × M8                 |

When the BOP-2/IOP-2 is plugged on, the overall depth increases by 11 mm (0.43 inches).

#### More information

A hard copy of the Compact Operating Instructions is supplied in English and German for SINAMICS G120C. Further documentation, such as Operating Instructions and List Manuals, is available for download free of charge from the Internet at: [www.siemens.com/sinamics-g120c/documentation](http://www.siemens.com/sinamics-g120c/documentation)

Detailed information on SINAMICS G120C, the latest technical documentation (brochures, tutorials, dimensional drawings, certificates, manuals and operating instructions) is available on the Internet at: [www.siemens.com/sinamics-g120c](http://www.siemens.com/sinamics-g120c)

In addition, the Drive Technology Configurator (DT Configurator) can be used on the Internet. The DT Configurator can be found in the Siemens Industry Mall at the following address: [www.siemens.com/dt-configurator](http://www.siemens.com/dt-configurator)

Furthermore, the SINAMICS SELECTOR app is a practical tool that helps you find article numbers for SINAMICS V20, SINAMICS G120C, SINAMICS G120P and SINAMICS G120 inverters in the output range from 0.12 kW to 630 kW quickly and easily. You will find the free downloads for Android and for iOS at the following link:

[www.siemens.com/sinamics-selector](http://www.siemens.com/sinamics-selector)

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

Line-side components &gt; Line filters

## Overview



Line filter for SINAMICS G120C, frame size FSAA

With a line filter, the SINAMICS G120C can achieve a higher radio interference class.

All SINAMICS G120C inverters are available without and with integrated line filter.

For SINAMICS G120C frame sizes FSAA to FSC, external line filters suitable for base mounting are available.

## Selection and ordering data

| Rated power |      | SINAMICS G120C   |            | Line filter class B according to EN 55011 |
|-------------|------|------------------|------------|-------------------------------------------|
| kW          | hp   | Type 6SL3210-... | Frame size | Article No.                               |
| 0.55        | 0.75 | 1KE11-8U.2       | FSAA       | <b>6SL3203-0BE17-7BA0</b>                 |
| 0.75        | 1    | 1KE12-3U.2       |            |                                           |
| 1.1         | 1.5  | 1KE13-2U.2       |            |                                           |
| 1.5         | 2    | 1KE14-3U.2       |            |                                           |
| 2.2         | 3    | 1KE15-8U.2       | FSA        |                                           |
| 3           | 4    | 1KE17-5U.1       |            |                                           |
| 4           | 5.5  | 1KE18-8U.1       | FSB        | <b>6SL3203-0BE21-8BA0</b>                 |
| 5.5         | 7.5  | 1KE21-3U.1       |            |                                           |
| 7.5         | 10   | 1KE21-7U.1       | FSC        | <b>6SL3203-0BE23-8BA0</b>                 |
| 11          | 15   | 1KE22-6U.1       |            |                                           |
| 15          | 20   | 1KE23-2U.1       |            |                                           |
| 18.5        | 25   | 1KE23-8U.1       |            |                                           |

## Technical specifications


| Line voltage 380 ... 480 V 3 AC      |                 | Line filter class B                                                                                                                                                   |                                          |                                                                |
|--------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------------------------|
|                                      |                 | 6SL3203-0BE17-7BA0                                                                                                                                                    | 6SL3203-0BE21-8BA0                       | 6SL3203-0BE23-8BA0                                             |
| Rated current                        | A               | 11.4                                                                                                                                                                  | 23.5                                     | 49.4                                                           |
| Pulse frequency                      | kHz             | 4 ... 16                                                                                                                                                              | 4 ... 16                                 | 4 ... 16                                                       |
| Line supply connection<br>L1, L2, L3 |                 | Screw terminals                                                                                                                                                       | Screw terminals                          | Screw terminals                                                |
| • Conductor cross-section            | mm <sup>2</sup> | 1 ... 2.5                                                                                                                                                             | 2.5 ... 6                                | 6 ... 16                                                       |
| Load connection<br>U, V, W           |                 | Shielded cable                                                                                                                                                        | Shielded cable                           | Shielded cable                                                 |
| • Cable cross-section                | mm <sup>2</sup> | 1.5                                                                                                                                                                   | 4                                        | 10                                                             |
| • Length                             | m (ft)          | 0.45 (1.48)                                                                                                                                                           | 0.5 (1.64)                               | 0.54 (1.77)                                                    |
| PE connection                        |                 | On housing via M5 screw stud                                                                                                                                          | On housing via M5 screw stud             | On housing via M6 screw studs                                  |
| • Conductor cross-section            | mm <sup>2</sup> | 1 ... 2.5                                                                                                                                                             | 2.5 ... 6                                | 6 ... 16                                                       |
| Degree of protection                 |                 | IP20                                                                                                                                                                  | IP20                                     | IP20                                                           |
| Dimensions                           |                 |                                                                                                                                                                       |                                          |                                                                |
| • Width                              | mm (in)         | 73 (2.87)                                                                                                                                                             | 100 (3.94)                               | 140 (5.51)                                                     |
| • Height                             | mm (in)         | 202 (7.95)                                                                                                                                                            | 297 (11.69)                              | 359 (14.13)                                                    |
| • Depth                              | mm (in)         | 65 (2.56)                                                                                                                                                             | 85 (3.35)                                | 95 (3.74)                                                      |
| Possible as base component           |                 | Yes                                                                                                                                                                   | Yes                                      | Yes                                                            |
| Weight, approx.                      | kg (lb)         | 1.75 (3.86)                                                                                                                                                           | 4 (8.82)                                 | 7.3 (16.1)                                                     |
| Suitable for SINAMICS G120C          |                 | FSAA<br>6SL3210-1KE11-8U.2<br>6SL3210-1KE12-3U.2<br>6SL3210-1KE13-2U.2<br>6SL3210-1KE14-2U.2<br>6SL3210-1KE15-8U.2<br>FSA<br>6SL3210-1KE17-5U.1<br>6SL3210-1KE18-8U.1 | 6SL3210-1KE21-3U.1<br>6SL3210-1KE21-7U.1 | 6SL3210-1KE22-6U.1<br>6SL3210-1KE23-2U.1<br>6SL3210-1KE23-8U.1 |
| • Frame size                         |                 | FSAA/FSA                                                                                                                                                              | FSB                                      | FSC                                                            |

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Line-side components > Line reactors

#### Overview

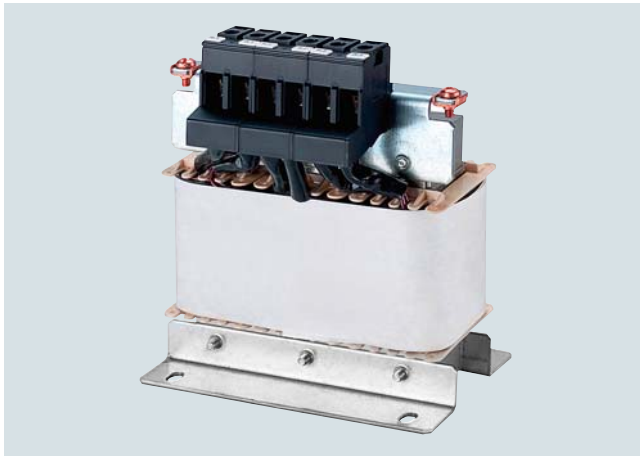

Line reactor for SINAMICS G120C frame size FSB

Line reactors smooth the current drawn by the inverter and thus reduce harmonic components in the line current. Through the reduction of the current harmonics, the thermal load on the power components in the rectifier and in the DC link capacitors is reduced as well as the harmonic effects on the supply. The use of a line reactor increases the service life of the inverter.

If the ratio of the rated inverter power to the line supply short-circuit power is less than 1 %, then it is recommended to use a line reactor to reduce the current peaks.

A DC link reactor is integrated in the SINAMICS G120C compact inverter frame sizes FSD to FSF and therefore no line reactor is required.

#### Selection and ordering data

| Rated power                     |      | SINAMICS G120C   |            | Line reactor       |
|---------------------------------|------|------------------|------------|--------------------|
| kW                              | hp   | Type 6SL3210-... | Frame size |                    |
| Article No.                     |      |                  |            |                    |
| Line voltage 380 ... 480 V 3 AC |      |                  |            |                    |
| 0.55                            | 0.75 | 1KE11-8..2       | FSA        | 6SL3203-0CE13-2AA0 |
| 0.75                            | 1    | 1KE12-3..2       |            |                    |
| 1.1                             | 1.5  | 1KE13-2..2       |            |                    |
| 1.5                             | 2    | 1KE14-3..2       | FSA        | 6SL3203-0CE21-0AA0 |
| 2.2                             | 3    | 1KE15-8..2       |            |                    |
| 3                               | 4    | 1KE17-5..1       | FSA        |                    |
| 4                               | 5    | 1KE18-8..1       |            |                    |
| 5.5                             | 7.5  | 1KE21-3..1       | FSB        | 6SL3203-0CE21-8AA0 |
| 7.5                             | 10   | 1KE21-7..1       |            |                    |
| 11                              | 15   | 1KE22-6..1       | FSC        | 6SL3203-0CE23-8AA0 |
| 15                              | 20   | 1KE23-2..1       |            |                    |
| 18.5                            | 25   | 1KE23-8..1       |            |                    |

Line reactors that are suitable for base mounting are also available for SINAMICS G120C, frame size FSAA, 0.55 kW to 2.2 kW.

- 0.55 kW: 6SE6400-3CC00-2AD3
- 0.75 kW to 1.1 kW: 6SE6400-3CC00-4AD3
- 1.5 kW to 2.2 kW: 6SE6400-3CC00-6AD3

For 2.2 kW, operation of the line reactors that are suitable for base mounting is only permitted for operating the inverter with rated power of 1.5 kW based on high overload (HO).

Additional information is available in the operating instructions on the Internet at:

[www.siemens.com/sinamics-g120c/documentation](http://www.siemens.com/sinamics-g120c/documentation)

#### Technical specifications

| Line voltage 380 ... 480 V 3 AC                               |                 | Line reactor                                                   |                                                                                                    |                                          |                                                                |
|---------------------------------------------------------------|-----------------|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------------------------|
|                                                               |                 | 6SL3203-0CE13-2AA0                                             | 6SL3203-0CE21-0AA0                                                                                 | 6SL3203-0CE21-8AA0                       | 6SL3203-0CE23-8AA0                                             |
| Rated current                                                 | A               | 4                                                              | 11.3                                                                                               | 22.3                                     | 47                                                             |
| Power loss at 50/60 Hz                                        | W               | 23/26                                                          | 36/40                                                                                              | 53/59                                    | 88/97                                                          |
| Line supply/load connection<br>1L1, 1L2, 1L3<br>2L1, 2L2, 2L3 |                 | Screw terminals                                                | Screw terminals                                                                                    | Screw terminals                          | Screw terminals                                                |
| • Conductor cross-section                                     | mm <sup>2</sup> | 4                                                              | 4                                                                                                  | 10                                       | 16                                                             |
| PE connection                                                 |                 | M4 × 8; U washer;<br>spring lock washer                        | M4 × 8; U washer;<br>spring lock washer                                                            | M5 × 10; U washer;<br>spring lock washer | M5 × 10; U washer;<br>spring lock washer                       |
| Degree of protection                                          |                 | IP20                                                           | IP20                                                                                               | IP20                                     | IP20                                                           |
| Dimensions                                                    |                 |                                                                |                                                                                                    |                                          |                                                                |
| • Width                                                       | mm (in)         | 125 (4.92)                                                     | 125 (4.92)                                                                                         | 125 (4.92)                               | 190 (7.48)                                                     |
| • Height                                                      | mm (in)         | 120 (4.72)                                                     | 140 (5.51)                                                                                         | 145 (5.71)                               | 220 (8.66)                                                     |
| • Depth                                                       | mm (in)         | 71 (2.80)                                                      | 71 (2.80)                                                                                          | 91 (3.58)                                | 91 (3.58)                                                      |
| Weight, approx.                                               | kg (lb)         | 1.1 (2.4)                                                      | 2.1 (4.6)                                                                                          | 2.95 (6.5)                               | 7.8 (17.2)                                                     |
| Suitable for SINAMICS G120C                                   | Type            | 6SL3210-1KE11-8..2<br>6SL3210-1KE12-3..2<br>6SL3210-1KE13-2..2 | FSA<br>6SL3210-1KE14-3..2<br>6SL3210-1KE15-8..2<br>FSA<br>6SL3210-1KE17-5..1<br>6SL3210-1KE18-8..1 | 6SL3210-1KE21-3..1<br>6SL3210-1KE21-7..1 | 6SL3210-1KE22-6..1<br>6SL3210-1KE23-2..1<br>6SL3210-1KE23-8..1 |
| • Frame size                                                  |                 | FSA                                                            | FSA/FSA                                                                                            | FSB                                      | FSC                                                            |

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Line-side components > Recommended line-side overcurrent protection devices

### Selection and ordering data

Overcurrent protection devices are absolutely necessary for the operation of the inverters. The following table lists recommendations for fuses.

- Siemens fuses of type 3NA3 for use in the area of validity of IEC
- UL-listed fuses Class J for use in USA and Canada

Recommendations on further overcurrent protection devices are available at:

<https://support.industry.siemens.com/cs/document/109750343>

The Short Circuit Current Rating (SCCR) according to UL for industrial control panel installations to NEC Article 409 or UL 508A/508C or UL 61800-5-1 is as follows for Class J fuses for

- SINAMICS G120C: 100 kA

SCCR and ICC values for combination with further overcurrent protection devices are available at:

<https://support.industry.siemens.com/cs/document/109750343>

### Notes for installations in Canada:

The inverters are intended for line supply systems with overvoltage category III. More information is available in the technical documentation on the Internet at:

[www.siemens.com/sinamics-g120c/documentation](http://www.siemens.com/sinamics-g120c/documentation)

More information about the listed Siemens fuses is available in Catalog LV 10 as well as in the Industry Mall.

| Rated power                     |      | SINAMICS G120C   |            | IEC-compliant |                     | UL/cUL-compliant       |              |
|---------------------------------|------|------------------|------------|---------------|---------------------|------------------------|--------------|
|                                 |      |                  |            | Fuse          |                     | Fuse type              |              |
|                                 |      |                  |            |               |                     | Rated voltage 600 V AC |              |
| kW                              | hp   | Type 6SL3210-... | Frame size | Current<br>A  | 3NA3<br>Article No. | Class                  | Current<br>A |
| Line voltage 380 ... 480 V 3 AC |      |                  |            |               |                     |                        |              |
| 0.55                            | 0.75 | 1KE11-8..2       | FSA        | 10            | 3NA3803             | J                      | 10           |
| 0.75                            | 1    | 1KE12-3..2       |            |               |                     |                        |              |
| 1.1                             | 1.5  | 1KE13-2..2       |            |               |                     |                        |              |
| 1.5                             | 2    | 1KE14-3..2       |            |               |                     |                        |              |
| 2.2                             | 3    | 1KE15-8..2       |            |               |                     |                        |              |
| 3                               | 4    | 1KE17-5..1       | FSA        | 16            | 3NA3805             | J                      | 15           |
| 4                               | 5    | 1KE18-8..1       |            |               |                     |                        |              |
| 5.5                             | 7.5  | 1KE21-3..1       | FSB        | 32            | 3NA3812             | J                      | 35           |
| 7.5                             | 10   | 1KE21-7..1       |            |               |                     |                        |              |
| 11                              | 15   | 1KE22-6..1       | FSC        | 63            | 3NA3822             | J                      | 60           |
| 15                              | 20   | 1KE23-2..1       |            |               |                     |                        |              |
| 18.5                            | 25   | 1KE23-8..1       |            |               |                     |                        |              |
| 22                              | 30   | 1KE24-4.F1       | FSD        | 80            | 3NA3824             | J                      | 70           |
| 30                              | 40   | 1KE26-0.F1       | FSD        | 100           | 3NA3830             | J                      | 90           |
| 37                              | 50   | 1KE27-0.F1       |            |               |                     | J                      | 100          |
| 45                              | 60   | 1KE28-4.F1       | FSD        | 125           | 3NA3832             | J                      | 125          |
| 55                              | 75   | 1KE31-1.F1       | FSE        | 160           | 3NA3836             | J                      | 150          |
| 75                              | 100  | 1KE31-4.F1       | FSF        | 200           | 3NA3140             | J                      | 200          |
| 90                              | 125  | 1KE31-7.F1       | FSF        | 224           | 3NA3142             | J                      | 250          |
| 110                             | 150  | 1KE32-1.F1       | FSF        | 300           | 3NA3250             | J                      | 300          |
| 132                             | 200  | 1KE32-4.F1       | FSF        | 315           | 3NA3252             | J                      | 350          |

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### DC link components > Braking resistors

#### Overview



Braking resistor for SINAMICS G120C, frame size FSB

The excess energy of the DC link is dissipated using the braking resistor. The braking resistors are designed for use with the SINAMICS G120C. SINAMICS G120C has an integrated brake chopper and cannot feed back regenerative energy to the line supply. For regenerative operation, e.g. the braking of a rotating mass with high moment of inertia, a braking resistor must be connected to convert the resulting energy into heat.

The braking resistors are designed for mounting horizontally or vertically onto a heat-resistant sheet steel panel. The resistors should be mounted such as to ensure that the air can flow in and out and heat cannot build up. The heat dissipated by the braking resistor must not diminish the inverter cooling.

Every braking resistor is equipped with a temperature switch. The temperature switch can be evaluated to prevent consequential damage if the braking resistor overheats.

#### Note:

For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSF. For more information, see [Shield connection kits](#) in the section [Supplementary system components](#).

#### Selection and ordering data


| Rated power                     |      | SINAMICS G120C   |            | Braking resistor   |
|---------------------------------|------|------------------|------------|--------------------|
| kW                              | hp   | Type 6SL3210-... | Frame size |                    |
| Line voltage 380 ... 480 V 3 AC |      |                  |            |                    |
| 0.55                            | 0.75 | 1KE11-8..2       | FSAA       | 6SL3201-0BE14-3AA0 |
| 0.75                            | 1    | 1KE12-3..2       |            |                    |
| 1.1                             | 1.5  | 1KE13-2..2       |            |                    |
| 1.5                             | 2    | 1KE14-3..2       |            |                    |
| 2.2                             | 3    | 1KE15-8..2       | FSAA       | 6SL3201-0BE21-0AA0 |
| 3                               | 4    | 1KE17-5..1       | FSA        |                    |
| 4                               | 5    | 1KE18-8..1       | FSB        | 6SL3201-0BE21-8AA0 |
| 5.5                             | 7.5  | 1KE21-3..1       |            |                    |
| 7.5                             | 10   | 1KE21-7..1       |            |                    |
| 11                              | 15   | 1KE22-6..1       |            |                    |
| 15                              | 20   | 1KE23-2..1       | FSC        | 6SL3201-0BE23-8AA0 |
| 18.5                            | 25   | 1KE23-8..1       |            |                    |
| 22                              | 30   | 1KE24-4.F1       |            |                    |
| 30                              | 40   | 1KE26-0.F1       |            |                    |
| 37                              | 50   | 1KE27-0.F1       | FSD        | JJY:023422620001   |
| 45                              | 60   | 1KE28-4.F1       |            |                    |
| 55                              | 75   | 1KE31-1.F1       | FSD        | JJY:023434020001   |
| 75                              | 75   | 1KE31-1.F1       | FSE        | JJY:023434020001   |
| 75                              | 100  | 1KE31-4.F1       | FSF        | JJY:023454020001   |
| 90                              | 125  | 1KE31-7.F1       |            |                    |
| 110                             | 150  | 1KE32-1.F1       |            |                    |
| 132                             | 200  | 1KE32-4.F1       | FSF        | JJY:023464020001   |

A braking resistor 6SE6400-4BD11-0AA0 that is suitable for base mounting is also available for SINAMICS G120C, frame size FSAA, 0.55 kW to 2.2 kW. For 2.2 kW, operation of the braking resistor that is suitable for base mounting is only permitted for operating the inverter with rated power of 1.5 kW based on high overload (HO).

Additional information is available in the operating instructions on the Internet at:

[www.siemens.com/sinamics-g120c/documentation](http://www.siemens.com/sinamics-g120c/documentation)

#### Characteristic curves

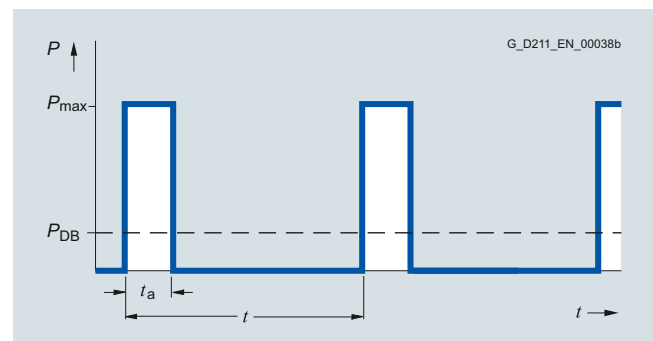

Load diagram for the braking resistors

$t_a = 12 \text{ s}$   
 $t = 240 \text{ s}$

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

DC link components > Braking resistors

## Technical specifications

| Line voltage 380 ... 480 V 3 AC                                                                   |                 | Braking resistor                                                                     |                                                                               |                                          |                                                                |
|---------------------------------------------------------------------------------------------------|-----------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------------------------|
|                                                                                                   |                 | 6SL3201-0BE14-3AA0                                                                   | 6SL3201-0BE21-0AA0                                                            | 6SL3201-0BE21-8AA0                       | 6SL3201-0BE23-8AA0                                             |
| <b>Resistance</b>                                                                                 | Ω               | 370                                                                                  | 140                                                                           | 75                                       | 30                                                             |
| <b>Rated power <math>P_{DB}</math></b><br>(Continuous braking power)                              | kW              | 0.075                                                                                | 0.2                                                                           | 0.375                                    | 0.925                                                          |
| <b>Peak power <math>P_{max}</math></b><br>(load duration $t_a = 12$ s<br>with period $t = 240$ s) | kW              | 1.5                                                                                  | 4                                                                             | 7.5                                      | 18.5                                                           |
| <b>Power connection</b>                                                                           |                 | Terminal block                                                                       | Terminal block                                                                | Terminal block                           | Terminal block                                                 |
| • Conductor cross-section                                                                         | mm <sup>2</sup> | 2.5                                                                                  | 2.5                                                                           | 2.5                                      | 6                                                              |
| <b>Thermostatic switch</b>                                                                        |                 | NC contact                                                                           | NC contact                                                                    | NC contact                               | NC contact                                                     |
| • Contact load, max.                                                                              |                 | 250 V AC/2.5 A                                                                       | 250 V AC/2.5 A                                                                | 250 V AC/2.5 A                           | 250 V AC/2.5 A                                                 |
| • Conductor cross-section                                                                         | mm <sup>2</sup> | 2.5                                                                                  | 2.5                                                                           | 2.5                                      | 2.5                                                            |
| <b>PE connection</b>                                                                              |                 |                                                                                      |                                                                               |                                          |                                                                |
| • Via terminal block                                                                              |                 | Yes                                                                                  | Yes                                                                           | Yes                                      | Yes                                                            |
| • PE connection on housing                                                                        |                 | M4 screw                                                                             | M4 screw                                                                      | M4 screw                                 | M4 screw                                                       |
| <b>Degree of protection</b>                                                                       |                 | IP20                                                                                 | IP20                                                                          | IP20                                     | IP20                                                           |
| <b>Dimensions</b>                                                                                 |                 |                                                                                      |                                                                               |                                          |                                                                |
| • Width                                                                                           | mm (in)         | 105 (4.13)                                                                           | 105 (4.13)                                                                    | 175 (6.89)                               | 250 (9.84)                                                     |
| • Height                                                                                          | mm (in)         | 295 (11.61)                                                                          | 345 (13.58)                                                                   | 345 (13.58)                              | 490 (19.29)                                                    |
| • Depth                                                                                           | mm (in)         | 100 (3.94)                                                                           | 100 (3.94)                                                                    | 100 (3.94)                               | 140 (5.51)                                                     |
| <b>Weight, approx.</b>                                                                            | kg (lb)         | 1.48 (3.26)                                                                          | 1.8 (3.97)                                                                    | 2.73 (6.02)                              | 6.2 (13.7)                                                     |
| <b>Suitable for SINAMICS G120C</b>                                                                | Type            | 6SL3210-1KE11-8..2<br>6SL3210-1KE12-3..2<br>6SL3210-1KE13-2..2<br>6SL3210-1KE14-3..2 | FSAA<br>6SL3210-1KE15-8..2<br>FSA<br>6SL3210-1KE17-5..1<br>6SL3210-1KE18-8..1 | 6SL3210-1KE21-3..1<br>6SL3210-1KE21-7..1 | 6SL3210-1KE22-6..1<br>6SL3210-1KE23-2..1<br>6SL3210-1KE23-8..1 |
| • Frame size                                                                                      |                 | FSAA                                                                                 | FSAA/FSA                                                                      | FSB                                      | FSC                                                            |

| Line voltage 380 ... 480 V 3 AC                                                                   |         | Braking resistor   |                                          |                                                        |                                          |                                          |
|---------------------------------------------------------------------------------------------------|---------|--------------------|------------------------------------------|--------------------------------------------------------|------------------------------------------|------------------------------------------|
|                                                                                                   |         | JJY:023422620001   | JJY:023424020001                         | JJY:023434020001                                       | JJY:023454020001 <sup>1)</sup>           | JJY:023464020001 <sup>2)</sup>           |
| <b>Resistance</b>                                                                                 | Ω       | 25                 | 15                                       | 10                                                     | 7.1                                      | 5                                        |
| <b>Rated power <math>P_{DB}</math></b><br>(Continuous braking power)                              | kW      | 1.1                | 1.85                                     | 2.75                                                   | 3.85                                     | 5.5                                      |
| <b>Peak power <math>P_{max}</math></b><br>(load duration $t_a = 12$ s<br>with period $t = 240$ s) | kW      | 22                 | 37                                       | 55                                                     | 77                                       | 110                                      |
| <b>Power connection</b>                                                                           |         | Cable              | Cable                                    | Cable                                                  | Cable                                    | Cable                                    |
| <b>Thermostatic switch</b>                                                                        |         | Integrated         | Integrated                               | Integrated                                             | Integrated                               | Integrated                               |
| <b>Degree of protection</b>                                                                       |         | IP21               | IP21                                     | IP21                                                   | IP21                                     | IP21                                     |
| <b>Dimensions</b>                                                                                 |         |                    |                                          |                                                        |                                          |                                          |
| • Width                                                                                           | mm (in) | 220 (8.66)         | 220 (8.66)                               | 350 (13.78)                                            | <sup>1)</sup>                            | <sup>2)</sup>                            |
| • Height                                                                                          | mm (in) | 470 (18.50)        | 610 (24.02)                              | 630 (24.80)                                            | <sup>1)</sup>                            | <sup>2)</sup>                            |
| • Depth                                                                                           | mm (in) | 180 (7.09)         | 180 (7.09)                               | 180 (7.09)                                             | <sup>1)</sup>                            | <sup>2)</sup>                            |
| <b>Weight, approx.</b>                                                                            | kg (lb) | 7 (15.4)           | 9.5 (20.9)                               | 13.5 (29.8)                                            | 20.5 (45.2)                              | 27 (59.5)                                |
| <b>Suitable for SINAMICS G120C</b>                                                                | Type    | 6SL3210-1KE24-4.F1 | 6SL3210-1KE26-0.F1<br>6SL3210-1KE27-0.F1 | FSD<br>6SL3210-1KE28-4.F1<br>FSE<br>6SL3210-1KE31-1.F1 | 6SL3210-1KE31-4.F1<br>6SL3210-1KE31-7.F1 | 6SL3210-1KE32-1.F1<br>6SL3210-1KE32-4.F1 |
| • Frame size                                                                                      |         | FSD                | FSD                                      | FSD/FSE                                                | FSF                                      | FSF                                      |

<sup>1)</sup> This braking resistor consists of the two braking resistors, JJY:023422620001 and JJY:023434020001, which must be connected in parallel on the plant/system side.


<sup>2)</sup> This braking resistor consists of two JJY:023434020001 braking resistors, which must be connected in parallel on the plant/system side.

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

Load-side power components > Output reactors

### Overview

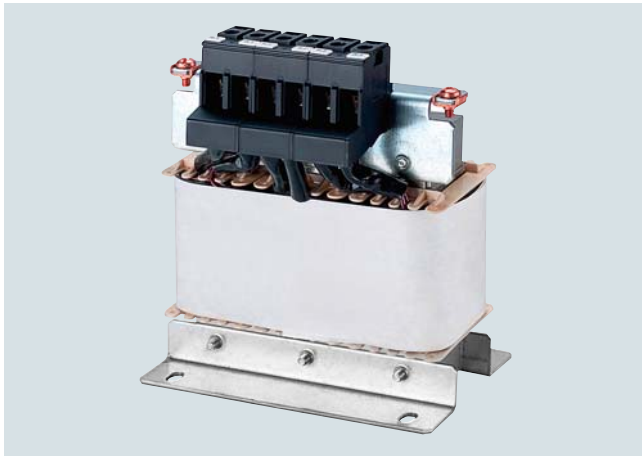

Output reactor for SINAMICS G120C, frame size FSA

Output reactors reduce the rate of voltage rise (dv/dt) and the height of the current peaks, and enable longer motor cables to be connected.

Owing to the high rates of voltage rise of the fast-switching IGBTs, the capacitance of long motor cables reverses polarity very quickly with every switching operation in the inverter. As a result, the inverter is loaded with additional current peaks of substantial magnitude.

Output reactors reduce the magnitude of these additional peaks because the cable capacitance reverses polarity more slowly across the reactor inductance, thereby attenuating the amplitudes of the current peaks.

When using output reactors, the following should be observed:

- Max. permissible output frequency 150 Hz
- Max. permissible pulse frequency 4 kHz
- The output reactor must be installed as close as possible to the inverter

### Selection and ordering data

| Rated power        |      | SINAMICS G120C   |            | Output reactor            |
|--------------------|------|------------------|------------|---------------------------|
| kW                 | hp   | Type 6SL3210-... | Frame size | Article No.               |
| 380 ... 480 V 3 AC |      |                  |            |                           |
| 0.55               | 0.75 | 1KE11-8..2       | FSAA       | <b>6SL3202-0AE16-1CA0</b> |
| 0.75               | 1    | 1KE12-3..2       |            |                           |
| 1.1                | 1.5  | 1KE13-2..2       |            |                           |
| 1.5                | 2    | 1KE14-3..2       |            |                           |
| 2.2                | 3    | 1KE15-8..2       | FSA        | <b>6SL3202-0AE18-8CA0</b> |
| 3                  | 4    | 1KE17-5..1       |            |                           |
| 4                  | 5    | 1KE18-8..1       | FSB        | <b>6SL3202-0AE21-8CA0</b> |
| 5.5                | 7.5  | 1KE21-3..1       |            |                           |
| 7.5                | 10   | 1KE21-7..1       | FSC        | <b>6SL3202-0AE23-8CA0</b> |
| 11                 | 15   | 1KE22-6..1       |            |                           |
| 15                 | 20   | 1KE23-2..1       | FSD        | <b>6SE6400-3TC07-5ED0</b> |
| 18.5               | 25   | 1KE23-8..1       |            |                           |
| 22                 | 30   | 1KE24-4.F1       | FSD        | <b>6SE6400-3TC14-5FD0</b> |
| 30                 | 40   | 1KE26-0.F1       |            |                           |
| 37                 | 50   | 1KE27-0.F1       | FSD        | <b>6SE6400-3TC14-5FD0</b> |
| 45                 | 60   | 1KE28-4.F1       |            |                           |
| 55                 | 75   | 1KE31-1.F1       | FSE        | <b>6SE6400-3TC14-5FD0</b> |
| 75                 | 100  | 1KE31-4.F1       | FSF        | <b>6SE6400-3TC14-5FD0</b> |
| 90                 | 125  | 1KE31-7.F1       |            |                           |
| 110                | 150  | 1KE32-1.F1       | FSF        | <b>6SL3000-2BE32-1AA0</b> |
| 132                | 200  | 1KE32-4.F1       | FSF        | <b>6SL3000-2BE32-6AA0</b> |

An output reactor 6SE6400-3TC00-4AD2 that is suitable for base mounting is also available for SINAMICS G120C, frame size FSAA, 0.55 kW to 2.2 kW. For 2.2 kW, operation of the output reactor that is suitable for base mounting is only permitted for operating the inverter with rated power of 1.5 kW based on high overload (HO).

Additional information is available in the operating instructions on the Internet at:

[www.siemens.com/sinamics-g120c/documentation](http://www.siemens.com/sinamics-g120c/documentation)

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Load-side power components > Output reactors

### Technical specifications

| Line voltage 380 ... 480 V 3 AC                        |                 | Output reactor                                                                                             |                                          |                                          |                                                                |
|--------------------------------------------------------|-----------------|------------------------------------------------------------------------------------------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------|
|                                                        |                 | 6SL3202-0AE16-1CA0                                                                                         | 6SL3202-0AE18-8CA0                       | 6SL3202-0AE21-8CA0                       | 6SL3202-0AE23-8CA0                                             |
| Rated current                                          | A               | 6.1                                                                                                        | 9                                        | 18.5                                     | 39                                                             |
| Power loss                                             | kW              | 0.09                                                                                                       | 0.08                                     | 0.08                                     | 0.11                                                           |
| Connection to the Power Module/<br>motor connection    |                 | Screw terminals                                                                                            | Screw terminals                          | Screw terminals                          | Screw terminals                                                |
| • Conductor cross-section                              | mm <sup>2</sup> | 4                                                                                                          | 4                                        | 10                                       | 16                                                             |
| PE connection                                          |                 | M4 screw stud                                                                                              | M4 screw stud                            | M5 screw stud                            | M5 screw stud                                                  |
| Cable length, max.<br>between output reactor and motor |                 |                                                                                                            |                                          |                                          |                                                                |
| • 380 V -10 % ... 415 V +10 % 3 AC                     |                 |                                                                                                            |                                          |                                          |                                                                |
| - Shielded                                             | m (ft)          | 150 (492)                                                                                                  | 150 (492)                                | 150 (492)                                | 150 (492)                                                      |
| - Unshielded                                           | m (ft)          | 225 (738)                                                                                                  | 225 (738)                                | 225 (738)                                | 225 (738)                                                      |
| • 440 ... 480 V 3 AC +10 %                             |                 |                                                                                                            |                                          |                                          |                                                                |
| - Shielded                                             | m (ft)          | 100 (328)                                                                                                  | 100 (328)                                | 100 (328)                                | 100 (328)                                                      |
| - Unshielded                                           | m (ft)          | 150 (492)                                                                                                  | 150 (492)                                | 150 (492)                                | 150 (492)                                                      |
| Dimensions                                             |                 |                                                                                                            |                                          |                                          |                                                                |
| • Width                                                | mm (in)         | 207 (8.15)                                                                                                 | 207 (8.15)                               | 247 (9.72)                               | 257 (10.12)                                                    |
| • Height                                               | mm (in)         | 175 (6.89)                                                                                                 | 180 (7.09)                               | 215 (8.46)                               | 235 (9.25)                                                     |
| • Depth                                                | mm (in)         | 72.5 (2.85)                                                                                                | 72.5 (2.85)                              | 100 (3.94)                               | 114.7 (4.52)                                                   |
| Possible as base component                             |                 | No                                                                                                         | No                                       | No                                       | No                                                             |
| Degree of protection                                   |                 | IP20                                                                                                       | IP20                                     | IP20                                     | IP20                                                           |
| Weight, approx.                                        | kg (lb)         | 3.4 (7.50)                                                                                                 | 3.9 (8.60)                               | 10.1 (22.3)                              | 11.2 (24.7)                                                    |
| Suitable for SINAMICS G120C                            | Type            | 6SL3210-1KE11-8..2<br>6SL3210-1KE12-3..2<br>6SL3210-1KE13-2..2<br>6SL3210-1KE14-3..2<br>6SL3210-1KE15-8..2 | 6SL3210-1KE17-5..1<br>6SL3210-1KE18-8..1 | 6SL3210-1KE21-3..1<br>6SL3210-1KE21-7..1 | 6SL3210-1KE22-6..1<br>6SL3210-1KE23-2..1<br>6SL3210-1KE23-8..1 |
| • Frame size                                           |                 | FSAA                                                                                                       | FSA                                      | FSB                                      | FSC                                                            |

| Line voltage 380 ... 480 V 3 AC                        |         | Output reactor                     |                                                                |                                                                                                           |                                     |                    |
|--------------------------------------------------------|---------|------------------------------------|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-------------------------------------|--------------------|
|                                                        |         | 6SE6400-3TC07-5ED0                 | 6SE6400-3TC14-5FD0                                             | 6SL3000-2BE32-1AA0                                                                                        | 6SL3000-2BE32-6AA0                  |                    |
| Rated current                                          | A       | 90 <sup>1)</sup>                   | 178 <sup>1)</sup>                                              | 210                                                                                                       | 260                                 |                    |
| Power loss                                             | kW      | 0.27                               | 0.47                                                           | 0.49                                                                                                      | 0.5                                 |                    |
| Connection to the Power Module/<br>motor connection    |         | Flat connector for<br>M6 cable lug | Flat connector for<br>M8 cable lug                             | Flat connector for<br>M10 cable lug                                                                       | Flat connector for<br>M10 cable lug |                    |
| PE connection                                          |         | M6 screw                           | M8 screw                                                       | M8 screw                                                                                                  | M8 screw                            |                    |
| Cable length, max.<br>between output reactor and motor |         |                                    |                                                                |                                                                                                           |                                     |                    |
| • 380 V -10 % ... 415 V +10 % 3 AC                     |         |                                    |                                                                |                                                                                                           |                                     |                    |
| - Shielded                                             | m (ft)  | 200 (656)                          | 200 (656)                                                      | 300 (984)                                                                                                 | 300 (984)                           |                    |
| - Unshielded                                           | m (ft)  | 300 (984)                          | 300 (984)                                                      | 450 (1476)                                                                                                | 450 (1476)                          |                    |
| • 440 ... 480 V 3 AC +10 %                             |         |                                    |                                                                |                                                                                                           |                                     |                    |
| - Shielded                                             | m (ft)  | 200 (656)                          | 200 (656)                                                      | 300 (984)                                                                                                 | 300 (984)                           |                    |
| - Unshielded                                           | m (ft)  | 300 (984)                          | 300 (984)                                                      | 450 (1476)                                                                                                | 450 (1476)                          |                    |
| Dimensions                                             |         |                                    |                                                                |                                                                                                           |                                     |                    |
| • Width                                                | mm (in) | 270 (10.63)                        | 350 (13.78)                                                    | 300 (11.81)                                                                                               | 300 (11.81)                         |                    |
| • Height                                               | mm (in) | 248 (9.76)                         | 321 (12.64)                                                    | 285 (11.22)                                                                                               | 315 (12.40)                         |                    |
| • Depth                                                | mm (in) | 209 (8.23)                         | 288 (11.34)                                                    | 257 (10.12)                                                                                               | 277 (10.91)                         |                    |
| Possible as base component                             |         | No                                 | No                                                             | No                                                                                                        | No                                  |                    |
| Degree of protection                                   |         | IP00                               | IP00                                                           | IP00                                                                                                      | IP00                                |                    |
| Weight, approx.                                        |         | kg (lb)                            | 27 (59.5)                                                      | 57 (126)                                                                                                  | 60 (132)                            | 66 (146)           |
| Suitable for SINAMICS G120C                            |         | Type                               | 6SL3210-1KE24-4.F1<br>6SL3210-1KE26-0.F1<br>6SL3210-1KE27-0.F1 | FSD<br>6SL3210-1KE28-4.F1<br>FSE<br>6SL3210-1KE31-1.F1<br>FSF<br>6SL3210-1KE31-4.F1<br>6SL3210-1KE31-7.F1 | 6SL3210-1KE32-1.F1                  | 6SL3210-1KE32-4.F1 |
| • Frame size                                           |         | FSD                                | FSD/FSE/FSF                                                    | FSF                                                                                                       | FSF                                 |                    |

<sup>1)</sup> On the rating plate of the reactor, the current is specified according to the duty cycle for high overload (HO). This is lower than the current specified according to the duty cycle for low overload (LO) of the SINAMICS G120C inverter.

**SINAMICS G120C compact inverters**

0.55 kW to 132 kW (0.75 hp to 150 hp)

Load-side power components &gt; Sine-wave filters

**Overview**

Sine-wave filter (example)

Sine-wave filters limit the rate of voltage rise ( $dv/dt$ ) and the peak voltages on the motor winding. Similar to an output reactor, they enable the connection of longer motor cables.

A sine-wave filter, suitable for base mounting, is available for SINAMICS G120C, frame size FSAA, 0.55 kW to 2.2 kW.

For 2.2 kW, operation of the sine-wave filter that is suitable for base mounting is only permitted for operating the inverter with rated power of 1.5 kW based on high overload (HO).

For technical specifications, see the datasheet on the Internet: <https://support.industry.siemens.com/cs/document/24479847>

Additional information is available in the Operating Instructions on the Internet at: [www.siemens.com/sinamics-g120c/documentation](http://www.siemens.com/sinamics-g120c/documentation)

**Selection and ordering data**

| Rated power        |      | SINAMICS G120C   |            | Sine-wave filter<br>(base mounting possible) |
|--------------------|------|------------------|------------|----------------------------------------------|
| kW                 | hp   | Type 6SL3210-... | Frame size | Article No.                                  |
| 380 ... 480 V 3 AC |      |                  |            |                                              |
| 0.55               | 0.75 | 1KE11-8U . 2     | FSAA       | 6SE6400-3TD00-4AD0                           |
| 0.75               | 1    | 1KE12-3U . 2     |            |                                              |
| 1.1                | 1.5  | 1KE13-2U . 2     |            |                                              |
| 1.5                | 2    | 1KE14-3U . 2     |            |                                              |

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Supplementary system components > Operator panels

### Overview

| Operator panel                                               | IOP-2 and IOP-2 Handheld Intelligent Operator Panel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | BOP-2 Basic Operator Panel                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                  |  <p>Thanks to the high-contrast color display, menu-based operation and the wizards, commissioning of the standard drives is easy. Application wizards guide the user through the commissioning of important applications such as pumps, fans, compressors, or conveyor systems.</p>                                                                                                                                                                                                                                                            |  <p>Commissioning of standard drives is easy with the menu-prompted dialog on a 2-line display. Simultaneous display of the parameter and parameter value, as well as parameter filtering, means that basic commissioning of a drive can be performed easily and, in most cases, without a printed parameter list.</p> |
| Possible applications                                        | <ul style="list-style-type: none"> <li>• Can be mounted directly on the inverter</li> <li>• Can be mounted in a control cabinet door using a door mounting kit (achievable degree of protection is IP55/UL Type 12 enclosure)</li> <li>• Available as handheld version</li> <li>• The following languages are integrated in the IOP-2: English, German, French, Italian, Spanish, Portuguese, Dutch, Swedish, Finnish, Russian, Czech, Polish, Turkish, Chinese Simplified</li> </ul>                                                                                                                                            | <ul style="list-style-type: none"> <li>• Can be mounted directly on the inverter</li> <li>• Can be mounted in the control cabinet door using a door mounting kit (achievable degree of protection is IP55/UL Type 12)</li> </ul>                                                                                                                                                                          |
| Quick commissioning without expert knowledge                 | <ul style="list-style-type: none"> <li>• Standard commissioning using the clone function</li> <li>• For quicker access, the parameter block names can be directly entered respectively changed on the IOP-2 using the virtual keyboard.</li> <li>• User-defined parameter list with a reduced number of self-selected parameters</li> <li>• Simple commissioning of standard applications using application-specific wizards; it is not necessary to know the parameter structure</li> <li>• Simple local commissioning using the handheld version</li> <li>• Commissioning is possible largely without documentation</li> </ul> | <ul style="list-style-type: none"> <li>• Standard commissioning using the clone function</li> </ul>                                                                                                                                                                                                                                                                                                       |
| High degree of operator friendliness and intuitive operation | <ul style="list-style-type: none"> <li>• Intuitive navigation by operating with a sensor control field</li> <li>• Graphic color display to show status values such as pressure or flow rate in the form of scalar values, bar-type diagrams, or trend displays</li> <li>• Status display with freely selectable units to specify physical values</li> <li>• Direct manual operation of the drive – you can simply toggle between the automatic and manual modes</li> <li>• Simple cloning of specific settings of the IOP-2 user interface.</li> </ul>                                                                           | <ul style="list-style-type: none"> <li>• 2-line display for showing up to 2 process values with text</li> <li>• Status display of predefined units</li> <li>• Direct manual operation of the drive – you can simply toggle between the automatic and manual modes</li> </ul>                                                                                                                              |
| Minimization of maintenance times                            | <ul style="list-style-type: none"> <li>• Diagnostics using plain text display, can be used locally on-site without documentation</li> <li>• The support function is used to determine the drive data for the Power Module, Control Unit and IOP-2 and makes this available as a two-dimensional code (data matrix/QR code)</li> <li>• Easily upgradable to new functional status via USB interface</li> </ul>                                                                                                                                                                                                                    | <ul style="list-style-type: none"> <li>• Diagnostics with menu prompting with 7-segment display</li> </ul>                                                                                                                                                                                                                                                                                                |

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Supplementary system components > IOP-2 Intelligent Operator Panel

#### Overview

##### *IOP-2 Intelligent Operator Panel*



IOP-2 Intelligent Operator Panel

The Intelligent Operator Panel IOP-2 is a very user-friendly and powerful operator panel for the SINAMICS G120, SINAMICS G120C, SINAMICS G120P, SINAMICS G110D, SINAMICS G120D, SINAMICS G110M and SIMATIC ET 200pro FC-2.

The IOP-2 supports both newcomers and drive experts. Thanks to the membrane keyboard with a central sensor control field, high-contrast color displays, menu-based operation and application wizards, it is easy to commission drives. A drive can be essentially commissioned without having to use a printed parameter list – as the parameters are displayed in plain text, and explanatory help texts and the parameter filtering function are provided.

Application wizards interactively guide you when commissioning important applications such as conveyor technology, pumps, fans and compressors. There is a basic commissioning wizard for general commissioning.

Up to two process values can be graphically visualized and up to four process values can be numerically visualized on the status screen/display. Process values can also be displayed in technological units.

The IOP-2 supports standard commissioning of identical drives. For this purpose, a parameter list can be copied from an inverter into the IOP-2 and downloaded into other drive units of the same type as required.

The IOP-2 can be installed in control cabinet doors using the optionally available door mounting kit.

#### Updating the IOP-2

The IOP-2 can be updated and expanded using the integrated USB interface.

Data to support future drive systems can be transferred from the PC to the IOP-2. Further, the USB interface allows user languages and wizards that will become available in the future to be subsequently downloaded and the firmware to be updated for the IOP-2 <sup>1)</sup>.

The IOP-2 is supplied with power via the USB interface during an update.

##### *IOP-2 Handheld*



IOP-2 Handheld

A handheld version of the IOP-2 can be ordered for mobile use. In addition to the IOP-2, it includes a housing with rechargeable batteries, a charging unit, an RS232 connecting cable, and a USB cable. The charging unit is supplied with connector adapters for Europe, the US and UK. When the batteries are fully charged, the operating time is up to 10 hours.

To connect the IOP-2 Handheld to SINAMICS G110D, SINAMICS G120D, SINAMICS G110M and SIMATIC ET 200pro FC-2, the RS232 connecting cable with optical interface is required in addition.

<sup>1)</sup> Information on updates for the IOP-2 is available at <https://support.industry.siemens.com/cs/document/67273266>

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Supplementary system components > IOP-2 Intelligent Operator Panel

#### Selection and ordering data

| Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Article No.               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>IOP-2 Intelligent Operator Panel</b><br>For use with<br>SINAMICS G120<br>SINAMICS G120C<br>SINAMICS G120P<br>SINAMICS G110D<br>SINAMICS G120D<br>SINAMICS G110M<br>SIMATIC ET 200pro FC-2<br><br>Operating languages: English, German, French, Italian, Spanish, Portuguese, Dutch, Swedish, Finnish, Russian, Czech, Polish, Turkish, Chinese Simplified                                                                                                                                                                                                                                                   | <b>6SL3255-0AA00-4JA2</b> |
| <b>IOP-2 Handheld</b><br>For use with<br>SINAMICS G120<br>SINAMICS G120C<br>SINAMICS G120P<br>SINAMICS G110D<br>SINAMICS G120D<br>SINAMICS G110M<br>SIMATIC ET 200pro FC-2<br><br>Included in the scope of delivery: <ul style="list-style-type: none"> <li>• IOP-2</li> <li>• Handheld housing</li> <li>• Rechargeable batteries (4 x AA)</li> <li>• Charging unit (international)</li> <li>• RS232 connecting cable <sup>1)</sup><br/>3 m (9.84 ft) long,<br/>can be used in combination with<br/>SINAMICS G120<br/>SINAMICS G120C<br/>SINAMICS G120P</li> <li>• USB cable<br/>1 m (3.28 ft) long</li> </ul> | <b>6SL3255-0AA00-4HA1</b> |
| <b>Accessories</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                           |
| <b>Door mounting kit</b><br>For mounting an operator panel in control cabinet doors with sheet steel thicknesses of 1 ... 3 mm (0.04 in ... 0.12 in)<br>Degree of protection IP55<br><br>Included in the scope of delivery: <ul style="list-style-type: none"> <li>• Seal</li> <li>• Mounting material</li> <li>• Connecting cable<br/>5 m (16.4 ft) long,<br/>also supplies voltage to the IOP-2 directly via the inverter</li> </ul>                                                                                                                                                                         | <b>6SL3256-0AP00-0JA0</b> |
| <b>RS232 connecting cable</b><br>2.5 m (8.20 ft) long,<br>with optical interface for connecting the IOP-2 Handheld to<br>SINAMICS G110D<br>SINAMICS G120D<br>SINAMICS G110M<br>SIMATIC ET 200pro FC-2                                                                                                                                                                                                                                                                                                                                                                                                          | <b>3RK1922-2BP00</b>      |

#### Benefits

- New device design
  - Intuitive user interface – membrane keyboard with central sensor control field
  - High-contrast color display with a range of display options
  - IOP-2 device design open for future functional expansions (e.g. device functions, wizards, languages)
  - Easily upgradable to new functional status via USB interface
- Commissioning
  - Simple commissioning via wizards
  - The "Fieldbus Interface Settings" wizard is used for easy configuration of the Ethernet interface
  - Fast standard commissioning of inverters thanks to cloning function
  - For quicker access, the parameter block names can be directly entered respectively changed on the IOP-2 using the virtual keyboard.
  - Simple local commissioning on-site using the handheld version
- Operator control and monitoring
  - Simple, individual local drive control (start/stop, setpoint value specification, change in direction of rotation)
  - Application-specific scenarios such as operator concepts with additional external operating elements can be implemented easily
  - Simple cloning of specific settings of the IOP-2 user interface, such as status screen, language settings, lighting duration, date/time settings, parameter backup mode and "My Parameters" – settings made once can such be easily transferred to many further IOP-2 Intelligent Operator Panels
- Diagnostics
  - Rapid diagnostics thanks to on-site plain text display
  - Integrated plain text help function for local display and resolution of fault messages
- Support function
  - Used to determine the drive data for the Power Module, Control Unit and IOP-2 (article number, serial number, firmware version, error statuses) and makes this available as a two-dimensional code (data matrix/QR code)
  - Allows easy contact with Customer Support via a data matrix/QR code generated on the IOP-2
  - Quick access via mobile devices (e.g. smartphones, tablets) to product information, documentation, FAQs, contact persons via a two-dimensional code generated on the IOP-2 (data matrix/QR code)
  - Scanning and evaluating of the two-dimensional data matrix code using the Industry Online Support app (<https://support.industry.siemens.com/cs/ww/en/sc/2067>), see also: <https://support.industry.siemens.com/cs/document/109748340>

<sup>1)</sup> For use in conjunction with SINAMICS G110D, SINAMICS G120D, SINAMICS G110M and SIMATIC ET 200pro FC-2, the RS232 connecting cable with optical interface is required (Article No.: **3RK1922-2BP00**). The cable must be ordered separately.

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Supplementary system components > IOP-2 Intelligent Operator Panel


#### Integration

##### Using the IOP-2 with the inverters

|                                                                                                                                                                                                                       | <ul style="list-style-type: none"> <li>• SINAMICS G120 with CU230P-2, CU240E-2 or CU250S-2</li> <li>• SINAMICS G120C</li> <li>• SINAMICS G120P with CU230P-2</li> </ul> | <ul style="list-style-type: none"> <li>• SINAMICS G110D</li> <li>• SINAMICS G120D</li> <li>• SINAMICS G110M</li> <li>• SIMATIC ET 200pro FC-2</li> </ul> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Plugging the IOP-2 onto the inverter</b><br>(Voltage supply via inverter)                                                                                                                                          | ✓                                                                                                                                                                       | –                                                                                                                                                        |
| <b>Door mounting of the IOP-2 with the door mounting kit</b><br>(Voltage supply via inverter. For this purpose, the IOP-2 must be connected up by means of the connecting cable supplied with the door mounting kit.) | ✓                                                                                                                                                                       | –                                                                                                                                                        |
| <b>Mobile use of the IOP-2 Handheld</b><br>(supplied from rechargeable batteries)                                                                                                                                     | ✓                                                                                                                                                                       | ✓ (RS232 connecting cable with optical interface required, article number 3RK1922-2BP00)                                                                 |

#### Door mounting

Using the optionally available door mounting kit, an operator panel can be simply mounted in a control cabinet door with just a few manual operations. In the case of door mounting, the IOP-2 Operator Panel achieves degree of protection IP55/UL Type 12 enclosure.

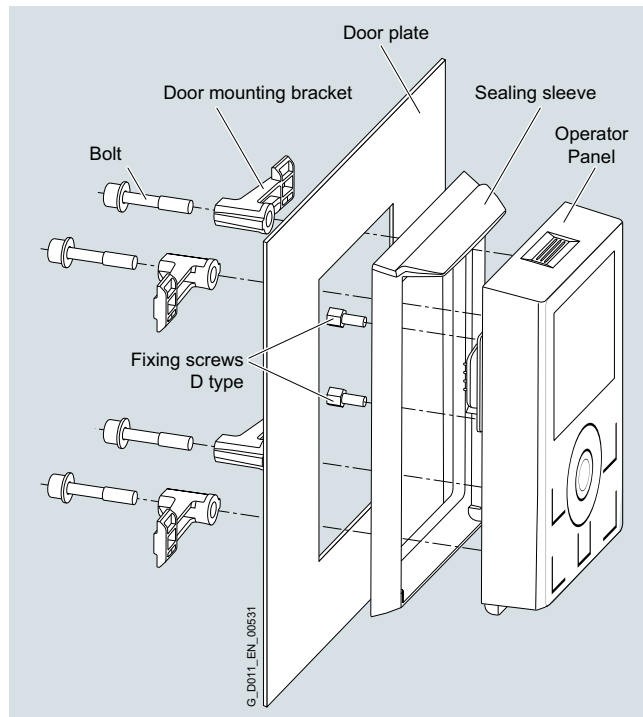

Door mounting kit with plugged-on IOP-2

#### Technical specifications

|                           | IOP-2<br>6SL3255-0AA00-4JA2                                                                                                         | IOP-2 Handheld<br>6SL3255-0AA00-4HA1                                                                                                                                                                                                                                                                                |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Display                   | High-contrast color display, a variety of display options                                                                           |                                                                                                                                                                                                                                                                                                                     |
| • Resolution              | 320 × 240 pixels                                                                                                                    |                                                                                                                                                                                                                                                                                                                     |
| Operator panel            | Membrane keyboard with central sensor control field                                                                                 |                                                                                                                                                                                                                                                                                                                     |
| Operating languages       | English, German, French, Italian, Spanish, Portuguese, Dutch, Swedish, Finnish, Russian, Czech, Polish, Turkish, Chinese Simplified |                                                                                                                                                                                                                                                                                                                     |
| Ambient temperature       | <div>• During transport and storage</div> <div>• During operation</div>                                                             | <div>-40 ... +70 °C<br/>(-40 ... +158 °F)</div> <div>For direct mounting on the inverter:<br/>0 ... 50 °C<br/>(32 ... 122 °F)<br/><br/>For installation with door mounting kit:<br/>0 ... 55 °C<br/>(32 ... 131 °F)</div> <div>-20 ... +55 °C<br/>(-4 ... +131 °F)</div> <div>0 ... 40 °C<br/>(32 ... 104 °F)</div> |
| Humidity                  | Relative humidity < 95 %, non-condensing                                                                                            |                                                                                                                                                                                                                                                                                                                     |
| Degree of protection      | For direct mounting on the inverter: IP20<br><br>For installation with door mounting kit: IP55, UL Type 12 enclosure                | IP20                                                                                                                                                                                                                                                                                                                |
| Dimensions (H × W × D)    | 106.86 × 70 × 19.65 mm<br>(4.21 × 2.76 × 0.77 in)                                                                                   | 195.04 × 70 × 37.58 mm<br>(7.68 × 2.76 × 1.48 in)                                                                                                                                                                                                                                                                   |
| Weight, approx.           | 0.134 kg (0.3 lb)                                                                                                                   | 0.724 kg (1.6 lb)                                                                                                                                                                                                                                                                                                   |
| Compliance with standards | CE, RCM, cULus, EAC, KC-REM-S49-SINAMICS                                                                                            |                                                                                                                                                                                                                                                                                                                     |

# SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Supplementary system components > BOP-2 Basic Operator Panel

### Overview



BOP-2 Basic Operator Panel

The BOP-2 Basic Operator Panel can be used to commission drives, monitor drives in operation and input individual parameter settings.

Commissioning of standard drives is easy with the menu-prompted dialog on a 2-line display. Simultaneous display of the parameter and parameter value, as well as parameter filtering, means that basic commissioning of a drive can be performed easily and, in most cases, without a printed parameter list.

The drives are easily controlled manually using directly assigned navigation buttons. The BOP-2 has a dedicated switchover button to switch from automatic to manual mode.

Diagnostics can easily be performed on the connected inverter by following the menus.

Up to two process values can be numerically visualized simultaneously.

BOP-2 supports standard commissioning of identical drives. For this purpose, a parameter list can be copied from an inverter into the BOP-2 and when required, downloaded into other drive units of the same type.

The operating temperature of the BOP-2 is 0 °C ... 50 °C (32 °F ... 122 °F).

### Selection and ordering data

| Description                                                                                                                                                                                                                                                                                                                                                              | Article No.               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>BOP-2 Basic Operator Panel</b>                                                                                                                                                                                                                                                                                                                                        | <b>6SL3255-0AA00-4CA1</b> |
| <b>Accessories</b>                                                                                                                                                                                                                                                                                                                                                       |                           |
| <b>Door mounting kit</b><br>For mounting an operator panel in control cabinet doors with sheet steel thicknesses of 1 ... 3 mm (0.04 in ... 0.12 in)<br>Degree of protection IP55<br>Included in the scope of delivery:<br>• Seal<br>• Mounting material<br>• Connecting cable (5 m/16.4 ft long, also supplies voltage to the operator panel directly via the inverter) | <b>6SL3256-0AP00-0JA0</b> |

### Benefits

- Shorten commissioning times – Easy commissioning of standard drives using basic commissioning wizards (setup)
- Minimize standstill times – Fast detection and rectification of faults (Diagnostics)
- Greater transparency in the process – The status display of the BOP-2 makes process variable monitoring easy (Monitoring)
- Direct mounting on the inverter (see also IOP-2)
- User-friendly user interface:
  - Easy navigation using clear menu structure and clearly assigned control keys
  - Two-line display

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Supplementary system components > Memory cards

#### Overview



SINAMICS SD memory card

The parameter settings for an inverter can be stored on the SINAMICS SD memory card. When service is required, e.g. after the inverter has been replaced and the data have been downloaded from the memory card, the drive system is immediately ready for use again.

- Parameter settings can be written from the memory card to the inverter or saved from the inverter to the memory card.
- Up to 100 parameter sets can be stored.
- The memory card supports standard commissioning without the use of an operator panel such as the IOP-2, BOP-2 or the STARTER and SINAMICS Startdrive commissioning tools.
- If firmware is stored on the memory card and a frequency inverter is installed, the firmware can be upgraded/downgraded during inverter startup <sup>1)</sup>.

#### Note:

The memory card is not required for operation and does not have to remain inserted.

#### Selection and ordering data

| Description                                                                       | Article No.               |
|-----------------------------------------------------------------------------------|---------------------------|
| <b>SINAMICS SD card<br/>512 MB</b>                                                | <b>6SL3054-4AG00-2AA0</b> |
| <i>Optional firmware memory cards</i>                                             |                           |
| <b>SINAMICS SD card<br/>512 MB + firmware V4.7 SP10<br/>(Multicard V4.7 SP10)</b> | <b>6SL3054-7TF00-2BA0</b> |

For an overview and more information on all available firmware versions, see

<https://support.industry.siemens.com/cs/document/67364620>

#### Notes:

SINAMICS G120C compact inverters with frame size FSAA can be operated as of firmware V4.7 SP3.

SINAMICS G120C compact inverters with frame sizes FSD to FSF can be operated as of firmware V4.7 SP6.

<sup>1)</sup> You can find more information about firmware upgrades/downgrades on the Internet at <https://support.industry.siemens.com/cs/document/67364620>

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

Supplementary system components > SINAMICS G120 Smart Access

### Overview



SINAMICS G120 Smart Access

It is also easy and convenient to commission and operate the SINAMICS G120, SINAMICS G120C and SINAMICS G120P inverters of firmware V4.7 SP6 and higher using the web server module SINAMICS G120 Smart Access and a connected smartphone, tablet or laptop.

### Benefits

- Wireless commissioning, operation and diagnostics via mobile device or laptop thanks to the optional SINAMICS G120 Smart Access
- Easy access to the inverter in difficult-to-access areas
- Intuitive user interface and commissioning wizard
- Free choice of terminal devices as the web server works with all common web browsers, such as iOS, Android, Windows, Linux and Mac OS

### Function

- Commissioning using commissioning wizard
- Setting and saving parameters
- Testing motor in JOG mode
- Monitoring of inverter data
- Quick diagnostics
- Saving the settings and restoring to factory settings

### Integration



SINAMICS G120C, FSAA, SINAMICS G120 Smart Access

The optional SINAMICS G120 Smart Access is simply plugged onto the inverter and is available for the following inverters of firmware V4.7 SP6 and higher.

- SINAMICS G120C
  - SINAMICS G120 together with the CU230P-2 and CU240E-2 Control Units (without fail-safe versions)
  - SINAMICS G120P together with the CU230P-2 Control Units
- [More information can be found in Catalog D 35.](#)

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Supplementary system components > SINAMICS G120 Smart Access

#### Selection and ordering data

| Description                                                                                                                                                                                                                                                                                                                                                                                                   | Article No.                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| <b>SINAMICS G120 Smart Access</b><br>For wireless commissioning, operation and diagnostics of the following inverters using a smartphone, tablet, or laptop <ul style="list-style-type: none"> <li>• SINAMICS G120C</li> <li>• SINAMICS G120 together with the CU230P-2 and CU240E-2 Control Units (without fail-safe versions)</li> <li>• SINAMICS G120P together with the CU230P-2 Control Units</li> </ul> | <b>NEW 6SL3255-0AA00-5AA0</b> |

#### Technical specifications

|                                                                                                                                         | <b>SINAMICS G120 Smart Access</b><br>6SL3255-0AA00-5AA0                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating system</b>                                                                                                                 | iOS, Android, Windows, Linux, Mac OS                                                                                         |
| <b>Languages</b>                                                                                                                        | Support of six languages: English, French, German, Italian, Spanish, Chinese                                                 |
| <b>Ambient temperature</b> <ul style="list-style-type: none"> <li>• During storage and transport</li> <li>• During operation</li> </ul> | -40 ... +70 °C (-40 ... +158 °F)<br>0 ... 50 °C (32 ... 122 °F)<br>if the Smart Access is plugged directly into the inverter |
| <b>Humidity</b>                                                                                                                         | < 95 %, non-condensing                                                                                                       |
| <b>Degree of protection</b>                                                                                                             | Depending on the degree of protection of the inverter, max. IP55/UL Type 12 enclosure                                        |
| <b>Dimensions</b> <ul style="list-style-type: none"> <li>• Width</li> <li>• Height</li> <li>• Depth</li> </ul>                          | 70 mm (2.76 in)<br>108.9 mm (4.29 in)<br>17.3 mm (0.68 in)                                                                   |
| <b>Weight, approx.</b>                                                                                                                  | 0.08 kg (0.18 lb)                                                                                                            |
| <b>Compliance with standards</b>                                                                                                        | CE, FCC, SRRC, WPC, ANATEL, BTK                                                                                              |

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Supplementary system components > PC inverter connection kit 2

#### Overview



PC inverter connection kit 2

For controlling and commissioning an inverter directly from a PC if the STARTER<sup>1)</sup> commissioning tool or SINAMICS Startdrive has been installed on the PC. With this, the inverter can be

- parameterized (commissioning, optimization),
- monitored (diagnostics)
- controlled (master control via the STARTER or SINAMICS Startdrive commissioning tool for test purposes)

A USB cable (3 m/9.84 ft) is included in the scope of delivery.

#### Selection and ordering data

| Description                         | Article No.               |
|-------------------------------------|---------------------------|
| <b>PC inverter connection kit 2</b> | <b>6SL3255-0AA00-2CA0</b> |
| USB cable (3 m/9.84 ft long) for    |                           |
| • SINAMICS G120C                    |                           |
| • SINAMICS G120 Control Units       |                           |
| - CU230P-2                          |                           |
| - CU240E-2                          |                           |
| - CU250S-2                          |                           |
| • SINAMICS G110M Control Units      |                           |
| - CU240M                            |                           |
| • SINAMICS G120D Control Units      |                           |
| - CU240D-2                          |                           |
| - CU250D-2                          |                           |

### Supplementary system components > Shield connection kits

#### Overview

A shield connection kit is supplied as standard with frame sizes FSAA to FSC. A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size for the frame sizes FSD to FSF. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSF.

#### Selection and ordering data

| Description                                                                                                                                                                                                                                                                                                         | Article No.                                           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| <b>Shield connection kit</b><br>for SINAMICS G120C                                                                                                                                                                                                                                                                  |                                                       |
| • Frame sizes FSAA to FSC                                                                                                                                                                                                                                                                                           | Supplied with the inverter, available as a spare part |
| • Frame sizes FSD to FSF<br>A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered. |                                                       |
| - Frame size FSD                                                                                                                                                                                                                                                                                                    | <b>6SL3262-1AD01-0DA0</b>                             |
| - Frame size FSE                                                                                                                                                                                                                                                                                                    | <b>6SL3262-1AE01-0DA0</b>                             |
| - Frame size FSF                                                                                                                                                                                                                                                                                                    | <b>6SL3262-1AF01-0DA0</b>                             |

<sup>1)</sup> The STARTER commissioning tool is available on the Internet at [www.siemens.com/starter](http://www.siemens.com/starter)

## SINAMICS G120C compact inverters

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Spare parts

#### Overview

The following spare parts are available for SINAMICS G120C for service and maintenance work.

##### **SINAMICS G120C shield connection kits**

A shield connection kit is supplied as standard with frame sizes FSAA to FSC.

A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size for the frame sizes FSD to FSF. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSF.

##### **SINAMICS G120C spare parts kit**

This kit comprises 4 I/O terminals, 1 RS485 terminal, 2 sets of Control Unit doors (1 × PN and 1 × other communication versions) and 1 blanking cover.

##### **SINAMICS terminal cover kit**

The terminal cover kit includes a replacement cover for the connecting terminals.

Terminal cover kits, which are suitable for frame sizes FSD to FSF, are available.

##### **SINAMICS G120C connectors**

A set of connectors for the line feeder cable, braking resistor and motor cable can be ordered corresponding to the frame size of the SINAMICS G120C compact inverter for the frame sizes FSAA to FSC.

##### **SINAMICS G120C roof-mounted fan**

A roof-mounted fan (at the top of the device) comprising a pre-assembled unit with holder and fan can be ordered corresponding to the frame size of the SINAMICS G120C compact inverter.



SINAMICS G120C frame size FSB, with integrated roof-mounted fan

##### **SINAMICS G120C fan unit**

A replacement fan (at the rear of the device; heat sink) comprising a pre-assembled unit with holder and fan can be ordered corresponding to the frame size of the SINAMICS G120C compact inverter.



SINAMICS G120C frame size FSB, with fan unit (rear view of rotated inverter)

#### Selection and ordering data

| Description                                 | Article No.        |
|---------------------------------------------|--------------------|
| <b>SINAMICS G120C shield connection kit</b> |                    |
| • Frame size FSAA                           | 6SL3266-1ER00-0KA0 |
| • Frame size FSA                            | 6SL3266-1EA00-0KA0 |
| • Frame size FSB                            | 6SL3266-1EB00-0KA0 |
| • Frame size FSC                            | 6SL3266-1EC00-0KA0 |
| • Frame size FSD                            | 6SL3262-1AD01-0DA0 |
| • Frame size FSE                            | 6SL3262-1AE01-0DA0 |
| • Frame size FSF                            | 6SL3262-1AF01-0DA0 |
| <b>SINAMICS G120C spare parts kit</b>       |                    |
| • Frame sizes FSAA to FSC                   | 6SL3200-0SK41-0AA0 |
| • Frame sizes FSD to FSF                    | 6SL3200-0SK08-0AA0 |
| <b>SINAMICS terminal cover kit</b>          |                    |
| • Frame size FSD                            | 6SL3200-0SM13-0AA0 |
| • Frame size FSE                            | 6SL3200-0SM14-0AA0 |
| • Frame size FSF                            | 6SL3200-0SM15-0AA0 |
| <b>SINAMICS G120C connectors</b>            |                    |
| • Frame sizes FSAA and FSA                  | 6SL3200-0ST05-0AA0 |
| • Frame size FSB                            | 6SL3200-0ST06-0AA0 |
| • Frame size FSC                            | 6SL3200-0ST07-0AA0 |
| <b>SINAMICS G120C roof-mounted fan</b>      |                    |
| • Frame size FSAA                           | 6SL3200-0SF38-0AA0 |
| • Frame size FSA                            | 6SL3200-0SF40-0AA0 |
| • Frame size FSB                            | 6SL3200-0SF41-0AA0 |
| • Frame size FSC                            | 6SL3200-0SF42-0AA0 |
| <b>SINAMICS G120C fan unit</b>              |                    |
| • Frame size FSA                            | 6SL3200-0SF12-0AA0 |
| • Frame size FSB                            | 6SL3200-0SF13-0AA0 |
| • Frame size FSC                            | 6SL3200-0SF14-0AA0 |
| • Frame size FSD                            | 6SL3200-0SF15-0AA0 |
| • Frame size FSE                            | 6SL3200-0SF16-0AA0 |
| • Frame size FSF                            | 6SL3200-0SF17-0AA0 |

# SINAMICS G120 standard inverters

## 0.37 kW to 250 kW (0.5 hp to 400 hp)



|            |                     |
|------------|---------------------|
| <b>9/2</b> | <b>Introduction</b> |
| 9/2        | Application         |
| 9/2        | More information    |

|            |                                         |
|------------|-----------------------------------------|
| <b>9/3</b> | <b>SINAMICS G120 standard inverters</b> |
| 9/3        | Overview                                |
| 9/5        | Benefits                                |
| 9/5        | Design                                  |
| 9/13       | Configuration                           |
| 9/14       | Technical specifications                |

|             |                             |
|-------------|-----------------------------|
| <b>9/17</b> | <b>Control Units</b>        |
| 9/17        | Overview                    |
| 9/20        | Design                      |
| 9/24        | Function                    |
| 9/26        | Integration                 |
| 9/30        | Selection and ordering data |
| 9/32        | Technical specifications    |

|             |                             |
|-------------|-----------------------------|
| <b>9/35</b> | <b>Power Modules</b>        |
| 9/35        | Overview                    |
| 9/37        | Integration                 |
| 9/41        | Selection and ordering data |
| 9/44        | Technical specifications    |
| 9/64        | Characteristic curves       |
| 9/68        | Dimensional drawings        |

|             |                                                      |
|-------------|------------------------------------------------------|
| <b>9/72</b> | <b>Line-side components</b>                          |
| 9/72        | Line filters                                         |
| 9/75        | Line reactors                                        |
| 9/78        | Recommended line-side overcurrent protection devices |

|             |                           |
|-------------|---------------------------|
| <b>9/82</b> | <b>DC link components</b> |
| 9/82        | Braking resistors         |

|             |                                   |
|-------------|-----------------------------------|
| <b>9/88</b> | <b>Load-side power components</b> |
| 9/88        | Output reactors                   |
| 9/95        | Sine-wave filters                 |
| 9/98        | dv/dt filters plus VPL            |

|              |                                                       |
|--------------|-------------------------------------------------------|
| <b>9/102</b> | <b>Supplementary system components</b>                |
| 9/102        | Operator panels                                       |
| 9/103        | IOP-2 Intelligent Operator Panel                      |
| 9/106        | BOP-2 Basic Operator Panel                            |
| 9/108        | Push-through mounting frame for PM240-2 Power Modules |
| 9/108        | Memory cards                                          |
| 9/109        | SINAMICS G120 Smart Access                            |
| 9/110        | Brake Relay                                           |
| 9/111        | Safe Brake Relay                                      |
| 9/112        | CM240NE chemical industry module                      |
| 9/114        | PC inverter connection kit 2                          |
| 9/115        | Shield connection kits for Control Units              |
| 9/115        | Shield connection kits for Power Modules              |










|              |                                                  |
|--------------|--------------------------------------------------|
| <b>9/116</b> | <b>Spare parts</b>                               |
| 9/116        | Spare parts kit for Control Units                |
| 9/116        | Shield connection kits for PM240-2 Power Modules |
| 9/116        | Mounting set for PM240-2 Power Modules           |
| 9/117        | Terminal cover kits for frame sizes FSD to FSG   |
| 9/117        | Replacement connectors                           |
| 9/118        | Fan units                                        |
| 9/120        | Replacement fans                                 |

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Introduction

### Application

| Use                                                                                 | Requirements for torque accuracy/speed accuracy/position accuracy/coordination of axes/functionality |                                                                                                                                                                                      |                                                                                                               |                                                                                                          |                                                                                                          |                                                                                                                                             |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                     | Continuous motion                                                                                    |                                                                                                                                                                                      |                                                                                                               | Non-continuous motion                                                                                    |                                                                                                          |                                                                                                                                             |
|                                                                                     | Basic                                                                                                | Medium                                                                                                                                                                               | High                                                                                                          | Basic                                                                                                    | Medium                                                                                                   | High                                                                                                                                        |
|                                                                                     |                     |                                                                                                     |                              |                         |                       |                                                          |
| <b>Pumping, ventilating, compressing</b>                                            | Centrifugal pumps<br>Radial / axial fans<br>Compressors                                              | Centrifugal pumps<br>Radial / axial fans<br>Compressors                                                                                                                              | Eccentric screw pumps                                                                                         | Hydraulic pumps<br>Metering pumps                                                                        | Hydraulic pumps<br>Metering pumps                                                                        | Descaling pumps<br>Hydraulic pumps                                                                                                          |
|    | V20<br>G120C<br>G120P                                                                                | G120P<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                             | S120                                                                                                          | <b>G120</b>                                                                                              | S110                                                                                                     | S120                                                                                                                                        |
| <b>Moving</b>                                                                       | Conveyor belts<br>Roller conveyors<br>Chain conveyors                                                | Conveyor belts<br>Roller conveyors<br>Chain conveyors<br>Lifting/lowering devices<br>Elevators<br>Escalators/<br>moving walkways<br>Indoor cranes<br>Marine drives<br>Cable railways | Elevators<br>Container cranes<br>Mining hoists<br>Excavators for open-cast mining<br>Test bays                | Acceleration conveyors<br>Storage and retrieval machines                                                 | Acceleration conveyors<br>Storage and retrieval machines<br>Cross cutters<br>Reel changers               | Storage and retrieval machines<br>Robotics<br>Pick & place<br>Rotary indexing tables<br>Cross cutters<br>Roll feeds<br>Engagers/disengagers |
|    | V20<br>G110D<br>G110M<br>G120C<br>ET 200pro FC-2 <sup>2)</sup>                                       | <b>G120</b><br>G120D<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                              | S120<br>S150<br>DCM                                                                                           | V90<br><b>G120</b><br>G120D                                                                              | S110<br>S210<br>DCM                                                                                      | S120<br>S210<br>DCM                                                                                                                         |
| <b>Processing</b>                                                                   | Mills<br>Mixers<br>Kneaders<br>Crushers<br>Agitators<br>Centrifuges                                  | Mills<br>Mixers<br>Kneaders<br>Crushers<br>Agitators<br>Centrifuges<br>Extruders<br>Rotary furnaces                                                                                  | Extruders<br>Winders/unwinders<br>Lead/follower drives<br>Calenders<br>Main press drives<br>Printing machines | Tubular bagging machines<br>Single-axis motion control such as<br>• Position profiles<br>• Path profiles | Tubular bagging machines<br>Single-axis motion control such as<br>• Position profiles<br>• Path profiles | Servo presses<br>Rolling mill drives<br>Multi-axis motion control such as<br>• Multi-axis positioning<br>• Cams<br>• Interpolations         |
|  | V20<br>G120C                                                                                         | <b>G120</b><br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                       | S120<br>S150<br>DCM                                                                                           | V90<br><b>G120</b>                                                                                       | S110<br>S210                                                                                             | S120<br>S210<br>DCM                                                                                                                         |
| <b>Machining</b>                                                                    | Main drives for<br>• Turning<br>• Milling<br>• Drilling                                              | Main drives for<br>• Drilling<br>• Sawing                                                                                                                                            | Main drives for<br>• Turning<br>• Milling<br>• Drilling<br>• Gear cutting<br>• Grinding                       | Axis drives for<br>• Turning<br>• Milling<br>• Drilling                                                  | Axis drives for<br>• Drilling<br>• Sawing                                                                | Axis drives for<br>• Turning<br>• Milling<br>• Drilling<br>• Lasering<br>• Gear cutting<br>• Grinding<br>• Nibbling and punching            |
|  | S110                                                                                                 | S110<br>S120                                                                                                                                                                         | S120                                                                                                          | S110                                                                                                     | S110<br>S120                                                                                             | S120                                                                                                                                        |

The standard SINAMICS G120 inverter is especially well-suited

- as a universal drive in all industrial and commercial applications
- e.g. in the automotive, textile, process technology industries
- for higher-level applications such as, for example, conveyor systems in the steel, oil, gas and offshore sectors, or in regenerative energy recovery applications.

Practical application examples and descriptions are available on the Internet at

[www.siemens.com/sinamics-applications](http://www.siemens.com/sinamics-applications)

### More information

You may also be interested in these drives:

- Higher degree of protection for power ratings up to 7.5 kW ⇒ SINAMICS G110M, SINAMICS G110D, SINAMICS G120D (Catalog D 31.2)
- With positioning function for distributed drive solutions in IP65 degree of protection ⇒ SINAMICS G120D (Catalog D 31.2)
- With positioning function in the control cabinet in IP20 degree of protection ⇒ SINAMICS S110
- Special functions for pumps, fans, and compressors ⇒ SINAMICS G120P (Catalog D 35)

<sup>1)</sup> Industry-specific inverters.

<sup>2)</sup> Information on the SIMATIC ET 200pro FC-2 frequency converter is available in Catalog D 31.2 and at [www.siemens.com/et200pro-fc](http://www.siemens.com/et200pro-fc)

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### SINAMICS G120 standard inverters

#### Overview

The SINAMICS G120 frequency inverter is designed to provide precise and cost-effective speed/torque control of three-phase motors.

With different device versions (frame sizes FSA to FSG) in a power range from 0.37 kW to 250 kW, it is suitable for a wide variety of drive solutions.



Example: SINAMICS G120, frame sizes FSA, FSB and FSC; each with Power Module, CU240E-2 F Control Unit and Basic Operator Panel BOP-2



Example: SINAMICS G120, frame sizes FSD, FSE, FSF and FSG; each with Power Module, CU240E-2 F Control Unit and Intelligent Operator Panel IOP-2

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### SINAMICS G120 standard inverters

#### Overview (continued)

##### Operator-friendly design

SINAMICS G120 is a modular inverter system that essentially comprises two function units:

- Control Unit (CU)
- Power Module (PM)

The Control Unit controls and monitors the Power Module and the connected motor using several different closed-loop control types that can be selected. It supports communication with a local or central controller and monitoring devices.

The Power Module supplies the motor in the power range 0.37 kW to 250 kW. It features state-of-the-art IGBT technology with pulse-width-modulated motor voltage and selectable pulse frequency. Comprehensive protection functions provide a high degree of protection for the Power Module and the motor.

The Control Units can be combined with the following Power Modules:

| Control Units | Power Modules degree of protection IP20 |       |
|---------------|-----------------------------------------|-------|
|               | PM240-2                                 | PM250 |
| CU230P-2      | ✓                                       | ✓     |
| CU240E-2      | ✓                                       | ✓     |
| CU250S-2      | ✓                                       | ✓     |

##### Safety Integrated

SINAMICS G120 standard inverters are available in different versions for safety-related applications. The PM240-2 and PM250 Power Modules are already designed for Safety Integrated. A drive can be combined with a Control Unit with safety functions (see overview) in order to create a Safety Integrated drive. The availability of Safety Integrated functions depends on the type of Control Unit.

| Control Unit | Basic Safety functions |     |                   | Extended Safety functions |                 |                 |
|--------------|------------------------|-----|-------------------|---------------------------|-----------------|-----------------|
|              | STO                    | SS1 | SBC <sup>1)</sup> | SLS                       | SDI             | SSM             |
| CU230P-2     | –                      | –   | –                 | –                         | –               | –               |
| CU240E-2     | ✓                      | –   | –                 | –                         | –               | –               |
| CU240E-2 F   | ✓                      | ✓   | –                 | ✓                         | ✓               | ✓ <sup>2)</sup> |
| CU250S-2     | ✓                      | ✓   | ✓                 | ✓ <sup>3)</sup>           | ✓ <sup>3)</sup> | ✓ <sup>3)</sup> |

Basic Safety functions (certified according to IEC 61508 SIL 2, and EN ISO 13849-1 PL d and Category 3)

- Safe Torque Off (STO) to protect against active movement of the drive
- The PM240-2 Power Modules, frame sizes FSD to FSG, offer additional terminals to achieve STO acc. to IEC 61508 SIL 3 and EN ISO 13849-1 PL e and Category 3.
- Safe Stop 1 (SS1) for continuous monitoring of a safe braking ramp
- Safe Brake Control (SBC) is used to safely control a holding brake. When enabled, SBC is always activated at the same time as STO. The Safe Brake Relay is used for SBC.

Extended Safety functions (certified according to IEC 61508 SIL 2 and EN ISO 13849-1 PL d and Category 3)

- Safely-Limited Speed (SLS) for protection against dangerous movements on exceeding a speed limit
- Safe Direction (SDI) This function ensures that the drive can only rotate in the selected direction.
- Safe Speed Monitor (SSM) This function signals if a drive operates below a specific speed/feed velocity.

Basic Safety and Extended Safety functions can be activated via PROFIsafe or by means of the safety inputs.

None of the safety functions require a motor encoder and they are thus cheaper and easier to implement. Existing systems in particular can be simply updated with safety technology without the need to change the motor or mechanical system.

The Safe Torque Off (STO) function can be used without restriction for all applications. The SS1, SLS, SSM and SDI functions are only permissible for applications where the load can never accelerate when the inverter is switched off. They are therefore not permitted for applications involving pull-through loads such as hoisting gear and unwinders.

Further information can be found in the section [Safety Integrated](#).

##### Efficient Infeed Technology

The innovative Efficient Infeed Technology is employed in PM250 Power Modules. This technology allows the energy produced by motors operating in generator mode connected to standard inverters to be fed back into the supply system. For control cabinets, an additional temperature rise can be avoided and the amount of space required can be reduced due to the fact that components such as braking resistors, braking choppers and line reactors can be eliminated. Further, wiring and engineering costs are significantly reduced. At the same time, energy consumption can be reduced and ongoing operating costs noticeably reduced.

##### Innovative cooling concept and varnishing of electronic modules

The new cooling system and varnishing of the electronic modules significantly increases the service life or useful life of the device.

- Disposal of all heat losses via an external heat sink
- Consequential convection cooling of the Control Unit, electronic modules are not located in the air duct
- All cooling air from the fan is directed through the heat sink

##### Energy efficiency

Integrated technologies help when optimizing the energy usage of the plant or system referred to the particular application:

- Energy-efficient vector control with or without sensors
- Automatic flux reduction with V/f ECO mode
- Integrated energy saving computer

Further information can be found in the section [Energy efficiency](#).

<sup>1)</sup> The SBC function can be utilized only if a Safe Brake Relay is installed.

<sup>2)</sup> SSM possible only for CU240E-2 DP-F / CU240E-2 PN-F Control Units with PROFIsafe.

<sup>3)</sup> With license for Extended Safety functions.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## SINAMICS G120 standard inverters

### Benefits

- Modularity ensures flexibility for a drive concept that is fit for the future
  - Control Unit can be hot-swapped
  - Pluggable terminals
  - The modules can be easily replaced, which makes the system extremely service friendly
- The integrated safety functions significantly reduce the costs when integrating drives into safety-oriented machines or systems
- The PM240-2 Power Modules, frame sizes FSD to FSG, offer additional terminals to achieve STO acc. to IEC 61508 SIL 3 and EN ISO 13489-1 PL e and Category 3.
- Communications-capable via PROFINET or PROFIBUS with PROFIdrive Profile 4.0
  - Plant-wide engineering
  - Easy to handle
- Wireless commissioning, operation and diagnostics via mobile device or laptop thanks to the optional SINAMICS G120 Smart Access
- The innovative circuit design (bidirectional input rectifier with "pared-down" DC link) allows the kinetic energy of a load to be fed back into the supply system when PM250 Power Modules are used. This feedback capability provides enormous potential for savings because generated energy no longer has to be converted into heat in a braking resistor
- Integrated USB interface for simplified, local commissioning and diagnostics
- With Control Unit CU230P-2: Application-specific functions for pumps, fans and compressors
  - Integrated are, e.g.:
    - 4 freely-programmable PID controllers
    - Application-specific wizards
    - Pt1000-/LG-Ni1000-/DIN-Ni1000 temperature sensor interface
    - 230 V AC relay
    - 3 freely-programmable digital time switches


Detailed information can be found in Catalog D 35.

- With CU250S-2 Control Units: Integrated positioning functionality (basic positioner EPos) supports process-related implementation of positioning tasks with a high dynamic response. Positioning can be implemented with an incremental and/or absolute encoder (SSI)
  - Encoder interfaces DRIVE-CLiQ, HTL/TTL/SSI (SUB-D) and resolver/HTL (terminal)
  - Vector control with or without sensors
- Integrated control functionality by using BICO technology
- An innovative cooling concept and coated electronic modules increase robustness and service life
  - External heat sink
  - Electronic components are not located in air duct
  - Control Unit that is completely cooled by convection
  - Additional coating of the most important components
- Simple unit replacement and quick copying of parameters using an optional Operator Panel or an optional memory card
- Quiet motor operation as a result of the high pulse frequency
- Compact, space-saving design
- Simple adaptation to 50 Hz or 60 Hz motors (IEC or NEMA motors)
- 2/3-wire control for static/pulsed signals for universal control via digital inputs
- Certified worldwide for compliance with CE, UL, cUL, RCM, SEMI F47 and Safety Integrated according to IEC 61508 SIL 2 and EN ISO 13849-1 PL d and Category 3

### Design

#### Application-orientated design of SINAMICS G120

SINAMICS G120 standard inverters are modular inverters for standard drives. Selection of the SINAMICS G120 is reduced to two or three steps thanks to the modular system used.

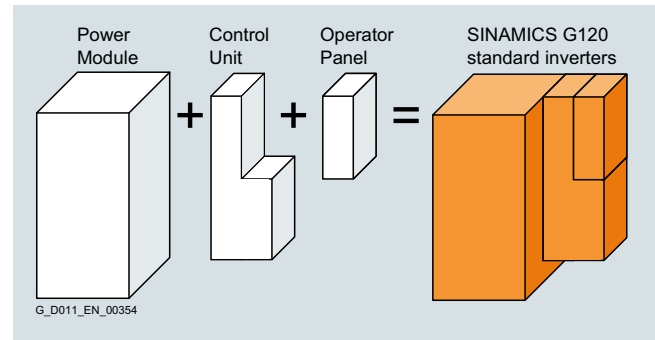

#### Selecting the Control Unit

The optimum Control Unit is selected first, based on the number of I/Os and any additional functions required such as Safety Integrated or HVAC. The communication options are already integrated and do not have to be additionally ordered or plugged in. Three product series are available corresponding to the particular application.

#### CU230P-2 Control Units

The CU230P-2 Control Units have been specifically designed for pump, fan and compressor applications. The CU230P-2 is the Control Unit for the pump, fan and compressor inverters SINAMICS G120P and SINAMICS G120P Cabinet. [Detailed information can be found in Catalog D 35.](#)

#### Control Unit CU240E-2

The CU240E-2 Control Unit is suitable for a wide range of applications in general machine construction, such as conveyor belts, mixers and extruders.

#### CU250S-2 Control Units

The CU250S-2 Control Units are suitable for applications involving single drives with exacting speed control requirements such as extruders and centrifuges, and for positioning tasks such as conveyor belts, lifting/lowering devices, etc. They can also be used to implement multi-motor drives without DC coupling such as wire-drawing machines and simple material lines.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## SINAMICS G120 standard inverters

### Design (continued)

| Description                                                                                                                                                                                                                                                   | Fieldbus                                                                                                                | Profile                                      | Inputs<br>Outputs                                   | Integrated safety<br>technology           | Fail-safe<br>digital inputs<br>digital outputs | Control Unit<br><br>Article No. |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|-----------------------------------------------------|-------------------------------------------|------------------------------------------------|---------------------------------|
| <b>CU230P-2 series – the specialist for pumps, fans, compressors, water, buildings</b><br>Technology functions (selection): Free function blocks (FFB), 4 × PID controller, cascade connection, hibernation mode, essential service mode, multi-zone control  |                                                                                                                         |                                              |                                                     |                                           |                                                |                                 |
| <b>CU230P-2 HVAC</b>                                                                                                                                                                                                                                          | <ul style="list-style-type: none"> <li>• USS</li> <li>• Modbus RTU</li> <li>• BACnet MS/TP</li> <li>• FLN P1</li> </ul> | –                                            | 6 DI<br>4 AI<br>3 DO<br>2 AO                        | –                                         | –                                              | <b>6SL3243-0BB30-1HA3</b>       |
| <b>CU230P-2 DP</b>                                                                                                                                                                                                                                            | • PROFIBUS DP                                                                                                           | • PROFIdrive                                 |                                                     |                                           |                                                | <b>6SL3243-0BB30-1PA3</b>       |
| <b>CU230P-2 PN</b>                                                                                                                                                                                                                                            | • PROFINET                                                                                                              | • PROFIdrive<br>• PROFIenergy                |                                                     |                                           |                                                | <b>6SL3243-0BB30-1FA0</b>       |
|                                                                                                                                                                                                                                                               | • EtherNet/IP                                                                                                           | –                                            |                                                     |                                           |                                                |                                 |
|                                                                                                                                                                                                                                                               | - ODVA AC drive                                                                                                         |                                              |                                                     |                                           |                                                |                                 |
|                                                                                                                                                                                                                                                               | - SINAMICS profile                                                                                                      |                                              |                                                     |                                           |                                                |                                 |
| <b>CU240E-2 series – for standard applications in general machinery construction, such as conveyor belts, mixers and extruders – without encoder</b><br>Technology functions (selection): Free function blocks (FFB), 1 × PID controller, motor holding brake |                                                                                                                         |                                              |                                                     |                                           |                                                |                                 |
| <b>CU240E-2</b>                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>• USS</li> <li>• Modbus RTU</li> </ul>                                           | –                                            | 6 DI<br>2 AI<br>3 DO<br>2 AO                        | STO                                       | 1 F-DI<br>(opt. for each 2 DI)                 | <b>6SL3244-0BB12-1BA1</b>       |
| <b>CU240E-2 DP</b>                                                                                                                                                                                                                                            | • PROFIBUS DP                                                                                                           | • PROFIdrive<br>• PROFIsafe                  |                                                     |                                           |                                                | <b>6SL3244-0BB12-1PA1</b>       |
| <b>CU240E-2 PN</b>                                                                                                                                                                                                                                            | • PROFINET                                                                                                              | • PROFIdrive<br>• PROFIsafe<br>• PROFIenergy |                                                     |                                           |                                                | <b>6SL3244-0BB12-1FA0</b>       |
|                                                                                                                                                                                                                                                               | • EtherNet/IP                                                                                                           | –                                            |                                                     |                                           |                                                |                                 |
|                                                                                                                                                                                                                                                               | - ODVA AC drive                                                                                                         |                                              |                                                     |                                           |                                                |                                 |
|                                                                                                                                                                                                                                                               | - SINAMICS profile                                                                                                      |                                              |                                                     |                                           |                                                |                                 |
| <b>CU240E-2 F</b>                                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>• USS</li> <li>• Modbus RTU</li> </ul>                                           | –                                            |                                                     | STO, SS1, SLS,<br>SDI                     | 3 F-DI<br>(opt. for each 2 DI)                 | <b>6SL3244-0BB13-1BA1</b>       |
| <b>CU240E-2 DP-F</b>                                                                                                                                                                                                                                          | • PROFIBUS DP                                                                                                           | • PROFIdrive<br>• PROFIsafe                  |                                                     | STO, SS1, SLS,<br>SSM <sup>1)</sup> , SDI |                                                | <b>6SL3244-0BB13-1PA1</b>       |
| <b>CU240E-2 PN-F</b>                                                                                                                                                                                                                                          | • PROFINET                                                                                                              | • PROFIdrive<br>• PROFIsafe<br>• PROFIenergy |                                                     |                                           |                                                | <b>6SL3244-0BB13-1FA0</b>       |
|                                                                                                                                                                                                                                                               | • EtherNet/IP                                                                                                           | –                                            |                                                     |                                           |                                                |                                 |
|                                                                                                                                                                                                                                                               | - ODVA AC drive                                                                                                         |                                              |                                                     |                                           |                                                |                                 |
|                                                                                                                                                                                                                                                               | - SINAMICS profile                                                                                                      |                                              |                                                     |                                           |                                                |                                 |
| <b>CU250S-2 series – for complex applications such as extruders and centrifuges – with and without encoder (basic positioner (EPos) optional)</b><br>Technology functions (selection): Free function blocks (FFB), 1 × PID controller, motor holding brake    |                                                                                                                         |                                              |                                                     |                                           |                                                |                                 |
| <b>CU250S-2</b>                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>• USS</li> <li>• Modbus RTU</li> </ul>                                           | –                                            | 11 DI<br>2 AI                                       | STO, SBC, SS1                             | 3 F-DI<br>(opt. for each 2 DI)                 | <b>6SL3246-0BA22-1BA0</b>       |
| <b>CU250S-2 DP</b>                                                                                                                                                                                                                                            | • PROFIBUS DP                                                                                                           | • PROFIdrive<br>• PROFIsafe                  | 3 DO<br>2 AO                                        |                                           | 1 F-DO<br>(opt. for each 2 DO)                 | <b>6SL3246-0BA22-1PA0</b>       |
| <b>CU250S-2 PN</b>                                                                                                                                                                                                                                            | • PROFINET                                                                                                              | • PROFIdrive<br>• PROFIsafe<br>• PROFIenergy | 4 DI/DO<br>(DI can be used as<br>high-speed inputs) |                                           |                                                | <b>6SL3246-0BA22-1FA0</b>       |
|                                                                                                                                                                                                                                                               | • EtherNet/IP                                                                                                           | –                                            |                                                     |                                           |                                                |                                 |
|                                                                                                                                                                                                                                                               | - ODVA AC drive                                                                                                         |                                              |                                                     |                                           |                                                |                                 |
|                                                                                                                                                                                                                                                               | - SINAMICS profile                                                                                                      |                                              |                                                     |                                           |                                                |                                 |
| <b>CU250S-2 CAN</b>                                                                                                                                                                                                                                           | • CANopen                                                                                                               | –                                            |                                                     |                                           |                                                | <b>6SL3246-0BA22-1CA0</b>       |

<sup>1)</sup> SSM is possible only with PROFIsafe.

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### SINAMICS G120 standard inverters

#### Design (continued)

##### Optional memory card with firmware V4.7 SP10 for CU230P-2, CU240E-2 and CU250S-2 Control Units

| Description                                                                  | Suitable for                     | Article No.                   |
|------------------------------------------------------------------------------|----------------------------------|-------------------------------|
| <b>SINAMICS SD card</b><br>512 MB + firmware V4.7 SP10 (Multicard V4.7 SP10) | CU230P-2<br>CU240E-2<br>CU250S-2 | <b>NEW</b> 6SL3054-7TF00-2BA0 |

##### Optional memory cards with licenses for CU250S-2 Control Units only

| Description                                                                                   | SINAMICS SD card<br>512 MB + licenses | SINAMICS SD card<br>512 MB +<br>firmware V4.7 SP10<br>(Multicard V4.7 SP10) +<br>licenses | Licenses (without SD card)<br>for upgrading license<br>of an existing SD card |
|-----------------------------------------------------------------------------------------------|---------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
|                                                                                               | Article No.                           | Article No.                                                                               | Article No.                                                                   |
| <b>License</b> Extended Functions<br>Basic positioner (EPos)                                  | 6SL3054-4AG00-2AA0-Z<br>E01           | 6SL3054-7TF00-2BA0-Z<br>E01                                                               | 6SL3074-7AA04-0AA0                                                            |
| <b>License</b> Extended Functions<br>Safety (SLS, SSM, SDI)                                   | 6SL3054-4AG00-2AA0-Z<br>F01           | 6SL3054-7TF00-2BA0-Z<br>F01                                                               | 6SL3074-0AA10-0AA0                                                            |
| <b>Licenses</b> Extended Functions<br>Basic positioner (EPos) + <u>Safety</u> (SLS, SSM, SDI) | 6SL3054-4AG00-2AA0-Z<br>E01+F01       | 6SL3054-7TF00-2BA0-Z<br>E01+F01                                                           | –                                                                             |

More information on firmware V4.7 SP10:

<https://support.industry.siemens.com/cs/document/109755811>

For an overview and more information on all available firmware versions, see

<https://support.industry.siemens.com/cs/document/67364620>

#### Selecting the Power Module

The optimum power unit can be quickly selected based on the required motor power, the supply voltage and the braking cycles to be expected. Power Modules in degree of protection IP20 are intended for installation in a control cabinet.

##### PM240-2 Power Modules – degree of protection IP20

PM240-2 Power Modules have an integrated braking chopper (four-quadrant applications) and are suitable for a large number of applications in general machinery construction.

##### PM250 Power Modules – degree of protection IP20

PM250 Power Modules are suitable for the same applications as the PM240-2. Any braking energy is directly fed back into the line supply (four-quadrant applications – a braking resistor is not required).

The Power Modules can be combined with the following Control Units:

| Control Units | Power Modules degree of protection IP20 |       |
|---------------|-----------------------------------------|-------|
|               | PM240-2                                 | PM250 |
| CU230P-2      | ✓                                       | ✓     |
| CU240E-2      | ✓                                       | ✓     |
| CU250S-2      | ✓                                       | ✓     |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### SINAMICS G120 standard inverters

#### Design (continued)

##### PM240-2 and PM250 Power Modules

| Rated power <sup>1)</sup>       |      | Rated output current $I_{rated}$ <sup>2)</sup> | Frame size | PM240-2 Power Modules<br>Degree of protection IP20<br>All CUs pluggable<br>Article No. | PM250 Power Modules<br>Degree of protection IP20<br>All CUs pluggable<br>Article No. |
|---------------------------------|------|------------------------------------------------|------------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| kW                              | hp   | A                                              |            |                                                                                        |                                                                                      |
| <b>200 ... 240 V 1 AC/3 AC</b>  |      |                                                |            |                                                                                        |                                                                                      |
| 0.55                            | 0.75 | 3.2                                            | FSA        | 6SL3210-1PB13-0■L0                                                                     | —                                                                                    |
| 0.75                            | 1    | 4.2                                            | FSA        | 6SL321■-1PB13-8■L0                                                                     | —                                                                                    |
| 1.1                             | 1.5  | 6                                              | FSB        | 6SL3210-1PB15-5■L0                                                                     | —                                                                                    |
| 1.5                             | 2    | 7.4                                            | FSB        | 6SL3210-1PB17-4■L0                                                                     | —                                                                                    |
| 2.2                             | 3    | 10.4                                           | FSB        | 6SL321■-1PB21-0■L0                                                                     | —                                                                                    |
| 3                               | 4    | 13.6                                           | FSC        | 6SL3210-1PB21-4■L0                                                                     | —                                                                                    |
| 4                               | 5    | 17.5                                           | FSC        | 6SL321■-1PB21-8■L0                                                                     | —                                                                                    |
| <b>200 ... 240 V 3 AC</b>       |      |                                                |            |                                                                                        |                                                                                      |
| 5.5                             | 7.5  | 22                                             | FSC        | 6SL3210-1PC22-2■L0                                                                     | —                                                                                    |
| 7.5                             | 10   | 28                                             | FSC        | 6SL3210-1PC22-8■L0                                                                     | —                                                                                    |
| 11                              | 15   | 42                                             | FSD        | 6SL3210-1PC24-2UL0                                                                     | —                                                                                    |
| 15                              | 20   | 54                                             | FSD        | 6SL3210-1PC25-4UL0                                                                     | —                                                                                    |
| 18.5                            | 25   | 68                                             | FSD        | 6SL321■-1PC26-8UL0                                                                     | —                                                                                    |
| 22                              | 30   | 80                                             | FSE        | 6SL3210-1PC28-0UL0                                                                     | —                                                                                    |
| 30                              | 40   | 104                                            | FSE        | 6SL321■-1PC31-1UL0                                                                     | —                                                                                    |
| 37                              | 50   | 130                                            | FSF        | 6SL3210-1PC31-3UL0                                                                     | —                                                                                    |
| 45                              | 60   | 154                                            | FSF        | 6SL3210-1PC31-6UL0                                                                     | —                                                                                    |
| 55                              | 75   | 178                                            | FSF        | 6SL321■-1PC31-8UL0                                                                     | —                                                                                    |
| <b>380 ... 480 V 3 AC</b>       |      |                                                |            |                                                                                        |                                                                                      |
| 0.37 <sup>3)</sup>              | 0.5  | 1.3                                            | —          | — <sup>3)</sup>                                                                        | —                                                                                    |
| 0.55                            | 0.75 | 1.7                                            | FSA        | 6SL3210-1PE11-8■L1                                                                     | —                                                                                    |
| 0.75                            | 1    | 2.2                                            | FSA        | 6SL3210-1PE12-3■L1                                                                     | —                                                                                    |
| 1.1                             | 1.5  | 3.1                                            | FSA        | 6SL3210-1PE13-2■L1                                                                     | —                                                                                    |
| 1.5                             | 2    | 4.1                                            | FSA        | 6SL3210-1PE14-3■L1                                                                     | —                                                                                    |
| 2.2                             | 3    | 5.9                                            | FSA        | 6SL3210-1PE16-1■L1                                                                     | —                                                                                    |
| 3                               | 4    | 7.7                                            | FSA        | 6SL321■-1PE18-0■L1                                                                     | —                                                                                    |
| 4                               | 5    | 10.2                                           | FSB        | 6SL3210-1PE21-1■L0                                                                     | —                                                                                    |
| 5.5                             | 7.5  | 13.2                                           | FSB        | 6SL3210-1PE21-4■L0                                                                     | —                                                                                    |
| <b>Heat sink variant</b>        |      |                                                |            | ↑                                                                                      |                                                                                      |
| <b>Standard</b>                 |      |                                                |            | 0                                                                                      |                                                                                      |
| <b>Push-through</b>             |      |                                                |            | 1                                                                                      |                                                                                      |
| <b>Integrated line filter</b>   |      |                                                |            | ↑                                                                                      |                                                                                      |
| <b>Without</b> (for IT systems) |      |                                                |            | U                                                                                      |                                                                                      |
| <b>Class A</b> (for TN systems) |      |                                                |            | A                                                                                      |                                                                                      |
| <b>Class B</b> (for TN systems) |      |                                                |            | —                                                                                      | —                                                                                    |

Data based on a duty cycle with low overload (LO).

Data based on duty cycle with high overload (HO), see section Power Modules.

<sup>1)</sup> Rated power based on the rated output current  $I_{rated}$ . The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO). Low overload (LO) generally applies for applications with low dynamic response (continuous operation), quadratic torque characteristic with low break loose torque and low speed accuracy. Examples: Centrifugal pumps, radial/axial fans, rotary piston fans, radial compressors, vacuum pumps, chain conveyors, agitators. High overload (HO) generally applies for applications with increased dynamic response (cyclic operation) and constant torque characteristics with high break loose torque. Examples: Gear pumps, eccentric worm pumps, mills, mixers, crushers, lifting/lowering gear, centrifuges.

<sup>2)</sup> The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO). These current values are applicable for 200 V, 400 V or 690 V.

<sup>3)</sup> The PM240-2 Power Module with Article No. 6SL3210-1PE11-8. L1 corresponds to 0.37 kW (0.5 hp) with duty cycle HO.

<sup>4)</sup> The 690 V versions of the PM240-2 Power Modules, frame size FSG are only available with an integrated Category C3 filter. To operate the inverter also within TN systems with grounded outer conductor, you must remove the grounding screw.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## SINAMICS G120 standard inverters

### Design (continued)

| Rated power <sup>1)</sup>         |     | Rated output current $I_{rated}$ <sup>2)</sup> | Frame size                      | PM240-2 Power Modules<br>Degree of protection IP20<br>All CUs pluggable |                                                               | PM250 Power Modules<br>Degree of protection IP20<br>All CUs pluggable |  |
|-----------------------------------|-----|------------------------------------------------|---------------------------------|-------------------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------------|--|
| kW                                | hp  |                                                |                                 | Article No.                                                             |                                                               | Article No.                                                           |  |
| 380 ... 480 V 3 AC (continued)    |     |                                                |                                 |                                                                         |                                                               |                                                                       |  |
| 7.5                               | 10  | 18                                             | FSB                             | 6SL321-1PE21-8L0                                                        | 6SL3225-0BE25-5AA1                                            |                                                                       |  |
| 11                                | 15  | 26/25                                          | FSC                             | 6SL3210-1PE22-7L0                                                       | 6SL3225-0BE27-5AA1                                            |                                                                       |  |
| 15                                | 20  | 32                                             | FSC                             | 6SL321-1PE23-3L0                                                        | 6SL3225-0BE31-1AA1                                            |                                                                       |  |
| 18.5                              | 25  | 38                                             | FSD                             | 6SL3210-1PE23-8L0                                                       | 6SL3225-0BE31-5A0                                             |                                                                       |  |
| 22                                | 30  | 45                                             | FSD                             | 6SL3210-1PE24-5L0                                                       | 6SL3225-0BE31-8A0                                             |                                                                       |  |
| 30                                | 40  | 60                                             | FSD                             | 6SL3210-1PE26-0L0                                                       | 6SL3225-0BE32-2A0                                             |                                                                       |  |
| 37                                | 50  | 75                                             | FSD                             | 6SL321-1PE27-5L0                                                        | 6SL3225-0BE33-0A0                                             |                                                                       |  |
| 45                                | 60  | 90                                             | FSE                             | 6SL3210-1PE28-8L0                                                       | 6SL3225-0BE33-7A0                                             |                                                                       |  |
| 55                                | 75  | 110                                            | FSE                             | 6SL321-1PE31-1L0                                                        | 6SL3225-0BE34-5A0                                             |                                                                       |  |
| 75                                | 100 | 145                                            | FSF                             | 6SL3210-1PE31-5L0                                                       | 6SL3225-0BE35-5A0                                             |                                                                       |  |
| 90                                | 125 | 178                                            | FSF                             | 6SL3210-1PE31-8L0                                                       | 6SL3225-0BE37-5A0                                             |                                                                       |  |
| 110                               | 150 | 205                                            | FSF                             | 6SL3210-1PE32-1L0                                                       | –                                                             |                                                                       |  |
| 132                               | 200 | 250                                            | FSF                             | 6SL321-1PE32-5L0                                                        | –                                                             |                                                                       |  |
| 160                               | 250 | 302                                            | FSG NEW                         | 6SL3210-1PE33-0L0                                                       | –                                                             |                                                                       |  |
| 200                               | 300 | 370                                            | FSG NEW                         | 6SL3210-1PE33-7L0                                                       | –                                                             |                                                                       |  |
| 250                               | 400 | 477                                            | FSG NEW                         | 6SL3210-1PE34-8L0                                                       | –                                                             |                                                                       |  |
| 500 ... 690 V 3 AC                |     |                                                |                                 |                                                                         |                                                               |                                                                       |  |
| 11                                | 10  | 14                                             | FSD                             | 6SL3210-1PH21-4L0                                                       | –                                                             |                                                                       |  |
| 15                                | 15  | 19                                             | FSD                             | 6SL3210-1PH22-0L0                                                       | –                                                             |                                                                       |  |
| 18.5                              | 20  | 23                                             | FSD                             | 6SL3210-1PH22-3L0                                                       | –                                                             |                                                                       |  |
| 22                                | 25  | 27                                             | FSD                             | 6SL3210-1PH22-7L0                                                       | –                                                             |                                                                       |  |
| 30                                | 30  | 35                                             | FSD                             | 6SL3210-1PH23-5L0                                                       | –                                                             |                                                                       |  |
| 37                                | 40  | 42                                             | FSD                             | 6SL3210-1PH24-2L0                                                       | –                                                             |                                                                       |  |
| 45                                | 50  | 52                                             | FSE                             | 6SL3210-1PH25-2L0                                                       | –                                                             |                                                                       |  |
| 55                                | 60  | 62                                             | FSE                             | 6SL3210-1PH26-2L0                                                       | –                                                             |                                                                       |  |
| 75                                | 75  | 80                                             | FSF                             | 6SL3210-1PH28-0L0                                                       | –                                                             |                                                                       |  |
| 90                                | 100 | 100                                            | FSF                             | 6SL3210-1PH31-0L0                                                       | –                                                             |                                                                       |  |
| 110                               | 100 | 115                                            | FSF                             | 6SL3210-1PH31-2L0                                                       | –                                                             |                                                                       |  |
| 132                               | 125 | 142                                            | FSF                             | 6SL3210-1PH31-4L0                                                       | –                                                             |                                                                       |  |
| 160                               | 150 | 171                                            | FSG NEW                         | 6SL3210-1PH31-7CL0                                                      | –                                                             |                                                                       |  |
| 200                               | 200 | 208                                            | FSG NEW                         | 6SL3210-1PH32-1CL0                                                      | –                                                             |                                                                       |  |
| 250                               | 250 | 250                                            | FSG NEW                         | 6SL3210-1PH32-5CL0                                                      | –                                                             |                                                                       |  |
| Heat sink variant                 |     |                                                |                                 | ↑                                                                       | ↑                                                             |                                                                       |  |
| Standard                          |     |                                                |                                 | 0                                                                       | 0                                                             |                                                                       |  |
| Push-through                      |     |                                                |                                 | 1                                                                       | Not available                                                 |                                                                       |  |
| Integrated line filter            |     |                                                |                                 | ↑                                                                       | ↑                                                             |                                                                       |  |
| Without                           |     |                                                | (for IT systems)                | U                                                                       | U                                                             |                                                                       |  |
| Category C3 (only for FSG)        |     |                                                | (for IT systems <sup>4)</sup> ) | C                                                                       | –                                                             |                                                                       |  |
| Class A and Category C2 (for FSG) |     |                                                | (for TN systems)                | A                                                                       | A                                                             |                                                                       |  |
| Class B                           |     |                                                | (for TN systems)                | –                                                                       | Integrated line filter not available, as external option only |                                                                       |  |

Data based on a duty cycle with low overload (LO).

Data based on duty cycle with high overload (HO), see section Power Modules.

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### SINAMICS G120 standard inverters

#### Design (continued)

##### Selecting optional system components

###### IOP-2 Intelligent Operator Panel

Color display, new functions, functional design for faster commissioning and easy adjustment of settings during operation. The most striking features are the new flat design of the operator panel and its integrated membrane keyboard with a central sensor control field.

###### IOP-2 Handheld Intelligent Operator Panel

A handheld version of the IOP-2 can be ordered for mobile use. In addition to the IOP-2, this includes a housing with rechargeable batteries, charging unit and RS232 connecting cable.

###### BOP-2 Basic Operator Panel

Menu navigation and 2-line display permit fast and user-friendly commissioning of the inverter. Simple basic commissioning by simultaneously displaying parameter and parameter value, as well as the option of filtering parameters.

###### Door mounting kit for IOP-2/BOP-2

Using the optionally available door mounting kit, the IOP-2/BOP-2 can be mounted in a control cabinet door with just a few manual operations (IP55/UL Type 12 degree of protection is achieved).

###### Push-through mounting frame for push-through variants of the PM240-2 Power Modules

It is advisable to use an optionally available mounting frame to install the push-through unit in a control cabinet. This mounting frame includes the necessary seals and frame to ensure compliance with degree of protection IP54. If the Power Module is installed without use of the optional mounting frame, the user is responsible for ensuring that the requisite degree of protection is provided. The kit contains all the necessary nuts and seals. For push-through Power Modules, frame sizes FSD to FSF, installation handles are available.

###### Memory card

The parameter settings for an inverter can be stored on the SINAMICS SD memory card. When service is required, e.g. after the inverter has been replaced, the drive system is immediately ready for use again. The memory card can also be used to upgrade the firmware of the Control Unit.

###### SINAMICS G120 Smart Access

Wireless commissioning, operation and diagnostics via mobile device or laptop thanks to the optional web server module SINAMICS G120 Smart Access enabling user-friendly operation and easy access to the inverter, even if this is installed in areas difficult to access.

###### Brake Relay

The Brake Relay allows the Power Module to be connected to an electromechanical motor brake. This allows the motor brake to be controlled directly from the Control Unit.

###### Safe Brake Relay

The Safe Brake Relay allows the Power Module to be safely connected to an electromechanical motor brake, allowing the brake to be directly and safely controlled from the CU250S-2 Control Unit in accordance with IEC 61508 SIL 2 and EN ISO 13849-1 PL d and Category 3.

###### PC inverter connection kit 2

For controlling and commissioning an inverter directly from a PC if the appropriate software (STARTER commissioning tool or SINAMICS Startdrive) has been installed.

###### Shield connection kits for Power Modules

The shield connection kit makes it easier to connect the shields of supply and control cables, provides mechanical strain relief and thus ensures optimum EMC performance.

A shield connection kit is supplied as standard with PM240-2 Power Modules in frame sizes FSA to FSC.

A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size for the frame sizes FSD to FSG. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSG.

###### Shield connection kits for Control Units

The shield connection kit offers optimum shield connection and strain relief for all signal and communication cables. It includes a matching shield connection plate and all of the necessary connecting and retaining elements for mounting.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## SINAMICS G120 standard inverters

### Design (continued)

| Description                                                                                                                                                                                         | Article No.               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>IOP-2 Intelligent Operator Panel</b><br>Operating languages: English, German, French, Italian, Spanish, Portuguese, Dutch, Swedish, Finnish, Russian, Czech, Polish, Turkish, Chinese Simplified | <b>6SL3255-0AA00-4JA2</b> |
| <b>IOP-2 Handheld Operator Panel</b>                                                                                                                                                                | <b>6SL3255-0AA00-4HA1</b> |
| <b>BOP-2 Operator Panel</b>                                                                                                                                                                         | <b>6SL3255-0AA00-4CA1</b> |
| <b>Door mounting kit</b><br>for IOP-2/BOP-2                                                                                                                                                         | <b>6SL3256-0AP00-0JA0</b> |
| <b>Push-through mounting frame</b><br>• For PM240-2 Power Modules degree of protection IP20, push-through variants                                                                                  |                           |
| - Frame size FSA                                                                                                                                                                                    | <b>6SL3260-6AA00-0DA0</b> |
| - Frame size FSB                                                                                                                                                                                    | <b>6SL3260-6AB00-0DA0</b> |
| - Frame size FSC                                                                                                                                                                                    | <b>6SL3260-6AC00-0DA0</b> |
| - Frame size FSD                                                                                                                                                                                    | <b>6SL3200-0SM17-0AA0</b> |
| - Frame size FSE                                                                                                                                                                                    | <b>6SL3200-0SM18-0AA0</b> |
| - Frame size FSF                                                                                                                                                                                    | <b>6SL3200-0SM20-0AA0</b> |
| <b>Installation handles</b><br>• For PM240-2 Power Modules – push-through variants                                                                                                                  |                           |
| - Frame sizes FSD to FSF                                                                                                                                                                            | <b>6SL3200-0SM22-0AA0</b> |
| <b>Memory card</b><br>SINAMICS SD card <sup>1)</sup><br>512 MB                                                                                                                                      | <b>6SL3054-4AG00-2AA0</b> |
| <b>Brake Relay</b>                                                                                                                                                                                  | <b>6SL3252-0BB00-0AA0</b> |
| <b>Safe Brake Relay</b>                                                                                                                                                                             | <b>6SL3252-0BB01-0AA0</b> |
| <b>PC inverter connection kit 2</b>                                                                                                                                                                 | <b>6SL3255-0AA00-2CA0</b> |

| Description                                                                                                                                                                                                                                                                                                                                                                                                            | Article No.                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>Shield connection kits</b><br>• For PM240-2 Power Modules<br>- Frame sizes FSA to FSC<br><br>- Frame sizes FSD to FSG<br>A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size.<br>For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered. | Supplied with the Power Modules, available as a spare part                                                       |
| - Frame size FSD                                                                                                                                                                                                                                                                                                                                                                                                       | <b>6SL3262-1AD01-0DA0</b>                                                                                        |
| - Frame size FSE                                                                                                                                                                                                                                                                                                                                                                                                       | <b>6SL3262-1AE01-0DA0</b>                                                                                        |
| - Frame size FSF                                                                                                                                                                                                                                                                                                                                                                                                       | <b>6SL3262-1AF01-0DA0</b>                                                                                        |
| - Frame size FSG <b>NEW</b>                                                                                                                                                                                                                                                                                                                                                                                            | <b>6SL3262-1AG01-0DA0</b>                                                                                        |
| • For PM250 Power Modules<br>- Frame size FSC<br>- Frame sizes FSD and FSE<br>- Frame size FSF                                                                                                                                                                                                                                                                                                                         | <b>6SL3262-1AC00-0DA0</b><br><b>6SL3262-1AD00-0DA0</b><br><b>6SL3262-1AF00-0DA0</b>                              |
| • For Control Units<br>- For CU230P-2 HVAC and CU230P-2 DP<br>- For CU240E-2<br>- For CU230P-2 PN, CU240E-2 PN and CU240E-2 PN-F<br>- For CU250S-2                                                                                                                                                                                                                                                                     | <b>6SL3264-1EA00-0FA0</b><br><b>6SL3264-1EA00-0HA0</b><br><b>6SL3264-1EA00-0HB0</b><br><b>6SL3264-1EA00-0LA0</b> |
| <b>STARTER commissioning tool <sup>2)</sup></b><br>on DVD-ROM                                                                                                                                                                                                                                                                                                                                                          | <b>6SL3072-0AA00-0AG0</b>                                                                                        |
| <b>SINAMICS Startdrive commissioning tool <sup>3)</sup></b><br>on DVD-ROM                                                                                                                                                                                                                                                                                                                                              | <b>6SL3072-4EA02-0XG0</b>                                                                                        |

<sup>1)</sup> Approved for CU230P-2 HVAC and CU230P-2 DP Control Units with firmware version V4.6 and higher.

<sup>2)</sup> STARTER commissioning tool is also available on the Internet at [www.siemens.com/starter](http://www.siemens.com/starter)

<sup>3)</sup> The SINAMICS Startdrive commissioning tool is also available on the Internet at <https://support.industry.siemens.com/cs/document/68034568>

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### SINAMICS G120 standard inverters

#### Design (continued)

##### Line-side components

The following line-side components are available for SINAMICS G120 standard inverters:

###### Line filters

With one of the additional line filters, the Power Module attains a higher radio interference class.

###### Line reactors

(for PM240-2 Power Modules only)

Line reactors smooth the current drawn by the inverter and thus reduce harmonic components in the line current. Through the reduction of the current harmonics, the thermal load on the power components in the rectifier and in the DC link capacitors is reduced as well as the harmonic effects on the supply. The use of a line reactor increases the service life of the inverter.

A DC link reactor is integrated in the PM240-2 Power Modules, frame sizes FSD to FSG, and therefore no line reactor is required. No line reactor is provided for the PM250 Power Modules, nor may one be used.

###### Recommended line-side overcurrent protection devices

Overcurrent protection devices are absolutely necessary for the operation of the inverters. The tables listed in the section "Recommended line-side overcurrent protection devices" provide recommendations according to IEC and UL regulations, depending on the area of application. Recommendations on further overcurrent protection devices are available at:

<https://support.industry.siemens.com/cs/document/109486009>

More information about the listed Siemens fuses is available in Catalog LV 10 as well as in the Industry Mall.

##### DC link components

The following DC link components are available for the SINAMICS G120 standard inverters:

###### Braking resistors

(for PM240-2 Power Modules only)

Excess energy in the DC link is dissipated in the braking resistor. The braking resistors are designed for use with PM240-2 Power Modules. They are equipped with an integrated braking chopper (electronic switch).

For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSG.

##### Load-side power components

The following load-side power components are available for the SINAMICS G120 standard inverters. This means that during operation with output reactors or sine-wave filters, longer, shielded motor cables are possible and the motor service life can be extended:

###### Output reactors

Output reactors reduce the rate of voltage rise (dv/dt) and the height of the current peaks, and can allow longer motor cables to be connected.

###### Sine-wave filters

(not for PM240-2 Power Modules)

Sine-wave filters limit the rate of voltage rise (dv/dt) and the peak voltages on the motor winding. Similar to an output reactor, they enable the connection of longer motor cables.

###### dv/dt filters plus VPL

(for PM240-2 Power Modules 400 V and 690 V versions only)

dv/dt filters plus voltage peak limiters limit the rate of voltage rise and the typical voltage peaks.

##### Additional options

Further selected accessories are available from "Siemens Product Partner for Drives Options":

[www.siemens.com/drives-options-partner](http://www.siemens.com/drives-options-partner)

##### Spare parts

###### Spare parts kit for Control Units

The spare parts kit contains small parts for all variants of the following SINAMICS G120 Control Units:

- CU230P-2
- CU240E-2
- CU240E-2 F
- CU250S-2

###### Shield connection kits for PM240-2 Power Modules

A shield connection kit is supplied as standard with PM240-2 Power Modules in frame sizes FSA to FSC. This shield connection kit is also available as a spare part.

A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size for the frame sizes FSD to FSG. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSG.

###### Terminal cover kits for frame sizes FSD to FSG

The terminal cover kit includes a replacement cover for the connecting terminals. Terminal cover kits which are suitable for the PM240-2 and PM250 Power Modules are available.

###### Replacement connectors for PM240-2 Power Modules

A set of connectors for the line feeder cable, braking resistor and motor cable can be ordered corresponding to the frame size of the PM240-2 Power Module.

###### Fan units for PM240-2 Power Modules

The fans of PM240-2 Power Modules are designed for extra long service life. For special requirements, replacement fans are available that can be exchanged quickly and easily.

###### Replacement fans for PM250 Power Modules

The fans of PM250 Power Modules are designed for extra long service life. Replacement fans can be ordered for special applications.

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### SINAMICS G120 standard inverters

#### Configuration

The following electronic configuring aids and engineering tools are available for the SINAMICS G120 standard inverters:

##### **Drive Technology Configurator (DT Configurator) within the CA 01**

The interactive catalog CA 01 – the offline Industry Mall of Siemens – contains over 100000 products with approximately 5 million possible drive system product variants. The Drive Technology Configurator (DT Configurator) has been developed to facilitate selection of the correct motor and/or inverter from the wide spectrum of drives. It is integrated as a selection tool in Catalog CA 01.

##### **Online DT Configurator**

In addition, the DT Configurator can be used on the Internet without requiring any installation. The DT Configurator can be found in the Siemens Industry Mall at the following address:  
[www.siemens.com/dt-configurator](http://www.siemens.com/dt-configurator)

##### **SIZER for Siemens Drives engineering tool**

The SIZER for Siemens Drives engineering tool makes it easy to configure the SINAMICS drive family. It provides support when selecting the hardware and firmware components necessary to implement a drive task. SIZER for Siemens Drives is designed to support configuring of the entire drive system.

You can find further information on the SIZER for Siemens Drives engineering tool in the section [Engineering tools](#).

The SIZER for Siemens Drives engineering tool is available free on the Internet at  
[www.siemens.com/sizer](http://www.siemens.com/sizer)

##### **STARTER commissioning tool**

The STARTER commissioning tool allows menu-prompted commissioning, optimization and diagnostics. Apart from the SINAMICS drives, STARTER is also suitable for MICROMASTER 4 devices.

You can find further information about the STARTER commissioning tool in the section [Engineering tools](#).

Additional information about the STARTER commissioning tool is available on the Internet at  
[www.siemens.com/starter](http://www.siemens.com/starter)

##### **SINAMICS Startdrive commissioning tool**

SINAMICS Startdrive is a tool for configuring, commissioning, and diagnosing the SINAMICS family of drives and is integrated into the TIA Portal. SINAMICS Startdrive can be used to implement drive tasks with the SINAMICS G110M, SINAMICS G120, SINAMICS G120C, SINAMICS G120D and SINAMICS G120P inverter series. The commissioning tool has been optimized with regard to user friendliness and consistent use of the TIA Portal benefits of a common working environment for PLC, HMI and drives.

You can find further information about the SINAMICS Startdrive commissioning tool in the section [Engineering tools](#).

The SINAMICS Startdrive commissioning tool is available free on the Internet at  
[www.siemens.com/startdrive](http://www.siemens.com/startdrive)

##### **Drive ES engineering system**

Drive ES is the engineering system that can be used to integrate the communication, configuration and data management functions of Siemens drive technology into the SIMATIC automation world easily, efficiently and cost-effectively. Two software packages are available for SINAMICS – Drive ES Basic Maintenance and Drive ES PCS.

You can find further information about the Drive ES engineering system in the section [Engineering tools](#).

Additional information about the Drive ES engineering system is available on the Internet at  
[www.siemens.com/drive-es](http://www.siemens.com/drive-es)

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### SINAMICS G120 standard inverters

#### Technical specifications

Unless explicitly specified otherwise, the following technical specifications are valid for all the following components of the SINAMICS G120 standard inverters.

##### General technical specifications

##### Mechanical ambient conditions

##### Long-term storage

acc. to EN 60721-3-1

- Devices and components, frame sizes FSA ... FSG <sup>1)</sup>

Class 1M2

##### Transport

acc. to EN 60721-3-2

- Devices and components, frame sizes FSA ... FSG <sup>2)</sup>

Class 2M3

##### Operation

acc. to EN 60721-3-3

- Devices and components, frame sizes FSA ... FSG

Class 3M1

- Vibration test

Test Fc (sinusoidal)  
according to EN 60068-2-6  
Deflection: 0.075 mm  
at 10 ... 57 Hz  
Acceleration: 10 m/s<sup>2</sup> (1 × g)  
at 57 ... 150 Hz  
10 frequency cycles per axis

- Shock test

Test Ea (semi-sinusoidal)  
according to EN 60068-2-27  
Acceleration: 49 m/s<sup>2</sup> (5 × g)  
at 30 ms  
3 shocks in all three axes in  
both directions

##### General technical specifications

##### Ambient conditions

**Protection class**  
acc. to EN 61800-5-1

Class I (with protective conductor system) and class III (PELV)

**Touch protection**  
acc. to EN 61800-5-1

For the intended purpose

##### Permissible ambient and coolant temperature (air) during operation for line-side components and Power Modules

- Low overload (LO)

- PM240-2,  
frame sizes FSA ... FSC

-10 ... +40 °C (14 ... 104 °F)  
without derating  
>40 ... 60 °C (>104 ... 140 °F)  
[see derating characteristics](#)

- PM240-2,  
frame sizes FSD ... FSG

-20 ... +40 °C (-4 ... +104 °F)  
without derating  
>40 ... 60 °C (>104 ... 140 °F)  
[see derating characteristics](#)

- PM250

0 ... 40 °C (32 ... 104 °F)  
without derating  
>40 ... 60 °C (>104 ... 140 °F)  
[see derating characteristics](#)

- High overload (HO)

- PM240-2,  
frame sizes FSA ... FSC

-10 ... +50 °C (14 ... 122 °F)  
without derating  
>50 ... 60 °C (>104 ... 140 °F)  
[see derating characteristics](#)

- PM240-2,  
frame sizes FSD ... FSG

-20 ... +50 °C (-4 ... +122 °F)  
without derating  
>50 ... 60 °C (>104 ... 140 °F)  
[see derating characteristics](#)

- PM250

0 ... 50 °C (32 ... 122 °F)  
without derating  
>50 ... 60 °C (>122 ... 140 °F)  
[see derating characteristics](#)

##### Permissible ambient and coolant temperature (air) during operation for Control Units and supplementary system components

With CU230P-2 HVAC and CU230P-2 DP:  
-10 ... +60 °C (14 ... 140 °F)  
With CU230P-2 PN:  
-10 ... +55 °C (14 ... 131 °F)  
With CU240E-2 (without PN):  
-10 ... +55 °C (14 ... 131 °F)  
With CU240E-2 PN and CU240E-2 PN-F:  
-10 ... +53 °C (14 ... 127.4 °F)  
With CU250S-2:  
-10 ... +50 °C (14 ... 122 °F)  
With IOP/BOP-2:  
0 ... 50 °C (32 ... 122 °F)  
Derating of 3 K/1000 m (3281 ft) applies to Control Units as of an installation altitude of 1000 m (3281 ft) above sea level.

<sup>1)</sup> In product packaging.

<sup>2)</sup> In transport packaging.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## SINAMICS G120 standard inverters

### Technical specifications (continued)

#### General technical specifications

##### Ambient conditions (continued)

##### Climatic ambient conditions

- Storage <sup>1)</sup>  
acc. to EN 60721-3-1  
Class 1K4  
Temperature: -25 ... +55 °C  
(-13 ... +131 °F)
- Transport <sup>1)</sup>  
acc. to EN 60721-3-2  
Class 2K4  
Temperature -40 ... +70 °C  
(-40 ... +158 °F)
- Operation  
acc. to EN 60721-3-3  
Better than class 3K3 with regard to
  - Temperature: -10 ... +40 °C  
(14 ... 104 °F) without derating  
>40 ... 60 °C (>32 ... 140 °F)  
[see derating characteristics](#)
  - Relative humidity: 5 ... 95 %  
(no condensation)  
Oil mist, salt mist, ice formation,  
condensation, dripping water,  
spraying water, splashing water  
and water jets are not permitted

##### Environmental class/harmful chemical substances

- Storage <sup>1)</sup>  
acc. to EN 60721-3-1  
Class 1C2
- Transport <sup>2)</sup>  
acc. to EN 60721-3-2  
Class 2C2
- Operation  
acc. to EN 60721-3-3  
- PM250 and PM240-2  
Power Modules FSA to FSC  
Class 3C2 <sup>2)</sup>  
- PM240-2 Power Modules,  
FSD to FSG  
Class 3C3 <sup>2)</sup>

##### Organic/biological influences

- Storage <sup>1)</sup> acc. to EN 60721-3-1  
Class 1B1
- Transport <sup>1)</sup> acc. to EN 60721-3-2  
Class 2B1
- Operation acc. to EN 60721-3-3  
Class 3B1

##### Degree of pollution

acc. to EN 61800-5-1

2

##### Certification for fail-safe versions

Applies to Control Units of the CU240E-2 and CU250S-2 series. The values include Control Unit and Power Module.

Note:  
The Safety Integrated Function Manual contains detailed information about the safety functions:  
<https://support.industry.siemens.com/cs/document/109477367>

- According to IEC 61508  
SIL 2
- According to EN ISO 13849-1  
PL d and Category 3

##### Standards

##### Compliance with standards

- PM240-2  
CE, cULus, RCM, SEMI F47, RoHS, EAC, KC (only with internal or external line filters Category C2)  
For frame sizes FSD ... FSG also: WEEE (Waste Electrical & Electronic Equipment)
- PM250  
CE, UL, cUL, RCM, SEMI F47

##### CE marking

According to Low-Voltage Directive 2014/35/EU

#### General technical specifications

##### EMC Directive acc. to EN 61800-3

##### Interference immunity

##### PM240-2 Power Modules PM250 Power Modules

The Power Modules are tested according to the interference immunity requirements for environments according to Category C3

##### Interference emissions

##### PM240-2 Power Modules

- Frame sizes FSA to FSF without integrated line filter
- Frame sizes FSA to FSC with integrated line filter class A

3)

Observance of the limit values  
- according to Category C3  
- for conducted interferences and field-conducted interference emissions according to Category C2 <sup>4)</sup>

- Frame sizes FSD to FSG with integrated line filter class A

Observance of the limit values according to Categories C3 and C2 <sup>4)</sup>

- Frame sizes FSA to FSC without integrated line filter with optional line filter class B

Observance of the limit values  
- for conducted interferences according to Category C1  
- for field-conducted interference emissions according to Category C2 <sup>4)</sup>

##### PM250 Power Modules

- Frame size FSC with integrated line filter class A
- Frame size FSC with integrated line filter class A and optional line filter class B

Observance of the limit values according to Categories C3 and C2 <sup>4)</sup>

Observance of the limit values  
- for low-frequency harmonic effects and conducted interferences according to Category C1  
- for field-conducted interference emissions according to Category C2 <sup>4)</sup>

- Frame sizes FSD to FSF without integrated line filter

3)

- Frame sizes FSD to FSF with integrated line filter class A

Observance of the limit values according to Categories C3 and C2 <sup>4)</sup>

#### Note:

The EMC product standard EN 61800-3 does not apply directly to a frequency inverter but to a PDS (Power Drive System), which comprises the complete circuitry, motor and cables in addition to the inverter. The frequency inverters on their own do not generally require identification according to the EMC Directive.

<sup>1)</sup> In transport packaging.

<sup>2)</sup> SIPLUS components for extreme requirements are available. More information is available on the Internet at [www.siemens.com/siplus-drives](http://www.siemens.com/siplus-drives)

<sup>3)</sup> Non-filtered devices are designed for operation on IT systems or in conjunction with an RCD. The customer must provide suitable RI suppression equipment to ensure that these devices comply with the limits defined for Category C3 or C2.

<sup>4)</sup> Max. permissible cable lengths [see section Power Modules → Integration](#).

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### SINAMICS G120 standard inverters

#### Technical specifications (continued)

##### Compliance with standards

##### CE marking



The SINAMICS G120 inverters meet the requirements of 2014/35/EU.

##### Low-Voltage Directive

The inverters comply with the following standards listed in the official journal of the EU:

- EN 60204  
Safety of machinery, electrical equipment of machines
- EN 61800-5-1  
Adjustable speed electrical power drive systems – Part 5-1: Requirements regarding safety – electrical, thermal, and energy requirements

##### UL listing



Inverter devices in UL category NMMS certified to UL and cUL, in compliance with UL508C. UL list numbers E121068 and E192450. This applies to all PM240-2 and PM250 Power Modules.

For use in environments with pollution degree 2.

See also on the Internet at  
[www.ul.com](http://www.ul.com)

##### Machinery Directive

The inverters are suitable for installation in machines. Compliance with the Machinery Directive 2006/42/EC requires a separate certificate of conformity. This must be provided by the plant construction company or the organization marketing the machine.

##### EMC Directive

- EN 61800-3  
Adjustable speed electrical power drive systems  
Part 3: EMC product standard including specific test methods

The following information applies to SINAMICS G120 frequency inverters from Siemens:

- The EMC product standard EN 61800-3 does not apply directly to a frequency inverter but to a PDS (Power Drive System), which comprises the complete circuitry, motor and cables in addition to the inverter.
- Frequency inverters are normally only supplied to experts for installation in machines or systems. A frequency inverter must, therefore, only be considered as a component which, on its own, is not subject to the EMC product standard EN 61800-3. The inverter's operating instructions, however, specify the conditions regarding compliance with the product standard if the frequency inverter is expanded to become a PDS. For a PDS, the EMC Directive in the EU is complied with by observing the product standard EN 61800-3 for variable-speed electric drive systems. The frequency inverters on their own do not generally require identification according to the EMC Directive.

- Different categories C1 to C4 have been defined in accordance with the environment of the PDS at the operating location:
  - **Category C1:** Drive systems for rated voltages < 1000 V for use in the first environment
  - **Category C2:** Stationary drive systems not connected by means of a plug connector for rated voltages < 1000 V. When used in the first environment, the system must be installed and commissioned by personnel familiar with EMC requirements. A warning note is required.
  - **Category C3:** Drive systems for rated voltages < 1000 V for exclusive use in the second environment. A warning note is required.
  - **Category C4:** Drive systems for rated voltages ≥ 1000 V or for rated currents ≥ 400 A or for use in complex systems in the second environment. An EMC plan must be created.
- The EMC product standard EN 61800-3 also defines limit values for conducted interference and radiated interference for the "second environment" (= industrial power supply systems that do not supply households). These limit values are below the limit values of filter class A acc. to EN 55011. Unfiltered inverters can be used in industrial environments as long as they are part of a system that contains line filters on the higher-level infeed side.
- With SINAMICS G120, Power Drive Systems (PDS) that fulfill the EMC product standard EN 61800-3 can be configured when observing the installation instructions in the product documentation.
- A differentiation must be made between the product standards for electrical drive systems (PDS) of the range of standards EN 61800 (of which Part 3 covers EMC topics) and the product standards for the devices/systems/machines, etc. This will probably not result in any changes in the practical use of frequency inverters. Since frequency inverters are always part of a PDS and these are part of a machine, the machine manufacturer must observe various standards depending on their type and environment (e.g. EN 61000-3-2 for line harmonics and EN 55011 for radio interference). The product standard for PDS on its own is, therefore, either insufficient or irrelevant.
- With respect to the compliance with limits for line supply harmonics, the EMC product standard EN 61800-3 for PDS refers to compliance with the EN 61000-3-2 and EN 61000-3-12 standards.
- Regardless of the configuration with SINAMICS G120 and its components, the machine construction company (OEM) can also apply other measures to ensure that the machine complies with the EU EMC Directive. The EU EMC Directive is generally fulfilled when the relevant EMC product standards are observed. If they are not available, the generic standards (e.g. DIN EN 61000-x-x) can be used instead. It is important that the conducted and emitted interference at the line supply connection point and outside the machine remain below the relevant limit values. Any suitable technical measures can be applied to ensure this.

##### SEMI F47

SEMI F47 is an industry standard relating to the immunity to voltage dips. This includes the requirement that industrial equipment must be able to tolerate defined dips or drops of the line supply voltage. As a result, industrial equipment that fulfills this standard is more reliable and productive. In the SINAMICS G120 product family, the PM240-2 and PM250 Power Modules fulfill the latest SEMI F47-0706 standard. In the case of a voltage dip, defined in accordance with SEMI F47-0607, these drives either continue to supply a defined output current, or using an automatic restart function, continue to operate as expected.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Control Units

### Overview

#### CU230P-2 Control Units



CU230P-2 PN Control Unit

The Control Unit performs closed-loop control functions for the inverter.

The CU230P-2 Control Units are designed for drives with integrated technological functions for pump, fan and compressor applications.

The I/O interface, the fieldbus interfaces and the additional software functions optimally support these applications. The integration of technological functions is a significant differentiating feature to the other Control Units of the SINAMICS G120 drive family.

The CU230P-2 Control Units can be operated with the following Power Modules:

- PM240-2
- PM250

#### Note:

The CU230P-2 is the Control Unit for SINAMICS G120P and SINAMICS G120P Cabinet for pumps, fans and compressors. [Please refer to Catalog D 35 for more information.](#)

#### Note:

Shield plates and shield connection kits are available for use in the wiring installation of Control Units and Power Modules to ensure that it complies with EMC guidelines.

[For more information about shield connection kits and shield plates for Control Units and Power Modules, please refer to section Supplementary system components.](#)

#### Typical, integrated HVAC/HLK functions

- Linear and quadratic torque characteristic for fluid flow and positive displacement machines
- ECO mode for additional energy saving in V/f control mode
- 2 analog inputs (current/voltage can be selected) to directly connect pressure/level sensors
- 2 additional analog inputs to connect Pt1000/LG-Ni1000/DIN-Ni1000 temperature sensors
- Direct control of valves and flaps using two 230 V AC relays
- Automatic restart
- Flying restart
- Skip frequencies
- Hibernation mode
- Load check function to monitor belts and flow
- Cascade connection
- 4 integrated PID controllers (e.g. for temperature, pressure, air quality, level)
- Multi-zone controller
- Essential service mode
- Real time clock with three time generators

#### IOP-2 wizards for special applications

- Pumps: Positive displacement (constant load torque) and centrifugal pumps (square load torque) with and without PID controller
- Fans: Radial and axial fans (square load torque) with and without PID controller
- Compressors: Positive displacement (constant load torque) and fluid flow machines (square load torque) with and without PID controller

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Control Units

#### Overview (continued)

##### Control Unit CU240E-2



CU240E-2 DP-F Control Unit

The Control Unit performs closed-loop control functions for the inverter.

The CU240E-2 Control Unit is designed as standard Control Unit for all of the usual applications involving V/f or vector control.

- CU240E-2 series with standard I/O quantity structure and integrated safety technology

The CU240E-2 Control Unit can be combined with the following Power Modules:

- PM240-2
- PM250

#### Note:

Shield plates and shield connection kits are available for use in the wiring installation of Control Units and Power Modules to ensure that it complies with EMC guidelines.

[For more information about shield connection kits and shield plates for Control Units and Power Modules, please refer to section Supplementary system components.](#)

#### Safety Integrated functions

The safety function "Safe Torque Off" (STO) (certified according to IEC 61508 SIL 2 and EN ISO 13849-1 PL d and Category 3) is already integrated into the basic versions of the CU240E-2 series (CU240E-2, CU240E-2 DP, CU240E-2 PN).

With the fail-safe variants of the CU240E-2 series (CU240E-2 F, CU240E-2 DP-F, CU240E-2 PN-F), the fail-safe SINAMICS G120 inverter provides five safety functions which are certified according to IEC 61508 SIL 2 and EN ISO 13849-1 PL d and Category 3:

- Safe Torque Off (STO)  
to protect against active movement of the drive
- Safe Stop 1 (SS1)  
for continuous monitoring of a safe braking ramp
- Safely-Limited Speed (SLS)  
for protection against dangerous movements when a speed limit is exceeded (the CU240E-2 DP Failsafe Control Unit has 4 selectable SLS limit values)
- Safe Direction (SDI)  
This function ensures that the drive can only rotate in the selected direction.
- Safe Speed Monitor (SSM)  
This function signals if a drive operates below a specific speed/feed velocity (CU240E-2 DP-F / CU240E-2 PN-F with PROFIsafe).

These functions can be activated by means of PROFIsafe or via the safety inputs.

None of the safety functions require a motor encoder and they are thus much cheaper and easier to implement. Existing systems in particular can be simply updated with safety technology without the need to change the motor or mechanical system.

The Safe Torque Off (STO) function can be used without restriction for all applications. The SS1, SLS, SDI and SSM functions are only permissible for applications where the load can never accelerate when the inverter is switched off. They are therefore not permitted for applications involving pull-through loads such as hoisting gear and unwinders.

[Further information can be found in the section Safety Integrated.](#)

**Overview** (continued)

**CU250S-2 Control Units**


CU250S-2 Control Unit

The Control Unit performs closed-loop control functions for the inverter.

The CU250S-2 Control Units are designed as standard Control Units for all of the usual applications involving V/f or vector control.

CU250S-2 Control Units can be used to implement all common applications involving V/f or vector control as well as applications for drives with positioning requirements. This expansion allows them to be used in lifting, swiveling, traversing or rotating applications. The positioning functionality is comparable with SINAMICS S110 servo drives.

Two points must be noted here:

- Vector control (VC) and sensorless vector control (SLVC) are possible
- Encoder possible for speed and position control (positioning)

The CU250S-2 Control Units can be combined with the following Power Modules:

- PM240-2
- PM250

**Note:**

Shield plates and shield connection kits are available for use in the wiring installation of Control Units and Power Modules to ensure that it complies with EMC guidelines.

For more information about shield connection kits and shield plates for Control Units and Power Modules, please refer to section Supplementary system components.

**Safety Integrated functions**

The following Safety Integrated Basic Functions (certified according to IEC 61508 SIL 2 and EN ISO 13849-1 PL d and Category 3) are integrated as standard in the CU250S-2 series:

- Safe Torque Off (STO)  
to protect against active movement of the drive
- Safe Stop 1 (SS1)  
for continuous monitoring of a safe braking ramp
- Safe Brake Control (SBC) is used to safely control a holding brake

The following Safety Integrated Extended Functions (certified according to IEC 61508 SIL 2 and EN ISO 13849-1 PL d and Category 3) are optionally available for the CU250S-2 series:

- Safely-Limited Speed (SLS)  
for protection against dangerous movements when a speed limit is exceeded
- Safe Direction (SDI)  
This function ensures that the drive can only rotate in the selected direction.
- Safe Speed Monitor (SSM)  
This function signals if a drive operates below a specific speed/feed velocity.

These functions can be activated by means of PROFIsafe or via the safety inputs.

None of the safety functions require a motor encoder and they are thus much cheaper and easier to implement. Existing systems in particular can be simply updated with safety technology without the need to change the motor or mechanical system.

The Safe Torque Off (STO) function can be used without restriction for all applications. The SS1, SLS, SDI and SSM functions are only permissible for applications where the load can never accelerate when the inverter is switched off. They are therefore not permitted for applications involving pull-through loads such as hoisting gear and unwinders.

Further information can be found in the section [Safety Integrated](#).


## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Control Units

#### Design

#### CU230P-2 HVAC, CU230P-2 DP and CU230P-2 PN Control Units

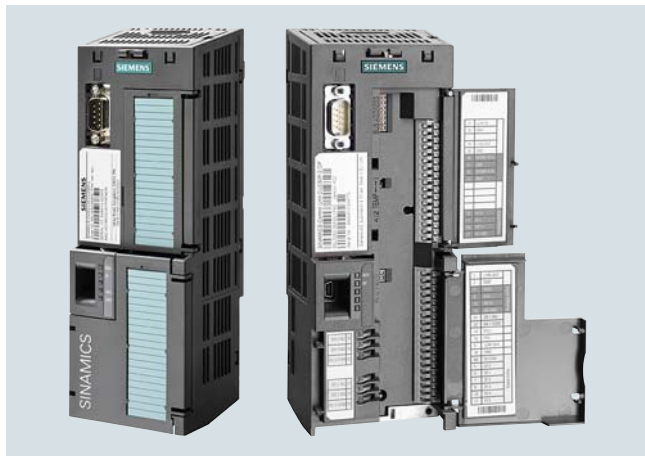

CU230P-2 Control Unit with open and closed terminal covers

| Terminal No.                          | Signal      | Features                                                                       |
|---------------------------------------|-------------|--------------------------------------------------------------------------------|
| <b>Digital inputs (DI) – Standard</b> |             |                                                                                |
| 69                                    | DI COM      | Reference potential for digital inputs                                         |
| 5 ... 8, 16, 17                       | DI0 ... DI5 | Freely programmable isolated, inputs in compliance with IEC 61131-2            |
| <b>Digital outputs (DO)</b>           |             |                                                                                |
| 18                                    | DO0, NC     | Relay output 1<br>NC contact (5 A, 30 V DC or 2 A, 250 V AC) <sup>1)</sup>     |
| 19                                    | DO0, NO     | Relay output 1<br>NO contact (5 A, 30 V DC or 2 A, 250 V AC)                   |
| 20                                    | DO0, COM    | Relay output 1<br>Common contact (5 A, 30 V DC or 2 A, 250 V AC) <sup>1)</sup> |
| 21                                    | DO1, NO     | Relay output 2<br>NO contact (0.5 A, 30 V DC)                                  |
| 22                                    | DO1, COM    | Relay output 2<br>Common contact (0.5 A, 30 V DC)                              |
| 23                                    | DO2, NC     | Relay output 3<br>NC contact (5 A, 30 V DC or 2 A, 250 V AC) <sup>1)</sup>     |
| 24                                    | DO2, NO     | Relay output 3<br>NO contact (5 A, 30 V DC or 2 A, 250 V AC)                   |
| 25                                    | DO2, COM    | Relay output 3<br>Common contact (5 A, 30 V DC or 2 A, 250 V AC) <sup>1)</sup> |

| Terminal No.               | Signal    | Features                                                                                                                                                                                               |
|----------------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Analog inputs (AI)</b>  |           |                                                                                                                                                                                                        |
| 3                          | AI0+      | Differential input, switchable between current, voltage<br>Value range: 0 ... 10 V, -10 ... +10 V, 0/2 ... 10 V, 0/4 ... 20 mA                                                                         |
| 4                          | AI0-      |                                                                                                                                                                                                        |
| 10                         | AI1+      | Differential input, switchable between current, voltage<br>Value range: 0 ... 10 V, -10 ... +10 V, 0/2 ... 10 V, 0/4 ... 20 mA                                                                         |
| 11                         | AI1-      |                                                                                                                                                                                                        |
| 50                         | AI2+      | Non-isolated input, switchable between current and temperature sensors, type Pt1000/LG-Ni1000/DIN-Ni1000<br>Value range: 0/4 ... 20 mA, Pt1000: -88 ... +240 °C; LG-Ni1000/DIN-Ni1000: -88 ... +165 °C |
| 51                         | GND       | Reference potential of the AI2/ internal electronics ground                                                                                                                                            |
| 52                         | AI3+      | Non-isolated input for temperature sensors, type Pt1000/LG-Ni1000/DIN-Ni1000<br>Value range: Pt1000: -88 ... +240 °C; LG-Ni1000/DIN-Ni1000: -88 ... +165 °C                                            |
| 53                         | GND       | Reference potential of the AI3/ internal electronics ground                                                                                                                                            |
| <b>Analog outputs (AO)</b> |           |                                                                                                                                                                                                        |
| 12                         | AO0+      | Non-isolated output<br>Freely programmable<br>Value range: 0 ... 10 V; 0/4 ... 20 mA                                                                                                                   |
| 13                         | GND       | Reference potential of the AO0/ internal electronics ground                                                                                                                                            |
| 26                         | AO1+      | Non-isolated output<br>Freely programmable<br>Value range: 0 ... 10 V; 0/4 ... 20 mA                                                                                                                   |
| 27                         | GND       | Reference potential of the AO1/ internal electronics ground                                                                                                                                            |
| <b>PTC/KTY interface</b>   |           |                                                                                                                                                                                                        |
| 14                         | T1 MOTOR  | Positive input for motor temperature sensor<br>Type: PTC, Pt1000, KTY, bimetal                                                                                                                         |
| 15                         | T2 MOTOR  | Negative input for motor temperature sensor                                                                                                                                                            |
| <b>Power supply</b>        |           |                                                                                                                                                                                                        |
| 9                          | +24 V OUT | Power supply output<br>24 V DC, max. 100 mA                                                                                                                                                            |
| 28                         | GND       | Reference potential of the power supply/ internal electronics ground                                                                                                                                   |
| 1                          | +10 V OUT | Power supply output<br>10 V DC ±0.5 V, max. 10 mA                                                                                                                                                      |
| 2                          | GND       | Reference potential of the power supply/ internal electronics ground                                                                                                                                   |
| 31                         | +24 V IN  | Power supply input<br>20.4 ... 28.8 V DC, max. 1500 mA                                                                                                                                                 |
| 32                         | GND IN    | Reference potential of the power supply input                                                                                                                                                          |
| 35                         | +10 V OUT | Power supply output<br>10 V DC ±0.5 V, max. 10 mA                                                                                                                                                      |
| 36                         | GND       | Reference potential of the power supply/ internal electronics ground                                                                                                                                   |

<sup>1)</sup> The following applies to systems complying with UL: A maximum of 3 A, 30 V DC or 2 A, 250 V AC may be connected via terminals 18 / 20 (DO0 NC) and 23 / 25 (DO2 NC).

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Control Units

### Design (continued)

**CU240E-2, CU240E-2 DP, CU240E-2 PN, CU240E-2 F, CU240E-2 DP-F and CU240E-2 PN-F Control Units**



CU240E-2 Control Unit with open and closed terminal covers

| Terminal No.                                                                                                         | Signal      | Features                                                                                     |
|----------------------------------------------------------------------------------------------------------------------|-------------|----------------------------------------------------------------------------------------------|
| <b>Digital inputs (DI) – Standard</b>                                                                                |             |                                                                                              |
| 5 ... 8, 16, 17                                                                                                      | DI0 ... DI5 | Freely programmable (isolated) 5.5 mA/24 V                                                   |
| 69                                                                                                                   | DI COM1     | Reference potential for digital inputs 0, 2, 4, 6                                            |
| 34                                                                                                                   | DI COM2     | Reference potential for digital inputs 1, 3, 5, 7                                            |
| <b>Digital inputs (DI) – Fail-safe<br/>(formed from two standard inputs using the appropriate parameter setting)</b> |             |                                                                                              |
| 16, 17                                                                                                               | F-DI0       | Fail-safe digital inputs, 2 channels (redundant), freely programmable (isolated) 5.5 mA/24 V |
| The following are only available for CU240E-2 F, CU240E-2 DP-F and CU240E-2 PN-F                                     |             |                                                                                              |
| 5, 6                                                                                                                 | F-DI0       | Fail-safe digital inputs, 2 channels (redundant), freely programmable (isolated) 5.5 mA/24 V |
| 7, 8                                                                                                                 | F-DI1       | Fail-safe digital inputs, 2 channels (redundant), freely programmable (isolated) 5.5 mA/24 V |
| 16, 17                                                                                                               | F-DI2       | Fail-safe digital inputs, 2 channels (redundant), freely programmable (isolated) 5.5 mA/24 V |

| Terminal No.                | Signal    | Features                                                                                                                       |
|-----------------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------|
| <b>Digital outputs (DO)</b> |           |                                                                                                                                |
| 18                          | DO0, NC   | Relay output DO0<br>NC contact (0.5 A, 30 V DC)                                                                                |
| 19                          | DO0, NO   | Relay output DO0<br>NO contact (0.5 A, 30 V DC)                                                                                |
| 20                          | DO0, COM  | Relay output DO0<br>Common contact (0.5 A, 30 V DC)                                                                            |
| 21                          | DO1+      | Transistor output DO1<br>Positive (0.5 A, 30 V DC)                                                                             |
| 22                          | DO1-      | Transistor output DO1<br>Negative (0.5 A, 30 V DC)                                                                             |
| 23                          | DO2, NC   | Relay output DO2<br>NC contact (0.5 A, 30 V DC)                                                                                |
| 24                          | DO2, NO   | Relay output DO2<br>NO contact (0.5 A, 30 V DC)                                                                                |
| 25                          | DO2, COM  | Relay output DO2<br>Common contact (0.5 A, 30 V DC)                                                                            |
| <b>Analog inputs (AI)</b>   |           |                                                                                                                                |
| 3                           | AI0+      | Differential input, switchable between current, voltage<br>Value range: 0 ... 10 V, -10 ... +10 V, 0/2 ... 10 V, 0/4 ... 20 mA |
| 4                           | AI0-      |                                                                                                                                |
| 10                          | AI1+      | Differential input, switchable between current, voltage<br>Value range: 0 ... 10 V, -10 ... +10 V, 0/2 ... 10 V, 0/4 ... 20 mA |
| 11                          | AI1-      |                                                                                                                                |
| <b>Analog outputs (AO)</b>  |           |                                                                                                                                |
| 12                          | AO0+      | Non-isolated output<br>Freely programmable<br>Value range: 0 ... 10 V; 0/4 ... 20 mA                                           |
| 13                          | GND       | Reference potential of the AO0/<br>internal electronics ground                                                                 |
| 26                          | AO1+      | Non-isolated output<br>Freely programmable<br>Value range: 0 ... 10 V; 0/4 ... 20 mA                                           |
| 27                          | GND       | Reference potential of the AO1/<br>internal electronics ground                                                                 |
| <b>PTC/KTY interface</b>    |           |                                                                                                                                |
| 14                          | T1 MOTOR  | Positive input for motor temperature sensor<br>Type: PTC, Pt1000, KTY, bimetal                                                 |
| 15                          | T2 MOTOR  | Negative input for motor temperature sensor                                                                                    |
| <b>Power supply</b>         |           |                                                                                                                                |
| 9                           | +24 V OUT | Power supply output<br>24 V DC, max. 100 mA                                                                                    |
| 28                          | GND       | Reference potential of the power supply/<br>internal electronics ground                                                        |
| 1                           | +10 V OUT | Power supply output<br>10 V DC $\pm 0.5$ V, max. 10 mA                                                                         |
| 2                           | GND       | Reference potential of the power supply/<br>internal electronics ground                                                        |
| 31                          | +24 V IN  | Power supply input<br>20.4 ... 28.8 V DC, max. 1500 mA                                                                         |
| 32                          | GND IN    | Reference potential of the power supply input                                                                                  |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Control Units

#### Design (continued)

#### *CU250S-2, CU250S-2 DP, CU250S-2 PN, CU250S-2 CAN Control Units*



CU250S-2 Control Unit with open and closed terminal covers

| Terminal No.                                                                                                                                   | Signal        | Features                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------------------------------|
| <b>Digital inputs (DI)</b>                                                                                                                     |               |                                                                                              |
| 5                                                                                                                                              | DI0           | Digital inputs, isolated, 5.5 mA/24 V                                                        |
| 6                                                                                                                                              | DI1+          | Digital inputs, isolated, 5.5 mA/24 V                                                        |
| 64                                                                                                                                             | DI1-          | Digital inputs, isolated, 5.5 mA/24 V                                                        |
| 7                                                                                                                                              | DI2           | Digital inputs, isolated, 5.5 mA/24 V                                                        |
| 8                                                                                                                                              | DI3+          | Digital inputs, isolated, 5.5 mA/24 V                                                        |
| 65                                                                                                                                             | DI3-          | Digital inputs, isolated, 5.5 mA/24 V                                                        |
| 16                                                                                                                                             | DI4           | Digital inputs, isolated, 5.5 mA/24 V                                                        |
| 17                                                                                                                                             | DI5+          | Digital inputs, isolated, 5.5 mA/24 V                                                        |
| 66                                                                                                                                             | DI5-          | Digital inputs, isolated, 5.5 mA/24 V                                                        |
| 67                                                                                                                                             | DI6           | Digital inputs, isolated, 5.5 mA/24 V                                                        |
| 69                                                                                                                                             | DI COM1       | Reference potential for digital inputs DI0, DI2, DI4, DI6                                    |
| 41 ... 44                                                                                                                                      | DI16 ... DI19 | Freely programmable (isolated) 5.5 mA/24 V                                                   |
| 40                                                                                                                                             | DI COM3       | Reference potential for digital inputs DI16 ... DI19                                         |
| <b>Digital inputs (DI) – Fail-safe (formed from two standard inputs using the appropriate parameter setting)</b>                               |               |                                                                                              |
| 5, 6                                                                                                                                           | F-DI0         | Fail-safe digital inputs, 2 channels (redundant), freely programmable (isolated) 5.5 mA/24 V |
| 7, 8                                                                                                                                           | F-DI1         | Fail-safe digital inputs, 2 channels (redundant), freely programmable (isolated) 5.5 mA/24 V |
| 16, 17                                                                                                                                         | F-DI2         | Fail-safe digital inputs, 2 channels (redundant), freely programmable (isolated) 5.5 mA/24 V |
| 69                                                                                                                                             | DI COM1       | Reference potential for digital inputs F-DI0, F-DI1, F-DI2                                   |
| <b>Switchable digital inputs or outputs (digital inputs DI24 to DI27 can also be used as a pulse input with a maximum frequency of 32 kHz)</b> |               |                                                                                              |
| 51                                                                                                                                             | DI24/DO24     | Freely programmable (not isolated), DI: 5.5 mA/24 V, DO: 100 mA/24 V                         |
| 53                                                                                                                                             | DI25/DO25     | Freely programmable (not isolated), DI: 5.5 mA/24 V, DO: 100 mA/24 V                         |
| 53                                                                                                                                             | DI26/DO26     | Freely programmable (not isolated), DI: 5.5 mA/24 V, DO: 100 mA/24 V                         |
| 54                                                                                                                                             | DI27/DO27     | Freely programmable (not isolated), DI: 5.5 mA/24 V, DO: 100 mA/24 V                         |
| 50                                                                                                                                             | GND           | Reference potential                                                                          |

| Terminal No.                                                                                                      | Signal     | Features                                                                                                                       |
|-------------------------------------------------------------------------------------------------------------------|------------|--------------------------------------------------------------------------------------------------------------------------------|
| <b>Digital outputs (DO)</b>                                                                                       |            |                                                                                                                                |
| 18                                                                                                                | DO0, NC    | Relay output DO0<br>NC contact (0.5 A, 30 V DC)                                                                                |
| 19                                                                                                                | DO0, NO    | Relay output DO0<br>NO contact (0.5 A, 30 V DC)                                                                                |
| 20                                                                                                                | DO0, COM   | Relay output DO0<br>Common contact (0.5 A, 30 V DC)                                                                            |
| 21                                                                                                                | DO1 NO     | Relay output DO1<br>NO contact (0.5 A, 30 V DC)                                                                                |
| 22                                                                                                                | DO1 COM    | Relay output DO1<br>Common contact (0.5 A, 30 V DC)                                                                            |
| 23                                                                                                                | DO2, NC    | Relay output DO2<br>NC contact (0.5 A, 30 V DC)                                                                                |
| 24                                                                                                                | DO2, NO    | Relay output DO2<br>NO contact (0.5 A, 30 V DC)                                                                                |
| 25                                                                                                                | DO2, COM   | Relay output DO2<br>Common contact (0.5 A, 30 V DC)                                                                            |
| <b>Digital output (DO) – Fail-safe (formed from two standard outputs using the appropriate parameter setting)</b> |            |                                                                                                                                |
| 18, 23                                                                                                            | F-DO0, NC  | Relay output F-DO0 NC contact (0.5 A, 30 V DC), 2-channel (redundant)                                                          |
| 19, 24                                                                                                            | F-DO0, NO  | Relay output F-DO0 NO contact (0.5 A, 30 V DC), 2-channel (redundant)                                                          |
| 20, 25                                                                                                            | F-DO0, COM | Relay output F-DO0 common contact (0.5 A, 30 V DC), 2-channel (redundant)                                                      |
| <b>Analog inputs (AI)</b>                                                                                         |            |                                                                                                                                |
| 3                                                                                                                 | AI0+       | Differential input, switchable between current, voltage<br>Value range: 0 ... 10 V, -10 ... +10 V, 0/2 ... 10 V, 0/4 ... 20 mA |
| 4                                                                                                                 | AI0-       |                                                                                                                                |
| 10                                                                                                                | AI1+       | Differential input, switchable between current, voltage<br>Value range: 0 ... 10 V, -10 ... +10 V, 0/2 ... 10 V, 0/4 ... 20 mA |
| 11                                                                                                                | AI1-       |                                                                                                                                |
| 13                                                                                                                | GND        | Reference potential of AI                                                                                                      |
| <b>Analog outputs (AO)</b>                                                                                        |            |                                                                                                                                |
| 12                                                                                                                | AO0+       | Non-isolated output<br>Freely programmable<br>Value range: 0 ... 10 V; 0/4 ... 20 mA                                           |
| 26                                                                                                                | AO1+       | Non-isolated output<br>Freely programmable<br>Value range: 0 ... 10 V; 0/4 ... 20 mA                                           |
| 27                                                                                                                | GND        | Reference potential of AO                                                                                                      |
| <b>PTC/KTY interface</b>                                                                                          |            |                                                                                                                                |
| 14                                                                                                                | T1 MOTOR   | Positive input for motor temperature sensor<br>Type: PTC, Pt1000, KTY, bimetal                                                 |
| 15                                                                                                                | T2 MOTOR   | Negative input for motor temperature sensor                                                                                    |
| <b>Power supply</b>                                                                                               |            |                                                                                                                                |
| 9                                                                                                                 | +24 V OUT  | Power supply output<br>24 V DC, max. 200 mA                                                                                    |
| 28                                                                                                                | GND        | Reference potential of the power supply/<br>internal electronics ground                                                        |
| 1                                                                                                                 | +10 V OUT  | Power supply output<br>10 V DC $\pm 0.5$ V, max. 10 mA                                                                         |
| 2                                                                                                                 | GND        | Reference potential of the power supply/<br>internal electronics ground                                                        |
| 31                                                                                                                | +24 V IN   | Power supply input<br>20.4 ... 28.8 V DC, max. 1500 mA                                                                         |
| 32                                                                                                                | GND IN     | Reference potential of the power supply input                                                                                  |

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Control Units

### Design (continued)

| Terminal No.                                       | Signal | Features                                         |
|----------------------------------------------------|--------|--------------------------------------------------|
| <b>HTL encoder/resolver interface via terminal</b> |        |                                                  |
| 33                                                 | ENC+   | HTL encoder power supply                         |
| 79                                                 | GND    | Reference potential                              |
| 70                                                 | AP/S2  | HTL track A+ / resolver signal A (sin+)          |
| 71                                                 | AN/S4  | HTL track A- / inverted resolver signal A (sin-) |
| 72                                                 | BP/S1  | HTL track B+ / resolver signal S1                |
| 73                                                 | BN/S3  | HTL track B- / inverted resolver signal B (cos-) |
| 74                                                 | ZP     | HTL zero signal+                                 |
| 75                                                 | ZN     | HTL zero signal-                                 |
| 76                                                 | R1     | Resolver excitation+                             |
| 77                                                 | R2     | Resolver excitation-                             |

| Terminal No.      | Signal                        |
|-------------------|-------------------------------|
| <b>DRIVE-CLiQ</b> |                               |
| 1                 | Transmit data +               |
| 2                 | Transmit data -               |
| 3                 | Receive data +                |
| 4                 | –                             |
| 5                 | –                             |
| 6                 | Receive data -                |
| 7                 | –                             |
| 8                 | –                             |
| A                 | +24 V power supply            |
| B                 | M, reference for power supply |

### HTL, TTL, SSI, temperature via SUB-D interface

| Terminal No. | Signal                                   | HTL       | TTL       | SSI (RS422 standard) | PTC, Pt1000, KTY84, bimetal |
|--------------|------------------------------------------|-----------|-----------|----------------------|-----------------------------|
| 1            | Motor temperature sensing +              | –         | –         | –                    | Temp +                      |
| 2            | SSI clock                                | –         | –         | Clock +              | –                           |
| 3            | Inverse SSI clock                        | –         | –         | Clock -              | –                           |
| 4            | 5 V/24 V encoder supply                  | P encoder | P encoder | P encoder            | –                           |
| 5            | 5 V/24 V encoder supply                  | P encoder | P encoder | P encoder            | –                           |
| 6            | Sense input, encoder supply              | –         | P sense   | –                    | –                           |
| 7            | 0 V, reference for encoder supply        | M encoder | M encoder | M encoder            | –                           |
| 8            | Motor temperature sensing -              | –         | –         | –                    | Temp-                       |
| 9            | 0 V, reference for sense input           | –         | M sense   | –                    | –                           |
| 10           | Referencing signal                       | R +       | R +       | –                    | –                           |
| 11           | Inverted referencing signal              | R -       | R -       | –                    | –                           |
| 12           | Inverted incremental signal B            | B -       | B -       | –                    | –                           |
| 13           | Incremental signal B                     | B +       | B +       | –                    | –                           |
| 14           | Inverted incremental signal A / SSI data | A -       | A -       | Data -               | –                           |
| 15           | Incremental signal A / SSI data          | A +       | A +       | Data +               | –                           |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Control Units

#### Function


##### Function module basic positioner EPos

The basic positioner EPos is available as a standard technology function for the following SINAMICS Control Units and can be called as a function module that can be activated additionally.

- SINAMICS S120 CU310-2 and CU320-2 Control Units
- SINAMICS S110 CU305 Control Units
- SINAMICS G120 CU250S-2 Control Units
- SINAMICS G120D CU250D-2 Control Units

The basic positioner can be used to resolve basic motion control tasks without additional external technological outlay from the drive itself.

Integrated functionality for absolute and relative positioning of linear and rotary axes with motor encoders or machine encoders.

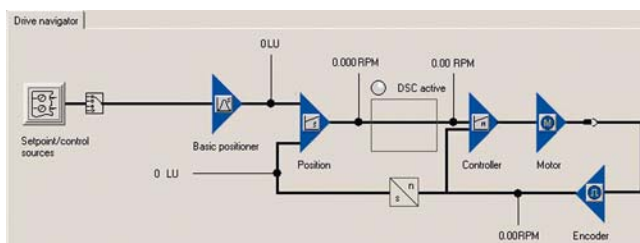

The EPos basic positioner in the SINAMICS drive system provides powerful and precise positioning functions. Due to its flexibility and adaptability, the basic positioner can be used for a wide range of positioning tasks.

The functions are easy to handle both during commissioning and during operation, and the comprehensive monitoring functions are outstanding.

Many applications can be carried out without external position controllers.

The EPos basic positioner is used to position linear and rotary axes (modulo) in absolute/relative terms with rotary as well as linear motor encoder or machine encoder (indirect or direct measuring system).


EPos is a function module that can be activated additionally in Servo Control and in Vector Control.

User-friendly configuring and commissioning, including control panel (operation using PC) and diagnostics, are possible with the STARTER and SINAMICS Startdrive commissioning tools.

In addition to extremely flexible positioning functions, EPos offers a high degree of user-friendliness and reliability thanks to integral monitoring and compensation functions.

Different operating modes and their functionality increase flexibility and plant productivity, for example, by means of "on-the-fly" and bumpless correction of the motion control.

Preconfigured PROFIdrive positioning frames are available which, when selected, automatically establish the internal "connection" to the basic positioner.

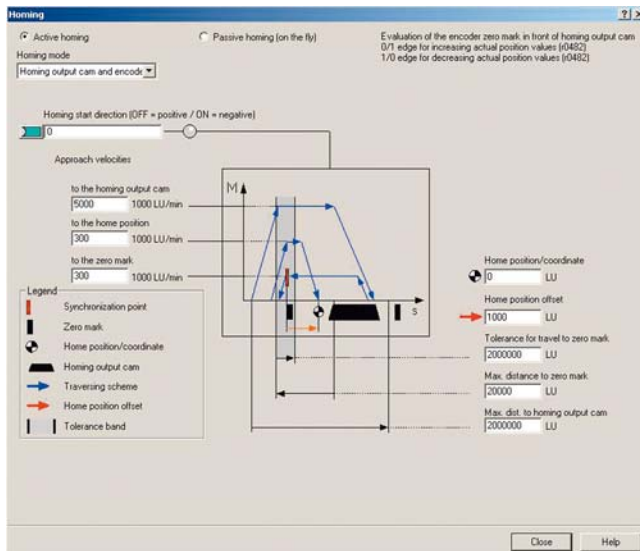

**Function** (continued)

**Functionality of the EPos basic positioner**

Lower-level closed-loop position control with the following essential components

- Position actual value sensing (including the lower-level measuring probe evaluation and reference mark search)
- Position controller (including limits, adaptation and pre-control calculation)
- Monitoring functions (standstill, positioning and dynamic following error monitoring, cam signals)

Mechanical system

- Backlash compensation
- Modulo offset

Limitations

- Speed/acceleration/delay/jerk limitation
- Software limit switches (traversing range limitation by means of position setpoint evaluation)
- Stop cams (traversing range limitation using hardware limit switch evaluation)

Referencing or adjustment

- Set reference point (for an axis at standstill)
- Search for reference (separate mode including reversing cam functionality, automatic reversal of direction, homing to "output cam and encoder zero mark" or only "encoder zero mark" or "external zero mark (BERO)")
- Flying referencing (seamless referencing possible during "normal" traversing with the aid of the measuring input evaluation; generally evaluation, e.g. of a BERO. Subordinate function for the modes "jog", "direct setpoint input/MDI" and "traversing blocks")
- Absolute encoder alignment

Traversing block mode

- 64 traversing blocks for
  - SINAMICS S120 CU310-2 and CU320-2 Control Units
- 16 traversing blocks for
  - SINAMICS S110 CU305 Control Units
  - SINAMICS G120 CU250S-2 Control Units
  - SINAMICS G120D CU250D-2 Control Units
- Positioning using traversing blocks that can be stored in the drive unit including continuation conditions and specific jobs for a previously homed axis
- Configuring traversing blocks using the traversing block editor in the relevant commissioning tool of the SINAMICS drive family
- A traversing block contains the following information:
  - Job number and job (e.g. positioning, waiting, GOTO block jump, setting of binary outputs, travel to fixed stop)
  - Motion parameters (target position, velocity, override for acceleration and deceleration)
  - Mode (e.g.: hide block, continuation conditions such as "Continue\_with\_stop", "Continue\_flying" and "Continue\_externally using high-speed measuring inputs")
  - Job parameters (e.g. wait time, block step conditions)

Direct setpoint specification (MDI) mode

- Positioning (absolute, relative) and setting-up (endless closed-loop position control) using direct setpoint inputs (e.g. via the PLC using process data)
- It is always possible to influence the motion parameters during traversing (on-the-fly setpoint acceptance) as well as for on-the-fly changes between the setup and positioning modes.
- The direct setpoint specification mode (MDI) can also be used in the relative positioning or setup mode if the axis is not referenced. This means that on-the-fly synchronization and re-referencing can be carried out using "flying referencing".

Jog mode

- Closed-loop position controlled traversing of the axis with "endless position controlled" or "jog incremental" modes (traverse through a "step width"), which can be toggled between


Further information can be found in the section [Technology functions](#).

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Control Units

### Integration

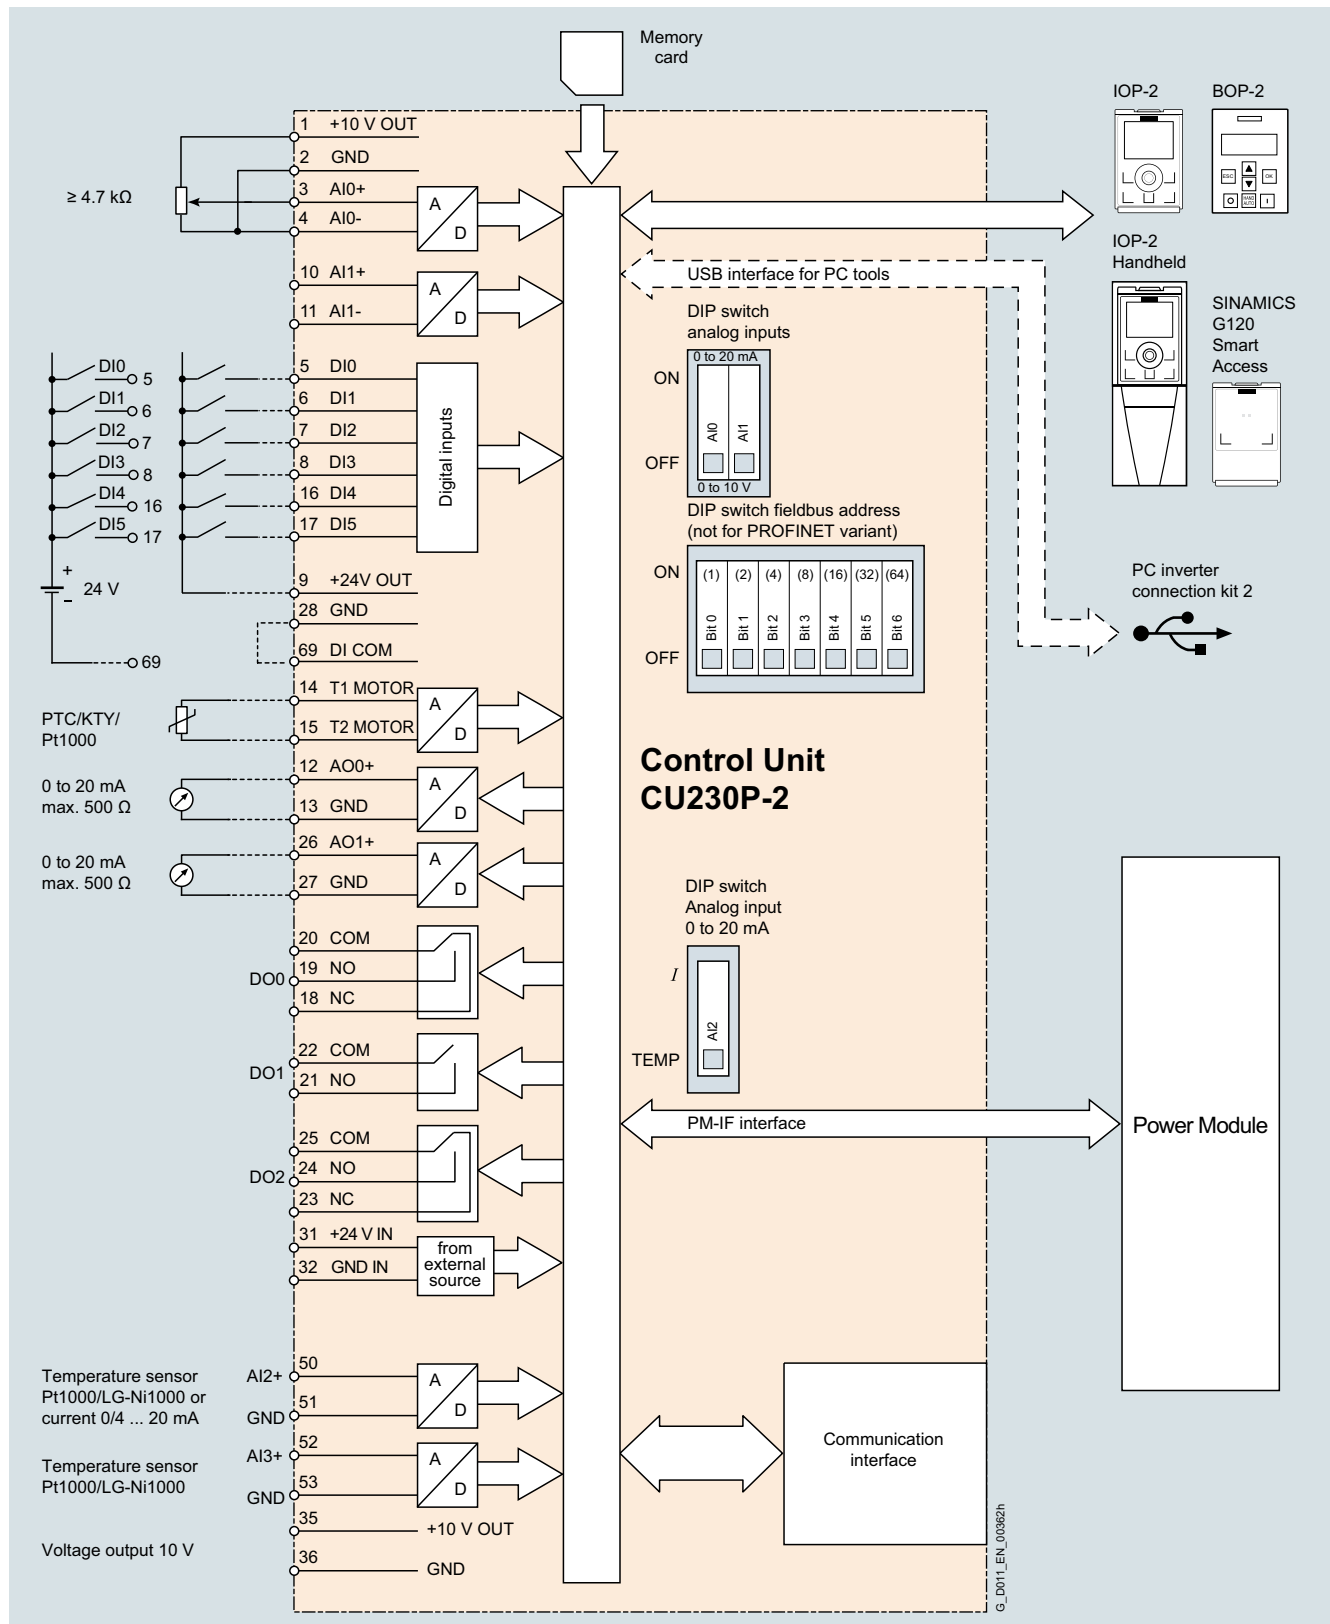

Connection example of a CU230P-2 series Control Unit

More information about the interfaces of the Control Unit is available on the Internet at:


<https://support.industry.siemens.com/cs/document/109477360>

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Control Units

### Integration (continued)

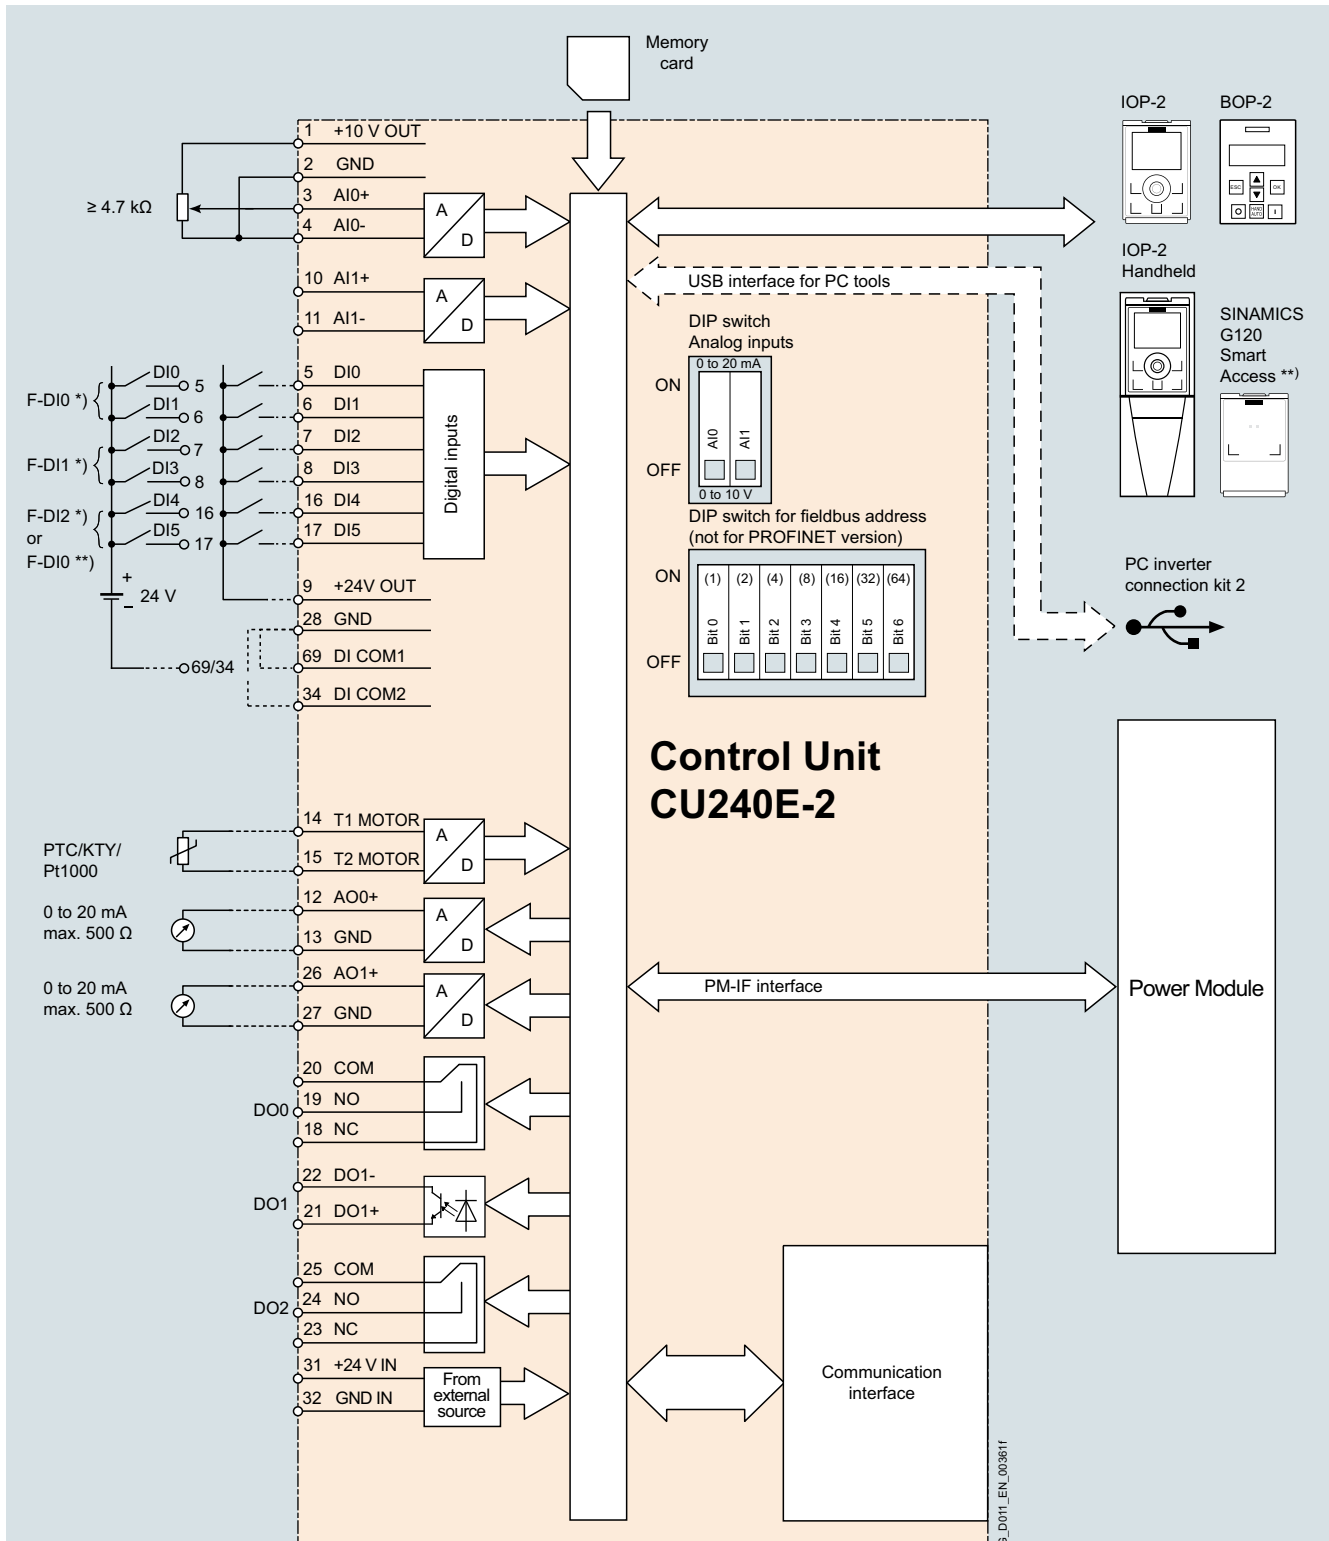

Connection example of a CU240E-2 series Control Unit

More information about the interfaces of the Control Unit is available on the Internet at:

<https://support.industry.siemens.com/cs/document/109477361>




# SINAMICS G120 standard inverters


0.37 kW to 250 kW (0.5 hp to 400 hp)

## Control Units


### Integration (continued)

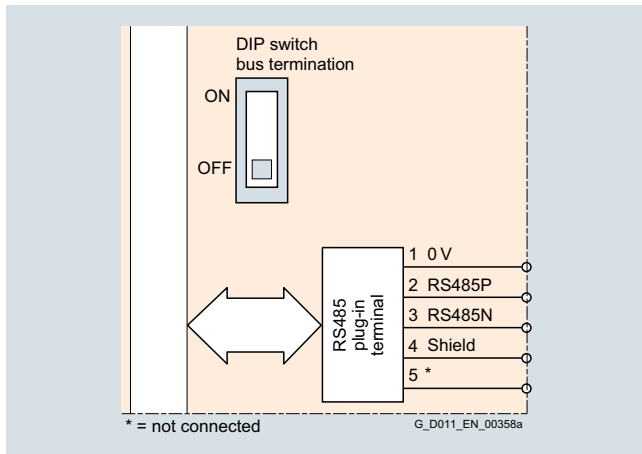


Communication interface USS, Modbus RTU, BACnet MS/TP, FLN P1 (BACnet MS/TP and FLN P1 for CU230P-2 HVAC only)

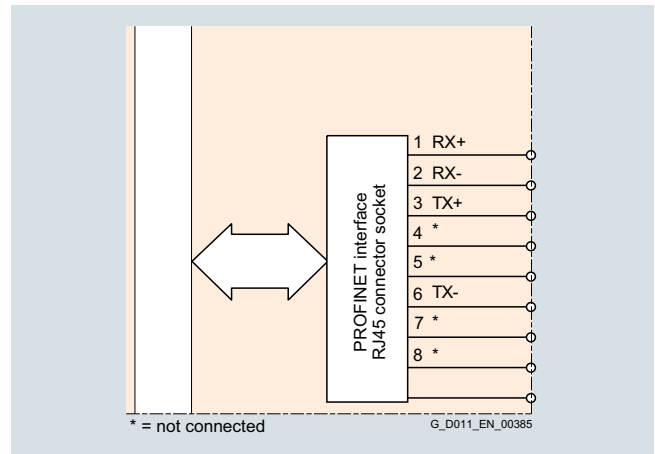

Communication interface PROFINET, EtherNet/IP

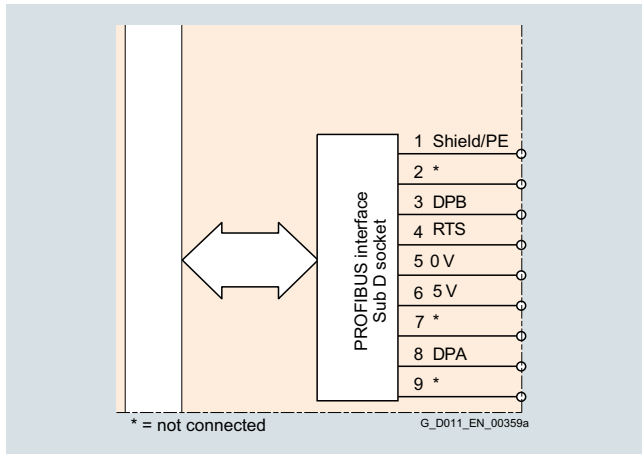

PROFIBUS DP communication interface

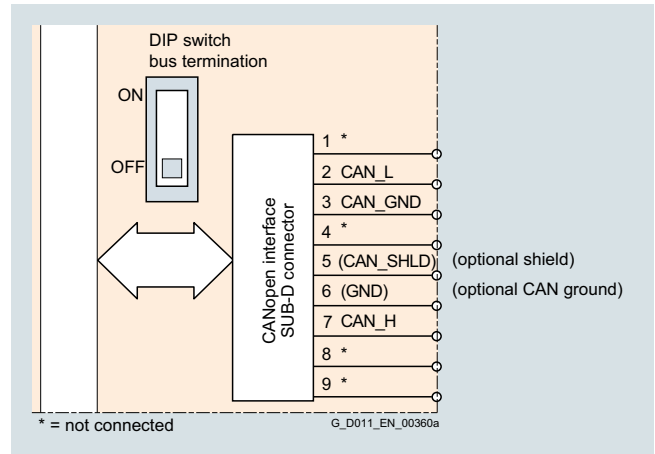

CANopen communication interface (only for CU250S-2)

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Control Units

### Selection and ordering data

| Description                                                                                                                                                                                                                                                   | Fieldbus                                                                                                                | Profile                                                                                                    | Inputs<br>Outputs                                | Integrated safety<br>technology        | Fail-safe<br>digital inputs<br>digital outputs | Control Unit<br><br>Article No. |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|--------------------------------------------------|----------------------------------------|------------------------------------------------|---------------------------------|
| <b>CU230P-2 series – the specialist for pumps, fans, compressors, water, buildings</b><br>Technology functions (selection): Free function blocks (FFB), 4 × PID controller, cascade connection, hibernation mode, essential service mode, multi-zone control  |                                                                                                                         |                                                                                                            |                                                  |                                        |                                                |                                 |
| <b>CU230P-2 HVAC</b>                                                                                                                                                                                                                                          | <ul style="list-style-type: none"> <li>• USS</li> <li>• Modbus RTU</li> <li>• BACnet MS/TP</li> <li>• FLN P1</li> </ul> | –                                                                                                          | 6 DI<br>4 AI<br><br>3 DO<br>2 AO                 | –                                      | –                                              | <b>6SL3243-0BB30-1HA3</b>       |
| <b>CU230P-2 DP</b>                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>• PROFIBUS DP</li> </ul>                                                         | <ul style="list-style-type: none"> <li>• PROFIdrive</li> </ul>                                             |                                                  |                                        |                                                | <b>6SL3243-0BB30-1PA3</b>       |
| <b>CU230P-2 PN</b>                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>• PROFINET</li> </ul>                                                            | <ul style="list-style-type: none"> <li>• PROFIdrive</li> <li>• PROFIenergy</li> </ul>                      |                                                  |                                        |                                                | <b>6SL3243-0BB30-1FA0</b>       |
|                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>• EtherNet/IP</li> <li>- ODVA AC drive</li> <li>- SINAMICS profile</li> </ul>    | –                                                                                                          |                                                  |                                        |                                                |                                 |
| <b>CU240E-2 series – for standard applications in general machinery construction, such as conveyor belts, mixers and extruders – without encoder</b><br>Technology functions (selection): Free function blocks (FFB), 1 × PID controller, motor holding brake |                                                                                                                         |                                                                                                            |                                                  |                                        |                                                |                                 |
| <b>CU240E-2</b>                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>• USS</li> <li>• Modbus RTU</li> </ul>                                           | –                                                                                                          | 6 DI<br>2 AI<br><br>3 DO<br>2 AO                 | STO                                    | 1 F-DI<br>(opt. for each 2 DI)                 | <b>6SL3244-0BB12-1BA1</b>       |
| <b>CU240E-2 DP</b>                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>• PROFIBUS DP</li> </ul>                                                         | <ul style="list-style-type: none"> <li>• PROFIdrive</li> <li>• PROFIsafe</li> </ul>                        |                                                  |                                        |                                                | <b>6SL3244-0BB12-1PA1</b>       |
| <b>CU240E-2 PN</b>                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>• PROFINET</li> </ul>                                                            | <ul style="list-style-type: none"> <li>• PROFIdrive</li> <li>• PROFIsafe</li> <li>• PROFIenergy</li> </ul> |                                                  |                                        |                                                | <b>6SL3244-0BB12-1FA0</b>       |
|                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>• EtherNet/IP</li> <li>- ODVA AC drive</li> <li>- SINAMICS profile</li> </ul>    | –                                                                                                          |                                                  |                                        |                                                |                                 |
| <b>CU240E-2 F</b>                                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>• USS</li> <li>• Modbus RTU</li> </ul>                                           | –                                                                                                          |                                                  | STO, SS1, SLS, SDI                     | 3 F-DI<br>(opt. for each 2 DI)                 | <b>6SL3244-0BB13-1BA1</b>       |
| <b>CU240E-2 DP-F</b>                                                                                                                                                                                                                                          | <ul style="list-style-type: none"> <li>• PROFIBUS DP</li> </ul>                                                         | <ul style="list-style-type: none"> <li>• PROFIdrive</li> <li>• PROFIsafe</li> </ul>                        |                                                  | STO, SS1, SLS, SSM <sup>1)</sup> , SDI |                                                | <b>6SL3244-0BB13-1PA1</b>       |
| <b>CU240E-2 PN-F</b>                                                                                                                                                                                                                                          | <ul style="list-style-type: none"> <li>• PROFINET</li> </ul>                                                            | <ul style="list-style-type: none"> <li>• PROFIdrive</li> <li>• PROFIsafe</li> <li>• PROFIenergy</li> </ul> |                                                  |                                        |                                                | <b>6SL3244-0BB13-1FA0</b>       |
|                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>• EtherNet/IP</li> <li>- ODVA AC drive</li> <li>- SINAMICS profile</li> </ul>    | –                                                                                                          |                                                  |                                        |                                                |                                 |
| <b>CU250S-2 series – for complex applications such as extruders and centrifuges – with and without encoder (basic positioner (EPos) optional)</b><br>Technology functions (selection): Free function blocks (FFB), 1 × PID controller, motor holding brake    |                                                                                                                         |                                                                                                            |                                                  |                                        |                                                |                                 |
| <b>CU250S-2</b>                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>• USS</li> <li>• Modbus RTU</li> </ul>                                           | –                                                                                                          | 11 DI<br>2 AI<br><br>3 DO<br>2 AO                | STO, SBC, SS1                          | 3 F-DI<br>(opt. for each 2 DI)                 | <b>6SL3246-0BA22-1BA0</b>       |
| <b>CU250S-2 DP</b>                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>• PROFIBUS DP</li> </ul>                                                         | <ul style="list-style-type: none"> <li>• PROFIdrive</li> <li>• PROFIsafe</li> </ul>                        | 4 DI/DO<br>(DI can be used as high-speed inputs) |                                        | 1 F-DO<br>(opt. for each 2 DO)                 | <b>6SL3246-0BA22-1PA0</b>       |
| <b>CU250S-2 PN</b>                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>• PROFINET</li> </ul>                                                            | <ul style="list-style-type: none"> <li>• PROFIdrive</li> <li>• PROFIsafe</li> <li>• PROFIenergy</li> </ul> |                                                  |                                        |                                                | <b>6SL3246-0BA22-1FA0</b>       |
|                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>• EtherNet/IP</li> <li>- ODVA AC drive</li> <li>- SINAMICS profile</li> </ul>    | –                                                                                                          |                                                  |                                        |                                                |                                 |
| <b>CU250S-2 CAN</b>                                                                                                                                                                                                                                           | <ul style="list-style-type: none"> <li>• CANopen</li> </ul>                                                             | –                                                                                                          |                                                  |                                        |                                                | <b>6SL3246-0BA22-1CA0</b>       |

<sup>1)</sup> SSM is possible only with PROFIsafe.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Control Units

### Selection and ordering data (continued)

#### Optional memory card with firmware V4.7 SP10 for CU230P-2, CU240E-2 and CU250S-2 Control Units

| Description                                                                  | Suitable for                     | Article No.                   |
|------------------------------------------------------------------------------|----------------------------------|-------------------------------|
| <b>SINAMICS SD card</b><br>512 MB + firmware V4.7 SP10 (Multicard V4.7 SP10) | CU230P-2<br>CU240E-2<br>CU250S-2 | <b>NEW</b> 6SL3054-7TF00-2BA0 |

#### Optional memory cards with licenses for CU250S-2 Control Units only

| Description                                                                            | SINAMICS SD card<br>512 MB + licenses | SINAMICS SD card<br>512 MB + firmware V4.7 SP10<br>(Multicard V4.7 SP10) +<br>licenses | Licenses (without SD card)<br>for upgrading license<br>of an existing SD card |
|----------------------------------------------------------------------------------------|---------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
|                                                                                        | Article No.                           | Article No.                                                                            | Article No.                                                                   |
| <b>License</b> Extended Functions<br>Basic positioner (EPos)                           | 6SL3054-4AG00-2AA0-Z<br>E01           | 6SL3054-7TF00-2BA0-Z<br>E01                                                            | 6SL3074-7AA04-0AA0                                                            |
| <b>License</b> Extended Functions<br>Safety (SLS, SSM, SDI)                            | 6SL3054-4AG00-2AA0-Z<br>F01           | 6SL3054-7TF00-2BA0-Z<br>F01                                                            | 6SL3074-0AA10-0AA0                                                            |
| <b>Licenses</b> Extended Functions<br>Basic positioner (EPos) + Safety (SLS, SSM, SDI) | 6SL3054-4AG00-2AA0-Z<br>E01+F01       | 6SL3054-7TF00-2BA0-Z<br>E01+F01                                                        | —                                                                             |

More information on firmware V4.7 SP10:

<https://support.industry.siemens.com/cs/document/109755811>

For an overview and more information on all available  
firmware versions, see

<https://support.industry.siemens.com/cs/document/67364620>

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Control Units

### Technical specifications

| Control Unit                                                      | CU230P-2 series                                                                                                                                                                                                                                                                                                                     | CU240E-2 series                                                                                                     | CU250S-2 series                                                                                                                                                                                |
|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                   | 6SL3243-0BB30-1 . A3<br>6SL3243-0BB30-1FA0                                                                                                                                                                                                                                                                                          | 6SL3244-0BB1 . -1 . A1<br>6SL3244-0BB1 . -1FA0                                                                      | 6SL3246-0BA22-1 . A0                                                                                                                                                                           |
| <b>Electrical specifications</b>                                  |                                                                                                                                                                                                                                                                                                                                     |                                                                                                                     |                                                                                                                                                                                                |
| <b>Operating voltage</b>                                          | 24 V DC via the Power Module or by connecting to an external 20.4 ... 28.8 V DC power supply                                                                                                                                                                                                                                        |                                                                                                                     |                                                                                                                                                                                                |
| <b>Current consumption, max.</b>                                  | 0.5 A                                                                                                                                                                                                                                                                                                                               | 0.5 A                                                                                                               | 1.5 A                                                                                                                                                                                          |
| <b>Protective insulation</b>                                      | PELV according to EN 50178<br>Protective separation from the line supply using double/reinforced insulation                                                                                                                                                                                                                         |                                                                                                                     |                                                                                                                                                                                                |
| <b>Power loss, max.</b>                                           | 5 W                                                                                                                                                                                                                                                                                                                                 | 5 W                                                                                                                 | 12 W                                                                                                                                                                                           |
| <b>Interfaces</b>                                                 |                                                                                                                                                                                                                                                                                                                                     |                                                                                                                     |                                                                                                                                                                                                |
| <b>Digital inputs – Standard</b>                                  | 6 isolated inputs                                                                                                                                                                                                                                                                                                                   | 6 isolated inputs                                                                                                   | 11 isolated inputs<br>+4 switchable DI/DO,<br>non-isolated (DI can be used as<br>high-speed inputs)                                                                                            |
|                                                                   | Optically isolated, free reference potential (own potential group), input current 5.5 mA<br>NPN/PNP logic can be selected using the wiring<br>Switching level: 0 → 1: 11 V<br>Switching level: 1 → 0: 5 V                                                                                                                           |                                                                                                                     |                                                                                                                                                                                                |
| <b>Digital inputs – Fail-safe</b>                                 | –                                                                                                                                                                                                                                                                                                                                   | 1 (use of 2 × DI standard)<br>Max. 3 (use of 6 × DI standard) for<br>CU240E-2 F, CU240E-2 PN-F and<br>CU240E-2 DP-F | 1 (use of 2 × DI standard)<br>Max. 3 (use of 6 × DI standard)                                                                                                                                  |
| <b>Digital outputs</b>                                            | 2 relay changeover contacts<br>250 V AC, 2 A (inductive load),<br>30 V DC, 5 A (ohmic load)<br>The following applies to systems<br>complying with UL: A maximum of<br>3 A, 30 V DC or 2 A, 250 V AC may<br>be connected via terminals 18 / 20<br>(DO0 NC) and 23 / 25 (DO2 NC)<br>1 relay NO contact<br>30 V DC, 0.5 A (ohmic load) | 1 transistor<br>30 V DC, 0.5 A (ohmic load)<br>2 relay changeover contacts<br>30 V DC, 0.5 A (ohmic load)           | 2 relay changeover contacts<br>30 V DC, 0.5 A (ohmic load)<br>1 relay NO contact<br>30 V DC, 0.5 A (ohmic load)                                                                                |
| <b>Digital outputs – Fail-safe</b>                                | –                                                                                                                                                                                                                                                                                                                                   | –                                                                                                                   | 1 (use of 2 × DO standard)                                                                                                                                                                     |
| <b>Analog inputs – standard</b>                                   | 2 differential inputs                                                                                                                                                                                                                                                                                                               | 2 differential inputs                                                                                               | 2 differential inputs                                                                                                                                                                          |
|                                                                   | Switchable using DIP switch between voltage and current:<br>-10 ... +10 V, 0/4 ... 20 mA, 12-bit resolution (with CU250S-2: 13-bit resolution)<br>The differential analog inputs can be configured as additional digital inputs.<br>Switching thresholds:<br>0 → 1: Rated voltage 4 V<br>1 → 0: Rated voltage 1.6 V                 |                                                                                                                     |                                                                                                                                                                                                |
| <b>Analog inputs – switchable:<br/>Temperature sensor/current</b> | 1 non-isolated input,<br>switchable using DIP switch<br>between current 0/4 ... 20 mA and<br>temperature sensor, type<br>Pt1000/LG-Ni1000/DIN-Ni1000,<br>12-bit resolution                                                                                                                                                          | –                                                                                                                   | –                                                                                                                                                                                              |
| <b>Analog inputs – temperature sensor</b>                         | 1 non-isolated input,<br>temperature sensor, type<br>Pt1000/LG-Ni1000/DIN-Ni1000,<br>12-bit resolution                                                                                                                                                                                                                              | –                                                                                                                   | –                                                                                                                                                                                              |
| <b>Analog outputs</b>                                             | 2 non-isolated outputs                                                                                                                                                                                                                                                                                                              | 2 non-isolated outputs                                                                                              | 2 non-isolated outputs                                                                                                                                                                         |
|                                                                   | Switchable between voltage and current using parameter setting:<br>0 ... 10 V, 0/4 ... 20 mA<br>Voltage mode: 10 V, min. burden 10 kΩ<br>Current mode: 20 mA, max. burden 500 Ω<br>The analog outputs have short-circuit protection                                                                                                 |                                                                                                                     |                                                                                                                                                                                                |
| <b>PTC/KTY interface</b>                                          | 1 motor temperature sensor input,<br>connectable sensors PTC, Pt1000,<br>KTY and bimetal,<br>accuracy ±5 °C                                                                                                                                                                                                                         | 1 motor temperature sensor input,<br>connectable sensors PTC, Pt1000,<br>KTY and bimetal,<br>accuracy ±5 °C         | 2 motor temperature sensor inputs,<br>connectable sensors PTC, Pt1000,<br>KTY and bimetal,<br>accuracy ±5 °C<br>• 1 input via terminal 14/15<br>• 1 input via SUB-D encoder<br>interface X2100 |
| <b>Removable terminal connector for<br/>I/O interface</b>         | –                                                                                                                                                                                                                                                                                                                                   | ✓                                                                                                                   | ✓                                                                                                                                                                                              |

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Control Units

### Technical specifications (continued)

|                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                    |                                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|
| Control Unit                                                                                                                                                                                                      | <b>CU230P-2 series</b><br>6SL3243-0BB30-1 . A3<br>6SL3243-0BB30-1FA0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>CU240E-2 series</b><br>6SL3244-0BB1 . -1 . A1<br>6SL3244-0BB1 . -1FA0                                           | <b>CU250S-2 series</b><br>6SL3246-0BA22-1 . A0       |
| Integrated bus interface                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                    |                                                      |
| <b>USS, Modbus RTU</b><br>RS485 connected at a terminal, isolated, bus terminating resistor can be switched in, slave address can be set using DIP switches<br><br>USS: max. 187.5 kBaud<br>Modbus RTU:19.2 kBaud | CU230P-2 HVAC<br>6SL3243-0BB30-1HA3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | CU240E-2<br>6SL3244-0BB12-1BA1<br><br>CU240E-2 F<br>6SL3244-0BB13-1BA1                                             | CU250S-2<br>6SL3246-0BA22-1BA0                       |
| <b>BACnet MS/TP, FLN P1</b><br>RS485 connected to a terminal, isolated, bus terminating resistor can be switched in<br>Max. 187.5 kBaud                                                                           | CU230P-2 HVAC<br>6SL3243-0BB30-1HA3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | –                                                                                                                  | –                                                    |
| <b>PROFIBUS DP</b><br>- PROFIdrive profile<br>9-pin SUB-D socket, isolated, PROFIdrive profile V4.1, slave address can be set using DIP switches<br>Max. 12 Mbit/s                                                | CU230P-2 DP<br>6SL3243-0BB30-1PA3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | CU240E-2 DP<br>6SL3244-0BB12-1PA1<br>incl. PROFIsafe<br><br>CU240E-2 DP-F<br>6SL3244-0BB13-1PA1<br>incl. PROFIsafe | CU250S-2 DP<br>6SL3246-0BA22-1PA0<br>incl. PROFIsafe |
| <b>PROFINET</b><br>- PROFIdrive profile<br>- PROFINergy profile<br><br>2 × RJ45, PROFIdrive profile V4.1, device name can be stored on the device<br>Max. 100 Mbit/s (full duplex)                                | CU230P-2 PN<br>6SL3243-0BB30-1FA0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | CU240E-2 PN<br>6SL3244-0BB12-1FA0<br>incl. PROFIsafe<br><br>CU240E-2 PN-F<br>6SL3244-0BB13-1FA0<br>incl. PROFIsafe | CU250S-2 PN<br>6SL3246-0BA22-1FA0<br>incl. PROFIsafe |
| <b>EtherNet/IP</b><br>- ODVA AC drive<br>- SINAMICS profile                                                                                                                                                       | CU230P-2 PN<br>6SL3243-0BB30-1FA0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | CU240E-2 PN<br>6SL3244-0BB12-1FA0<br>CU240E-2 PN-F<br>6SL3244-0BB13-1FA0                                           | CU250S-2 PN<br>6SL3246-0BA22-1FA0                    |
| <b>CANopen</b><br>9-pin SUB-D connector, isolated, slave address can be set using DIP switches, bus terminating resistor can be switched in<br>Max. 1 Mbit/s                                                      | –                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | –                                                                                                                  | CU250S-2 CAN<br>6SL3246-0BA22-1CA0                   |
| Tool interfaces                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                    |                                                      |
| <b>Memory card</b>                                                                                                                                                                                                | SINAMICS SD card                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                    |                                                      |
| <b>Operator panels</b>                                                                                                                                                                                            | <ul style="list-style-type: none"><li>• IOP-2<br/>supported connection options between Control Unit and IOP-2:<br/>Can be directly plugged on, door mounting or handheld</li><li>• BOP-2<br/>Supported connection options between Control Unit and BOP-2:<br/>can be directly plugged on or door-mounted</li><li>• SINAMICS G120 Smart Access<br/>Supported connection options between CU230P-2 and CU240E-2 Control Units and SINAMICS G120 Smart Access:<br/>Can be directly plugged on for wireless commissioning, operation and diagnostics via mobile device</li></ul> |                                                                                                                    |                                                      |
| <b>PC interface</b>                                                                                                                                                                                               | USB (connection via PC inverter connection kit 2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                    |                                                      |
| Open-loop/closed-loop control techniques                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                    |                                                      |
| <b>V/f linear/square/parameterizable</b>                                                                                                                                                                          | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                    |                                                      |
| <b>V/f with flux current control (FCC)</b>                                                                                                                                                                        | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                    |                                                      |
| <b>V/f ECO; linear/square-law</b>                                                                                                                                                                                 | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                    |                                                      |
| <b>Vector control, sensorless</b>                                                                                                                                                                                 | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                    |                                                      |
| <b>Vector control, with sensor</b>                                                                                                                                                                                | –                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | –                                                                                                                  | ✓                                                    |
| <b>Torque control, sensorless</b>                                                                                                                                                                                 | –                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ✓                                                                                                                  | ✓                                                    |
| <b>Torque control, with sensor</b>                                                                                                                                                                                | –                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | –                                                                                                                  | ✓                                                    |
| Software functions                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                    |                                                      |
| <b>Application macro</b>                                                                                                                                                                                          | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                    |                                                      |
| <b>Setpoint input, can be parameterized</b>                                                                                                                                                                       | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                    |                                                      |
| <b>Fixed frequencies</b>                                                                                                                                                                                          | 16, parameterizable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                    |                                                      |
| <b>JOG</b>                                                                                                                                                                                                        | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                    |                                                      |
| <b>Digital motorized potentiometer (MOP)</b>                                                                                                                                                                      | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                    |                                                      |
| <b>Ramp smoothing</b>                                                                                                                                                                                             | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                    |                                                      |
| <b>Extended ramp-function generator (with ramp smoothing OFF3)</b>                                                                                                                                                | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                    |                                                      |

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Control Units

### Technical specifications (continued)

| Control Unit                                                                                                                                        | CU230P-2 series<br>6SL3243-0BB30-1 . A3<br>6SL3243-0BB30-1FA0                                                                            | CU240E-2 series<br>6SL3244-0BB1 . -1 . A1<br>6SL3244-0BB1 . -1FA0                                                                                            | CU250S-2 series<br>6SL3246-0BA22-1 . A0                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Software functions (continued)</b>                                                                                                               |                                                                                                                                          |                                                                                                                                                              |                                                                                     |
| Slip compensation                                                                                                                                   | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| Signal interconnection with BICO technology                                                                                                         | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| Trace                                                                                                                                               | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| Energy saving display                                                                                                                               | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| Switchable drive data sets (DDS)                                                                                                                    | ✓ (4)                                                                                                                                    |                                                                                                                                                              |                                                                                     |
| Switchable command data sets (CDS)                                                                                                                  | ✓ (4)                                                                                                                                    |                                                                                                                                                              |                                                                                     |
| Free function blocks (FFB) for logical and arithmetic operations                                                                                    | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| Technology controller (internal PID)                                                                                                                | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| 3 additional, free PID controllers                                                                                                                  | ✓                                                                                                                                        | –                                                                                                                                                            | –                                                                                   |
| 2-zone controller                                                                                                                                   | ✓                                                                                                                                        | –                                                                                                                                                            | –                                                                                   |
| Flying restart                                                                                                                                      | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| Automatic restart after line supply failure or operating fault (AR)                                                                                 | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| Hibernation mode with internal/external PID controller                                                                                              | ✓                                                                                                                                        | –                                                                                                                                                            | –                                                                                   |
| Belt monitoring with and without sensor (load torque monitoring)                                                                                    | ✓                                                                                                                                        | –                                                                                                                                                            | ✓                                                                                   |
| Dry-running/overload protection monitoring (load torque monitoring)                                                                                 | ✓                                                                                                                                        | –                                                                                                                                                            | –                                                                                   |
| Thermal motor protection                                                                                                                            | ✓ ( $I^2t$ , sensor: PTC/Pt1000/KTY/bimetal)                                                                                             |                                                                                                                                                              |                                                                                     |
| Thermal inverter protection                                                                                                                         | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| Motor identification                                                                                                                                | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| Motor holding brake                                                                                                                                 | –                                                                                                                                        | ✓                                                                                                                                                            | ✓                                                                                   |
| Auto-ramping ( $V_{dc\_max}$ controller)                                                                                                            | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| Kinetic buffering ( $V_{dc\_min}$ controller)                                                                                                       | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| <b>Braking functions for PM240-2</b>                                                                                                                |                                                                                                                                          |                                                                                                                                                              |                                                                                     |
| • DC braking                                                                                                                                        | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| • Compound braking                                                                                                                                  | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| • Dynamic braking with integrated braking chopper and external braking resistor                                                                     | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| <b>Braking functions for PM250</b><br>Regenerative feedback                                                                                         | ✓                                                                                                                                        |                                                                                                                                                              |                                                                                     |
| <b>Mechanical specifications and ambient conditions</b>                                                                                             |                                                                                                                                          |                                                                                                                                                              |                                                                                     |
| Degree of protection                                                                                                                                | IP20                                                                                                                                     |                                                                                                                                                              |                                                                                     |
| <b>Signal cable cross-section</b>                                                                                                                   |                                                                                                                                          |                                                                                                                                                              |                                                                                     |
| • Min.                                                                                                                                              | 0.15 mm <sup>2</sup> (AWG28)                                                                                                             | 0.2 mm <sup>2</sup> (AWG24)                                                                                                                                  | 0.2 mm <sup>2</sup> (AWG24)                                                         |
| • Max.                                                                                                                                              | 1.5 mm <sup>2</sup> (AWG16)                                                                                                              | 1.5 mm <sup>2</sup> (AWG16)                                                                                                                                  | 1.5 mm <sup>2</sup> (AWG16)                                                         |
| <b>Operating temperature</b><br>Derating of 3 K/1000 m applies to Control Units as of an installation altitude of 1000 m (3281 ft) above sea level. | -10 ... +60 °C (14 ... 140 °F)<br>For CU230P-2 PN:<br>-10 ... +55 °C (14 ... 131 °F)<br>With IOP-2/BOP-2:<br>0 ... 50 °C (32 ... 122 °F) | -10 ... +55 °C (14 ... 131 °F)<br>For CU240E-2 PN and CU240E-2 PN-F:<br>-10 ... +53 °C (14 ... 127.4 °F)<br>With IOP-2/BOP-2:<br>0 ... 50 °C (32 ... 122 °F) | -10 ... +50 °C (14 ... 122 °F)<br>With IOP-2/BOP-2:<br>0 ... +50 °C (32 ... 122 °F) |
| <b>Storage temperature</b>                                                                                                                          | -40 ... +70 °C (-40 ... +158 °F)                                                                                                         |                                                                                                                                                              |                                                                                     |
| <b>Relative humidity</b>                                                                                                                            | <95 % RH, condensation not permissible                                                                                                   |                                                                                                                                                              |                                                                                     |
| <b>Dimensions</b>                                                                                                                                   |                                                                                                                                          |                                                                                                                                                              |                                                                                     |
| • Width                                                                                                                                             | 73 mm (2.87 in)                                                                                                                          | 73 mm (2.87 in)                                                                                                                                              | 73 mm (2.87 in)                                                                     |
| • Height                                                                                                                                            | 199 mm (7.83 in)                                                                                                                         | 199 mm (7.83 in)                                                                                                                                             | 199 mm (7.83 in)                                                                    |
| • Depth                                                                                                                                             | 65.5 mm (2.58 in)                                                                                                                        | 46 mm (1.81 in)                                                                                                                                              | 67 mm (2.64 in)                                                                     |
| <b>Weight, approx.</b>                                                                                                                              | 0.61 kg (1.34 lb)                                                                                                                        | 0.49 kg (1.08 lb)                                                                                                                                            | 0.67 kg (1.48 lb)                                                                   |

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

Power Modules

## Overview

### PM240-2 Power Modules – 0.55 kW to 250 kW (0.75 hp to 400 hp), IP20 degree of protection



PM240-2 Power Modules, frame sizes FSA to FSG (with Control Unit and Operator Panel)

The PM240-2 Power Modules are based on a new hardware platform. This permits an increase in power density as well as the application of innovative cooling concepts (push-through technology) with especially high requirements in terms of control cabinet cooling.

Furthermore, the PM240-2 Power Module is also suitable for use in safety-oriented applications. In conjunction with a fail-safe Control Unit, the drive can be transformed into a Safety Integrated Drive (see section Control Units).

The PM240-2 Power Modules in frame sizes FSA to FSF are available both with and without an integrated line filter class A of compact design for 200 V, 400 V and 690 V line voltages (except PM240-2 frame sizes FSD to FSF: 200 V). The PM240-2 Power Modules in frame size FSG are available with an integrated line filter Category C3 of compact design for 400 V and 690 V line voltages, also with integrated line filter Category C2 for a line voltage of 400 V. In addition, a DC link reactor is integrated in the PM240-2 Power Modules, frame sizes FSD to FSG, and therefore no line reactor is required.

The PM240-2 Power Modules with integrated line filter class A are suitable for connection to TN supply systems. Power Modules without integrated line filter can be connected to grounded TN/TT systems and non-grounded IT systems.

The PM240-2 Power Module has an integrated braking chopper. In generating mode, the excess energy of the DC link can be dissipated by means of an optional braking resistor.

The permissible cable lengths between inverter and motor are limited (for max. permissible cable lengths, see Integration). Longer cables can be used if output reactors are connected (see section Load-side power components).

### Push-through variant



Example: PM240-2 Power Modules, degree of protection IP20, push-through variant, frame sizes FSD to FSF (with Control Unit and Operator Panel)

The push-through variants in the frame sizes FSA to FSF allow the cooling fins of the Power Modules to be pushed through the rear panel of the control cabinet. Push-through variants should be used in applications where the amount of power loss generated inside the control cabinet itself must be minimized.

Shield plates and shield connection kits are available for use in the wiring installation of Control Units and Power Modules to ensure that it complies with EMC guidelines.

For more information, see Shield connection kits for Control Units and Power Modules in section Supplementary system components.

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Power Modules

#### Overview (continued)

#### PM250 Power Modules – 7.5 kW to 90 kW (10 hp to 125 hp), IP20 degree of protection



PM250 Power Modules, frame sizes FSC to FSF

PM250 Power Modules are suitable for a large number of applications in general mechanical engineering. Any braking energy is directly fed back into the line supply (four-quadrant applications – a braking chopper is not required).

The PM250 Power Module features an absolutely unique technology – Efficient Infeed Technology. This feature provides the ability to feed energy back into the supply system in the generator mode (electronic braking) so that the energy is not converted into heat in a braking resistor. This saves space in the control cabinet. The time-consuming process of dimensioning the braking resistor and the expense of the extra wiring are eliminated. Furthermore, heat losses in the control cabinet are reduced.

Further, the innovative circuit design reduces the line harmonics. There is no need to use an optional line reactor at the supply infeed. This saves space and costs for engineering and procurement.

The permissible cable lengths between inverter and motor are limited (for max. permissible cable lengths, [see Integration](#)). Longer cables can be used if output reactors are connected ([see section Load-side power components](#)).

Frame sizes FSD to FSF of the PM250 Power Modules are available both with as well as without integrated line filter class A.

For frame size FSC of the PM250 Power Module with an integrated line filter class A, an additional base filter of class B is available for achieving class B ([see section Line-side components](#)).

The PM250 Power Module is also designed for safety-oriented applications. In conjunction with a fail-safe Control Unit, the drive can be transformed into a Safety Integrated Drive ([see section Control Units](#)).

The PM250 Power Modules with integrated line filter class A are suitable for connection to TN supply systems. Power Modules without integrated line filter can be connected to grounded TN/TT systems and non-grounded IT systems.

#### Note:

Shield plates and shield connection kits are available for use in the wiring installation of Control Units and Power Modules to ensure that it complies with EMC guidelines.

For more information, see [Shield connection kits for Control Units and Power Modules](#) in section [Supplementary system components](#).

# SINAMICS G120 standard inverters


0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules


### Integration

All Power Modules have the following connections and interfaces:


- PM-IF interface to connect the Power Module to the Control Unit. The Power Module also supplies power to the Control Unit using an integrated power supply
- Motor connection using screw-type terminals or screw studs
- 2 PE/protective conductor connections
- Shield connection plate

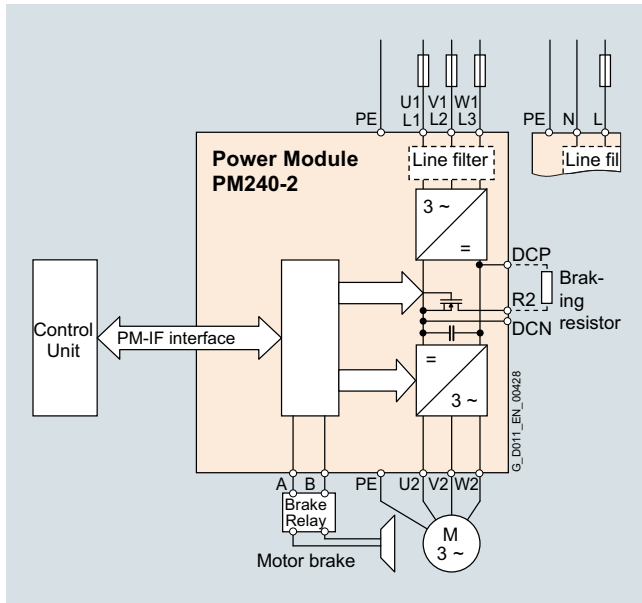

Connection example for PM240-2 Power Modules, frame sizes FSA to FSC, with or without integrated line filter

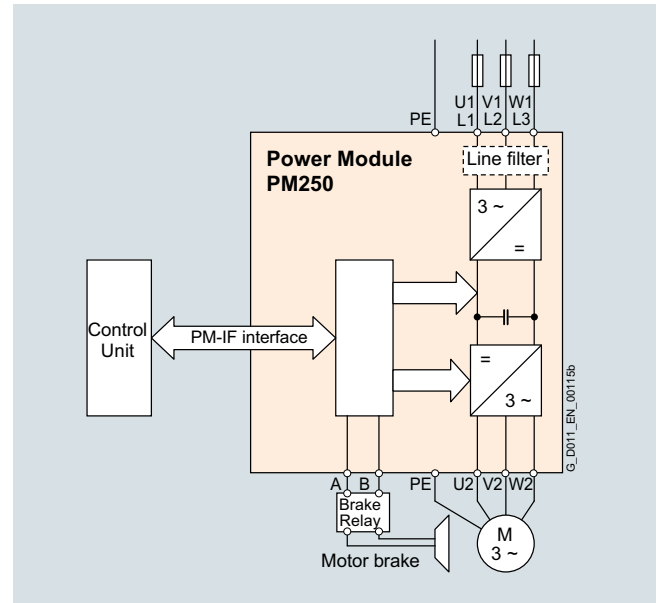

Connection example for PM250 Power Modules with or without integrated line filter

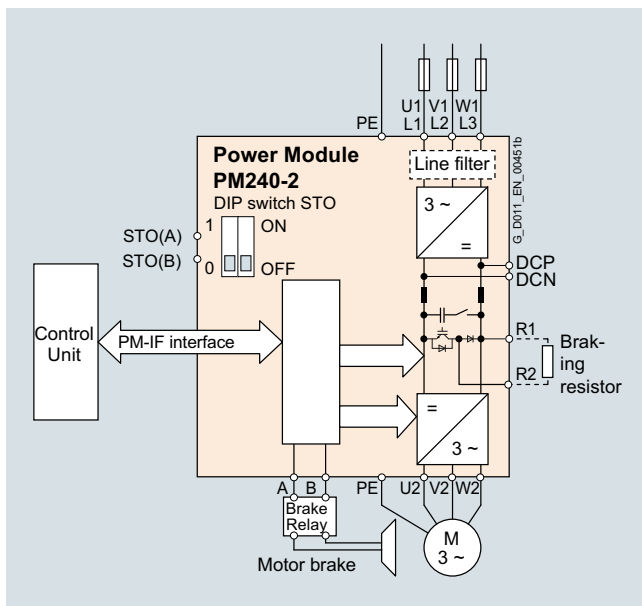

Connection example for PM240-2 Power Modules, frame sizes FSD to FSG, with or without integrated line filter

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Integration (continued)

#### Power and DC link components that are optionally available depending on the Power Module used

The following line-side components, DC link components and load-side power components are optionally available in the appropriate frames sizes for the Power Modules:

|                                                                             | Frame size      |                 |                 |                 |                 |                 |                 |
|-----------------------------------------------------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|                                                                             | FSA             | FSB             | FSC             | FSD             | FSE             | FSF             | FSG             |
| <b>PM240-2 Power Module with integrated braking chopper</b>                 |                 |                 |                 |                 |                 |                 |                 |
| Available frame sizes                                                       |                 |                 |                 |                 |                 |                 |                 |
| • 200 V versions                                                            | ✓               | ✓               | ✓               | ✓ <sup>1)</sup> | ✓ <sup>1)</sup> | ✓ <sup>1)</sup> | –               |
| • 400 V versions                                                            | ✓               | ✓               | ✓               | ✓               | ✓               | ✓               | ✓               |
| • 690 V versions                                                            | –               | –               | –               | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | ✓               | ✓               |
| <b>Line-side components</b>                                                 |                 |                 |                 |                 |                 |                 |                 |
| Line filter class A                                                         | F               | F               | F               | F <sup>1)</sup> | F <sup>1)</sup> | F <sup>1)</sup> | –               |
| Line filter class B<br>(only for 400 V versions)                            | U <sup>3)</sup> | U <sup>3)</sup> | U <sup>3)</sup> | –               | –               | –               | –               |
| Line filters Category C2 or C3<br>(for 400 V versions frame size FSG)       | –               | –               | –               | –               | –               | –               | I               |
| Line filters Category C3<br>(for 690 V versions frame size FSG)             | –               | –               | –               | –               | –               | –               | I <sup>4)</sup> |
| Line reactor (only for 3 AC versions <sup>5)</sup> )                        | S <sup>6)</sup> | S <sup>6)</sup> | S <sup>6)</sup> | I               | I               | I               | I               |
| <b>DC link components</b>                                                   |                 |                 |                 |                 |                 |                 |                 |
| Braking resistor                                                            | S               | S               | S               | S               | S               | S               | S               |
| <b>Load-side power components</b>                                           |                 |                 |                 |                 |                 |                 |                 |
| Output reactor                                                              | S               | S               | S               | S <sup>2)</sup> | S <sup>2)</sup> | S               | S               |
| dv/dt filter plus VPL<br>(for 400 V and 690 V versions only <sup>9)</sup> ) | S               | S               | S               | S               | S               | S               | S               |
| <b>PM250 Power Module with line-commutated energy recovery</b>              |                 |                 |                 |                 |                 |                 |                 |
| Available frame sizes                                                       | –               | –               | ✓               | ✓               | ✓               | ✓               | –               |
| <b>Line-side components</b>                                                 |                 |                 |                 |                 |                 |                 |                 |
| Line filter class A                                                         | –               | –               | I               | F               | F               | F               | –               |
| Line filter class B                                                         | –               | –               | U               | –               | –               | –               | –               |
| Line reactor <sup>7)</sup>                                                  | –               | –               | – <sup>7)</sup> | – <sup>7)</sup> | – <sup>7)</sup> | – <sup>7)</sup> | –               |
| <b>DC link components</b>                                                   |                 |                 |                 |                 |                 |                 |                 |
| Braking resistor <sup>8)</sup>                                              | –               | –               | – <sup>8)</sup> | – <sup>8)</sup> | – <sup>8)</sup> | – <sup>8)</sup> | –               |
| <b>Load-side power components</b>                                           |                 |                 |                 |                 |                 |                 |                 |
| Output reactor                                                              | –               | –               | U               | S               | S               | S               | –               |
| Sine-wave filter                                                            | –               | –               | U               | S               | S               | S               | –               |

U = Base component

S = Lateral mounting

I = Integrated

F = Power Modules available with and without integrated filter class A

– = Not possible

<sup>1)</sup> The 200 V versions of the PM240-2 Power Modules, frame sizes FSD to FSF, are only available without integrated line filter.

<sup>2)</sup> There are no optional output reactors available for 690 V versions of PM240-2 Power Modules, frame sizes FSD and FSE.

<sup>3)</sup> Lateral mounting is the only possible option for push-through variants.

<sup>4)</sup> The 690 V versions of the PM240-2 Power Modules frame size FSG are only available with an integrated Category C3 filter. To operate the inverter also within TN systems with grounded outer conductor, you must remove the grounding screw.

<sup>5)</sup> With the appropriate wiring, the line reactors for 200 V 3 AC can be used for the 200 V versions for 200 V 1 AC. Further information can be found on the Internet at:  
<https://support.industry.siemens.com/cs/document/109486005>  
<https://support.industry.siemens.com/cs/document/109482011>

<sup>6)</sup> For frame sizes FSA to FSC, for lines with  $u_k < 1\%$ , it is recommended that you use a line reactor or the next more powerful Power Module. Further information can be found on the Internet at:  
<https://support.industry.siemens.com/cs/document/109482011>

<sup>7)</sup> A line reactor is not required and must not be used in conjunction with a PM250 Power Module.

<sup>8)</sup> A PM250 Power Module is capable of line-commutated energy feedback. A braking resistor cannot be connected and is not necessary.

<sup>9)</sup> The 690 V versions of the PM240-2 Power Modules require motors with a suitable isolating system for 690 V inverter operation (IVIC-C premium). The VSD10 line with corresponding SIMOTICS GP 1LE109 General Purpose motors or SIMOTICS SD 1LE159 Severe Duty motors is ideally suited for inverter operation at 690 V.  
 More information is available in Catalog D 81.1.


## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Power Modules

#### Integration (continued)

##### General design information

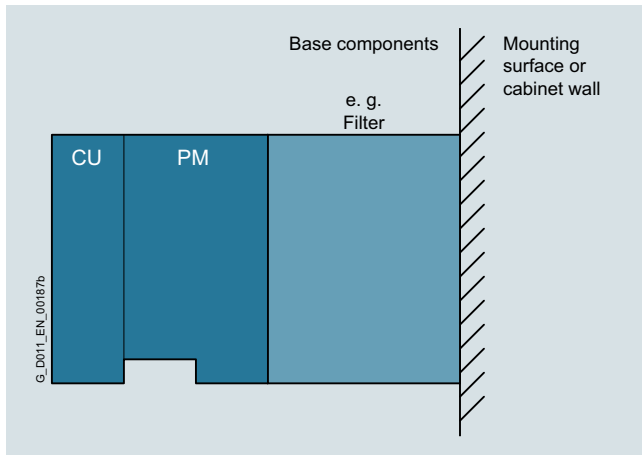

Inverter comprising a Power Module (PM), a Control Unit (CU), and base components (side view)

- If at all possible, the line filter should be mounted directly below the inverter <sup>1)</sup>.
- With lateral mounting, the line-side components have to be mounted on the left side of the inverter, and the load-side components on the right side.
- Braking resistors have to be mounted directly on the control cabinet wall due to heating issues.

##### Recommended installation combinations of the inverter and optional power and DC link components

| Power Module<br>Frame size | Base                      | Lateral mounting                                   |                                                                                              |
|----------------------------|---------------------------|----------------------------------------------------|----------------------------------------------------------------------------------------------|
|                            |                           | Left of the inverter<br>(for line-side components) | Right of the inverter<br>(for load-side power components<br>and DC link components)          |
| FSA and FSB                | Line filter               | Line reactor                                       | Output reactor or<br>dv/dt filter plus VPL and/or<br>braking resistor                        |
| FSC                        | Line filter <sup>1)</sup> | Line reactor                                       | Output reactor or<br>dv/dt filter plus VPL and/or<br>braking resistor                        |
| FSD and FSE                | –                         | Line filter                                        | Output reactor or<br>sine-wave filter or<br>dv/dt filter plus VPL and/or<br>braking resistor |
| FSF and FSG                | –                         | Line filter                                        | Output reactor or<br>sine-wave filter or<br>dv/dt filter plus VPL and/or<br>braking resistor |

<sup>1)</sup> With the PM250 Power Module, frame size FSC, the output reactor and sine-wave filter can be installed as base components. The output reactor or sine-wave filter should be mounted under the line filter.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Integration (continued)

**Maximum permissible cable lengths from the motor to the inverter when using output reactors, dv/dt filters plus VPL or filters depending on the voltage range and the Power Module being used**

| Frame size                                                                                                                                                                                                                                                  | Maximum permissible motor cable lengths (shielded/unshielded) in m (ft) |                                 |                                 |                                                                        |                                   |                                   |                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|---------------------------------|---------------------------------|------------------------------------------------------------------------|-----------------------------------|-----------------------------------|------------------------------------------------------------|
|                                                                                                                                                                                                                                                             | FSA                                                                     | FSB                             | FSC                             | FSD                                                                    | FSE                               | FSF                               | FSG                                                        |
| <b>PM240-2 Power Module with integrated braking chopper</b>                                                                                                                                                                                                 |                                                                         |                                 |                                 |                                                                        |                                   |                                   |                                                            |
| <b>Without optional power components</b>                                                                                                                                                                                                                    |                                                                         |                                 |                                 |                                                                        |                                   |                                   |                                                            |
| • 200 V versions without integrated line filter                                                                                                                                                                                                             | 50/100 (164/328)                                                        | 50/100 (164/328)                | 50/100 (164/328)                | 200/300 (656/984)                                                      | 200/300 (656/984)                 | 300/450 (984/1476)                | –                                                          |
| • 200 V versions with integrated line filter                                                                                                                                                                                                                | 50/100 (164/328)                                                        | 50/100 (164/328)                | 50/100 (164/328)                | –                                                                      | –                                 | –                                 | –                                                          |
| • 400 V versions without integrated line filter                                                                                                                                                                                                             | 150/150 (492/492)                                                       | 150/150 (492/492)               | 150/150 (492/492)               | 200/300 (656/984)                                                      | 200/300 (656/984)                 | 300/450 (984/1476)                | 300/450 (984/1476)                                         |
| • 400 V versions with integrated line filter                                                                                                                                                                                                                | 50/100 (164/328)                                                        | 100/100 (328/328) <sup>1)</sup> | 150/150 (492/492) <sup>1)</sup> | 200/300 (656/984)                                                      | 200/300 (656/984)                 | 300/450 (984/1476)                | 300/450 (984/1476)                                         |
| • 690 V versions                                                                                                                                                                                                                                            | –                                                                       | –                               | –                               | 200/300 (656/984)                                                      | 200/300 (656/984)                 | 300/450 (984/1476)                | 300/450 (984/1476)                                         |
| <b>With optional output reactor</b>                                                                                                                                                                                                                         |                                                                         |                                 |                                 |                                                                        |                                   |                                   |                                                            |
| • At 200 ... 240 V 1 AC/3 AC                                                                                                                                                                                                                                | 150/225 (492/738)                                                       | 150/225 (492/738)               | 150/225 (492/738)               | 200/300 (656/984) <sup>2)</sup>                                        | 200/300 (656/984) <sup>2)</sup>   | 300/450 (984/1476) <sup>2)</sup>  | –                                                          |
| • At 380 ... 415 V 3 AC                                                                                                                                                                                                                                     | 150/225 (492/738)                                                       | 150/225 (492/738)               | 150/225 (492/738)               | 200/300 (656/984) <sup>2)</sup>                                        | 200/300 (656/984) <sup>2)</sup>   | 300/450 (984/1476) <sup>2)</sup>  | 300/450 (984/1476) <sup>2)</sup>                           |
| • At 440 ... 480 V 3 AC                                                                                                                                                                                                                                     | 100/150 (328/492)                                                       | 100/150 (328/492)               | 100/150 (328/492)               | 200/300 (656/984) <sup>2)</sup>                                        | 200/300 (656/984) <sup>2)</sup>   | 300/450 (984/1476) <sup>2)</sup>  | 300/450 (984/1476) <sup>2)</sup>                           |
| • At 500 ... 690 V 3 AC                                                                                                                                                                                                                                     | –                                                                       | –                               | –                               | 200/300 (656/984) <sup>2)</sup>                                        | 200/300 (656/984) <sup>2)</sup>   | 300/450 (984/1476) <sup>2)</sup>  | 300/450 (984/1476) <sup>2)</sup>                           |
| <b>With optional dv/dt filter plus VPL</b>                                                                                                                                                                                                                  |                                                                         |                                 |                                 |                                                                        |                                   |                                   |                                                            |
| • At 380 ... 480 V 3 AC                                                                                                                                                                                                                                     | 350/525 (1148/1723)                                                     | 350/525 (1148/1723)             | 350/525 (1148/1723)             | 30 kW: 350/525 (1148/1723)<br>37 kW: 450/650 (1476/2133) <sup>3)</sup> | 450/650 (1476/2133) <sup>3)</sup> | 450/650 (1476/2133) <sup>3)</sup> | –                                                          |
| • At 500 ... 690 V 3 AC                                                                                                                                                                                                                                     | –                                                                       | –                               | –                               | 350/525 (1148/1723)                                                    | 350/525 (1148/1723)               | 450/650 (1476/2133) <sup>3)</sup> | 450/650 (1476/2133) <sup>3)</sup>                          |
| <b>With integrated line filter</b><br>According to EN 55011 to comply with radio interference emissions according to EN 61800-3 EMC Category C2                                                                                                             |                                                                         |                                 |                                 |                                                                        |                                   |                                   |                                                            |
| • At 200 ... 240 V 1 AC/3 AC                                                                                                                                                                                                                                | 50/– (164/–)                                                            | 50/– (164/–)                    | 50/– (164/–)                    | –                                                                      | –                                 | –                                 | –                                                          |
| • At 380 ... 480 V 3 AC                                                                                                                                                                                                                                     | 50/– (164/–)                                                            | 100/– (328/–) <sup>4)</sup>     | 150/– (492/–) <sup>4)</sup>     | 150/– (492/–)                                                          | 150/– (492/–)                     | 150/– (492/–)                     | 150/– (492/–) (Category C2)<br>300/– (984/–) (Category C3) |
| • At 500 ... 690 V 3 AC                                                                                                                                                                                                                                     | –                                                                       | –                               | –                               | 100/– (328/–)                                                          | 100/– (328/–)                     | 150/– (492/–) (Category C3)       | 300/– (984/–) (Category C3 <sup>5)</sup> )                 |
| <b>With optional, external line filter class B</b><br>According to EN 55011 to comply with conducted radio interference emissions according to EN 61800-3 EMC Category C1 <sup>6)</sup> ,<br><b>together with unfiltered Power Module</b>                   |                                                                         |                                 |                                 |                                                                        |                                   |                                   |                                                            |
| • At 380 ... 480 V 3 AC                                                                                                                                                                                                                                     | 50/– (164/–)                                                            | 50/– (164/–)                    | 50/– (164/–)                    | –                                                                      | –                                 | –                                 | –                                                          |
| <b>With optional, external line filter class B</b><br>According to EN 55011 and optional output reactor to comply with radio interference emissions according to EN 61800-3 EMC Category C2 <sup>6)</sup> ,<br><b>together with unfiltered Power Module</b> |                                                                         |                                 |                                 |                                                                        |                                   |                                   |                                                            |
| • At 380 ... 415 V 3 AC                                                                                                                                                                                                                                     | 150/– (492/–)                                                           | 150/– (492/–)                   | 150/– (492/–)                   | –                                                                      | –                                 | –                                 | –                                                          |
| • At 440 ... 480 V 3 AC                                                                                                                                                                                                                                     | 100/– (328/–)                                                           | 100/– (328/–)                   | 100/– (328/–)                   | –                                                                      | –                                 | –                                 | –                                                          |
| <b>PM250 Power Module with line-commutated energy recovery</b>                                                                                                                                                                                              |                                                                         |                                 |                                 |                                                                        |                                   |                                   |                                                            |
| <b>Without optional power components</b>                                                                                                                                                                                                                    |                                                                         |                                 |                                 |                                                                        |                                   |                                   |                                                            |
| –                                                                                                                                                                                                                                                           | –                                                                       | –                               | 25/100 (82/328)                 | 50/100 (164/328) <sup>7)</sup>                                         | 50/100 (164/328) <sup>7)</sup>    | 50/100 (164/328) <sup>7)</sup>    | –                                                          |
| <b>With optional output reactor</b>                                                                                                                                                                                                                         |                                                                         |                                 |                                 |                                                                        |                                   |                                   |                                                            |
| • At 380 ... 400 V 3 AC                                                                                                                                                                                                                                     | –                                                                       | –                               | 150/225 (492/738)               | 200/300 (656/984)                                                      | 200/300 (656/984)                 | 200/300 (656/984)                 | –                                                          |
| • At 401 ... 480 V 3 AC                                                                                                                                                                                                                                     | –                                                                       | –                               | 100/150 (328/492)               | 200/300 (656/984)                                                      | 200/300 (656/984)                 | 200/300 (656/984)                 | –                                                          |
| <b>With optional sine-wave filter</b>                                                                                                                                                                                                                       |                                                                         |                                 |                                 |                                                                        |                                   |                                   |                                                            |
| • At 380 ... 480 V 3 AC                                                                                                                                                                                                                                     | –                                                                       | –                               | 200/300 (656/984)               | 200/300 (656/984)                                                      | 200/300 (656/984)                 | 200/300 (656/984)                 | –                                                          |

<sup>1)</sup> The values apply with low-capacitance CY cables – the max. permissible motor cable length is 50 m (164 ft) (shielded) and 100 m (328 ft) (unshielded) as standard.

<sup>2)</sup> For frame sizes FSD to FSG the maximum permissible cable lengths are not increased with an output reactor. By means of the output reactor, the loading of the motor windings is reduced by lower rates of voltage rise ( $dv/dt$ ). By means of two output reactors connected in series, the maximum permissible cable lengths for frame sizes FSD and FSE are increased to 350 m (1148 ft) (shielded) and 525 m (1723 ft) (unshielded), and for frame sizes FSF and FSG to 525 m (1723 ft) (shielded) and 800 m (2625 ft) (unshielded). There are no optional output reactors available for 690 V versions of PM240-2 Power Modules, frame sizes FSD and FSE.

<sup>3)</sup> Maximum overvoltage at the motor terminals <1500 V with cable lengths up to 450 m (1476 ft) shielded or 650 m (2133 ft) unshielded – maximum

overvoltage at the motor terminals <1500 V with cable lengths up to 525 m (1723 ft) shielded or 800 m (2625 ft) unshielded.

<sup>4)</sup> The values apply with low-capacitance CY cables – the max. permissible motor cable length is 50 m (164 ft) (shielded) as standard.

<sup>5)</sup> The 690 V versions of the PM240-2 Power Modules frame size FSG are only available with an integrated Category C3 filter. To operate the inverter also within TN systems with grounded outer conductor, you must remove the grounding screw.

<sup>6)</sup> Further information is available on the Internet at [www.siemens.com/sinamics-g120/documentation](http://www.siemens.com/sinamics-g120/documentation)

<sup>7)</sup> Max. motor cable length 25 m (82 ft) (shielded) for Power Modules with integrated line filter to maintain the limit values acc. to EN 61800-3 Category C2.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Selection and ordering data

To ensure that a suitable Power Module is selected, the following currents should be used for applications:

- Rated output current for applications with low overload (LO)
- Base-load current for applications with high overload (HO)

With reference to the rated output current, the modules support at least 2-pole to 6-pole low-voltage motors, e.g. the SIMOTICS 1LE1 motor series. The rated power is merely a guide value. For a description of the overload performance, please refer to the general technical specifications of the Power Modules.

### PM240-2 Power Modules standard variant

| Rated power <sup>1)</sup>      |      | Rated output current $I_{rated}$ <sup>2)</sup> | Power based on the base-load current <sup>3)</sup> |      | Base-load current $I_H$ <sup>3)</sup> | Frame size | PM240-2 Power Module standard variant without integrated line filter | PM240-2 Power Module standard variant with integrated line filter class A |
|--------------------------------|------|------------------------------------------------|----------------------------------------------------|------|---------------------------------------|------------|----------------------------------------------------------------------|---------------------------------------------------------------------------|
| kW                             | hp   | A                                              | kW                                                 | hp   | A                                     |            | Article No.                                                          | Article No.                                                               |
| <b>200 ... 240 V 1 AC/3 AC</b> |      |                                                |                                                    |      |                                       |            |                                                                      |                                                                           |
| <b>0.55</b>                    | 0.75 | 3.2                                            | <b>0.37</b>                                        | 0.5  | 2.3                                   | FSA        | <b>6SL3210-1PB13-0UL0</b>                                            | <b>6SL3210-1PB13-0AL0</b>                                                 |
| <b>0.75</b>                    | 1    | 4.2                                            | <b>0.55</b>                                        | 0.75 | 3.2                                   | FSA        | <b>6SL3210-1PB13-8UL0</b>                                            | <b>6SL3210-1PB13-8AL0</b>                                                 |
| <b>1.1</b>                     | 1.5  | 6                                              | <b>0.75</b>                                        | 1    | 4.2                                   | FSB        | <b>6SL3210-1PB15-5UL0</b>                                            | <b>6SL3210-1PB15-5AL0</b>                                                 |
| <b>1.5</b>                     | 2    | 7.4                                            | <b>1.1</b>                                         | 1.5  | 6                                     | FSB        | <b>6SL3210-1PB17-4UL0</b>                                            | <b>6SL3210-1PB17-4AL0</b>                                                 |
| <b>2.2</b>                     | 3    | 10.4                                           | <b>1.5</b>                                         | 2    | 7.4                                   | FSB        | <b>6SL3210-1PB21-0UL0</b>                                            | <b>6SL3210-1PB21-0AL0</b>                                                 |
| <b>3</b>                       | 4    | 13.6                                           | <b>2.2</b>                                         | 3    | 10.4                                  | FSC        | <b>6SL3210-1PB21-4UL0</b>                                            | <b>6SL3210-1PB21-4AL0</b>                                                 |
| <b>4</b>                       | 5    | 17.5                                           | <b>3</b>                                           | 4    | 13.6                                  | FSC        | <b>6SL3210-1PB21-8UL0</b>                                            | <b>6SL3210-1PB21-8AL0</b>                                                 |
| <b>200 ... 240 V 3 AC</b>      |      |                                                |                                                    |      |                                       |            |                                                                      |                                                                           |
| <b>5.5</b>                     | 7.5  | 22                                             | <b>4</b>                                           | 5    | 17.5                                  | FSC        | <b>6SL3210-1PC22-2UL0</b>                                            | <b>6SL3210-1PC22-2AL0</b>                                                 |
| <b>7.5</b>                     | 10   | 28                                             | <b>5.5</b>                                         | 7.5  | 22                                    | FSC        | <b>6SL3210-1PC22-8UL0</b>                                            | <b>6SL3210-1PC22-8AL0</b>                                                 |
| <b>11</b>                      | 15   | 42                                             | <b>7.5</b>                                         | 10   | 35                                    | FSD        | <b>6SL3210-1PC24-2UL0</b>                                            | —                                                                         |
| <b>15</b>                      | 20   | 54                                             | <b>11</b>                                          | 15   | 42                                    | FSD        | <b>6SL3210-1PC25-4UL0</b>                                            | —                                                                         |
| <b>18.5</b>                    | 25   | 68                                             | <b>15</b>                                          | 20   | 54                                    | FSD        | <b>6SL3210-1PC26-8UL0</b>                                            | —                                                                         |
| <b>22</b>                      | 30   | 80                                             | <b>18.5</b>                                        | 25   | 68                                    | FSE        | <b>6SL3210-1PC28-0UL0</b>                                            | —                                                                         |
| <b>30</b>                      | 40   | 104                                            | <b>22</b>                                          | 30   | 80                                    | FSE        | <b>6SL3210-1PC31-1UL0</b>                                            | —                                                                         |
| <b>37</b>                      | 50   | 130                                            | <b>30</b>                                          | 40   | 104                                   | FSF        | <b>6SL3210-1PC31-3UL0</b>                                            | —                                                                         |
| <b>45</b>                      | 60   | 154                                            | <b>37</b>                                          | 50   | 130                                   | FSF        | <b>6SL3210-1PC31-6UL0</b>                                            | —                                                                         |
| <b>55</b>                      | 75   | 178                                            | <b>45</b>                                          | 60   | 154                                   | FSF        | <b>6SL3210-1PC31-8UL0</b>                                            | —                                                                         |

<sup>1)</sup> Rated power based on the rated output current  $I_{rated}$ . The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO). These current values are valid for 200 V, 400 V or 690 V and are specified on the rating plate of the Power Module.

<sup>3)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Selection and ordering data (continued)

| Rated power <sup>1)</sup>               |      | Rated output current $I_{rated}$ <sup>2)</sup> | Power based on the base-load current <sup>3)</sup> |      | Base-load current $I_H$ <sup>3)</sup> | Frame size                   | PM240-2 Power Module standard variant without integrated line filter | PM240-2 Power Module standard variant with integrated line filter class A |
|-----------------------------------------|------|------------------------------------------------|----------------------------------------------------|------|---------------------------------------|------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------|
| kW                                      | hp   | A                                              | kW                                                 | hp   | A                                     |                              | Article No.                                                          | Article No.                                                               |
| <b>380 ... 480 V 3 AC <sup>4)</sup></b> |      |                                                |                                                    |      |                                       |                              |                                                                      |                                                                           |
| <b>0.55</b>                             | 0.75 | 1.7                                            | <b>0.37</b>                                        | 0.5  | 1.3                                   | FSA                          | <b>6SL3210-1PE11-8UL1</b>                                            | <b>6SL3210-1PE11-8AL1</b>                                                 |
| <b>0.75</b>                             | 1    | 2.2                                            | <b>0.55</b>                                        | 0.75 | 1.7                                   | FSA                          | <b>6SL3210-1PE12-3UL1</b>                                            | <b>6SL3210-1PE12-3AL1</b>                                                 |
| <b>1.1</b>                              | 1.5  | 3.1                                            | <b>0.75</b>                                        | 1    | 2.2                                   | FSA                          | <b>6SL3210-1PE13-2UL1</b>                                            | <b>6SL3210-1PE13-2AL1</b>                                                 |
| <b>1.5</b>                              | 2    | 4.1                                            | <b>1.1</b>                                         | 1.5  | 3.1                                   | FSA                          | <b>6SL3210-1PE14-3UL1</b>                                            | <b>6SL3210-1PE14-3AL1</b>                                                 |
| <b>2.2</b>                              | 3    | 5.9                                            | <b>1.5</b>                                         | 2    | 4.1                                   | FSA                          | <b>6SL3210-1PE16-1UL1</b>                                            | <b>6SL3210-1PE16-1AL1</b>                                                 |
| <b>3</b>                                | 4    | 7.7                                            | <b>2.2</b>                                         | 3    | 5.9                                   | FSA                          | <b>6SL3210-1PE18-0UL1</b>                                            | <b>6SL3210-1PE18-0AL1</b>                                                 |
| <b>4</b>                                | 5    | 10.2                                           | <b>3</b>                                           | 4    | 7.7                                   | FSB                          | <b>6SL3210-1PE21-1UL0</b>                                            | <b>6SL3210-1PE21-1AL0</b>                                                 |
| <b>5.5</b>                              | 7.5  | 13.2                                           | <b>4</b>                                           | 5    | 10.2                                  | FSB                          | <b>6SL3210-1PE21-4UL0</b>                                            | <b>6SL3210-1PE21-4AL0</b>                                                 |
| <b>7.5</b>                              | 10   | 18                                             | <b>5.5</b>                                         | 7.5  | 13.2                                  | FSB                          | <b>6SL3210-1PE21-8UL0</b>                                            | <b>6SL3210-1PE21-8AL0</b>                                                 |
| <b>11</b>                               | 15   | 26                                             | <b>7.5</b>                                         | 10   | 18                                    | FSC                          | <b>6SL3210-1PE22-7UL0</b>                                            | <b>6SL3210-1PE22-7AL0</b>                                                 |
| <b>15</b>                               | 20   | 32                                             | <b>11</b>                                          | 15   | 26                                    | FSC                          | <b>6SL3210-1PE23-3UL0</b>                                            | <b>6SL3210-1PE23-3AL0</b>                                                 |
| <b>18.5</b>                             | 25   | 38                                             | <b>15</b>                                          | 20   | 32                                    | FSD                          | <b>6SL3210-1PE23-8UL0</b>                                            | <b>6SL3210-1PE23-8AL0</b>                                                 |
| <b>22</b>                               | 30   | 45                                             | <b>18.5</b>                                        | 25   | 38                                    | FSD                          | <b>6SL3210-1PE24-5UL0</b>                                            | <b>6SL3210-1PE24-5AL0</b>                                                 |
| <b>30</b>                               | 40   | 60                                             | <b>22</b>                                          | 30   | 45                                    | FSD                          | <b>6SL3210-1PE26-0UL0</b>                                            | <b>6SL3210-1PE26-0AL0</b>                                                 |
| <b>37</b>                               | 50   | 75                                             | <b>30</b>                                          | 40   | 60                                    | FSD                          | <b>6SL3210-1PE27-5UL0</b>                                            | <b>6SL3210-1PE27-5AL0</b>                                                 |
| <b>45</b>                               | 60   | 90                                             | <b>37</b>                                          | 50   | 75                                    | FSE                          | <b>6SL3210-1PE28-8UL0</b>                                            | <b>6SL3210-1PE28-8AL0</b>                                                 |
| <b>55</b>                               | 75   | 110                                            | <b>45</b>                                          | 60   | 90                                    | FSE                          | <b>6SL3210-1PE31-1UL0</b>                                            | <b>6SL3210-1PE31-1AL0</b>                                                 |
| <b>75</b>                               | 100  | 145                                            | <b>55</b>                                          | 75   | 110                                   | FSF                          | <b>6SL3210-1PE31-5UL0</b>                                            | <b>6SL3210-1PE31-5AL0</b>                                                 |
| <b>90</b>                               | 125  | 178                                            | <b>75</b>                                          | 100  | 145                                   | FSF                          | <b>6SL3210-1PE31-8UL0</b>                                            | <b>6SL3210-1PE31-8AL0</b>                                                 |
| <b>110</b>                              | 150  | 205                                            | <b>90</b>                                          | 125  | 178                                   | FSF                          | <b>6SL3210-1PE32-1UL0</b>                                            | <b>6SL3210-1PE32-1AL0</b>                                                 |
| <b>132</b>                              | 200  | 250                                            | <b>110</b>                                         | 150  | 205                                   | FSF                          | <b>6SL3210-1PE32-5UL0</b>                                            | <b>6SL3210-1PE32-5AL0</b>                                                 |
| <b>500 ... 690 V 3 AC</b>               |      |                                                |                                                    |      |                                       |                              |                                                                      |                                                                           |
| <b>11</b>                               | 10   | 14                                             | <b>7.5</b>                                         | 7.5  | 11                                    | FSD                          | <b>6SL3210-1PH21-4UL0</b>                                            | <b>6SL3210-1PH21-4AL0</b>                                                 |
| <b>15</b>                               | 15   | 19                                             | <b>11</b>                                          | 10   | 14                                    | FSD                          | <b>6SL3210-1PH22-0UL0</b>                                            | <b>6SL3210-1PH22-0AL0</b>                                                 |
| <b>18.5</b>                             | 20   | 23                                             | <b>15</b>                                          | 15   | 19                                    | FSD                          | <b>6SL3210-1PH22-3UL0</b>                                            | <b>6SL3210-1PH22-3AL0</b>                                                 |
| <b>22</b>                               | 25   | 27                                             | <b>18.5</b>                                        | 20   | 23                                    | FSD                          | <b>6SL3210-1PH22-7UL0</b>                                            | <b>6SL3210-1PH22-7AL0</b>                                                 |
| <b>30</b>                               | 30   | 35                                             | <b>22</b>                                          | 25   | 27                                    | FSD                          | <b>6SL3210-1PH23-5UL0</b>                                            | <b>6SL3210-1PH23-5AL0</b>                                                 |
| <b>37</b>                               | 40   | 42                                             | <b>30</b>                                          | 30   | 35                                    | FSD                          | <b>6SL3210-1PH24-2UL0</b>                                            | <b>6SL3210-1PH24-2AL0</b>                                                 |
| <b>45</b>                               | 50   | 52                                             | <b>37</b>                                          | 40   | 42                                    | FSE                          | <b>6SL3210-1PH25-2UL0</b>                                            | <b>6SL3210-1PH25-2AL0</b>                                                 |
| <b>55</b>                               | 60   | 62                                             | <b>45</b>                                          | 50   | 52                                    | FSE                          | <b>6SL3210-1PH26-2UL0</b>                                            | <b>6SL3210-1PH26-2AL0</b>                                                 |
| <b>75</b>                               | 75   | 80                                             | <b>55</b>                                          | 60   | 62                                    | FSF                          | <b>6SL3210-1PH28-0UL0</b>                                            | <b>6SL3210-1PH28-0AL0</b>                                                 |
| <b>90</b>                               | 100  | 100                                            | <b>75</b>                                          | 75   | 80                                    | FSF                          | <b>6SL3210-1PH31-0UL0</b>                                            | <b>6SL3210-1PH31-0AL0</b>                                                 |
| <b>110</b>                              | 100  | 115                                            | <b>90</b>                                          | 100  | 100                                   | FSF                          | <b>6SL3210-1PH31-2UL0</b>                                            | <b>6SL3210-1PH31-2AL0</b>                                                 |
| <b>132</b>                              | 125  | 142                                            | <b>110</b>                                         | 100  | 115                                   | FSF                          | <b>6SL3210-1PH31-4UL0</b>                                            | <b>6SL3210-1PH31-4AL0</b>                                                 |
| <b>380 ... 480 V 3 AC <sup>4)</sup></b> |      |                                                |                                                    |      |                                       |                              |                                                                      |                                                                           |
| <b>160</b>                              | 250  | 302                                            | <b>132</b>                                         | 200  | 250                                   | FSG <b>NEW</b>               | <b>6SL3210-1PE33-0CL0</b>                                            | <b>6SL3210-1PE33-0AL0</b>                                                 |
| <b>200</b>                              | 300  | 370                                            | <b>160</b>                                         | 250  | 302                                   | FSG <b>NEW</b>               | <b>6SL3210-1PE33-7CL0</b>                                            | <b>6SL3210-1PE33-7AL0</b>                                                 |
| <b>250</b>                              | 400  | 477                                            | <b>200</b>                                         | 300  | 370                                   | FSG <b>NEW</b>               | <b>6SL3210-1PE34-8CL0</b>                                            | <b>6SL3210-1PE34-8AL0</b>                                                 |
| <b>500 ... 690 V 3 AC</b>               |      |                                                |                                                    |      |                                       |                              |                                                                      |                                                                           |
| <b>160</b>                              | 150  | 171                                            | <b>132</b>                                         | 150  | 142                                   | FSG <sup>5)</sup> <b>NEW</b> | <b>6SL3210-1PH31-7CL0</b>                                            | —                                                                         |
| <b>200</b>                              | 200  | 208                                            | <b>160</b>                                         | 150  | 171                                   | FSG <sup>5)</sup> <b>NEW</b> | <b>6SL3210-1PH32-1CL0</b>                                            | —                                                                         |
| <b>250</b>                              | 250  | 250                                            | <b>200</b>                                         | 200  | 208                                   | FSG <sup>5)</sup> <b>NEW</b> | <b>6SL3210-1PH32-5CL0</b>                                            | —                                                                         |

Footnotes see page 9/43.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Selection and ordering data (continued)

#### PM240-2 Power Modules push-through variant

| Rated power <sup>1)</sup>      |            | Rated output current $I_{rated}$ <sup>2)</sup> | Power based on the base-load current <sup>3)</sup> |             | Base-load current $I_H$ <sup>3)</sup> | Frame size | PM240-2 Power Module push-through variant without integrated line filter | PM240-2 Power Module push-through variant with integrated line filter class A |
|--------------------------------|------------|------------------------------------------------|----------------------------------------------------|-------------|---------------------------------------|------------|--------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| kW                             | hp         | A                                              | kW                                                 | hp          | A                                     |            | Article No.                                                              | Article No.                                                                   |
| <b>200 ... 240 V 1 AC/3 AC</b> |            |                                                |                                                    |             |                                       |            |                                                                          |                                                                               |
| <b>0.75</b>                    | <b>1</b>   | <b>4.2</b>                                     | <b>0.55</b>                                        | <b>0.75</b> | <b>3.2</b>                            | FSA        | <b>6SL3211-1PB13-8UL0</b>                                                | <b>6SL3211-1PB13-8AL0</b>                                                     |
| <b>2.2</b>                     | <b>3</b>   | <b>10.4</b>                                    | <b>1.5</b>                                         | <b>2</b>    | <b>7.4</b>                            | FSB        | <b>6SL3211-1PB21-0UL0</b>                                                | <b>6SL3211-1PB21-0AL0</b>                                                     |
| <b>4</b>                       | <b>5</b>   | <b>17.5</b>                                    | <b>3</b>                                           | <b>4</b>    | <b>13.6</b>                           | FSC        | <b>6SL3211-1PB21-8UL0</b>                                                | <b>6SL3211-1PB21-8AL0</b>                                                     |
| <b>200 ... 240 V 3 AC</b>      |            |                                                |                                                    |             |                                       |            |                                                                          |                                                                               |
| <b>18.5</b>                    | <b>25</b>  | <b>68</b>                                      | <b>15</b>                                          | <b>20</b>   | <b>54</b>                             | FSD        | <b>6SL3211-1PC26-8UL0</b>                                                | –                                                                             |
| <b>30</b>                      | <b>40</b>  | <b>104</b>                                     | <b>22</b>                                          | <b>30</b>   | <b>80</b>                             | FSE        | <b>6SL3211-1PC31-1UL0</b>                                                | –                                                                             |
| <b>55</b>                      | <b>75</b>  | <b>178</b>                                     | <b>45</b>                                          | <b>60</b>   | <b>154</b>                            | FSF        | <b>6SL3211-1PC31-8UL0</b>                                                | –                                                                             |
| <b>380 ... 480 V 3 AC</b>      |            |                                                |                                                    |             |                                       |            |                                                                          |                                                                               |
| <b>3</b>                       | <b>4</b>   | <b>7.7</b>                                     | <b>2.2</b>                                         | <b>7.5</b>  | <b>5.9</b>                            | FSA        | <b>6SL3211-1PE18-0UL1</b>                                                | <b>6SL3211-1PE18-0AL1</b>                                                     |
| <b>7.5</b>                     | <b>10</b>  | <b>18</b>                                      | <b>5.5</b>                                         | <b>7.5</b>  | <b>13.2</b>                           | FSB        | <b>6SL3211-1PE21-8UL0</b>                                                | <b>6SL3211-1PE21-8AL0</b>                                                     |
| <b>15</b>                      | <b>20</b>  | <b>32</b>                                      | <b>11</b>                                          | <b>15</b>   | <b>26</b>                             | FSC        | <b>6SL3211-1PE23-3UL0</b>                                                | <b>6SL3211-1PE23-3AL0</b>                                                     |
| <b>37</b>                      | <b>50</b>  | <b>75</b>                                      | <b>30</b>                                          | <b>40</b>   | <b>60</b>                             | FSD        | <b>6SL3211-1PE27-5UL0</b>                                                | <b>6SL3211-1PE27-5AL0</b>                                                     |
| <b>55</b>                      | <b>75</b>  | <b>110</b>                                     | <b>45</b>                                          | <b>60</b>   | <b>90</b>                             | FSE        | <b>6SL3211-1PE31-1UL0</b>                                                | <b>6SL3211-1PE31-1AL0</b>                                                     |
| <b>132</b>                     | <b>200</b> | <b>250</b>                                     | <b>110</b>                                         | <b>150</b>  | <b>205</b>                            | FSF        | <b>6SL3211-1PE32-5UL0</b>                                                | <b>6SL3211-1PE32-5AL0</b>                                                     |

#### PM250 Power Modules

| Rated power <sup>1)</sup> |            | Rated output current $I_{rated}$ <sup>2)</sup> | Power based on the base-load current <sup>3)</sup> |            | Base-load current $I_H$ <sup>3)</sup> | Frame size | PM250 Power Module without integrated line filter | PM250 Power Module with integrated line filter class A |
|---------------------------|------------|------------------------------------------------|----------------------------------------------------|------------|---------------------------------------|------------|---------------------------------------------------|--------------------------------------------------------|
| kW                        | hp         | A                                              | kW                                                 | hp         | A                                     |            | Article No.                                       | Article No.                                            |
| <b>380 ... 480 V 3 AC</b> |            |                                                |                                                    |            |                                       |            |                                                   |                                                        |
| <b>7.5</b>                | <b>10</b>  | <b>18</b>                                      | <b>5.5</b>                                         | <b>7.5</b> | <b>13.2</b>                           | FSC        | –                                                 | <b>6SL3225-0BE25-5AA1</b>                              |
| <b>11</b>                 | <b>15</b>  | <b>25</b>                                      | <b>7.5</b>                                         | <b>10</b>  | <b>19</b>                             | FSC        | –                                                 | <b>6SL3225-0BE27-5AA1</b>                              |
| <b>15</b>                 | <b>20</b>  | <b>32</b>                                      | <b>11</b>                                          | <b>15</b>  | <b>26</b>                             | FSC        | –                                                 | <b>6SL3225-0BE31-1AA1</b>                              |
| <b>18.5</b>               | <b>25</b>  | <b>38</b>                                      | <b>15</b>                                          | <b>20</b>  | <b>32</b>                             | FSD        | <b>6SL3225-0BE31-5UA0</b>                         | <b>6SL3225-0BE31-5AA0</b>                              |
| <b>22</b>                 | <b>30</b>  | <b>45</b>                                      | <b>18.5</b>                                        | <b>25</b>  | <b>38</b>                             | FSD        | <b>6SL3225-0BE31-8UA0</b>                         | <b>6SL3225-0BE31-8AA0</b>                              |
| <b>30</b>                 | <b>40</b>  | <b>60</b>                                      | <b>22</b>                                          | <b>30</b>  | <b>45</b>                             | FSD        | <b>6SL3225-0BE32-2UA0</b>                         | <b>6SL3225-0BE32-2AA0</b>                              |
| <b>37</b>                 | <b>50</b>  | <b>75</b>                                      | <b>30</b>                                          | <b>40</b>  | <b>60</b>                             | FSE        | <b>6SL3225-0BE33-0UA0</b>                         | <b>6SL3225-0BE33-0AA0</b>                              |
| <b>45</b>                 | <b>60</b>  | <b>90</b>                                      | <b>37</b>                                          | <b>50</b>  | <b>75</b>                             | FSE        | <b>6SL3225-0BE33-7UA0</b>                         | <b>6SL3225-0BE33-7AA0</b>                              |
| <b>55</b>                 | <b>75</b>  | <b>110</b>                                     | <b>45</b>                                          | <b>60</b>  | <b>90</b>                             | FSF        | <b>6SL3225-0BE34-5UA0</b>                         | <b>6SL3225-0BE34-5AA0</b>                              |
| <b>75</b>                 | <b>100</b> | <b>145</b>                                     | <b>55</b>                                          | <b>75</b>  | <b>110</b>                            | FSF        | <b>6SL3225-0BE35-5UA0</b>                         | <b>6SL3225-0BE35-5AA0</b>                              |
| <b>90</b>                 | <b>125</b> | <b>178</b>                                     | <b>75</b>                                          | <b>100</b> | <b>145</b>                            | FSF        | <b>6SL3225-0BE37-5UA0</b>                         | <b>6SL3225-0BE37-5AA0</b>                              |

<sup>1)</sup> Rated power based on the rated output current  $I_{rated}$ . The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO). These current values are valid for 200 V, 400 V or 690 V and are specified on the rating plate of the Power Module.

<sup>3)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>4)</sup> SIPLUS components for extreme requirements are available. Additional information is available on the Internet at [www.siemens.com/siplus-drives](http://www.siemens.com/siplus-drives)

<sup>5)</sup> The 690 V versions of the PM240-2 Power Modules frame size FSG are only available with an integrated Category C3 filter. To operate the inverter also within TN systems with grounded outer conductor, you must remove the grounding screw.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications

#### General technical specifications

| Power Modules                                                                                                                                                                                                                           | PM240-2                                                                                                                                                                                                                                                                                                                                                                                      | PM250                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>System operating voltage</b>                                                                                                                                                                                                         | FSA ... FSC:<br>200 ... 240 V 1 AC/3 AC $\pm 10\%$<br>380 ... 480 V 3 AC $\pm 10\%$<br>FSD ... FSG:<br>200 ... 240 V 3 AC $\pm 10\%$<br>(in operation $-20\% < 1$ min)<br>380 ... 480 V 3 AC $\pm 10\%$<br>(in operation $-20\% < 1$ min)<br>500 ... 690 V 3 AC $\pm 10\%$<br>(in operation $-20\% < 1$ min)                                                                                 | 380 ... 480 V 3 AC $\pm 10\%$                                                                                                                                                                                                                                                                                                                                                                |
| <b>Line supply requirements</b><br><b>Short-circuit power ratio <math>R_{SC}</math></b>                                                                                                                                                 | 200 V: $>25$<br>With $R_{SC} >50$ it is advisable for FSA to FSC to install a line reactor, or alternatively, to select a Power Module with the next-higher power rating.<br>400 V: $>25$<br>With $R_{SC} >100$ it is advisable for FSA to FSC to install a line reactor, or alternatively, to select a Power Module with the next-higher power rating.<br>690 V: No restriction             | $>100$                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Input frequency</b>                                                                                                                                                                                                                  | 47 ... 63 Hz                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Output frequency</b><br>• Control mode V/f<br>• Control mode Vector                                                                                                                                                                  | 0 ... 550 Hz<br>0 ... 240 Hz                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Pulse frequency</b>                                                                                                                                                                                                                  | 200 V: 4 kHz<br>400 V: $<75$ kW: 4 kHz; $\geq 75$ kW: 2 kHz<br>690 V: 2 kHz<br>For higher pulse frequencies,<br><a href="#">see derating data</a>                                                                                                                                                                                                                                            | 4 kHz<br>For higher pulse frequencies,<br><a href="#">see derating data</a>                                                                                                                                                                                                                                                                                                                  |
| <b>Power factor <math>\lambda</math></b>                                                                                                                                                                                                | FSA ... FSC:<br>0.7 ... 0.85<br>FSD ... FSG:<br>- 200 V: $>0.95$<br>- 400 V and 690 V: $>0.9$                                                                                                                                                                                                                                                                                                | 0.9                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Offset factor <math>\cos \varphi</math></b>                                                                                                                                                                                          | FSA ... FSC: $>0.96$<br>FSD ... FSG: 0.98 ... 0.99                                                                                                                                                                                                                                                                                                                                           | 0.95 capacitive                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Inverter efficiency</b>                                                                                                                                                                                                              | 200 V: $>96\%$<br>400 V: $>97\%$<br>690 V: $>98\%$                                                                                                                                                                                                                                                                                                                                           | 95 ... 97 %                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Output voltage, max.</b><br>as % of input voltage                                                                                                                                                                                    | 95 %                                                                                                                                                                                                                                                                                                                                                                                         | 87 %                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Overload capability</b><br>• Low overload (LO)<br><u>Note:</u><br>No reduction in base-load current $I_L$ for use of overload<br>• High overload (HO)<br><u>Note:</u><br>No reduction in base-load current $I_H$ for use of overload | 1.5 $\times$ base-load current $I_L$<br>(i.e. 150 % overload) for 3 s<br><b>plus</b> 1.1 $\times$ base-load current $I_L$<br>(i.e. 110 % overload) for 57 s<br>within a cycle time of 300 s<br><br>2 $\times$ base-load current $I_H$<br>(i.e. 200 % overload) for 3 s<br><b>plus</b> 1.5 $\times$ base-load current $I_H$<br>(i.e. 150 % overload) for 57 s<br>within a cycle time of 300 s | 1.5 $\times$ base-load current $I_L$<br>(i.e. 150 % overload) for 3 s<br><b>plus</b> 1.1 $\times$ base-load current $I_L$<br>(i.e. 110 % overload) for 57 s<br>within a cycle time of 300 s<br><br>2 $\times$ base-load current $I_H$<br>(i.e. 200 % overload) for 3 s<br><b>plus</b> 1.5 $\times$ base-load current $I_H$<br>(i.e. 150 % overload) for 57 s<br>within a cycle time of 300 s |

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Power Modules                                                                                               | PM240-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | PM250                                                                                                                                              |
|-------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Possible braking methods</b>                                                                             | DC braking<br>Compound braking<br>Dynamic braking with integrated braking chopper                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Energy recovery in generator operation (max. with rated power based on high overload (HO))                                                         |
| <b>Degree of protection</b>                                                                                 | IP20 (standard or push-through)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | IP20                                                                                                                                               |
| <b>Operating temperature</b>                                                                                | <p>Frame sizes FSA ... FSC:<br/>-10 ... +40 °C (14 ... 104 °F)<br/>without derating<br/>&gt;40 ... 60 °C (&gt;104 ... 140 °F)<br/><a href="#">see derating characteristics</a></p> <p>Frame sizes FSD ... FSG:<br/>-20 ... +40 °C (-4 ... +104 °F)<br/>without derating<br/>&gt;40 ... 60 °C (&gt;104 ... 140 °F)<br/><a href="#">see derating characteristics</a></p> <p>Frame sizes FSA ... FSC:<br/>-10 ... +50 °C (14 ... 122 °F)<br/>without derating<br/>&gt;50 ... 60 °C (&gt;122 ... 140 °F)<br/><a href="#">see derating characteristics</a></p> <p>Frame sizes FSD ... FSG:<br/>-20 ... +50 °C (-4 ... +122 °F)<br/>without derating<br/>&gt;50 ... 60 °C (&gt;122 ... 140 °F)<br/><a href="#">see derating characteristics</a></p> | <p>0 ... 40 °C (32 ... 104 °F)<br/>without derating<br/>&gt;40 ... 60 °C (&gt;104 ... 140 °F)<br/><a href="#">see derating characteristics</a></p> |
| <ul style="list-style-type: none"> <li>Low overload (LO)</li> </ul>                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <p>0 ... 50 °C (32 ... 122 °F)<br/>without derating<br/>&gt;50 ... 60 °C (&gt;122 ... 140 °F)<br/><a href="#">see derating characteristics</a></p> |
| <ul style="list-style-type: none"> <li>High overload (HO)</li> </ul>                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                    |
| <b>Relative humidity</b>                                                                                    | <95 % RH, condensation not permissible                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                    |
| <b>Cooling</b>                                                                                              | Internal air cooling, power units with increased air cooling by built-in fans                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Internal air cooling, power units with increased air cooling by built-in fans                                                                      |
| <b>Installation altitude</b>                                                                                | Up to 1000 m (3281 ft) above sea level without derating, > 1000 m (3281 ft)<br><a href="#">see derating characteristics</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Up to 1000 m (3281 ft) above sea level without derating, > 1000 m (3281 ft)<br><a href="#">see derating characteristics</a>                        |
| <b>Protection functions</b>                                                                                 | <ul style="list-style-type: none"> <li>Undervoltage</li> <li>Overvoltage</li> <li>Overload</li> <li>Ground fault</li> <li>Short-circuit</li> <li>Stall protection</li> <li>Motor blocking protection</li> <li>Motor overtemperature</li> <li>Inverter overtemperature</li> <li>Parameter locking</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                    |
| <b>Short-Circuit Current Rating SCCR</b><br>according to UL<br>(Short Circuit Current Rating) <sup>1)</sup> | 200 V: 100 kA<br>400 V: 100 kA<br>690 V: 100 kA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | FSC: 40 kA<br>FSD ... FSF: 42 kA                                                                                                                   |
| <b>Compliance with standards</b>                                                                            | CE, cULus, RCM, SEMI F47, RoHS, EAC, KC (only with internal or external line filters Category C2)<br>For frame sizes FSD ... FSG also: WEEE (Waste Electrical & Electronic Equipment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | CE, UL, cUL, RCM, SEMI F47                                                                                                                         |
| <b>CE marking</b>                                                                                           | According to Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                    |

<sup>1)</sup> Applies to industrial control panel installations to NEC article 409 or UL 508A.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

#### PM240-2 Power Modules standard variant

| Line voltage 200 ... 240 V 1 AC/3 AC                 |                                        | PM240-2 Power Modules standard variant |                                |                                |                                |                                |
|------------------------------------------------------|----------------------------------------|----------------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Without integrated line filter                       |                                        | 6SL3210-1PB13-0ULO                     | 6SL3210-1PB13-8ULO             | 6SL3210-1PB15-5ULO             | 6SL3210-1PB17-4ULO             | 6SL3210-1PB21-0ULO             |
| With integrated line filter class A                  |                                        | 6SL3210-1PB13-0ALO                     | 6SL3210-1PB13-8ALO             | 6SL3210-1PB15-5ALO             | 6SL3210-1PB17-4ALO             | 6SL3210-1PB21-0ALO             |
| <b>Output current</b><br>at 50 Hz 230 V 1 AC         |                                        |                                        |                                |                                |                                |                                |
| • Rated current $I_{rated}^{1)}$                     | A                                      | 3.2                                    | 4.2                            | 6                              | 7.4                            | 10.4                           |
| • Base-load current $I_L^{1)}$                       | A                                      | 3.2                                    | 4.2                            | 6                              | 7.4                            | 10.4                           |
| • Base-load current $I_H^{2)}$                       | A                                      | 2.3                                    | 3.2                            | 4.2                            | 6                              | 7.4                            |
| • Maximum current $I_{max}$                          | A                                      | 4.6                                    | 6                              | 8.3                            | 11.1                           | 15.6                           |
| <b>Rated power</b>                                   |                                        |                                        |                                |                                |                                |                                |
| • Based on $I_L$                                     | kW (hp)                                | 0.55 (0.75)                            | 0.75 (1)                       | 1.1 (1.5)                      | 1.5 (2)                        | 2.2 (3)                        |
| • Based on $I_H$                                     | kW (hp)                                | 0.37 (0.50)                            | 0.55 (0.75)                    | 0.75 (1)                       | 1.1 (1.5)                      | 1.5 (2)                        |
| <b>Rated pulse frequency</b>                         | kHz                                    | 4                                      | 4                              | 4                              | 4                              | 4                              |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >96                                    | >96                            | >96                            | >96                            | >96                            |
| <b>Power loss <sup>3)</sup></b><br>At rated current  | kW                                     | 0.04                                   | 0.04                           | 0.05                           | 0.07                           | 0.12                           |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.005 (0.18)                           | 0.005 (0.18)                   | 0.0092 (0.325)                 | 0.0092 (0.325)                 | 0.0092 (0.325)                 |
| <b>Sound pressure level</b><br>$L_{pA}$ (1 m)        | dB                                     | <50                                    | <50                            | <62                            | <62                            | <62                            |
| <b>Input current <sup>4)</sup></b>                   |                                        |                                        |                                |                                |                                |                                |
| • Rated input current 1 AC/3 AC                      | A                                      | 7.5/4.2                                | 9.6/5.5                        | 13.5/7.8                       | 18.1/9.7                       | 24/13.6                        |
| • Based on $I_H$ 1 AC/3 AC                           | A                                      | 6.6/3                                  | 8.4/4.2                        | 11.8/5.5                       | 15.8/7.8                       | 20.9/9.7                       |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | Terminal connector                     | Terminal connector             | Terminal connector             | Terminal connector             | Terminal connector             |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 1.5 ... 2.5                            | 1.5 ... 2.5                    | 1.5 ... 6                      | 1.5 ... 6                      | 1.5 ... 6                      |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | Terminal connector                     | Terminal connector             | Terminal connector             | Terminal connector             | Terminal connector             |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 1.5 ... 2.5                            | 1.5 ... 2.5                    | 1.5 ... 6                      | 1.5 ... 6                      | 1.5 ... 6                      |
| <b>PE connection</b>                                 |                                        | Included in terminal connector         | Included in terminal connector | Included in terminal connector | Included in terminal connector | Included in terminal connector |
| <b>Motor cable length, max.</b>                      |                                        |                                        |                                |                                |                                |                                |
| • Shielded                                           | m (ft)                                 | 50 (164)                               | 50 (164)                       | 50 (164)                       | 50 (164)                       | 50 (164)                       |
| • Unshielded                                         | m (ft)                                 | 100 (328)                              | 100 (328)                      | 100 (328)                      | 100 (328)                      | 100 (328)                      |
| <b>Degree of protection</b>                          |                                        | IP20                                   | IP20                           | IP20                           | IP20                           | IP20                           |
| <b>Dimensions</b>                                    |                                        |                                        |                                |                                |                                |                                |
| • Width                                              | mm (in)                                | 73 (2.87)                              | 73 (2.87)                      | 100 (3.94)                     | 100 (3.94)                     | 100 (3.94)                     |
| • Height                                             | mm (in)                                | 196 (7.72)                             | 196 (7.72)                     | 292 (11.5)                     | 292 (11.5)                     | 292 (11.5)                     |
| • Depth                                              |                                        |                                        |                                |                                |                                |                                |
| - Without operator panel                             | mm (in)                                | 165 (6.50)                             | 165 (6.50)                     | 165 (6.50)                     | 165 (6.50)                     | 165 (6.50)                     |
| - With operator panel, max.                          | mm (in)                                | 238 (9.37)                             | 238 (9.37)                     | 238 (9.37)                     | 238 (9.37)                     | 238 (9.37)                     |
| <b>Frame size</b>                                    |                                        | FSA                                    | FSA                            | FSB                            | FSB                            | FSB                            |
| <b>Weight, approx.</b>                               |                                        |                                        |                                |                                |                                |                                |
| • Without integrated line filter                     | kg (lb)                                | 1.4 (3.09)                             | 1.4 (3.09)                     | 2.8 (6.17)                     | 2.8 (6.17)                     | 2.8 (6.17)                     |
| • With integrated line filter                        | kg (lb)                                | 1.6 (3.53)                             | 1.6 (3.53)                     | 3.1 (6.84)                     | 3.1 (6.84)                     | 3.1 (6.84)                     |

<sup>1)</sup> The rated output current  $I_{rated}$  and the base-load current  $I_L$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at: <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load at rated power (based on  $I_{rated}$ ) for a line impedance corresponding to  $u_K = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 200 ... 240 V 1 AC/3 AC                 |                                        | PM240-2 Power Modules standard variant |                                |
|------------------------------------------------------|----------------------------------------|----------------------------------------|--------------------------------|
| Without integrated line filter                       |                                        | 6SL3210-1PB21-4UL0                     | 6SL3210-1PB21-8UL0             |
| With integrated line filter class A                  |                                        | 6SL3210-1PB21-4AL0                     | 6SL3210-1PB21-8AL0             |
| <b>Output current</b><br>at 50 Hz 230 V 1 AC         |                                        |                                        |                                |
| • Rated current $I_{\text{rated}}$ <sup>1)</sup>     | A                                      | 13.6                                   | 17.5                           |
| • Base-load current $I_L$ <sup>1)</sup>              | A                                      | 13.6                                   | 17.5                           |
| • Base-load current $I_H$ <sup>2)</sup>              | A                                      | 10.4                                   | 13.6                           |
| • Maximum current $I_{\text{max}}$                   | A                                      | 20.8                                   | 27.2                           |
| <b>Rated power</b>                                   |                                        |                                        |                                |
| • Based on $I_L$                                     | kW (hp)                                | 3 (4)                                  | 4 (5)                          |
| • Based on $I_H$                                     | kW (hp)                                | 2.2 (3)                                | 3 (4)                          |
| <b>Rated pulse frequency</b>                         | kHz                                    | 4                                      | 4                              |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >96                                    | >96                            |
| <b>Power loss</b> <sup>3)</sup><br>At rated current  | kW                                     | 0.14                                   | 0.18                           |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.0185 (0.65)                          | 0.0185 (0.65)                  |
| <b>Sound pressure level</b><br>$L_{pA}$ (1 m)        | dB                                     | <65                                    | <65                            |
| <b>Input current</b> <sup>4)</sup>                   |                                        |                                        |                                |
| • Rated input current 1 AC/3 AC                      | A                                      | 35.9/17.7                              | 43/22.8                        |
| • Based on $I_H$ 1 AC/3 AC                           | A                                      | 31.3/13.6                              | 37.5/17.7                      |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | Terminal connector                     | Terminal connector             |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 6 ... 16                               | 6 ... 16                       |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | Terminal connector                     | Terminal connector             |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 6 ... 16                               | 6 ... 16                       |
| <b>PE connection</b>                                 |                                        | Included in terminal connector         | Included in terminal connector |
| <b>Motor cable length, max.</b>                      |                                        |                                        |                                |
| • Shielded                                           | m (ft)                                 | 50 (164)                               | 50 (164)                       |
| • Unshielded                                         | m (ft)                                 | 100 (328)                              | 100 (328)                      |
| <b>Degree of protection</b>                          |                                        | IP20                                   | IP20                           |
| <b>Dimensions</b>                                    |                                        |                                        |                                |
| • Width                                              | mm (in)                                | 140 (5.51)                             | 140 (5.51)                     |
| • Height                                             | mm (in)                                | 355 (13.98)                            | 355 (13.98)                    |
| • Depth                                              |                                        |                                        |                                |
| - Without operator panel                             | mm (in)                                | 165 (6.50)                             | 165 (6.50)                     |
| - With operator panel, max.                          | mm (in)                                | 238 (9.37)                             | 238 (9.37)                     |
| <b>Frame size</b>                                    |                                        | FSC                                    | FSC                            |
| <b>Weight, approx.</b>                               |                                        |                                        |                                |
| • Without integrated line filter                     | kg (lb)                                | 5 (11)                                 | 5 (11)                         |
| • With integrated line filter                        | kg (lb)                                | 5.2 (11.5)                             | 5.2 (11.5)                     |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  and the base-load current  $I_L$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at: <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load at rated power (based on  $I_{\text{rated}}$ ) for a line impedance corresponding to  $u_K = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 200 ... 240 V 3 AC                      |                                        | PM240-2 Power Modules standard variant |                                |                         |                         |                         |
|------------------------------------------------------|----------------------------------------|----------------------------------------|--------------------------------|-------------------------|-------------------------|-------------------------|
| Without integrated line filter                       |                                        | 6SL3210-1PC22-2UL0                     | 6SL3210-1PC22-8UL0             | 6SL3210-1PC24-2UL0      | 6SL3210-1PC25-4UL0      | 6SL3210-1PC26-8UL0      |
| With integrated line filter class A                  |                                        | 6SL3210-1PC22-2AL0                     | 6SL3210-1PC22-8AL0             | –                       | –                       | –                       |
| <b>Output current</b><br>at 50 Hz 230 V 3 AC         |                                        |                                        |                                |                         |                         |                         |
| • Rated current $I_{\text{rated}}$ <sup>1)</sup>     | A                                      | 22                                     | 28                             | 42                      | 54                      | 68                      |
| • Base-load current $I_{\text{L}}$ <sup>1)</sup>     | A                                      | 22                                     | 28                             | 42                      | 54                      | 68                      |
| • Base-load current $I_{\text{H}}$ <sup>2)</sup>     | A                                      | 17.5                                   | 22                             | 35                      | 42                      | 54                      |
| • Maximum current $I_{\text{max}}$                   | A                                      | 35                                     | 44                             | 70                      | 84                      | 108                     |
| <b>Rated power</b>                                   |                                        |                                        |                                |                         |                         |                         |
| • Based on $I_{\text{L}}$                            | kW (hp)                                | 5.5 (7.5)                              | 7.5 (10)                       | 11 (15)                 | 15 (20)                 | 18.5 (25)               |
| • Based on $I_{\text{H}}$                            | kW (hp)                                | 4 (5)                                  | 5.5 (7.5)                      | 7.5 (10)                | 11 (15)                 | 15 (20)                 |
| <b>Rated pulse frequency</b>                         | kHz                                    | 4                                      | 4                              | 4                       | 4                       | 4                       |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >97                                    | >97                            | >97                     | >97                     | >97                     |
| <b>Power loss</b> <sup>3)</sup><br>At rated current  | kW                                     | 0.2                                    | 0.26                           | 0.45                    | 0.61                    | 0.82                    |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.0185 (0.65)                          | 0.0185 (0.65)                  | 0.055 (1.94)            | 0.055 (1.94)            | 0.055 (1.94)            |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m) | dB                                     | <65                                    | <65                            | 45 ... 65 <sup>4)</sup> | 45 ... 65 <sup>4)</sup> | 45 ... 65 <sup>4)</sup> |
| <b>Input current</b> <sup>5)</sup>                   |                                        |                                        |                                |                         |                         |                         |
| • Rated input current                                | A                                      | 28.6                                   | 36.4                           | 40                      | 51                      | 64                      |
| • Based on $I_{\text{H}}$                            | A                                      | 22.8                                   | 28.6                           | 36                      | 43                      | 56                      |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | Terminal connector                     | Terminal connector             | Screw terminals         | Screw terminals         | Screw terminals         |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 6 ... 16                               | 6 ... 16                       | 10 ... 35               | 10 ... 35               | 10 ... 35               |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | Terminal connector                     | Terminal connector             | Screw terminals         | Screw terminals         | Screw terminals         |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 6 ... 16                               | 6 ... 16                       | 10 ... 35               | 10 ... 35               | 10 ... 35               |
| <b>PE connection</b>                                 |                                        | Included in terminal connector         | Included in terminal connector | Screw terminals         | Screw terminals         | Screw terminals         |
| <b>Motor cable length, max.</b>                      |                                        |                                        |                                |                         |                         |                         |
| • Shielded                                           | m (ft)                                 | 50 (164)                               | 50 (164)                       | 200 (656)               | 200 (656)               | 200 (656)               |
| • Unshielded                                         | m (ft)                                 | 100 (328)                              | 100 (328)                      | 300 (984)               | 300 (984)               | 300 (984)               |
| <b>Degree of protection</b>                          |                                        | IP20                                   | IP20                           | IP20                    | IP20                    | IP20                    |
| <b>Dimensions</b>                                    |                                        |                                        |                                |                         |                         |                         |
| • Width                                              | mm (in)                                | 140 (5.51)                             | 140 (5.51)                     | 200 (7.87)              | 200 (7.87)              | 200 (7.87)              |
| • Height                                             | mm (in)                                | 355 (13.98)                            | 355 (13.98)                    | 472 (18.58)             | 472 (18.58)             | 472 (18.58)             |
| • Depth                                              |                                        |                                        |                                |                         |                         |                         |
| - Without operator panel                             | mm (in)                                | 165 (6.50)                             | 165 (6.50)                     | 237 (9.33)              | 237 (9.33)              | 237 (9.33)              |
| - With operator panel, max.                          | mm (in)                                | 238 (9.37)                             | 238 (9.37)                     | 268 (10.55)             | 268 (10.55)             | 268 (10.55)             |
| <b>Frame size</b>                                    |                                        | FSC                                    | FSC                            | FSD                     | FSD                     | FSD                     |
| <b>Weight, approx.</b>                               |                                        |                                        |                                |                         |                         |                         |
| • Without integrated line filter                     | kg (lb)                                | 5 (11)                                 | 5 (11)                         | 17 (37.5)               | 17 (37.5)               | 17 (37.5)               |
| • With integrated line filter                        | kg (lb)                                | 5.2 (11.5)                             | 5.2 (11.5)                     | –                       | –                       | –                       |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  and the base-load current  $I_{\text{L}}$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_{\text{H}}$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at:  
<https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> Values dependent on ambient temperature and utilization.

<sup>5)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load at rated power (based on  $I_{\text{rated}}$ ) for a line impedance corresponding to  $u_{\text{K}} = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 200 ... 240 V 3 AC                      |                                        | PM240-2 Power Modules standard variant |                         |                         |                         |                         |
|------------------------------------------------------|----------------------------------------|----------------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Without integrated line filter                       |                                        | 6SL3210-1PC28-0UL0                     | 6SL3210-1PC31-1UL0      | 6SL3210-1PC31-3UL0      | 6SL3210-1PC31-6UL0      | 6SL3210-1PC31-8UL0      |
| With integrated line filter class A                  |                                        | –                                      | –                       | –                       | –                       | –                       |
| <b>Output current</b><br>at 50 Hz 230 V 3 AC         |                                        |                                        |                         |                         |                         |                         |
| • Rated current $I_{rated}^{1)}$                     | A                                      | 80                                     | 104                     | 130                     | 154                     | 178                     |
| • Base-load current $I_L^{1)}$                       | A                                      | 80                                     | 104                     | 130                     | 154                     | 178                     |
| • Base-load current $I_H^{2)}$                       | A                                      | 68                                     | 80                      | 104                     | 130                     | 154                     |
| • Maximum current $I_{max}$                          | A                                      | 136                                    | 160                     | 208                     | 260                     | 308                     |
| <b>Rated power</b>                                   |                                        |                                        |                         |                         |                         |                         |
| • Based on $I_L$                                     | kW (hp)                                | 22 (30)                                | 30 (40)                 | 37 (50)                 | 45 (60)                 | 55 (75)                 |
| • Based on $I_H$                                     | kW (hp)                                | 18.5 (25)                              | 22 (30)                 | 30 (40)                 | 37 (50)                 | 45 (60)                 |
| <b>Rated pulse frequency</b>                         | kHz                                    | 4                                      | 4                       | 4                       | 4                       | 4                       |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >97                                    | >97                     | >97                     | >97                     | >97                     |
| <b>Power loss <sup>3)</sup></b><br>At rated current  | kW                                     | 0.92                                   | 1.28                    | 1.38                    | 1.72                    | 2.09                    |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.083 (2.93)                           | 0.083 (2.93)            | 0.153 (5.4)             | 0.153 (5.4)             | 0.153 (5.4)             |
| <b>Sound pressure level</b><br>$L_{pA}$ (1 m)        | dB                                     | 44 ... 62 <sup>4)</sup>                | 44 ... 62 <sup>4)</sup> | 56 ... 68 <sup>4)</sup> | 56 ... 68 <sup>4)</sup> | 56 ... 68 <sup>4)</sup> |
| <b>Input current <sup>5)</sup></b>                   |                                        |                                        |                         |                         |                         |                         |
| • Rated input current                                | A                                      | 76                                     | 98                      | 126                     | 149                     | 172                     |
| • Based on $I_H$                                     | A                                      | 71                                     | 83                      | 110                     | 138                     | 164                     |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | Screw terminals                        | Screw terminals         | M10 screw stud          | M10 screw stud          | M10 screw stud          |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 25 ... 70                              | 25 ... 70               | 35 ... 2 × 120          | 35 ... 2 × 120          | 35 ... 2 × 120          |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | Screw terminals                        | Screw terminals         | M10 screw stud          | M10 screw stud          | M10 screw stud          |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 25 ... 70                              | 25 ... 70               | 35 ... 2 × 120          | 35 ... 2 × 120          | 35 ... 2 × 120          |
| <b>PE connection</b>                                 |                                        | Screw terminals                        | Screw terminals         | M10 screw stud          | M10 screw stud          | M10 screw stud          |
| <b>Motor cable length, max.</b>                      |                                        |                                        |                         |                         |                         |                         |
| • Shielded                                           | m (ft)                                 | 200 (656)                              | 200 (656)               | 300 (984)               | 300 (984)               | 300 (984)               |
| • Unshielded                                         | m (ft)                                 | 300 (984)                              | 300 (984)               | 450 (1476)              | 450 (1476)              | 450 (1476)              |
| <b>Degree of protection</b>                          |                                        | IP20                                   | IP20                    | IP20                    | IP20                    | IP20                    |
| <b>Dimensions</b>                                    |                                        |                                        |                         |                         |                         |                         |
| • Width                                              | mm (in)                                | 275 (10.83)                            | 275 (10.83)             | 305 (12.01)             | 305 (12.01)             | 305 (12.01)             |
| • Height                                             | mm (in)                                | 551 (21.69)                            | 551 (21.69)             | 708 (27.87)             | 708 (27.87)             | 708 (27.87)             |
| • Depth                                              |                                        |                                        |                         |                         |                         |                         |
| - Without operator panel                             | mm (in)                                | 237 (9.33)                             | 237 (9.33)              | 357 (14.06)             | 357 (14.06)             | 357 (14.06)             |
| - With operator panel, max.                          | mm (in)                                | 268 (10.55)                            | 268 (10.55)             | 388 (15.28)             | 388 (15.28)             | 388 (15.28)             |
| <b>Frame size</b>                                    |                                        | FSE                                    | FSE                     | FSF                     | FSF                     | FSF                     |
| <b>Weight, approx.</b>                               |                                        |                                        |                         |                         |                         |                         |
| • Without integrated line filter                     | kg (lb)                                | 26 (57.3)                              | 26 (57.3)               | 57 (126)                | 57 (126)                | 57 (126)                |
| • With integrated line filter                        | kg (lb)                                | –                                      | –                       | –                       | –                       | –                       |

<sup>1)</sup> The rated output current  $I_{rated}$  and the base-load current  $I_L$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at:  
<https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> Values dependent on ambient temperature and utilization.

<sup>5)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load at rated power (based on  $I_{rated}$ ) for a line impedance corresponding to  $u_K = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                       |                                        | PM240-2 Power Modules standard variant |                                |                                |                                |                                |                                |
|-------------------------------------------------------|----------------------------------------|----------------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Without integrated line filter                        |                                        | 6SL3210-1PE11-8UL1                     | 6SL3210-1PE12-3UL1             | 6SL3210-1PE13-2UL1             | 6SL3210-1PE14-3UL1             | 6SL3210-1PE16-1UL1             | 6SL3210-1PE18-0UL1             |
| With integrated line filter class A                   |                                        | 6SL3210-1PE11-8AL1                     | 6SL3210-1PE12-3AL1             | 6SL3210-1PE13-2AL1             | 6SL3210-1PE14-3AL1             | 6SL3210-1PE16-1AL1             | 6SL3210-1PE18-0AL1             |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC          |                                        |                                        |                                |                                |                                |                                |                                |
| • Rated current $I_{\text{rated}}^{1)}$               | A                                      | 1.7                                    | 2.2                            | 3.1                            | 4.1                            | 5.9                            | 7.7                            |
| • Base-load current $I_{\text{L}}^{1)}$               | A                                      | 1.7                                    | 2.2                            | 3.1                            | 4.1                            | 5.9                            | 7.7                            |
| • Base-load current $I_{\text{H}}^{2)}$               | A                                      | 1.3                                    | 1.7                            | 2.2                            | 3.1                            | 4.1                            | 5.9                            |
| • Maximum current $I_{\text{max}}$                    | A                                      | 2.6                                    | 3.4                            | 4.7                            | 6.2                            | 8.9                            | 11.8                           |
| <b>Rated power</b>                                    |                                        |                                        |                                |                                |                                |                                |                                |
| • Based on $I_{\text{L}}$                             | kW (hp)                                | 0.55 (0.75)                            | 0.75 (1)                       | 1.1 (1.5)                      | 1.5 (2)                        | 2.2 (3)                        | 3 (4)                          |
| • Based on $I_{\text{H}}$                             | kW (hp)                                | 0.37 (0.50)                            | 0.55 (0.75)                    | 0.75 (1)                       | 1.1 (1.5)                      | 1.5 (2)                        | 2.2 (3)                        |
| <b>Rated pulse frequency</b>                          | kHz                                    | 4                                      | 4                              | 4                              | 4                              | 4                              | 4                              |
| <b>Efficiency <math>\eta</math></b>                   | %                                      | >96                                    | >96                            | >96                            | >96                            | >96                            | >96                            |
| <b>Power loss <sup>3)</sup></b><br>At rated current   | kW                                     | 0.04                                   | 0.04                           | 0.04                           | 0.07                           | 0.1                            | 0.12                           |
| <b>Cooling air requirement</b>                        | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.005 (0.18)                           | 0.005 (0.18)                   | 0.005 (0.18)                   | 0.005 (0.18)                   | 0.005 (0.18)                   | 0.005 (0.18)                   |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m)  | dB                                     | <50                                    | <50                            | <50                            | <50                            | <57                            | <57                            |
| <b>Input current <sup>4)</sup></b>                    |                                        |                                        |                                |                                |                                |                                |                                |
| • Rated input current                                 | A                                      | 2.3                                    | 2.9                            | 4.1                            | 5.5                            | 7.7                            | 10.1                           |
| • Based on $I_{\text{H}}$                             | A                                      | 2                                      | 2.6                            | 3.3                            | 4.7                            | 6.1                            | 8.8                            |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3  |                                        | Terminal connector                     | Terminal connector             | Terminal connector             | Terminal connector             | Terminal connector             | Terminal connector             |
| • Conductor cross-section                             | mm <sup>2</sup>                        | 1 ... 2.5                              | 1 ... 2.5                      | 1 ... 2.5                      | 1 ... 2.5                      | 1 ... 2.5                      | 1 ... 2.5                      |
| <b>Motor connection</b><br>U2, V2, W2                 |                                        | Terminal connector                     | Terminal connector             | Terminal connector             | Terminal connector             | Terminal connector             | Terminal connector             |
| • Conductor cross-section                             | mm <sup>2</sup>                        | 1 ... 2.5                              | 1 ... 2.5                      | 1 ... 2.5                      | 1 ... 2.5                      | 1 ... 2.5                      | 1 ... 2.5                      |
| <b>PE connection</b>                                  |                                        | Included in terminal connector         | Included in terminal connector | Included in terminal connector | Included in terminal connector | Included in terminal connector | Included in terminal connector |
| <b>Motor cable length, max.</b>                       |                                        |                                        |                                |                                |                                |                                |                                |
| • Without filter, shielded/unshielded                 | m (ft)                                 | 150/150 (492/492)                      | 150/150 (492/492)              | 150/150 (492/492)              | 150/150 (492/492)              | 150/150 (492/492)              | 150/150 (492/492)              |
| • With integrated filter class A, shielded/unshielded | m (ft)                                 | 50/100 (164/328)                       | 50/100 (164/328)               | 50/100 (164/328)               | 50/100 (164/328)               | 50/100 (164/328)               | 50/100 (164/328)               |
| <b>Degree of protection</b>                           |                                        | IP20                                   | IP20                           | IP20                           | IP20                           | IP20                           | IP20                           |
| <b>Dimensions</b>                                     |                                        |                                        |                                |                                |                                |                                |                                |
| • Width                                               | mm (in)                                | 73 (2.87)                              | 73 (2.87)                      | 73 (2.87)                      | 73 (2.87)                      | 73 (2.87)                      | 73 (2.87)                      |
| • Height                                              | mm (in)                                | 196 (7.72)                             | 196 (7.72)                     | 196 (7.72)                     | 196 (7.72)                     | 196 (7.72)                     | 196 (7.72)                     |
| • Depth                                               |                                        |                                        |                                |                                |                                |                                |                                |
| - Without operator panel                              | mm (in)                                | 165 (6.50)                             | 165 (6.50)                     | 165 (6.50)                     | 165 (6.50)                     | 165 (6.50)                     | 165 (6.50)                     |
| - With operator panel, max.                           | mm (in)                                | 238 (9.37)                             | 238 (9.37)                     | 238 (9.37)                     | 238 (9.37)                     | 238 (9.37)                     | 238 (9.37)                     |
| <b>Frame size</b>                                     |                                        | FSA                                    | FSA                            | FSA                            | FSA                            | FSA                            | FSA                            |
| <b>Weight, approx.</b>                                |                                        |                                        |                                |                                |                                |                                |                                |
| • Without integrated line filter                      | kg (lb)                                | 1.3 (2.87)                             | 1.3 (2.87)                     | 1.3 (2.87)                     | 1.4 (3.09)                     | 1.4 (3.09)                     | 1.4 (3.09)                     |
| • With integrated line filter                         | kg (lb)                                | 1.5 (3.31)                             | 1.5 (3.31)                     | 1.5 (3.31)                     | 1.6 (3.53)                     | 1.6 (3.53)                     | 1.6 (3.53)                     |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  and the base-load current  $I_{\text{L}}$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_{\text{H}}$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at:  
<https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load at rated power (based on  $I_{\text{rated}}$ ) for a line impedance corresponding to  $u_K = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                       |                                        | PM240-2 Power Modules standard variant |                                 |                                 |                                 |                                 |
|-------------------------------------------------------|----------------------------------------|----------------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| Without integrated line filter                        |                                        | 6SL3210-1PE21-1UL0                     | 6SL3210-1PE21-4UL0              | 6SL3210-1PE21-8UL0              | 6SL3210-1PE22-7UL0              | 6SL3210-1PE23-3UL0              |
| With integrated line filter class A                   |                                        | 6SL3210-1PE21-1AL0                     | 6SL3210-1PE21-4AL0              | 6SL3210-1PE21-8AL0              | 6SL3210-1PE22-7AL0              | 6SL3210-1PE23-3AL0              |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC          |                                        |                                        |                                 |                                 |                                 |                                 |
| • Rated current $I_{\text{rated}}$ <sup>1)</sup>      | A                                      | 10.2                                   | 13.2                            | 18                              | 26                              | 32                              |
| • Base-load current $I_L$ <sup>1)</sup>               | A                                      | 10.2                                   | 13.2                            | 18                              | 26                              | 32                              |
| • Base-load current $I_H$ <sup>2)</sup>               | A                                      | 7.7                                    | 10.2                            | 13.2                            | 18                              | 26                              |
| • Maximum current $I_{\text{max}}$                    | A                                      | 15.4                                   | 20.4                            | 27                              | 39                              | 52                              |
| <b>Rated power</b>                                    |                                        |                                        |                                 |                                 |                                 |                                 |
| • Based on $I_L$                                      | kW (hp)                                | 4 (5)                                  | 5.5 (7.5)                       | 7.5 (10)                        | 11 (15)                         | 15 (20)                         |
| • Based on $I_H$                                      | kW (hp)                                | 3 (4)                                  | 4 (5)                           | 5.5 (7.5)                       | 7.5 (10)                        | 11 (15)                         |
| <b>Rated pulse frequency</b>                          | kHz                                    | 4                                      | 4                               | 4                               | 4                               | 4                               |
| <b>Efficiency <math>\eta</math></b>                   | %                                      | >97                                    | >97                             | >97                             | >97                             | >97                             |
| <b>Power loss</b> <sup>3)</sup><br>At rated current   | kW                                     | 0.11                                   | 0.15                            | 0.2                             | 0.3                             | 0.37                            |
| <b>Cooling air requirement</b>                        | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.0092 (0.325)                         | 0.0092 (0.325)                  | 0.0092 (0.325)                  | 0.0185 (0.65)                   | 0.0185 (0.65)                   |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m)  | dB                                     | <62                                    | <62                             | <62                             | <65                             | <65                             |
| <b>Input current</b> <sup>4)</sup>                    |                                        |                                        |                                 |                                 |                                 |                                 |
| • Rated input current                                 | A                                      | 13.3                                   | 17.2                            | 22.2                            | 32.6                            | 39.9                            |
| • Based on $I_H$                                      | A                                      | 11.6                                   | 15.3                            | 19.8                            | 27                              | 36                              |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3  |                                        | Terminal connector                     | Terminal connector              | Terminal connector              | Terminal connector              | Terminal connector              |
| • Conductor cross-section                             | mm <sup>2</sup>                        | 1.5 ... 6                              | 1.5 ... 6                       | 1.5 ... 6                       | 6 ... 16                        | 6 ... 16                        |
| <b>Motor connection</b><br>U2, V2, W2                 |                                        | Terminal connector                     | Terminal connector              | Terminal connector              | Terminal connector              | Terminal connector              |
| • Conductor cross-section                             | mm <sup>2</sup>                        | 1.5 ... 6                              | 1.5 ... 6                       | 1.5 ... 6                       | 6 ... 16                        | 6 ... 16                        |
| <b>PE connection</b>                                  |                                        | Included in terminal connector         | Included in terminal connector  | Included in terminal connector  | Included in terminal connector  | Included in terminal connector  |
| <b>Motor cable length, max.</b>                       |                                        |                                        |                                 |                                 |                                 |                                 |
| • Without filter, shielded/unshielded                 | m (ft)                                 | 150/150 (492/492)                      | 150/150 (492/492)               | 150/150 (492/492)               | 150/150 (492/492)               | 150/150 (492/492)               |
| • With integrated filter class A, shielded/unshielded | m (ft)                                 | 100/100 (328/328) <sup>5)</sup>        | 100/100 (328/328) <sup>5)</sup> | 100/100 (328/328) <sup>5)</sup> | 150/150 (492/492) <sup>5)</sup> | 150/150 (492/492) <sup>5)</sup> |
| <b>Degree of protection</b>                           |                                        | IP20                                   | IP20                            | IP20                            | IP20                            | IP20                            |
| <b>Dimensions</b>                                     |                                        |                                        |                                 |                                 |                                 |                                 |
| • Width                                               | mm (in)                                | 100 (3.94)                             | 100 (3.94)                      | 100 (3.94)                      | 140 (5.51)                      | 140 (5.51)                      |
| • Height                                              | mm (in)                                | 292 (11.5)                             | 292 (11.5)                      | 292 (11.5)                      | 355 (13.98)                     | 355 (13.98)                     |
| • Depth                                               |                                        |                                        |                                 |                                 |                                 |                                 |
| - Without operator panel                              | mm (in)                                | 165 (6.50)                             | 165 (6.50)                      | 165 (6.50)                      | 165 (6.50)                      | 165 (6.50)                      |
| - With operator panel, max.                           | mm (in)                                | 238 (9.37)                             | 238 (9.37)                      | 238 (9.37)                      | 238 (9.37)                      | 238 (9.37)                      |
| <b>Frame size</b>                                     |                                        | FSB                                    | FSB                             | FSB                             | FSC                             | FSC                             |
| <b>Weight, approx.</b>                                |                                        |                                        |                                 |                                 |                                 |                                 |
| • Without integrated line filter                      | kg (lb)                                | 2.9 (6.39)                             | 2.9 (6.39)                      | 3 (6.62)                        | 4.7 (10.4)                      | 4.8 (10.6)                      |
| • With integrated line filter                         | kg (lb)                                | 3.1 (6.84)                             | 3.1 (6.84)                      | 3.2 (7.06)                      | 5.3 (11.7)                      | 5.4 (11.9)                      |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  and the base-load current  $I_L$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at: <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load at rated power (based on  $I_{\text{rated}}$ ) for a line impedance corresponding to  $u_K = 1\%$ . The current values are specified on the rating plate of the Power Module.

<sup>5)</sup> The values apply with low-capacitance CY cables – the max. permissible motor cable length is 50 m (164 ft) (shielded) and 100 m (328 ft) (unshielded) as standard.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                      |                                        | PM240-2 Power Modules standard variant |                         |                         |                         |                         |                         |
|------------------------------------------------------|----------------------------------------|----------------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Without integrated line filter                       |                                        | 6SL3210-1PE23-8UL0                     | 6SL3210-1PE24-5UL0      | 6SL3210-1PE26-0UL0      | 6SL3210-1PE27-5UL0      | 6SL3210-1PE28-8UL0      | 6SL3210-1PE31-1UL0      |
| With integrated line filter class A                  |                                        | 6SL3210-1PE23-8AL0                     | 6SL3210-1PE24-5AL0      | 6SL3210-1PE26-0AL0      | 6SL3210-1PE27-5AL0      | 6SL3210-1PE28-8AL0      | 6SL3210-1PE31-1AL0      |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC         |                                        |                                        |                         |                         |                         |                         |                         |
| • Rated current $I_{rated}^{1)}$                     | A                                      | 38                                     | 45                      | 60                      | 75                      | 90                      | 110                     |
| • Base-load current $I_L^{1)}$                       | A                                      | 38                                     | 45                      | 60                      | 75                      | 90                      | 110                     |
| • Base-load current $I_H^{2)}$                       | A                                      | 32                                     | 38                      | 45                      | 60                      | 75                      | 90                      |
| • Maximum current $I_{max}$                          | A                                      | 64                                     | 76                      | 90                      | 120                     | 150                     | 180                     |
| <b>Rated power</b>                                   |                                        |                                        |                         |                         |                         |                         |                         |
| • Based on $I_L$                                     | kW (hp)                                | 18.5 (25)                              | 22 (30)                 | 30 (40)                 | 37 (50)                 | 45 (60)                 | 55 (75)                 |
| • Based on $I_H$                                     | kW (hp)                                | 15 (20)                                | 18.5 (25)               | 22 (30)                 | 30 (40)                 | 37 (50)                 | 45 (60)                 |
| <b>Rated pulse frequency</b>                         | kHz                                    | 4                                      | 4                       | 4                       | 4                       | 4                       | 4                       |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >97                                    | >97                     | >97                     | >97                     | >97                     | >97                     |
| <b>Power loss <sup>3)</sup></b><br>At rated current  |                                        |                                        |                         |                         |                         |                         |                         |
| • Without integrated line filter                     | kW                                     | 0.57                                   | 0.7                     | 0.82                    | 1.09                    | 1.29                    | 1.65                    |
| • With integrated line filter                        | kW                                     | 0.58                                   | 0.71                    | 0.83                    | 1.1                     | 1.3                     | 1.67                    |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.055 (1.94)                           | 0.055 (1.94)            | 0.055 (1.94)            | 0.055 (1.94)            | 0.083 (2.93)            | 0.083 (2.93)            |
| <b>Sound pressure level</b><br>$L_{pA}$ (1 m)        | dB                                     | 45 ... 65 <sup>4)</sup>                | 45 ... 65 <sup>4)</sup> | 45 ... 65 <sup>4)</sup> | 45 ... 65 <sup>4)</sup> | 44 ... 62 <sup>4)</sup> | 44 ... 62 <sup>4)</sup> |
| <b>Input current <sup>5)</sup></b>                   |                                        |                                        |                         |                         |                         |                         |                         |
| • Rated input current                                | A                                      | 36                                     | 42                      | 57                      | 70                      | 86                      | 104                     |
| • Based on $I_H$                                     | A                                      | 33                                     | 38                      | 47                      | 62                      | 78                      | 94                      |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | Screw terminals                        | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 10 ... 35                              | 10 ... 35               | 10 ... 35               | 10 ... 35               | 25 ... 70               | 25 ... 70               |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | Screw terminals                        | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 10 ... 35                              | 10 ... 35               | 10 ... 35               | 10 ... 35               | 25 ... 70               | 25 ... 70               |
| <b>PE connection</b>                                 |                                        | Screw terminals                        | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         |
| <b>Motor cable length, max.</b>                      |                                        |                                        |                         |                         |                         |                         |                         |
| • Shielded                                           | m (ft)                                 | 200 (656)                              | 200 (656)               | 200 (656)               | 200 (656)               | 200 (656)               | 200 (656)               |
| • Unshielded                                         | m (ft)                                 | 300 (984)                              | 300 (984)               | 300 (984)               | 300 (984)               | 300 (984)               | 300 (984)               |
| <b>Degree of protection</b>                          |                                        | IP20                                   | IP20                    | IP20                    | IP20                    | IP20                    | IP20                    |
| <b>Dimensions</b>                                    |                                        |                                        |                         |                         |                         |                         |                         |
| • Width                                              | mm (in)                                | 200 (7.87)                             | 200 (7.87)              | 200 (7.87)              | 200 (7.87)              | 275 (10.83)             | 275 (10.83)             |
| • Height                                             | mm (in)                                | 472 (18.58)                            | 472 (18.58)             | 472 (18.58)             | 472 (18.58)             | 551 (21.69)             | 551 (21.69)             |
| • Depth                                              |                                        |                                        |                         |                         |                         |                         |                         |
| - Without operator panel                             | mm (in)                                | 237 (9.33)                             | 237 (9.33)              | 237 (9.33)              | 237 (9.33)              | 237 (9.33)              | 237 (9.33)              |
| - With operator panel, max.                          | mm (in)                                | 268 (10.55)                            | 268 (10.55)             | 268 (10.55)             | 268 (10.55)             | 268 (10.55)             | 268 (10.55)             |
| <b>Frame size</b>                                    |                                        | FSD                                    | FSD                     | FSD                     | FSD                     | FSE                     | FSE                     |
| <b>Weight, approx.</b>                               |                                        |                                        |                         |                         |                         |                         |                         |
| • Without integrated line filter                     | kg (lb)                                | 16 (35.3)                              | 16 (35.3)               | 17 (37.5)               | 17 (37.5)               | 26 (57.3)               | 26 (57.3)               |
| • With integrated line filter                        | kg (lb)                                | 17.5 (38.6)                            | 17.5 (38.6)             | 18.5 (40.8)             | 18.5 (40.8)             | 28 (61.7)               | 28 (61.7)               |

<sup>1)</sup> The rated output current  $I_{rated}$  and the base-load current  $I_L$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at:  
<https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> Values dependent on ambient temperature and utilization.

<sup>5)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load at rated power (based on  $I_{rated}$ ) for a line impedance corresponding to  $u_K = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                      |                                        | PM240-2 Power Modules standard variant |                         |                         |                         |
|------------------------------------------------------|----------------------------------------|----------------------------------------|-------------------------|-------------------------|-------------------------|
| Without integrated line filter                       |                                        | 6SL3210-1PE31-5UL0                     | 6SL3210-1PE31-8UL0      | 6SL3210-1PE32-1UL0      | 6SL3210-1PE32-5UL0      |
| With integrated line filter class A                  |                                        | 6SL3210-1PE31-5AL0                     | 6SL3210-1PE31-8AL0      | 6SL3210-1PE32-1AL0      | 6SL3210-1PE32-5AL0      |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC         |                                        |                                        |                         |                         |                         |
| • Rated current $I_{\text{rated}}$ <sup>1)</sup>     | A                                      | 145                                    | 178                     | 205                     | 250                     |
| • Base-load current $I_L$ <sup>1)</sup>              | A                                      | 145                                    | 178                     | 205                     | 250                     |
| • Base-load current $I_H$ <sup>2)</sup>              | A                                      | 110                                    | 145                     | 178                     | 205                     |
| • Maximum current $I_{\text{max}}$                   | A                                      | 220                                    | 290                     | 356                     | 410                     |
| <b>Rated power</b>                                   |                                        |                                        |                         |                         |                         |
| • Based on $I_L$                                     | kW (hp)                                | 75 (100)                               | 90 (125)                | 110 (150)               | 132 (200)               |
| • Based on $I_H$                                     | kW (hp)                                | 55 (75)                                | 75 (100)                | 90 (125)                | 110 (150)               |
| <b>Rated pulse frequency</b>                         | kHz                                    | 2                                      | 2                       | 2                       | 2                       |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >97                                    | >97                     | >97                     | >97                     |
| <b>Power loss</b> <sup>3)</sup><br>At rated current  |                                        |                                        |                         |                         |                         |
| • Without integrated line filter                     | kW                                     | 1.91                                   | 2.46                    | 2.28                    | 2.98                    |
| • With integrated line filter                        | kW                                     | 1.93                                   | 2.48                    | 2.3                     | 3.02                    |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.153 (5.4)                            | 0.153 (5.4)             | 0.153 (5.4)             | 0.153 (5.4)             |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m) | dB                                     | 56 ... 68 <sup>4)</sup>                | 56 ... 68 <sup>4)</sup> | 56 ... 68 <sup>4)</sup> | 56 ... 68 <sup>4)</sup> |
| <b>Input current</b> <sup>5)</sup>                   |                                        |                                        |                         |                         |                         |
| • Rated input current                                | A                                      | 140                                    | 172                     | 198                     | 242                     |
| • Based on $I_H$                                     | A                                      | 117                                    | 154                     | 189                     | 218                     |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | M10 screw stud                         | M10 screw stud          | M10 screw stud          | M10 screw stud          |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 35 ... 2 × 120                         | 35 ... 2 × 120          | 35 ... 2 × 120          | 35 ... 2 × 120          |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | M10 screw stud                         | M10 screw stud          | M10 screw stud          | M10 screw stud          |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 35 ... 2 × 120                         | 35 ... 2 × 120          | 35 ... 2 × 120          | 35 ... 2 × 120          |
| <b>PE connection</b>                                 |                                        | M10 screw stud                         | M10 screw stud          | M10 screw stud          | M10 screw stud          |
| <b>Motor cable length, max.</b>                      |                                        |                                        |                         |                         |                         |
| • Shielded                                           | m (ft)                                 | 300 (984)                              | 300 (984)               | 300 (984)               | 300 (984)               |
| • Unshielded                                         | m (ft)                                 | 450 (1476)                             | 450 (1476)              | 450 (1476)              | 450 (1476)              |
| <b>Degree of protection</b>                          |                                        | IP20                                   | IP20                    | IP20                    | IP20                    |
| <b>Dimensions</b>                                    |                                        |                                        |                         |                         |                         |
| • Width                                              | mm (in)                                | 305 (12.01)                            | 305 (12.01)             | 305 (12.01)             | 305 (12.01)             |
| • Height                                             | mm (in)                                | 708 (27.87)                            | 708 (27.87)             | 708 (27.87)             | 708 (27.87)             |
| • Depth                                              |                                        |                                        |                         |                         |                         |
| - Without operator panel                             | mm (in)                                | 357 (14.06)                            | 357 (14.06)             | 357 (14.06)             | 357 (14.06)             |
| - With operator panel, max.                          | mm (in)                                | 388 (15.28)                            | 388 (15.28)             | 388 (15.28)             | 388 (15.28)             |
| <b>Frame size</b>                                    |                                        | FSF                                    | FSF                     | FSF                     | FSF                     |
| <b>Weight, approx.</b>                               |                                        |                                        |                         |                         |                         |
| • Without integrated line filter                     | kg (lb)                                | 57 (126)                               | 57 (126)                | 61 (135)                | 61 (135)                |
| • With integrated line filter                        | kg (lb)                                | 63 (139)                               | 63 (139)                | 65 (143)                | 65 (143)                |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  and the base-load current  $I_L$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at:  
<https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> Values dependent on ambient temperature and utilization.

<sup>5)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load at rated power (based on  $I_{\text{rated}}$ ) for a line impedance corresponding to  $u_K = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                      |                                        | PM240-2 Power Modules standard variant |                    |                    |
|------------------------------------------------------|----------------------------------------|----------------------------------------|--------------------|--------------------|
| With integrated line filter Category C2              |                                        | 6SL3210-1PE33-0AL0                     | 6SL3210-1PE33-7AL0 | 6SL3210-1PE34-8AL0 |
| With integrated line filter Category C3              |                                        | 6SL3210-1PE33-0CL0                     | 6SL3210-1PE33-7CL0 | 6SL3210-1PE34-8CL0 |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC         |                                        |                                        |                    |                    |
| • Rated current $I_{\text{rated}}$ <sup>1)</sup>     | A                                      | 302                                    | 370                | 477                |
| • Base-load current $I_L$ <sup>1)</sup>              | A                                      | 302                                    | 370                | 477                |
| • Base-load current $I_H$ <sup>2)</sup>              | A                                      | 250                                    | 302                | 370                |
| • Maximum current $I_{\text{max}}$                   | A                                      | 500                                    | 604                | 740                |
| <b>Rated power</b>                                   |                                        |                                        |                    |                    |
| • Based on $I_L$                                     | kW (hp)                                | 160 (250)                              | 200 (300)          | 250 (400)          |
| • Based on $I_H$                                     | kW (hp)                                | 132 (200)                              | 160 (250)          | 200 (300)          |
| <b>Rated pulse frequency</b>                         | kHz                                    | 2                                      | 2                  | 2                  |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >98                                    | >98                | >98                |
| <b>Power loss</b> <sup>3)</sup><br>at rated current  | kW                                     | 3.67                                   | 4.62               | 6.18               |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.21 (7.42)                            | 0.21 (7.42)        | 0.21 (7.42)        |
| <b>Sound pressure level</b><br>$L_{pA}$ (1 m)        | dB                                     | <74.7                                  | <74.7              | <74.7              |
| <b>Input current</b> <sup>4)</sup>                   |                                        |                                        |                    |                    |
| • Rated input current                                | A                                      | 300                                    | 365                | 470                |
| • Based on $I_H$                                     | A                                      | 275                                    | 330                | 400                |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | M10 screw stud                         | M10 screw stud     | M10 screw stud     |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 35 ... 2 × 185                         | 35 ... 2 × 185     | 35 ... 2 × 185     |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | M10 screw stud                         | M10 screw stud     | M10 screw stud     |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 35 ... 2 × 185                         | 35 ... 2 × 185     | 35 ... 2 × 185     |
| <b>PE connection</b>                                 |                                        | M10 screw stud                         | M10 screw stud     | M10 screw stud     |
| <b>Motor cable length, max.</b>                      |                                        |                                        |                    |                    |
| • Shielded                                           | m (ft)                                 | 300 (984)                              | 300 (984)          | 300 (984)          |
| • Unshielded                                         | m (ft)                                 | 450 (1476)                             | 450 (1476)         | 450 (1476)         |
| <b>Degree of protection</b>                          |                                        | IP20                                   | IP20               | IP20               |
| <b>Dimensions</b>                                    |                                        |                                        |                    |                    |
| • Width                                              | mm (in)                                | 305 (12.01)                            | 305 (12.01)        | 305 (12.01)        |
| • Height                                             | mm (in)                                | 1000 (39.37)                           | 1000 (39.37)       | 1000 (39.37)       |
| • Depth                                              |                                        |                                        |                    |                    |
| - Without operator panel                             | mm (in)                                | 357 (14.06)                            | 357 (14.06)        | 357 (14.06)        |
| - With operator panel                                | mm (in)                                | 388 (15.28)                            | 388 (15.28)        | 388 (15.28)        |
| <b>Frame size</b>                                    |                                        | FSG                                    | FSG                | FSG                |
| <b>Weight, approx.</b>                               |                                        |                                        |                    |                    |
| • With integrated line filter Category C2            | kg (lb)                                | 107 (236)                              | 114 (251)          | 122 (269)          |
| • With integrated line filter Category C3            | kg (lb)                                | 105 (231)                              | 113 (249)          | 120 (265)          |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  and the base-load current  $I_L$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at:  
<https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load at rated power (based on  $I_{\text{rated}}$ ) for a line impedance corresponding to  $u_K = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 500 ... 690 V 3 AC                      |                                        | PM240-2 Power Modules standard variant |                         |                         |                         |                         |                         |
|------------------------------------------------------|----------------------------------------|----------------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Without integrated line filter                       |                                        | 6SL3210-1PH21-4UL0                     | 6SL3210-1PH22-0UL0      | 6SL3210-1PH22-3UL0      | 6SL3210-1PH22-7UL0      | 6SL3210-1PH23-5UL0      | 6SL3210-1PH24-2UL0      |
| With integrated line filter class A                  |                                        | 6SL3210-1PH21-4AL0                     | 6SL3210-1PH22-0AL0      | 6SL3210-1PH22-3AL0      | 6SL3210-1PH22-7AL0      | 6SL3210-1PH23-5AL0      | 6SL3210-1PH24-2AL0      |
| <b>Output current</b><br>at 50 Hz 690 V 3 AC         |                                        |                                        |                         |                         |                         |                         |                         |
| • Rated current $I_{\text{rated}}^{1)}$              | A                                      | 14                                     | 19                      | 23                      | 27                      | 35                      | 42                      |
| • Base-load current $I_{\text{L}}^{1)}$              | A                                      | 14                                     | 19                      | 23                      | 27                      | 35                      | 42                      |
| • Base-load current $I_{\text{H}}^{2)}$              | A                                      | 11                                     | 14                      | 19                      | 23                      | 27                      | 35                      |
| • Maximum current $I_{\text{max}}$                   | A                                      | 22                                     | 29                      | 38                      | 46                      | 54                      | 70                      |
| <b>Rated power</b>                                   |                                        |                                        |                         |                         |                         |                         |                         |
| • Based on $I_{\text{L}}$                            | kW (hp)                                | 11 (10)                                | 15 (15)                 | 18.5 (20)               | 22 (25)                 | 30 (30)                 | 37 (40)                 |
| • Based on $I_{\text{H}}$                            | kW (hp)                                | 7.5 (7.5)                              | 11 (10)                 | 15 (15)                 | 18.5 (20)               | 22 (25)                 | 30 (30)                 |
| <b>Rated pulse frequency</b>                         | kHz                                    | 2                                      | 2                       | 2                       | 2                       | 2                       | 2                       |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >98                                    | >98                     | >98                     | >98                     | >98                     | >98                     |
| <b>Power loss <sup>3)</sup></b><br>At rated current  |                                        |                                        |                         |                         |                         |                         |                         |
| • Without integrated line filter                     | kW                                     | 0.35                                   | 0.44                    | 0.52                    | 0.6                     | 0.77                    | 0.93                    |
| • With integrated line filter                        | kW                                     | 0.35                                   | 0.45                    | 0.52                    | 0.6                     | 0.78                    | 0.94                    |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.055 (1.94)                           | 0.055 (1.94)            | 0.055 (1.94)            | 0.055 (1.94)            | 0.055 (1.94)            | 0.055 (1.94)            |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m) | dB                                     | 45 ... 65 <sup>4)</sup>                | 45 ... 65 <sup>4)</sup> | 45 ... 65 <sup>4)</sup> | 45 ... 65 <sup>4)</sup> | 45 ... 65 <sup>4)</sup> | 45 ... 65 <sup>4)</sup> |
| <b>Input current <sup>5)</sup></b>                   |                                        |                                        |                         |                         |                         |                         |                         |
| • Rated input current                                | A                                      | 14                                     | 18                      | 22                      | 25                      | 33                      | 40                      |
| • Based on $I_{\text{H}}$                            | A                                      | 11                                     | 14                      | 20                      | 24                      | 28                      | 36                      |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | Screw terminals                        | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 10 ... 35                              | 10 ... 35               | 10 ... 35               | 10 ... 35               | 10 ... 35               | 10 ... 35               |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | Screw terminals                        | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 10 ... 35                              | 10 ... 35               | 10 ... 35               | 10 ... 35               | 10 ... 35               | 10 ... 35               |
| <b>PE connection</b>                                 |                                        | Screw terminals                        | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         |
| <b>Motor cable length, max.</b>                      |                                        |                                        |                         |                         |                         |                         |                         |
| • Shielded                                           | m (ft)                                 | 200 (656)                              | 200 (656)               | 200 (656)               | 200 (656)               | 200 (656)               | 200 (656)               |
| • Unshielded                                         | m (ft)                                 | 300 (984)                              | 300 (984)               | 300 (984)               | 300 (984)               | 300 (984)               | 300 (984)               |
| <b>Degree of protection</b>                          |                                        | IP20                                   | IP20                    | IP20                    | IP20                    | IP20                    | IP20                    |
| <b>Dimensions</b>                                    |                                        |                                        |                         |                         |                         |                         |                         |
| • Width                                              | mm (in)                                | 200 (7.87)                             | 200 (7.87)              | 200 (7.87)              | 200 (7.87)              | 200 (7.87)              | 200 (7.87)              |
| • Height                                             | mm (in)                                | 472 (18.58)                            | 472 (18.58)             | 472 (18.58)             | 472 (18.58)             | 472 (18.58)             | 472 (18.58)             |
| • Depth                                              |                                        |                                        |                         |                         |                         |                         |                         |
| - Without operator panel                             | mm (in)                                | 237 (9.33)                             | 237 (9.33)              | 237 (9.33)              | 237 (9.33)              | 237 (9.33)              | 237 (9.33)              |
| - With operator panel, max.                          | mm (in)                                | 268 (10.55)                            | 268 (10.55)             | 268 (10.55)             | 268 (10.55)             | 268 (10.55)             | 268 (10.55)             |
| <b>Frame size</b>                                    |                                        | FSD                                    | FSD                     | FSD                     | FSD                     | FSD                     | FSD                     |
| <b>Weight, approx.</b>                               |                                        |                                        |                         |                         |                         |                         |                         |
| • Without integrated line filter                     | kg (lb)                                | 17 (37.5)                              | 17 (37.5)               | 17 (37.5)               | 17 (37.5)               | 17 (37.5)               | 17 (37.5)               |
| • With integrated line filter                        | kg (lb)                                | 18.5 (40.8)                            | 18.5 (40.8)             | 18.5 (40.8)             | 18.5 (40.8)             | 18.5 (40.8)             | 18.5 (40.8)             |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  and the base-load current  $I_{\text{L}}$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_{\text{H}}$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at:  
<https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> Values dependent on ambient temperature and utilization.

<sup>5)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load at rated power (based on  $I_{\text{rated}}$ ) for a line impedance corresponding to  $u_{\text{K}} = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 500 ... 690 V 3 AC                      |                                        | PM240-2 Power Modules standard variant |                         |                         |                         |                         |                         |
|------------------------------------------------------|----------------------------------------|----------------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Without integrated line filter                       |                                        | 6SL3210-1PH25-2UL0                     | 6SL3210-1PH26-2UL0      | 6SL3210-1PH28-0UL0      | 6SL3210-1PH31-0UL0      | 6SL3210-1PH31-2UL0      | 6SL3210-1PH31-4UL0      |
| With integrated line filter class A                  |                                        | 6SL3210-1PH25-2AL0                     | 6SL3210-1PH26-2AL0      | 6SL3210-1PH28-0AL0      | 6SL3210-1PH31-0AL0      | 6SL3210-1PH31-2AL0      | 6SL3210-1PH31-4AL0      |
| <b>Output current</b><br>at 50 Hz 690 V 3 AC         |                                        |                                        |                         |                         |                         |                         |                         |
| • Rated current $I_{\text{rated}}^{1)}$              | A                                      | 52                                     | 62                      | 80                      | 100                     | 115                     | 142                     |
| • Base-load current $I_{\text{L}}^{1)}$              | A                                      | 52                                     | 62                      | 80                      | 100                     | 115                     | 142                     |
| • Base-load current $I_{\text{H}}^{2)}$              | A                                      | 42                                     | 52                      | 62                      | 80                      | 100                     | 115                     |
| • Maximum current $I_{\text{max}}$                   | A                                      | 84                                     | 104                     | 124                     | 160                     | 200                     | 230                     |
| <b>Rated power</b>                                   |                                        |                                        |                         |                         |                         |                         |                         |
| • Based on $I_{\text{L}}$                            | kW (hp)                                | 45 (50)                                | 55 (60)                 | 75 (75)                 | 90 (100)                | 110 (100)               | 132 (125)               |
| • Based on $I_{\text{H}}$                            | kW (hp)                                | 37 (40)                                | 45 (50)                 | 55 (60)                 | 75 (75)                 | 90 (100)                | 110 (100)               |
| <b>Rated pulse frequency</b>                         | kHz                                    | 2                                      | 2                       | 2                       | 2                       | 2                       | 2                       |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >98                                    | >98                     | >98                     | >98                     | >98                     | >98                     |
| <b>Power loss <sup>3)</sup></b><br>At rated current  |                                        |                                        |                         |                         |                         |                         |                         |
| • Without integrated line filter                     | kW                                     | 1.07                                   | 1.3                     | 1.37                    | 1.74                    | 1.95                    | 2.48                    |
| • With integrated line filter                        | kW                                     | 1.08                                   | 1.31                    | 1.38                    | 1.76                    | 1.97                    | 2.51                    |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.083 (2.93)                           | 0.083 (2.93)            | 0.153 (5.4)             | 0.153 (5.4)             | 0.153 (5.4)             | 0.153 (5.4)             |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m) | dB                                     | 44 ... 62 <sup>4)</sup>                | 44 ... 62 <sup>4)</sup> | 56 ... 68 <sup>4)</sup> | 56 ... 68 <sup>4)</sup> | 56 ... 68 <sup>4)</sup> | 56 ... 68 <sup>4)</sup> |
| <b>Input current <sup>5)</sup></b>                   |                                        |                                        |                         |                         |                         |                         |                         |
| • Rated input current                                | A                                      | 50                                     | 59                      | 78                      | 97                      | 111                     | 137                     |
| • Based on $I_{\text{H}}$                            | A                                      | 44                                     | 54                      | 66                      | 85                      | 106                     | 122                     |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | Screw terminals                        | Screw terminals         | M10 screw stud          | M10 screw stud          | M10 screw stud          | M10 screw stud          |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 25 ... 70                              | 25 ... 70               | 35 ... 2 × 120          | 35 ... 2 × 120          | 35 ... 2 × 120          | 35 ... 2 × 120          |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | Screw terminals                        | Screw terminals         | M10 screw stud          | M10 screw stud          | M10 screw stud          | M10 screw stud          |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 25 ... 70                              | 25 ... 70               | 35 ... 2 × 120          | 35 ... 2 × 120          | 35 ... 2 × 120          | 35 ... 2 × 120          |
| <b>PE connection</b>                                 |                                        | Screw terminals                        | Screw terminals         | M10 screw stud          | M10 screw stud          | M10 screw stud          | M10 screw stud          |
| <b>Motor cable length, max.</b>                      |                                        |                                        |                         |                         |                         |                         |                         |
| • Shielded                                           | m (ft)                                 | 200 (656)                              | 200 (656)               | 300 (984)               | 300 (984)               | 300 (984)               | 300 (984)               |
| • Unshielded                                         | m (ft)                                 | 300 (984)                              | 300 (984)               | 450 (1476)              | 450 (1476)              | 450 (1476)              | 450 (1476)              |
| <b>Degree of protection</b>                          |                                        | IP20                                   | IP20                    | IP20                    | IP20                    | IP20                    | IP20                    |
| <b>Dimensions</b>                                    |                                        |                                        |                         |                         |                         |                         |                         |
| • Width                                              | mm (in)                                | 275 (10.83)                            | 275 (10.83)             | 305 (12.01)             | 305 (12.01)             | 305 (12.01)             | 305 (12.01)             |
| • Height                                             | mm (in)                                | 551 (21.69)                            | 551 (21.69)             | 708 (27.87)             | 708 (27.87)             | 708 (27.87)             | 708 (27.87)             |
| • Depth                                              |                                        |                                        |                         |                         |                         |                         |                         |
| - Without operator panel                             | mm (in)                                | 237 (9.33)                             | 237 (9.33)              | 357 (14.06)             | 357 (14.06)             | 357 (14.06)             | 357 (14.06)             |
| - With operator panel, max.                          | mm (in)                                | 268 (10.55)                            | 268 (10.55)             | 388 (15.28)             | 388 (15.28)             | 388 (15.28)             | 388 (15.28)             |
| <b>Frame size</b>                                    |                                        | FSE                                    | FSE                     | FSF                     | FSF                     | FSF                     | FSF                     |
| <b>Weight, approx.</b>                               |                                        |                                        |                         |                         |                         |                         |                         |
| • Without integrated line filter                     | kg (lb)                                | 26 (57.3)                              | 26 (57.3)               | 60 (132)                | 60 (132)                | 60 (132)                | 60 (132)                |
| • With integrated line filter                        | kg (lb)                                | 28 (61.7)                              | 28 (61.7)               | 64 (141)                | 64 (141)                | 64 (141)                | 64 (141)                |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  and the base-load current  $I_{\text{L}}$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_{\text{H}}$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at:  
<https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> Values dependent on ambient temperature and utilization.

<sup>5)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load at rated power (based on  $I_{\text{rated}}$ ) for a line impedance corresponding to  $u_{\text{K}} = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 500 ... 690 V 3 AC                      |                                        | PM240-2 Power Modules standard variant |                    |                    |
|------------------------------------------------------|----------------------------------------|----------------------------------------|--------------------|--------------------|
| With integrated line filter Category C3              |                                        | 6SL3210-1PH31-7CLO                     | 6SL3210-1PH32-1CLO | 6SL3210-1PH32-5CLO |
| <b>Output current</b><br>at 50 Hz 690 V 3 AC         |                                        |                                        |                    |                    |
| • Rated current $I_{rated}^{1)}$                     | A                                      | 171                                    | 208                | 250                |
| • Base-load current $I_L^{1)}$                       | A                                      | 171                                    | 208                | 250                |
| • Base-load current $I_H^{2)}$                       | A                                      | 144                                    | 171                | 208                |
| • Maximum current $I_{max}$                          | A                                      | 288                                    | 342                | 416                |
| <b>Rated power</b>                                   |                                        |                                        |                    |                    |
| • Based on $I_L$                                     | kW (hp)                                | 160 (150)                              | 200 (200)          | 250 (250)          |
| • Based on $I_H$                                     | kW (hp)                                | 132 (150)                              | 160 (150)          | 200 (200)          |
| <b>Rated pulse frequency</b>                         | kHz                                    | 2                                      | 2                  | 2                  |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >98                                    | >98                | >98                |
| <b>Power loss <sup>3)</sup></b><br>at rated current  | kW                                     | 2.94                                   | 3.7                | 4.64               |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.21 (7.42)                            | 0.21 (7.42)        | 0.21 (7.42)        |
| <b>Sound pressure level</b><br>$L_{pA}$ (1 m)        | dB                                     | <74.7                                  | <74.7              | <74.7              |
| <b>Input current <sup>4)</sup></b>                   |                                        |                                        |                    |                    |
| • Rated input current                                | A                                      | 170                                    | 205                | 250                |
| • Based on $I_H$                                     | A                                      | 160                                    | 185                | 225                |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | M10 screw stud                         | M10 screw stud     | M10 screw stud     |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 35 ... 2 × 185                         | 35 ... 2 × 185     | 35 ... 2 × 185     |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | M10 screw stud                         | M10 screw stud     | M10 screw stud     |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 35 ... 2 × 185                         | 35 ... 2 × 185     | 35 ... 2 × 185     |
| <b>PE connection</b>                                 |                                        | M10 screw stud                         | M10 screw stud     | M10 screw stud     |
| <b>Motor cable length, max.</b>                      |                                        |                                        |                    |                    |
| • Shielded                                           | m (ft)                                 | 300 (984)                              | 300 (984)          | 300 (984)          |
| • Unshielded                                         | m (ft)                                 | 450 (1476)                             | 450 (1476)         | 450 (1476)         |
| <b>Degree of protection</b>                          |                                        | IP20                                   | IP20               | IP20               |
| <b>Dimensions</b>                                    |                                        |                                        |                    |                    |
| • Width                                              | mm (in)                                | 305 (12.01)                            | 305 (12.01)        | 305 (12.01)        |
| • Height                                             | mm (in)                                | 1000 (39.37)                           | 1000 (39.37)       | 1000 (39.37)       |
| • Depth                                              |                                        |                                        |                    |                    |
| - Without operator panel                             | mm (in)                                | 357 (14.06)                            | 357 (14.06)        | 357 (14.06)        |
| - With operator panel                                | mm (in)                                | 388 (15.28)                            | 388 (15.28)        | 388 (15.28)        |
| <b>Frame size</b>                                    |                                        | FSG                                    | FSG                | FSG                |
| <b>Weight, approx.</b>                               | kg (lb)                                | 114 (251)                              | 114 (251)          | 114 (251)          |

<sup>1)</sup> The rated output current  $I_{rated}$  and the base-load current  $I_L$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at:  
<https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load at rated power (based on  $I_{rated}$ ) for a line impedance corresponding to  $u_K = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

#### PM240-2 Power Modules push-through variant

| Line voltage 200 ... 240 V 1 AC/3 AC    |                                        | PM240-2 Power Modules push-through variant |                          |                          |
|-----------------------------------------|----------------------------------------|--------------------------------------------|--------------------------|--------------------------|
| Without integrated line filter          |                                        | 6SL3211-1PB13-8UL0                         | 6SL3211-1PB21-0UL0       | 6SL3211-1PB21-8UL0       |
| With integrated line filter class A     |                                        | 6SL3211-1PB13-8AL0                         | 6SL3211-1PB21-0AL0       | 6SL3211-1PB21-8AL0       |
| <b>Output current</b>                   |                                        |                                            |                          |                          |
| At 50 Hz 230 V 1 AC/3 AC                |                                        |                                            |                          |                          |
| • Rated current $I_{\text{rated}}^{1)}$ | A                                      | 4.2                                        | 10.4                     | 17.5                     |
| • Base-load current $I_{\text{L}}^{1)}$ | A                                      | 4.2                                        | 10.4                     | 17.5                     |
| • Base-load current $I_{\text{H}}^{2)}$ | A                                      | 3.2                                        | 7.4                      | 13.6                     |
| • Maximum current $I_{\text{max}}$      | A                                      | 6.4                                        | 15.6                     | 27.2                     |
| <b>Rated power</b>                      |                                        |                                            |                          |                          |
| • Based on $I_{\text{L}}$               | kW (hp)                                | 0.75 (1)                                   | 2.2 (3)                  | 4 (5)                    |
| • Based on $I_{\text{H}}$               | kW (hp)                                | 0.55 (0.75)                                | 1.5 (2)                  | 3 (4)                    |
| <b>Rated pulse frequency</b>            | kHz                                    | 4                                          | 4                        | 4                        |
| <b>Efficiency <math>\eta</math></b>     | %                                      | >96                                        | >96                      | >96                      |
| <b>Power loss <sup>3)</sup></b>         | kW                                     | 0.04                                       | 0.12                     | 0.18                     |
| At rated current                        |                                        |                                            |                          |                          |
| <b>Cooling air requirement</b>          | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.005 (0.18)                               | 0.0092 (0.325)           | 0.0185 (0.65)            |
| <b>Sound pressure level</b>             |                                        |                                            |                          |                          |
| $L_{\text{pA}}$ (1 m)                   | dB                                     | <56                                        | <62                      | <65                      |
| <b>Input current <sup>4)</sup></b>      |                                        |                                            |                          |                          |
| • Rated input current 1 AC/3 AC         | A                                      | 9.6/5.5                                    | 24/13.6                  | 43/22.8                  |
| • Based on $I_{\text{H}}$ 1 AC/3 AC     | A                                      | 8.4/4.2                                    | 20.9/9.7                 | 37.5/17.7                |
| <b>Line supply connection</b>           |                                        |                                            |                          |                          |
| U1/L1, V1/L2, W1/L3                     |                                        | Screw terminals, plug-in                   | Screw terminals, plug-in | Screw terminals, plug-in |
| • Conductor cross-section               | mm <sup>2</sup>                        | 1.5 ... 2.5                                | 1.5 ... 6                | 6 ... 16                 |
| <b>Motor connection</b>                 |                                        |                                            |                          |                          |
| U2, V2, W2                              |                                        | Screw terminals, plug-in                   | Screw terminals, plug-in | Screw terminals, plug-in |
| • Conductor cross-section               | mm <sup>2</sup>                        | 1.5 ... 2.5                                | 1.5 ... 6                | 6 ... 16                 |
| <b>Motor cable length, max.</b>         |                                        |                                            |                          |                          |
| • Shielded                              | m (ft)                                 | 150 (492)                                  | 150 (492)                | 150 (492)                |
| • Unshielded                            | m (ft)                                 | 150 (492)                                  | 150 (492)                | 150 (492)                |
| <b>Degree of protection</b>             |                                        | IP20                                       | IP20                     | IP20                     |
| <b>Dimensions</b>                       |                                        |                                            |                          |                          |
| • Width                                 | mm (in)                                | 126 (4.96)                                 | 154 (6.06)               | 200 (7.87)               |
| • Height                                | mm (in)                                | 238 (9.37)                                 | 345 (13.58)              | 411 (16.18)              |
| • Depth                                 |                                        |                                            |                          |                          |
| - Without operator panel                | mm (in)                                | 171 (6.73)                                 | 171 (6.73)               | 171 (6.73)               |
| - With operator panel, max.             | mm (in)                                | 244 (9.61)                                 | 244 (9.61)               | 244 (9.61)               |
| <b>Frame size</b>                       |                                        | FSA                                        | FSB                      | FSC                      |
| <b>Weight, approx.</b>                  |                                        |                                            |                          |                          |
| • Without integrated line filter        | kg (lb)                                | 1.8 (3.97)                                 | 3.4 (7.50)               | 5.9 (13.0)               |
| • With integrated line filter           | kg (lb)                                | 2 (4.41)                                   | 3.7 (8.16)               | 6.2 (13.7)               |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  and the base-load current  $I_{\text{L}}$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_{\text{H}}$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at:  
<https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance and applies for a line impedance corresponding to  $u_{\text{K}} = 1\%$ . The rated input currents apply for a load at rated power (based on  $I_{\text{rated}}$ ) – these current values are specified on the rating plate.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 200 ... 240 V 3 AC                      |                                        | PM240-2 Power Modules push-through variant |                         |                         |
|------------------------------------------------------|----------------------------------------|--------------------------------------------|-------------------------|-------------------------|
| Without integrated line filter                       |                                        | 6SL3210-1PC26-8UL0                         | 6SL3211-1PC31-1UL0      | 6SL3211-1PC31-8UL0      |
| With integrated line filter class A                  |                                        | –                                          | –                       | –                       |
| <b>Output current</b><br>at 50 Hz 230 V 3 AC         |                                        |                                            |                         |                         |
| • Rated current $I_{rated}^{1)}$                     | A                                      | 68                                         | 104                     | 178                     |
| • Base-load current $I_L^{1)}$                       | A                                      | 68                                         | 104                     | 178                     |
| • Base-load current $I_H^{2)}$                       | A                                      | 54                                         | 80                      | 154                     |
| • Maximum current $I_{max}$                          | A                                      | 108                                        | 160                     | 308                     |
| <b>Rated power</b>                                   |                                        |                                            |                         |                         |
| • Based on $I_L$                                     | kW (hp)                                | 18.5 (25)                                  | 30 (40)                 | 55 (75)                 |
| • Based on $I_H$                                     | kW (hp)                                | 15 (20)                                    | 22 (30)                 | 45 (60)                 |
| <b>Rated pulse frequency</b>                         | kHz                                    | 4                                          | 4                       | 4                       |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >97                                        | >97                     | >97                     |
| <b>Power loss <sup>3)</sup></b><br>at rated current  | kW                                     | 0.82                                       | 1.28                    | 2.09                    |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.055 (1.94)                               | 0.083 (2.93)            | 0.153 (5.40)            |
| <b>Sound pressure level</b><br>$L_{pA}$ (1 m)        | dB                                     | 45 ... 65 <sup>4)</sup>                    | 44 ... 62 <sup>4)</sup> | 56 ... 68 <sup>4)</sup> |
| <b>Input current <sup>5)</sup></b>                   |                                        |                                            |                         |                         |
| • Rated input current                                | A                                      | 64                                         | 98                      | 172                     |
| • Based on $I_H$                                     | A                                      | 56                                         | 83                      | 164                     |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | Screw terminals                            | Screw terminals         | M10 screw stud          |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 10 ... 35                                  | 25 ... 70               | 35 ... 2 × 120          |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | Screw terminals                            | Screw terminals         | M10 screw stud          |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 10 ... 35                                  | 25 ... 70               | 35 ... 2 × 120          |
| <b>PE connection</b>                                 |                                        | Screw terminals                            | Screw terminals         | M10 screw stud          |
| <b>Motor cable length, max.</b>                      |                                        |                                            |                         |                         |
| • Shielded                                           | m (ft)                                 | 200 (656)                                  | 200 (656)               | 300 (984)               |
| • Unshielded                                         | m (ft)                                 | 300 (984)                                  | 300 (984)               | 450 (1476)              |
| <b>Degree of protection</b>                          |                                        | IP20                                       | IP20                    | IP20                    |
| <b>Dimensions</b>                                    |                                        |                                            |                         |                         |
| • Width                                              | mm (in)                                | 275 (10.83)                                | 354 (13.94)             | 384 (15.12)             |
| • Height                                             | mm (in)                                | 517 (20.35)                                | 615 (24.21)             | 785 (30.91)             |
| • Depth                                              |                                        |                                            |                         |                         |
| - Without operator panel                             | mm (in)                                | 238.5 (9.39)                               | 238.5 (9.39)            | 358 (14.09)             |
| - With operator panel, max.                          | mm (in)                                | 268 (10.55)                                | 268 (10.55)             | 388 (15.28)             |
| <b>Frame size</b>                                    |                                        | FSD                                        | FSE                     | FSF                     |
| <b>Weight, approx.</b>                               |                                        |                                            |                         |                         |
| • Without integrated line filter                     | kg (lb)                                | 19.5 (43.0)                                | 29 (63.9)               | 60 (132)                |
| • With integrated line filter                        | kg (lb)                                | –                                          | –                       | –                       |

<sup>1)</sup> The rated output current  $I_{rated}$  and the base-load current  $I_L$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at:  
<https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> Values dependent on ambient temperature and utilization.

<sup>5)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load at rated power (based on  $I_{rated}$ ) for a line impedance corresponding to  $u_K = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                       |                                        | PM240-2 Power Modules push-through variant |                                 |                                 |                         |                         |                         |
|-------------------------------------------------------|----------------------------------------|--------------------------------------------|---------------------------------|---------------------------------|-------------------------|-------------------------|-------------------------|
| Without integrated line filter                        |                                        | 6SL3211-1PE18-0UL1                         | 6SL3211-1PE21-8ULO              | 6SL3211-1PE23-3ULO              | 6SL3211-1PE27-5ULO      | 6SL3211-1PE31-1ULO      | 6SL3211-1PE32-5ULO      |
| With integrated line filter class A                   |                                        | 6SL3211-1PE18-0AL1                         | 6SL3211-1PE21-8ALO              | 6SL3211-1PE23-3ALO              | 6SL3211-1PE27-5ALO      | 6SL3211-1PE31-1ALO      | 6SL3211-1PE32-5ALO      |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC          |                                        |                                            |                                 |                                 |                         |                         |                         |
| • Rated current $I_{\text{rated}}$ <sup>1)</sup>      | A                                      | 7.7                                        | 18                              | 32                              | 75                      | 110                     | 250                     |
| • Base-load current $I_{\text{L}}$ <sup>1)</sup>      | A                                      | 7.7                                        | 18                              | 32                              | 75                      | 110                     | 250                     |
| • Base-load current $I_{\text{H}}$ <sup>2)</sup>      | A                                      | 5.9                                        | 13.2                            | 26                              | 60                      | 90                      | 205                     |
| • Maximum current $I_{\text{max}}$                    | A                                      | 11.8                                       | 27                              | 52                              | 120                     | 180                     | 410                     |
| <b>Rated power</b>                                    |                                        |                                            |                                 |                                 |                         |                         |                         |
| • Based on $I_{\text{L}}$                             | kW (hp)                                | 3 (4)                                      | 7.5 (10)                        | 15 (20)                         | 37 (50)                 | 55 (75)                 | 132 (200)               |
| • Based on $I_{\text{H}}$                             | kW (hp)                                | 2.2 (7.5)                                  | 5.5 (7.5)                       | 11 (15)                         | 30 (40)                 | 45 (60)                 | 110 (150)               |
| <b>Rated pulse frequency</b>                          | kHz                                    | 4                                          | 4                               | 4                               | 4                       | 4                       | 2                       |
| <b>Efficiency <math>\eta</math></b>                   | %                                      | >96                                        | >97                             | >97                             | >97                     | >97                     | >97                     |
| <b>Power loss</b> <sup>3)</sup><br>At rated current   | kW                                     | 0.12                                       | 0.2                             | 0.37                            | 1.09                    | 1.65                    | 2.98                    |
| <b>Cooling air requirement</b>                        | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.007 (0.25)                               | 0.0092 (0.325)                  | 0.0185 (0.65)                   | 0.055 (1.94)            | 0.083 (2.93)            | 0.153 (5.40)            |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m)  | dB                                     | <56                                        | <62                             | <65                             | 45 ... 65 <sup>4)</sup> | 44 ... 62 <sup>4)</sup> | 56 ... 68 <sup>4)</sup> |
| <b>Input current</b> <sup>4)</sup>                    |                                        |                                            |                                 |                                 |                         |                         |                         |
| • Rated input current                                 | A                                      | 10.1                                       | 22.2                            | 39.9                            | 70                      | 104                     | 242                     |
| • Based on $I_{\text{H}}$                             | A                                      | 8.8                                        | 19.8                            | 36                              | 62                      | 94                      | 218                     |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3  |                                        | Screw terminals, plug-in                   | Screw terminals, plug-in        | Screw terminals, plug-in        | Screw terminals         | Screw terminals         | M10 screw stud          |
| • Conductor cross-section                             | mm <sup>2</sup>                        | 1.5 ... 2.5                                | 1.5 ... 6                       | 6 ... 16                        | 10 ... 35               | 25 ... 70               | 35 ... 2 × 120          |
| <b>Motor connection</b><br>U2, V2, W2                 |                                        | Screw terminals, plug-in                   | Screw terminals, plug-in        | Screw terminals, plug-in        | Screw terminals         | Screw terminals         | M10 screw stud          |
| • Conductor cross-section                             | mm <sup>2</sup>                        | 1.5 ... 2.5                                | 1.5 ... 6                       | 6 ... 16                        | 10 ... 35               | 25 ... 70               | 35 ... 2 × 120          |
| <b>Motor cable length, max.</b>                       |                                        |                                            |                                 |                                 |                         |                         |                         |
| • Without filter, shielded/unshielded                 | m (ft)                                 | 150/150 (492/492)                          | 150/150 (492/492)               | 150/150 (492/492)               | 200 (656)               | 200 (656)               | 300 (984)               |
| • With integrated filter class A, shielded/unshielded | m (ft)                                 | 50/100 (164/328)                           | 100/100 (328/328) <sup>5)</sup> | 150/150 (492/492) <sup>5)</sup> | 300 (984)               | 300 (984)               | 450 (1476)              |
| <b>Degree of protection</b>                           |                                        | IP20                                       | IP20                            | IP20                            | IP20                    | IP20                    | IP20                    |
| <b>Dimensions</b>                                     |                                        |                                            |                                 |                                 |                         |                         |                         |
| • Width                                               | mm (in)                                | 126 (4.96)                                 | 154 (6.06)                      | 200 (7.87)                      | 275 (10.83)             | 354 (13.94)             | 384 (15.12)             |
| • Height                                              | mm (in)                                | 238 (9.37)                                 | 345 (13.58)                     | 411 (16.18)                     | 517 (20.35)             | 615 (24.21)             | 785 (30.91)             |
| • Depth                                               |                                        |                                            |                                 |                                 |                         |                         |                         |
| - Without operator panel                              | mm (in)                                | 171 (6.73)                                 | 171 (6.73)                      | 171 (6.73)                      | 238.5 (9.39)            | 238.5 (9.39)            | 358 (14.09)             |
| - With operator panel, max.                           | mm (in)                                | 244 (9.61)                                 | 244 (9.61)                      | 244 (9.61)                      | 268 (10.55)             | 268 (10.55)             | 388 (15.28)             |
| <b>Frame size</b>                                     |                                        | FSA                                        | FSB                             | FSC                             | FSD                     | FSE                     | FSF                     |
| <b>Weight, approx.</b>                                |                                        |                                            |                                 |                                 |                         |                         |                         |
| • Without integrated line filter                      | kg (lb)                                | 1.8 (3.97)                                 | 3.6 (7.94)                      | 5.8 (12.8)                      | 20 (44.1)               | 30.5 (67.2)             | 63.5 (85.2)             |
| • With integrated line filter                         | kg (lb)                                | 2 (4.41)                                   | 3.9 (8.60)                      | 6.3 (13.9)                      | 21.5 (47.4)             | 32 (70.5)               | 68 (150)                |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  and the base-load current  $I_{\text{L}}$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_{\text{H}}$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at: <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance and applies for a line impedance corresponding to  $u_{\text{K}} = 1\%$ . The rated input currents apply for a load at rated power (based on  $I_{\text{rated}}$ ) – these current values are specified on the rating plate.

<sup>5)</sup> The values apply with low-capacitance CY cables – the max. permissible motor cable length is 50 m (164 ft) (shielded) and 100 m (328 ft) (unshielded) as standard.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

#### PM250 Power Modules

| Line voltage 380 ... 480 V 3 AC                      |                                        | PM250 Power Modules      |                          |                          |
|------------------------------------------------------|----------------------------------------|--------------------------|--------------------------|--------------------------|
| With integrated line filter                          |                                        | 6SL3225-0BE25-5AA1       | 6SL3225-0BE27-5AA1       | 6SL3225-0BE31-1AA1       |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC         |                                        |                          |                          |                          |
| • Rated current $I_{\text{rated}}$ <sup>1)</sup>     | A                                      | 18                       | 25                       | 32                       |
| • Base-load current $I_{\text{L}}$ <sup>1)</sup>     | A                                      | 18                       | 25                       | 32                       |
| • Base-load current $I_{\text{H}}$ <sup>2)</sup>     | A                                      | 13.2                     | 19                       | 26                       |
| • Maximum current $I_{\text{max}}$                   | A                                      | 26.4                     | 38                       | 52                       |
| <b>Rated power</b>                                   |                                        |                          |                          |                          |
| • Based on $I_{\text{L}}$                            | kW (hp)                                | 7.5 (10)                 | 11 (15)                  | 15 (20)                  |
| • Based on $I_{\text{H}}$                            | kW (hp)                                | 5.5 (7.5)                | 7.5 (10)                 | 11 (15)                  |
| <b>Rated pulse frequency</b>                         | kHz                                    | 4                        | 4                        | 4                        |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | 95                       | 95                       | 95                       |
| <b>Power loss</b> <sup>3)</sup><br>At rated current  | kW                                     | 0.298                    | 0.488                    | 0.472                    |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.038 (1.34)             | 0.038 (1.34)             | 0.038 (1.34)             |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m) | dB                                     | <60                      | <60                      | <60                      |
| <b>Input current</b> <sup>4)</sup>                   |                                        |                          |                          |                          |
| • Rated input current                                | A                                      | 18                       | 25                       | 32                       |
| • Based on $I_{\text{H}}$                            | A                                      | 13.2                     | 19                       | 26                       |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | Screw terminals          | Screw terminals          | Screw terminals          |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 2.5 ... 10               | 2.5 ... 10               | 2.5 ... 10               |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | Screw terminals          | Screw terminals          | Screw terminals          |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 2.5 ... 10               | 2.5 ... 10               | 2.5 ... 10               |
| <b>PE connection</b>                                 |                                        | On housing with M5 screw | On housing with M5 screw | On housing with M5 screw |
| <b>Motor cable length, max.</b>                      |                                        |                          |                          |                          |
| • Shielded                                           | m (ft)                                 | 25 (82)                  | 25 (82)                  | 25 (82)                  |
| • Unshielded                                         | m (ft)                                 | 100 (328)                | 100 (328)                | 100 (328)                |
| <b>Degree of protection</b>                          |                                        | IP20                     | IP20                     | IP20                     |
| <b>Dimensions</b>                                    |                                        |                          |                          |                          |
| • Width                                              | mm (in)                                | 189 (7.44)               | 189 (7.44)               | 189 (7.44)               |
| • Height                                             | mm (in)                                | 334 (13.15)              | 334 (13.15)              | 334 (13.15)              |
| • Depth                                              |                                        |                          |                          |                          |
| - Without operator panel                             | mm (in)                                | 185 (7.28)               | 185 (7.28)               | 185 (7.28)               |
| - With operator panel, max.                          | mm (in)                                | 258 (10.16)              | 258 (10.16)              | 258 (10.16)              |
| <b>Frame size</b>                                    |                                        | FSC                      | FSC                      | FSC                      |
| <b>Weight, approx.</b>                               | kg (lb)                                | 7.5 (16.5)               | 7.5 (16.5)               | 7.5 (16.5)               |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  and the base-load current  $I_{\text{L}}$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_{\text{H}}$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at:  
<https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance and applies for a line impedance corresponding to  $u_{\text{K}} = 1\%$ . The rated input currents apply for a load at rated power (based on  $I_{\text{rated}}$ ) – these current values are specified on the rating plate.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                      |                                        | PM250 Power Modules      |                          |                          |
|------------------------------------------------------|----------------------------------------|--------------------------|--------------------------|--------------------------|
| Without integrated line filter                       |                                        | 6SL3225-0BE31-5UA0       | 6SL3225-0BE31-8UA0       | 6SL3225-0BE32-2UA0       |
| With integrated line filter                          |                                        | 6SL3225-0BE31-5AA0       | 6SL3225-0BE31-8AA0       | 6SL3225-0BE32-2AA0       |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC         |                                        |                          |                          |                          |
| • Rated current $I_{\text{rated}}$ <sup>1)</sup>     | A                                      | 38                       | 45                       | 60                       |
| • Base-load current $I_L$ <sup>1)</sup>              | A                                      | 38                       | 45                       | 60                       |
| • Base-load current $I_H$ <sup>2)</sup>              | A                                      | 32                       | 38                       | 45                       |
| • Maximum current $I_{\text{max}}$                   | A                                      | 64                       | 76                       | 90                       |
| <b>Rated power</b>                                   |                                        |                          |                          |                          |
| • Based on $I_L$                                     | kW (hp)                                | 18.5 (25)                | 22 (30)                  | 30 (40)                  |
| • Based on $I_H$                                     | kW (hp)                                | 15 (20)                  | 18.5 (25)                | 22 (30)                  |
| <b>Rated pulse frequency</b>                         | kHz                                    | 4                        | 4                        | 4                        |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >97                      | >97                      | >97                      |
| <b>Power loss</b> <sup>3)</sup><br>At rated current  | kW                                     | 0.576                    | 0.693                    | 0.918                    |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.022 (0.78)             | 0.022 (0.78)             | 0.039 (1.38)             |
| <b>Sound pressure level</b><br>$L_{pA}$ (1 m)        | dB                                     | <60                      | <60                      | <61                      |
| <b>Input current</b> <sup>4)</sup>                   |                                        |                          |                          |                          |
| • Rated input current                                | A                                      | 36                       | 42                       | 56                       |
| • Based on $I_H$                                     | A                                      | 30                       | 36                       | 42                       |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | M6 screw studs           | M6 screw studs           | M6 screw studs           |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 10 ... 35                | 10 ... 35                | 10 ... 35                |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | M6 screw studs           | M6 screw studs           | M6 screw studs           |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 10 ... 35                | 10 ... 35                | 10 ... 35                |
| <b>PE connection</b>                                 |                                        | On housing with M6 screw | On housing with M6 screw | On housing with M6 screw |
| <b>Motor cable length</b> <sup>5)</sup> , max.       |                                        |                          |                          |                          |
| • Shielded                                           | m (ft)                                 | 50 (164)                 | 50 (164)                 | 50 (164)                 |
| • Unshielded                                         | m (ft)                                 | 100 (328)                | 100 (328)                | 100 (328)                |
| <b>Degree of protection</b>                          |                                        | IP20                     | IP20                     | IP20                     |
| <b>Dimensions</b>                                    |                                        |                          |                          |                          |
| • Width                                              | mm (in)                                | 275 (10.83)              | 275 (10.83)              | 275 (10.83)              |
| • Height                                             |                                        |                          |                          |                          |
| - Without integrated line filter                     | mm (in)                                | 419 (16.50)              | 419 (16.50)              | 419 (16.50)              |
| - With integrated line filter                        | mm (in)                                | 512 (20.16)              | 512 (20.16)              | 512 (20.16)              |
| • Depth                                              |                                        |                          |                          |                          |
| - Without operator panel                             | mm (in)                                | 204 (8.03)               | 204 (8.03)               | 204 (8.03)               |
| - With operator panel, max.                          | mm (in)                                | 268 (10.55)              | 268 (10.55)              | 268 (10.55)              |
| <b>Frame size</b>                                    |                                        | FSD                      | FSD                      | FSD                      |
| <b>Weight, approx.</b>                               |                                        |                          |                          |                          |
| • Without integrated line filter                     | kg (lb)                                | 13 (28.7)                | 13 (28.7)                | 13 (28.7)                |
| • With integrated line filter                        | kg (lb)                                | 15 (33.1)                | 15 (33.1)                | 16 (35.3)                |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  and the base-load current  $I_L$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at: <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance and applies for a line impedance corresponding to  $u_K = 1\%$ . The rated input currents apply for a load at rated power (based on  $I_{\text{rated}}$ ) – these current values are specified on the rating plate.

<sup>5)</sup> Max. motor cable length 25 m (82 ft) (shielded) for PM250 Power Modules with integrated line filter to maintain the limit values of EN 61800-3 Category C2.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                      |                                        | PM250 Power Modules      |                          |                          |                          |                          |
|------------------------------------------------------|----------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Without integrated line filter                       |                                        | 6SL3225-0BE33-0UA0       | 6SL3225-0BE33-7UA0       | 6SL3225-0BE34-5UA0       | 6SL3225-0BE35-5UA0       | 6SL3225-0BE37-5UA0       |
| With integrated line filter                          |                                        | 6SL3225-0BE33-0AA0       | 6SL3225-0BE33-7AA0       | 6SL3225-0BE34-5AA0       | 6SL3225-0BE35-5AA0       | 6SL3225-0BE37-5AA0       |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC         |                                        |                          |                          |                          |                          |                          |
| • Rated current $I_{\text{rated}}$ <sup>1)</sup>     | A                                      | 75                       | 90                       | 110                      | 145                      | 178                      |
| • Base-load current $I_L$ <sup>1)</sup>              | A                                      | 75                       | 90                       | 110                      | 145                      | 178                      |
| • Base-load current $I_H$ <sup>2)</sup>              | A                                      | 60                       | 75                       | 90                       | 110                      | 145                      |
| • Maximum current $I_{\text{max}}$                   | A                                      | 120                      | 150                      | 180                      | 220                      | 290                      |
| <b>Rated power</b>                                   |                                        |                          |                          |                          |                          |                          |
| • Based on $I_L$                                     | kW (hp)                                | 37 (50)                  | 45 (60)                  | 55 (75)                  | 75 (100)                 | 90 (125)                 |
| • Based on $I_H$                                     | kW (hp)                                | 30 (40)                  | 37 (50)                  | 45 (60)                  | 55 (75)                  | 75 (100)                 |
| <b>Rated pulse frequency</b>                         | kHz                                    | 4                        | 4                        | 4                        | 4                        | 4                        |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >97                      | >97                      | >97                      | >97                      | >97                      |
| <b>Power loss</b> <sup>3)</sup><br>At rated current  | kW                                     | 1.01                     | 1.217                    | 1.605                    | 2.234                    | 2.638                    |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.022 (0.78)             | 0.039 (1.38)             | 0.094 (3.32)             | 0.094 (3.32)             | 0.117 (4.13)             |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m) | dB                                     | <60                      | <62                      | <60                      | <60                      | <65                      |
| <b>Input current</b> <sup>4)</sup>                   |                                        |                          |                          |                          |                          |                          |
| • Rated input current                                | A                                      | 70                       | 84                       | 102                      | 135                      | 166                      |
| • Based on $I_H$                                     | A                                      | 56                       | 70                       | 84                       | 102                      | 135                      |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | M6 screw studs           | M6 screw studs           | M8 screw studs           | M8 screw studs           | M8 screw studs           |
| • Conductor cross-section, max.                      | mm <sup>2</sup>                        | 10 ... 50                | 10 ... 50                | 25 ... 120               | 25 ... 120               | 25 ... 120               |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | M6 screw studs           | M6 screw studs           | M8 screw studs           | M8 screw studs           | M8 screw studs           |
| • Conductor cross-section, max.                      | mm <sup>2</sup>                        | 10 ... 50                | 10 ... 50                | 25 ... 120               | 25 ... 120               | 25 ... 120               |
| <b>PE connection</b>                                 |                                        | On housing with M6 screw | On housing with M6 screw | On housing with M8 screw | On housing with M8 screw | On housing with M8 screw |
| <b>Motor cable length</b> <sup>5)</sup> , max.       |                                        |                          |                          |                          |                          |                          |
| • Shielded                                           | m (ft)                                 | 50 (164)                 | 50 (164)                 | 50 (164)                 | 50 (164)                 | 50 (164)                 |
| • Unshielded                                         | m (ft)                                 | 100 (328)                | 100 (328)                | 100 (328)                | 100 (328)                | 100 (328)                |
| <b>Degree of protection</b>                          |                                        | IP20                     | IP20                     | IP20                     | IP20                     | IP20                     |
| <b>Dimensions</b>                                    |                                        |                          |                          |                          |                          |                          |
| • Width                                              | mm (in)                                | 275 (10.83)              | 275 (10.83)              | 350 (13.78)              | 350 (13.78)              | 350 (13.78)              |
| • Height                                             |                                        |                          |                          |                          |                          |                          |
| - Without integrated line filter                     | mm (in)                                | 499 (19.65)              | 499 (19.65)              | 634 (24.96)              | 634 (24.96)              | 634 (24.96)              |
| - With integrated line filter                        | mm (in)                                | 635 (25.0)               | 635 (25.0)               | 934 (36.77)              | 934 (36.77)              | 934 (36.77)              |
| • Depth                                              |                                        |                          |                          |                          |                          |                          |
| - Without operator panel                             | mm (in)                                | 204 (8.03)               | 204 (8.03)               | 316 (12.44)              | 316 (12.44)              | 316 (12.44)              |
| - With operator panel, max.                          | mm (in)                                | 268 (10.55)              | 268 (10.55)              | 380 (14.96)              | 380 (14.96)              | 380 (14.96)              |
| <b>Frame size</b>                                    |                                        | FSE                      | FSE                      | FSF                      | FSF                      | FSF                      |
| <b>Weight, approx.</b>                               |                                        |                          |                          |                          |                          |                          |
| • Without integrated line filter                     | kg (lb)                                | 14 (30.9)                | 14 (30.9)                | 35 (77.2)                | 35 (77.2)                | 35 (77.2)                |
| • With integrated line filter                        | kg (lb)                                | 21 (46.3)                | 21 (46.3)                | 51 (112.5)               | 51 (112.5)               | 51 (112.5)               |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  and the base-load current  $I_L$  are based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. You can find more information on the Internet at: <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance and applies for a line impedance corresponding to  $u_K = 1\%$ . The rated input currents apply for a load at rated power (based on  $I_{\text{rated}}$ ) – these current values are specified on the rating plate.

<sup>5)</sup> Max. motor cable length 25 m (82 ft) (shielded) for PM250 Power Modules with integrated line filter to maintain the limit values of EN 61800-3 Category C2.

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Power Modules

#### Characteristic curves

##### Derating data, PM240-2 Power Modules

##### Pulse frequency

| Rated power <sup>1)</sup><br>at 50 Hz 200 V 1 AC/3 AC |      | Rated output current in A<br>for a pulse frequency of |       |       |       |        |        |        |        |
|-------------------------------------------------------|------|-------------------------------------------------------|-------|-------|-------|--------|--------|--------|--------|
| kW                                                    | hp   | 2 kHz                                                 | 4 kHz | 6 kHz | 8 kHz | 10 kHz | 12 kHz | 14 kHz | 16 kHz |
| 0.55                                                  | 0.75 | 3.2                                                   | 3.2   | 2.7   | 2.2   | 1.9    | 1.6    | 1.4    | 1.3    |
| 0.75                                                  | 1    | 4.2                                                   | 4.2   | 3.6   | 2.9   | 2.5    | 2.1    | 1.9    | 1.7    |
| 1.1                                                   | 1.5  | 6                                                     | 6     | 5.1   | 4.2   | 3.6    | 2.3    | 2.7    | 2.4    |
| 1.5                                                   | 2    | 7.4                                                   | 7.4   | 6.3   | 5.2   | 4.4    | 3.7    | 3.3    | 3      |
| 2.2                                                   | 3    | 10.4                                                  | 10.4  | 8.8   | 7.3   | 6.2    | 5.2    | 4.7    | 4.2    |
| 3                                                     | 4    | 13.6                                                  | 13.6  | 11.6  | 9.5   | 8.2    | 6.8    | 6.1    | 5.4    |
| 4                                                     | 5    | 17.5                                                  | 17.5  | 14.9  | 12.3  | 10.5   | 8.8    | 7.9    | 7      |
| 5.5                                                   | 7.5  | 22                                                    | 22    | 18.7  | 15.4  | 13.2   | 11     | 9.9    | 8.8    |
| 7.5                                                   | 10   | 28                                                    | 28    | 23.8  | 19.6  | 16.8   | 14     | 12.6   | 11.2   |
| 11                                                    | 15   | 42                                                    | 42    | 35.7  | 29.4  | 25.2   | 21     | 18.9   | 16.8   |
| 15                                                    | 20   | 54                                                    | 54    | 45.9  | 37.8  | 32.4   | 27     | 24.3   | 21.6   |
| 18.5                                                  | 25   | 68                                                    | 68    | 57.8  | 47.6  | 40.8   | 34     | 30.6   | 27.2   |
| 22                                                    | 30   | 80                                                    | 80    | 68    | 56    | 48     | 40     | 36     | 32     |
| 30                                                    | 40   | 104                                                   | 104   | 88.4  | 72.8  | 62.4   | 52     | 46.8   | 41.6   |
| 37                                                    | 50   | 130                                                   | 130   | 110.5 | 91    | –      | –      | –      | –      |
| 45                                                    | 60   | 154                                                   | 154   | 130.9 | 107.8 | –      | –      | –      | –      |
| 55                                                    | 75   | 178                                                   | 178   | 151.3 | 124.6 | –      | –      | –      | –      |

| Rated power <sup>1)</sup><br>at 50 Hz 400 V 3 AC |      | Rated output current in A<br>for a pulse frequency of |       |       |       |        |        |        |        |
|--------------------------------------------------|------|-------------------------------------------------------|-------|-------|-------|--------|--------|--------|--------|
| kW                                               | hp   | 2 kHz                                                 | 4 kHz | 6 kHz | 8 kHz | 10 kHz | 12 kHz | 14 kHz | 16 kHz |
| 0.55                                             | 0.75 | 1.7                                                   | 1.7   | 1.4   | 1.2   | 1      | 0.9    | 0.8    | 0.7    |
| 0.75                                             | 1    | 2.2                                                   | 2.2   | 1.9   | 1.5   | 1.3    | 1.1    | 1      | 0.9    |
| 1.1                                              | 1.5  | 3.1                                                   | 3.1   | 2.6   | 2.2   | 1.9    | 1.6    | 1.4    | 1.2    |
| 1.5                                              | 2    | 4.1                                                   | 4.1   | 3.5   | 2.9   | 2.5    | 2.1    | 1.8    | 1.6    |
| 2.2                                              | 3    | 5.9                                                   | 5.9   | 5     | 4.1   | 3.5    | 3      | 2.7    | 2.4    |
| 3                                                | 4    | 7.7                                                   | 7.7   | 6.5   | 5.4   | 4.6    | 3.9    | 3.5    | 3.1    |
| 4                                                | 5    | 10.2                                                  | 10.2  | 8.7   | 7.1   | 6.1    | 5.1    | 4.6    | 4.1    |
| 5.5                                              | 7.5  | 13.2                                                  | 13.2  | 11.2  | 9.2   | 7.9    | 6.6    | 5.9    | 5.3    |
| 7.5                                              | 10   | 18                                                    | 18    | 15.3  | 12.6  | 10.8   | 9      | 8.1    | 7.2    |
| 11                                               | 15   | 26                                                    | 26    | 22.1  | 18.2  | 15.6   | 13     | 11.7   | 10.4   |
| 15                                               | 20   | 32                                                    | 32    | 27.2  | 22.4  | 19.2   | 16     | 14.4   | 12.8   |
| 18.5                                             | 25   | 38                                                    | 38    | 32.3  | 26.6  | 22.8   | 19     | 17.1   | 15.2   |
| 22                                               | 30   | 45                                                    | 45    | 38.3  | 31.5  | 27     | 22.5   | 20.3   | 18     |
| 30                                               | 40   | 60                                                    | 60    | 51    | 42    | 36     | 30     | 27     | 24     |
| 37                                               | 50   | 75                                                    | 75    | 63.8  | 52.5  | 45     | 37.5   | 33.8   | 30     |
| 45                                               | 60   | 90                                                    | 90    | 76.5  | 63    | 54     | 45     | 40.5   | 36     |
| 55                                               | 75   | 110                                                   | 110   | 93.5  | 77    | –      | –      | –      | –      |
| 75                                               | 100  | 145                                                   | 145   | 123.3 | 101.5 | –      | –      | –      | –      |
| 90                                               | 125  | 178                                                   | 178   | 151.3 | 124.6 | –      | –      | –      | –      |
| 110                                              | 150  | 205                                                   | 143.5 | –     | –     | –      | –      | –      | –      |
| 132                                              | 200  | 250                                                   | 175   | –     | –     | –      | –      | –      | –      |
| 160                                              | 250  | 302                                                   | 211.4 | 151   | 120.8 | –      | –      | –      | –      |
| 200                                              | 300  | 370                                                   | 259   | 185   | 148   | –      | –      | –      | –      |
| 250                                              | 400  | 477                                                   | 333.9 | 238.5 | 190.8 | –      | –      | –      | –      |

The permissible motor cable length depends on the cable type and the pulse frequency.

<sup>1)</sup> Rated power based on the rated output current  $I_{rated}$ . The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules


### Characteristic curves (continued)

#### Derating data, PM240-2 Power Modules (continued)


| Rated power <sup>1)</sup><br>at 50 Hz 690 V 3 AC |     | Rated output current in A<br>for a pulse frequency of |       |       |       |        |        |        |        |
|--------------------------------------------------|-----|-------------------------------------------------------|-------|-------|-------|--------|--------|--------|--------|
| kW                                               | hp  | 2 kHz                                                 | 4 kHz | 6 kHz | 8 kHz | 10 kHz | 12 kHz | 14 kHz | 16 kHz |
| 11                                               | 10  | 14                                                    | 8.4   | –     | –     | –      | –      | –      | –      |
| 15                                               | 15  | 19                                                    | 11.4  | –     | –     | –      | –      | –      | –      |
| 18.5                                             | 20  | 23                                                    | 13.8  | –     | –     | –      | –      | –      | –      |
| 22                                               | 25  | 27                                                    | 16.2  | –     | –     | –      | –      | –      | –      |
| 30                                               | 30  | 35                                                    | 21    | –     | –     | –      | –      | –      | –      |
| 37                                               | 40  | 42                                                    | 25.2  | –     | –     | –      | –      | –      | –      |
| 45                                               | 50  | 52                                                    | 31.2  | –     | –     | –      | –      | –      | –      |
| 55                                               | 60  | 62                                                    | 37.2  | –     | –     | –      | –      | –      | –      |
| 75                                               | 75  | 80                                                    | 48    | –     | –     | –      | –      | –      | –      |
| 90                                               | 100 | 100                                                   | 60    | –     | –     | –      | –      | –      | –      |
| 110                                              | 100 | 115                                                   | 69    | –     | –     | –      | –      | –      | –      |
| 132                                              | 125 | 142                                                   | 85.2  | –     | –     | –      | –      | –      | –      |
| 160                                              | 150 | 171                                                   | 102.6 | –     | –     | –      | –      | –      | –      |
| 200                                              | 200 | 208                                                   | 124.8 | –     | –     | –      | –      | –      | –      |
| 250                                              | 250 | 250                                                   | 150   | –     | –     | –      | –      | –      | –      |

The permissible motor cable length depends on the cable type and the pulse frequency.


#### Ambient temperature

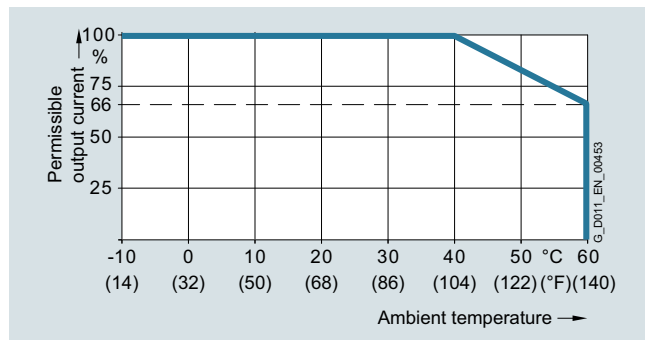


Permissible output current as a function of ambient temperature for low overload (LO) for PM240-2 Power Modules, frame sizes FSA to FSC

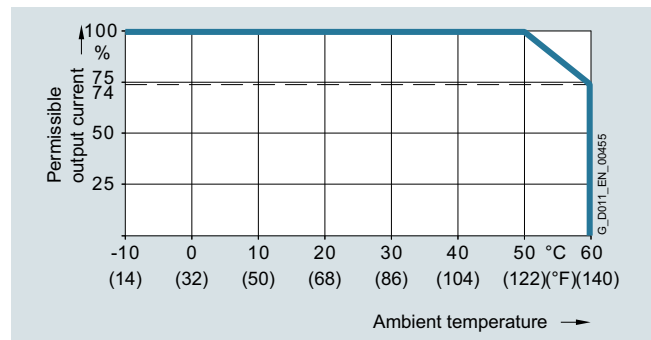

Permissible output current as a function of ambient temperature for high overload (HO) for PM240-2 Power Modules, frame sizes FSA to FSC

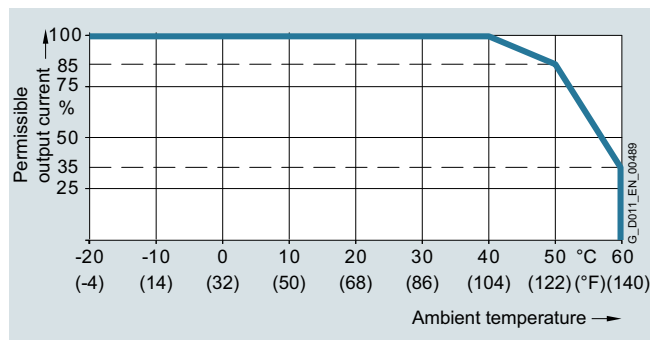

Permissible output current as a function of ambient temperature for low overload (LO) for PM240-2 Power Modules, frame sizes FSD to FSG

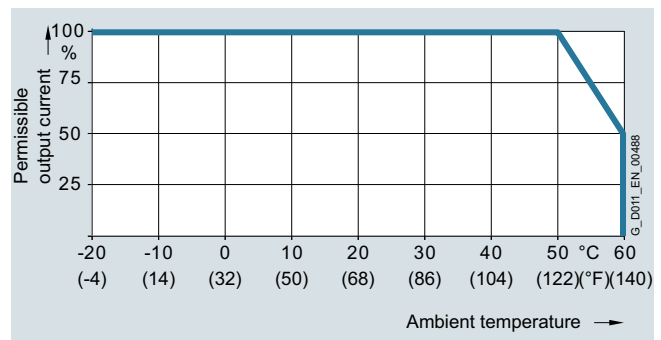

Permissible output current as a function of ambient temperature for high overload (HO) for PM240-2 Power Modules, frame sizes FSD to FSG

The operating temperature ranges of the Control Units should be taken into account. The temperature ranges are specified in the section [Technical specifications under Control Units](#).

<sup>1)</sup> Rated power based on the rated output current  $I_{rated}$ . The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Power Modules

#### Characteristic curves (continued)


##### Derating data, PM240-2 Power Modules (continued)

###### Installation altitude

Permissible line supplies as a function of the installation altitude

- Installation altitude up to 2000 m (6562 ft) above sea level
  - Connection to every supply system permitted for the inverter
- Installation altitudes between 2000 m (6562 ft) and 4000 m (13124 ft) above sea level
  - Connection only to a TN system with grounded neutral point
  - TN systems with grounded line conductor are not permitted
  - The TN line system with grounded neutral point can also be supplied using an isolation transformer
  - The phase-to-phase voltage does not have to be reduced

The connected motors, power elements and components must be considered separately.

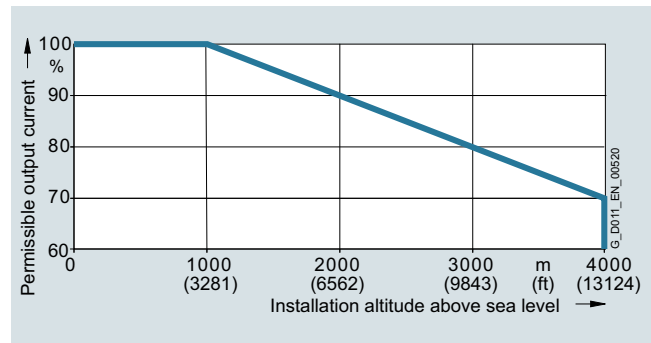

Permissible output current as a function of the installation altitude for PM240-2 Power Modules at 40 °C for low overload (LO)

###### System operating voltage


The rated output current remains constant over the 380 V to 480 V 3 AC voltage range.

More information on the derating data of the PM240-2 Power Modules is available in the Hardware Installation Manual on the Internet at:


[www.siemens.com/sinamics-g120/documentation](http://www.siemens.com/sinamics-g120/documentation)

**Characteristic curves (continued)**
**Derating data, PM250 Power Modules**
**Pulse frequency**

| Rated power at 400 V 3 AC |     | Rated output current in A for a pulse frequency of |       |       |        |        |        |        |
|---------------------------|-----|----------------------------------------------------|-------|-------|--------|--------|--------|--------|
| kW                        | hp  | 4 kHz                                              | 6 kHz | 8 kHz | 10 kHz | 12 kHz | 14 kHz | 16 kHz |
| 7.5                       | 10  | 18                                                 | 12.5  | 11.9  | 10.6   | 9.2    | 7.9    | 6.6    |
| 11                        | 15  | 25                                                 | 18.1  | 17.1  | 15.2   | 13.3   | 11.4   | 9.5    |
| 15                        | 20  | 32                                                 | 24.7  | 23.4  | 20.8   | 18.2   | 15.6   | 13     |
| 18.5                      | 25  | 38                                                 | 32    | 27    | 23     | 19     | 17     | 15     |
| 22                        | 30  | 45                                                 | 38    | 32    | 27     | 23     | 20     | 18     |
| 30                        | 40  | 60                                                 | 51    | 42    | 36     | 30     | 27     | 24     |
| 37                        | 50  | 75                                                 | 64    | 53    | 45     | 38     | 34     | 30     |
| 45                        | 60  | 90                                                 | 77    | 63    | 54     | 45     | 41     | 36     |
| 55                        | 75  | 110                                                | 94    | 77    | –      | –      | –      | –      |
| 75                        | 100 | 145                                                | 123   | 102   | –      | –      | –      | –      |
| 90                        | 125 | 178                                                | 151   | 125   | –      | –      | –      | –      |

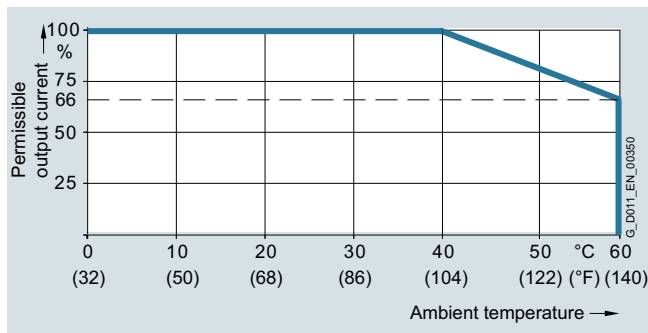**Ambient temperature**


Permissible output current as a function of ambient temperature for low overload (LO) for PM250 Power Modules, frame sizes FSC to FSF

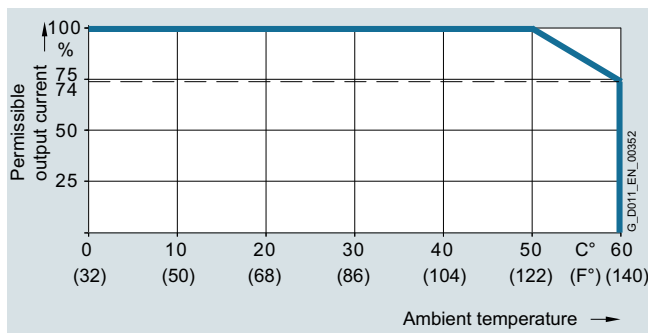

Permissible output current as a function of ambient temperature for high overload (HO) for PM250 Power Modules, frame sizes FSC to FSF


The operating temperature ranges of the Control Units should be taken into account. The temperature ranges are specified in the section **Technical specifications under Control Units**.

**Installation altitude**


Permissible line supplies as a function of the installation altitude

- Installation altitude up to 2000 m (6562 ft) above sea level
  - Connection to every supply system permitted for the inverter
- Installation altitudes between 2000 m (6562 ft) and 4000 m (13124 ft) above sea level
  - Connection only to a TN system with grounded neutral point
  - TN systems with grounded line conductor are not permitted
  - The TN line system with grounded neutral point can also be supplied using an isolation transformer
  - The phase-to-phase voltage does not have to be reduced


The connected motors, power elements and components must be considered separately.

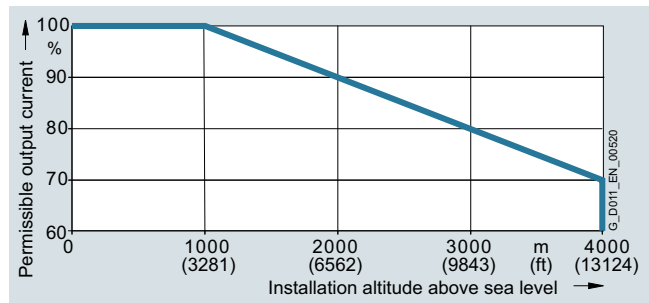

Permissible output current as a function of the installation altitude for PM250 Power Modules, frame sizes FSC to FSF

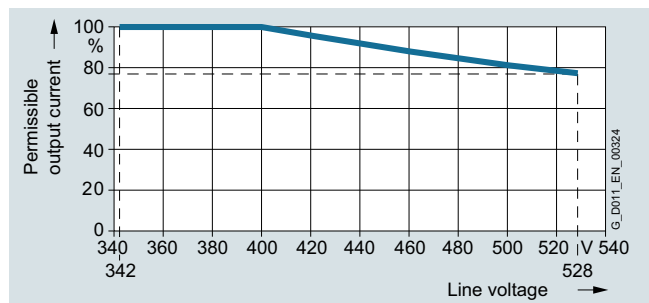**System operating voltage**


Permissible output current as a function of the line voltage for PM250 Power Modules, frame sizes FSC to FSF

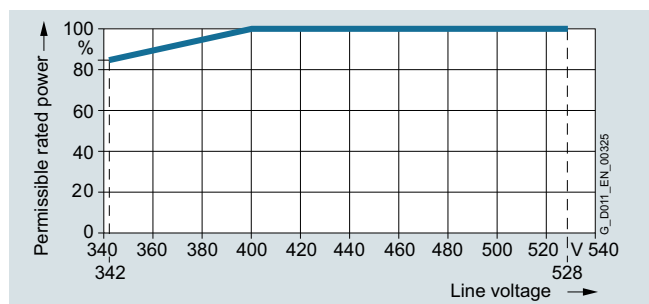

Permissible rated power as a function of the line voltage for PM250 Power Modules, frame sizes FSC to FSF

More information on the derating data of the PM250 Power Modules is available in the Hardware Installation Manual on the Internet at:

[www.siemens.com/sinamics-g120/documentation](http://www.siemens.com/sinamics-g120/documentation)


# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Dimensional drawings

#### PM240-2 Power Modules, standard variant

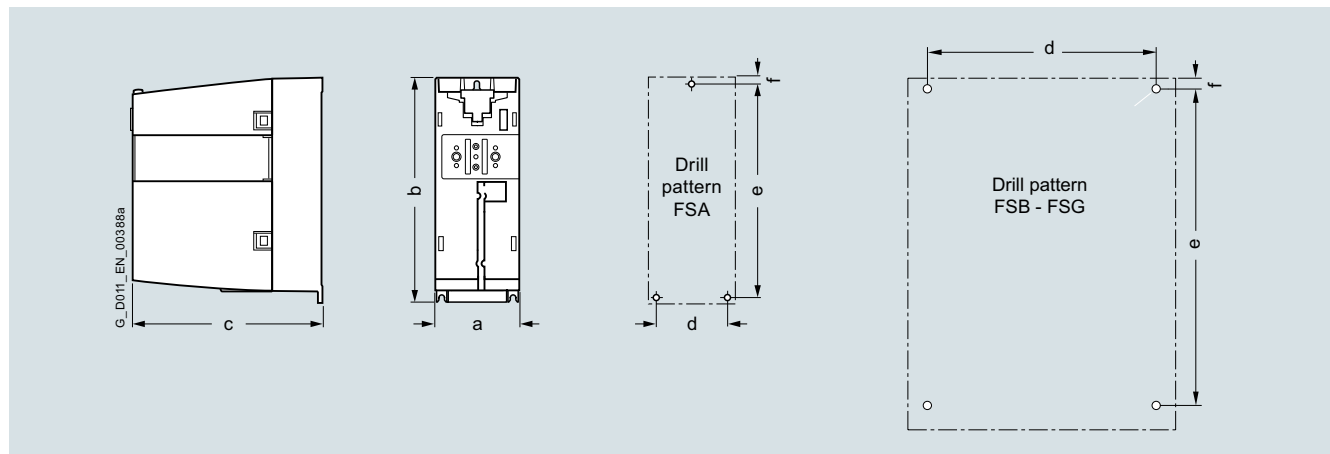

Principle dimension drawing and drill pattern for PM240-2 Power Modules, standard variant, with/without integrated line filter

| Frame size                                                                   | Dimensions<br>in mm (inches) |                 |                            | Drilling dimensions<br>in mm (inches) |                  |               | Cooling clearance <sup>2)</sup><br>in mm (inches) |                |               | Mounting   |
|------------------------------------------------------------------------------|------------------------------|-----------------|----------------------------|---------------------------------------|------------------|---------------|---------------------------------------------------|----------------|---------------|------------|
|                                                                              | a<br>(width)                 | b<br>(height)   | c<br>(depth) <sup>1)</sup> | d                                     | e                | f             | top                                               | bottom         | front         | With bolts |
| PM240-2 Power Modules, standard variant, with/without integrated line filter |                              |                 |                            |                                       |                  |               |                                                   |                |               |            |
| FSA                                                                          | 73<br>(2.87)                 | 196<br>(7.72)   | 165<br>(6.5)               | 62.3<br>(2.45)                        | 186<br>(7.32)    | 6<br>(0.24)   | 80<br>(3.15)                                      | 100<br>(3.94)  | 0<br>(0)      | 3 × M4     |
| FSB                                                                          | 100<br>(3.94)                | 292<br>(11.5)   | 165<br>(6.5)               | 80<br>(3.15)                          | 281<br>(11.06)   | 6<br>(0.24)   | 80<br>(3.15)                                      | 100<br>(3.94)  | 0<br>(0)      | 4 × M4     |
| FSC                                                                          | 140<br>(5.51)                | 355<br>(13.98)  | 165<br>(6.5)               | 120<br>(4.72)                         | 343<br>(13.5)    | 6<br>(0.24)   | 80<br>(3.15)                                      | 100<br>(3.94)  | 0<br>(0)      | 4 × M5     |
| FSD                                                                          | 200<br>(7.87)                | 472<br>(18.58)  | 237<br>(9.33)              | 170<br>(6.69)                         | 430<br>(16.93)   | 7<br>(0.28)   | 300<br>(11.81)                                    | 350<br>(13.78) | 100<br>(3.94) | 4 × M5     |
| FSE                                                                          | 275<br>(10.83)               | 551<br>(21.69)  | 237<br>(9.33)              | 230<br>(9.06)                         | 509<br>(20.04)   | 8.5<br>(0.33) | 300<br>(11.81)                                    | 350<br>(13.78) | 100<br>(3.94) | 4 × M6     |
| FSF                                                                          | 305<br>(12.01)               | 708<br>(27.87)  | 357<br>(14.06)             | 270<br>(10.63)                        | 680<br>(26.77)   | 13<br>(0.51)  | 300<br>(11.81)                                    | 350<br>(13.78) | 100<br>(3.94) | 4 × M8     |
| FSG                                                                          | 305<br>(12.01)               | 1000<br>(39.37) | 357<br>(14.06)             | 265<br>(10.43)                        | 970.5<br>(38.21) | 15<br>(0.59)  | 300<br>(11.81)                                    | 350<br>(13.78) | 100<br>(3.94) | 4 × M10    |

<sup>1)</sup> Increased depth:

- When the CU230P-2 Control Unit is plugged on, the depth increases by
  - 58 mm (2.28 in) for frame sizes FSA to FSC
  - 16 mm (0.63 in) for PM240-2, frame sizes FSD to FSG
- When the CU240E-2 Control Unit is plugged on, the depth increases by
  - 41 mm (1.61 in) for frame sizes FSA to FSC
  - 0 mm (0 in) for PM240-2, frame sizes FSD to FSG
- When the CU250S-2 Control Unit is plugged in, the depth increases by
  - 62 mm (2.44 in) for frame sizes FSA to FSC
  - 19 mm (0.75 in) for PM240-2, frame sizes FSD to FSG
- When the IOP-2/BOP-2 is plugged on, the depth increases by a further 11 mm (0.43 in)

<sup>2)</sup> The Power Modules can be mounted side by side. A side clearance of 1 mm (0.04 in) is recommended for tolerance-related reasons.


# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Dimensional drawings (continued)

#### PM240-2 Power Modules, push-through variant

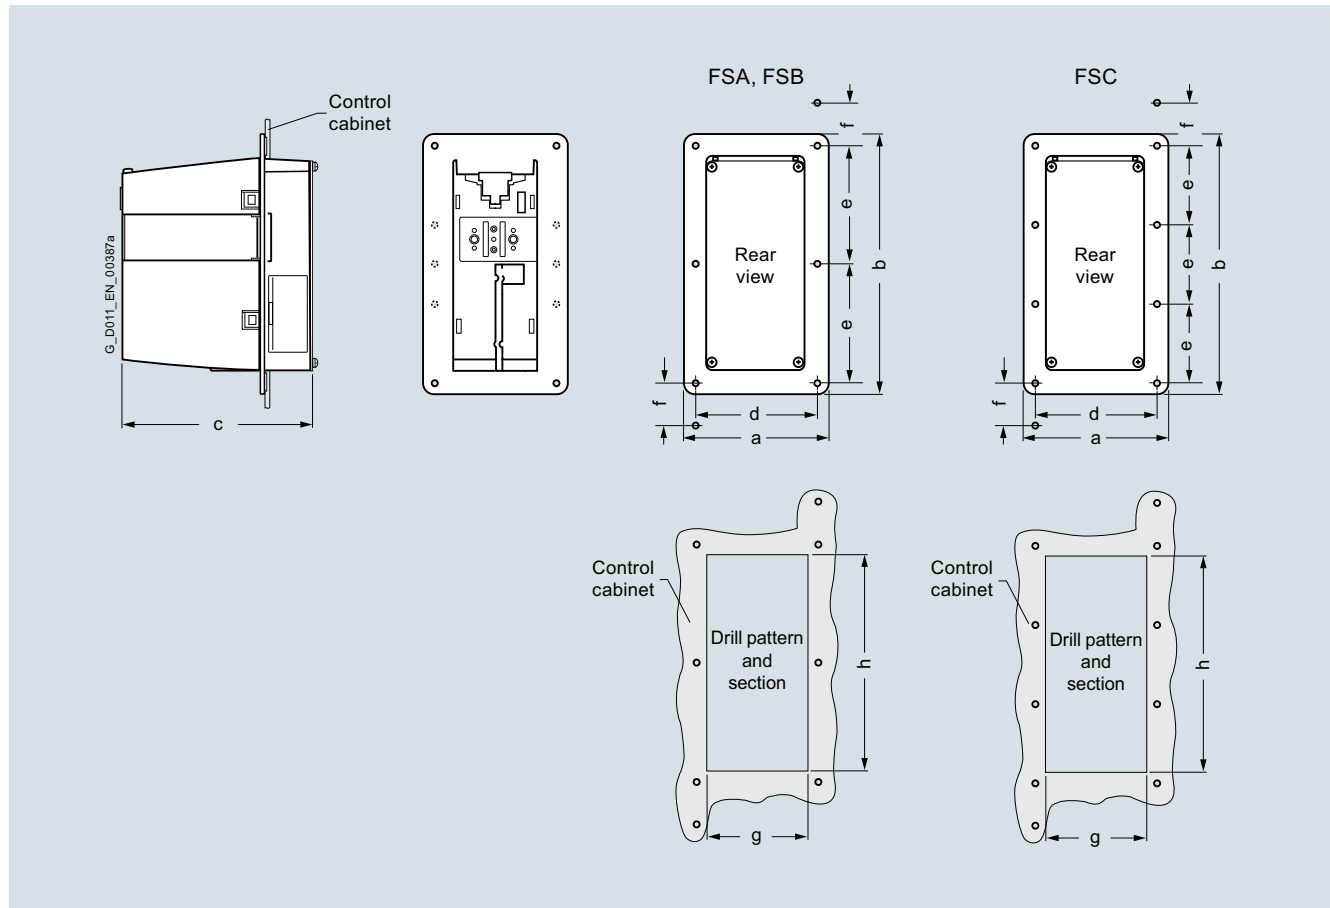

Principle dimension drawing and drill pattern for PM240-2 Power Modules, frame sizes FSA to FSC, push-through variant, with/without integrated line filter class A

| Frame size                                                                                                          | Dimensions<br>in mm (inches) |                |                            | Drilling dimensions<br>in mm (inches) |               |                | Section of cabinet<br>in mm (inches) |                | Cooling clearance<br>in mm (inches) |               |                    | Mounting   |
|---------------------------------------------------------------------------------------------------------------------|------------------------------|----------------|----------------------------|---------------------------------------|---------------|----------------|--------------------------------------|----------------|-------------------------------------|---------------|--------------------|------------|
|                                                                                                                     | a<br>(width)                 | b<br>(height)  | c<br>(depth) <sup>1)</sup> | d                                     | e             | f              | g<br>(width)                         | h<br>(height)  | top                                 | bottom        | side <sup>2)</sup> | With bolts |
| PM240-2 Power Modules, IP20 degree of protection, push-through variant, with/without integrated line filter class A |                              |                |                            |                                       |               |                |                                      |                |                                     |               |                    |            |
| FSA                                                                                                                 | 126<br>(4.96)                | 238<br>(9.37)  | 171<br>(6.73)              | 106<br>(4.17)                         | 103<br>(4.06) | 27<br>(1.06)   | 88<br>(3.46)                         | 198<br>(7.8)   | 80<br>(3.15)                        | 100<br>(3.94) | 0<br>(0)           | 8 × M5     |
| FSB                                                                                                                 | 154<br>(6.06)                | 345<br>(13.58) | 171<br>(6.73)              | 134<br>(5.28)                         | 148<br>(5.83) | 34.5<br>(1.36) | 116<br>(4.57)                        | 304<br>(11.97) | 80<br>(3.15)                        | 100<br>(3.94) | 0<br>(0)           | 8 × M5     |
| FSC                                                                                                                 | 200<br>(7.87)                | 411<br>(16.18) | 171<br>(6.73)              | 174<br>(6.85)                         | 123<br>(4.84) | 30.5<br>(1.2)  | 156<br>(6.14)                        | 365<br>(14.37) | 80<br>(3.15)                        | 100<br>(3.94) | 0<br>(0)           | 10 × M5    |

<sup>1)</sup> Overall depth, of which 117.7 mm (4.63 in) is inside and 53.1 mm (2.09 in) is outside the control cabinet. Increased depth:

- When the CU230P-2 Control Unit is plugged on, the depth increases by 58 mm (2.28 in)
- When the CU240E-2 Control Unit is plugged on, the depth increases by 41 mm (1.61 in)
- When the CU250S-2 Control Unit is plugged on, the depth increases by 62 mm (2.44 in)
- When the IOP-2/BOP-2 is plugged on, the depth increases by a further 11 mm (0.43 in)

<sup>2)</sup> The Power Modules can be mounted side by side (mounting frame to mounting frame). A side clearance of 1 mm (0.04 in) is recommended for tolerance-related reasons.


# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Power Modules

### Dimensional drawings (continued)

#### PM240-2 Power Modules, push-through variant (continued)

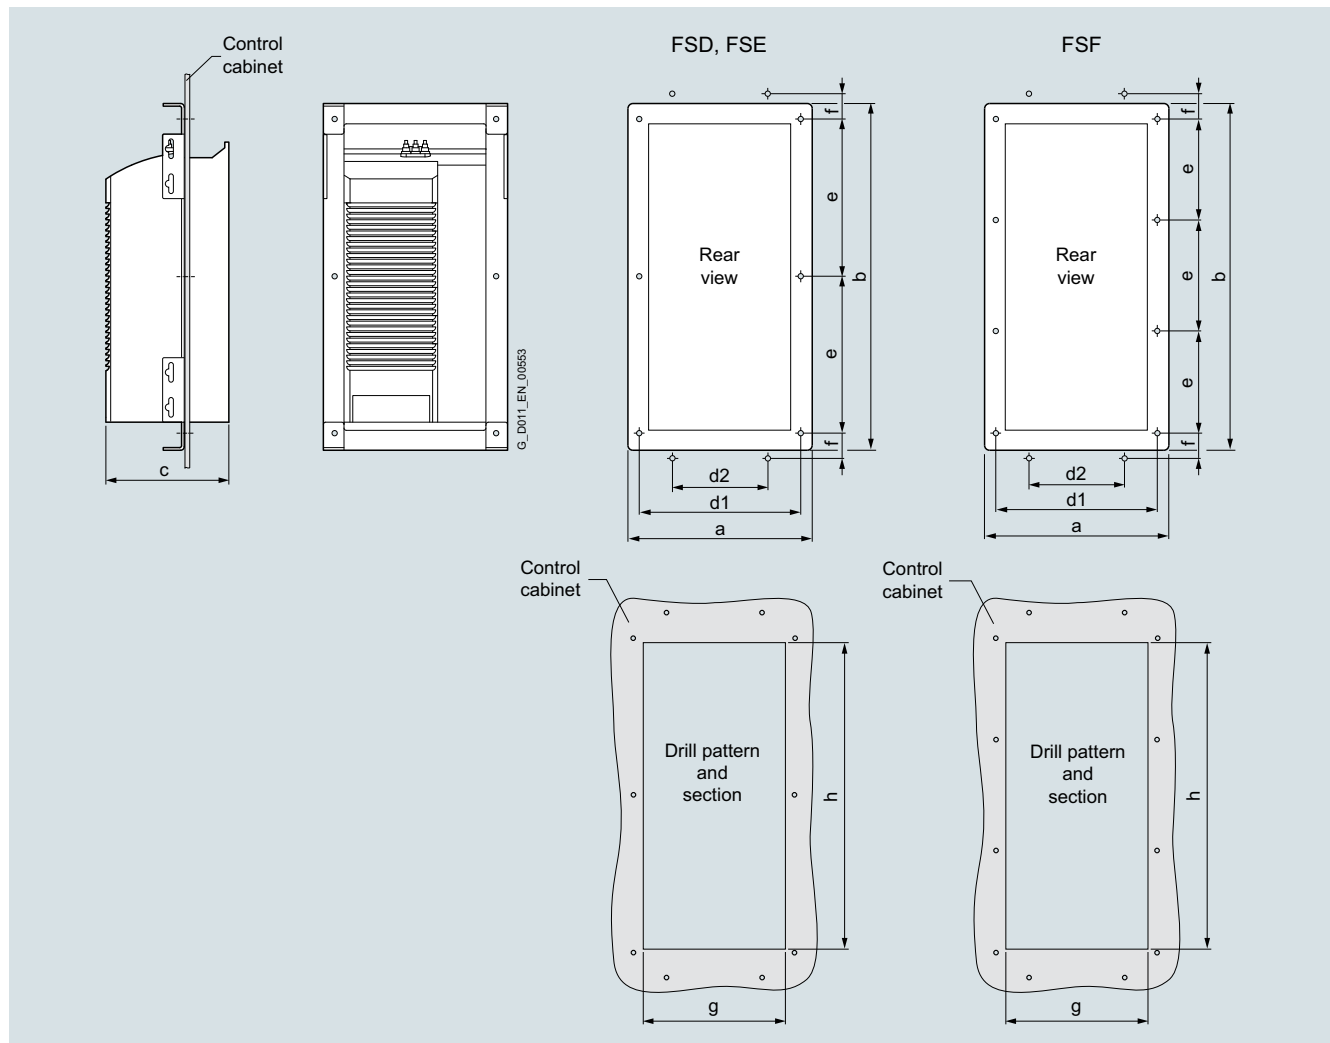

Principle dimension drawing and drill pattern for PM240-2 Power Modules, frame sizes FSD to FSF, push-through variant, with/without integrated line filter class A


| Frame size                                                                                                          | Dimensions<br>in mm (inches) |                |                            | Drilling dimensions<br>in mm (inches) |               |                  |              | Section of<br>cabinet<br>in mm (inches) |                | Cooling clearance<br>in mm (inches) |                |                    |               | Mounting   |
|---------------------------------------------------------------------------------------------------------------------|------------------------------|----------------|----------------------------|---------------------------------------|---------------|------------------|--------------|-----------------------------------------|----------------|-------------------------------------|----------------|--------------------|---------------|------------|
|                                                                                                                     | a<br>(width)                 | b<br>(height)  | c<br>(depth) <sup>1)</sup> | d1                                    | d2            | e                | f            | g<br>(width)                            | h<br>(height)  | top                                 | bottom         | side <sup>2)</sup> | front         | With bolts |
| PM240-2 Power Modules, IP20 degree of protection, push-through variant, with/without integrated line filter class A |                              |                |                            |                                       |               |                  |              |                                         |                |                                     |                |                    |               |            |
| FSD                                                                                                                 | 275<br>(10.83)               | 517<br>(20.35) | 238.5<br>(9.39)            | 276<br>(10.87)                        | 145<br>(5.71) | 240<br>(9.45)    | 39<br>(1.54) | 216<br>(8.5)                            | 468<br>(18.43) | 350<br>(13.78)                      | 350<br>(13.78) | 0<br>(0)           | 29<br>(1.14)  | 10 × M5    |
| FSE                                                                                                                 | 354<br>(13.94)               | 615<br>(24.21) | 238.5<br>(9.39)            | 302.5<br>(11.91)                      | 230<br>(9.06) | 297.5<br>(11.71) | 45<br>(1.77) | 285<br>(11.22)                          | 545<br>(21.46) | 350<br>(13.78)                      | 350<br>(13.78) | 0<br>(0)           | 29<br>(1.14)  | 10 × M5    |
| FSF                                                                                                                 | 384<br>(15.12)               | 785<br>(30.91) | 358<br>(14.09)             | 350<br>(13.78)                        | 223<br>(8.78) | 227<br>(8.94)    | 48<br>(1.89) | 315<br>(12.4)                           | 690<br>(27.17) | 80<br>(3.15)                        | 100<br>(3.94)  | 0<br>(0)           | 100<br>(3.94) | 12 × M5    |

<sup>1)</sup> Overall depth, of which for FSD and FSE 141 mm (5.55 in) is inside and 97.5 mm (3.84 in) outside the control cabinet, and for frame size FSF 177.5 mm (6.99 in) inside and 180.5 mm (7.1 in) outside the control cabinet. Increased depth:

- When the CU230P-2 Control Unit is plugged on, the depth increases by 15.5 mm (0.61 in), and with blanking cover, IOP-2 or BOP-2 by a further 11 mm (0.43 in)
- When the CU240E-2 Control Unit is plugged on, the depth does not increase, and with blanking cover, IOP-2 or BOP-2 by 11 mm (0.43 in)
- When the CU250S-2 Control Unit is plugged on, the depth increases by 18.5 mm (0.73 in), and with blanking cover, IOP-2 or BOP-2 by a further 11 mm (0.43 in)

<sup>2)</sup> The Power Modules can be mounted side by side (mounting frame to mounting frame). A side clearance of 1 mm (0.04 in) is recommended for tolerance-related reasons.

**Dimensional drawings** (continued)

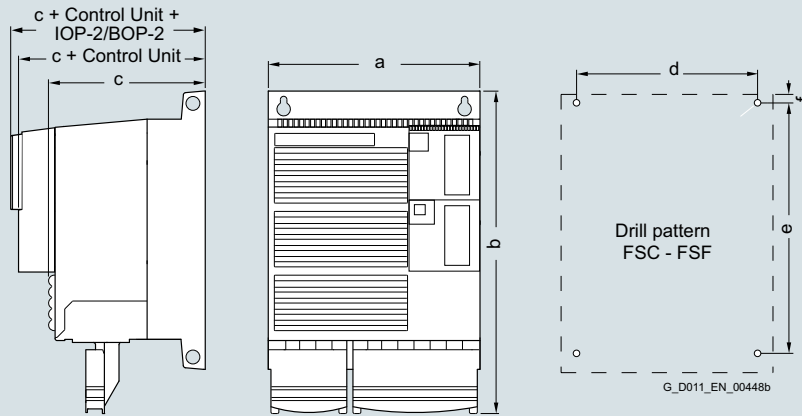**PM250 Power Modules – IP20 degree of protection**


Principle dimension drawing and drill pattern for PM250 Power Modules, IP20 degree of protection, with/without integrated line filter class A

| Frame size                                                                                  | Dimensions<br>in mm (inches) |                          |                            | Drilling dimensions<br>in mm (inches) |                          |              | Cooling clearance<br>in mm (inches) |                            |          | Mounting |
|---------------------------------------------------------------------------------------------|------------------------------|--------------------------|----------------------------|---------------------------------------|--------------------------|--------------|-------------------------------------|----------------------------|----------|----------|
|                                                                                             | a<br>(width)                 | b<br>(height)            | c<br>(depth) <sup>1)</sup> | d                                     | e                        | f            | top/bottom                          | side                       | front    |          |
| PM250 Power Modules, IP20 degree of protection, with/without integrated line filter class A |                              |                          |                            |                                       |                          |              |                                     |                            |          |          |
| FSC                                                                                         | 189<br>(7.44)                | 334<br>(13.15)           | 185<br>(7.28)              | 167<br>(6.57)                         | 323<br>(12.72)           | 6<br>(0.24)  | 125<br>(4.92)                       | 50<br>(1.97) <sup>2)</sup> | 0<br>(0) | 4 × M5   |
| FSD                                                                                         | 275<br>(10.83)               | 419/512<br>(16.5/20.16)  | 204<br>(8.03)              | 235<br>(9.25)                         | 325/419<br>(12.8/16.5)   | 11<br>(0.43) | 300<br>(11.81)                      | 0<br>(0)                   | 0<br>(0) | 4 × M8   |
| FSE                                                                                         | 275<br>(10.83)               | 499/635<br>(19.65/25)    | 204<br>(8.03)              | 235<br>(9.25)                         | 405/541<br>(15.94/21.3)  | 11<br>(0.43) | 300<br>(11.81)                      | 0<br>(0)                   | 0<br>(0) | 4 × M8   |
| FSF                                                                                         | 350<br>(13.78)               | 634/934<br>(24.96/36.77) | 316<br>(12.44)             | 300<br>(11.81)                        | 598/899<br>(23.54/35.39) | 11<br>(0.43) | 350<br>(13.78)                      | 0<br>(0)                   | 0<br>(0) | 4 × M8   |

<sup>1)</sup> Increased depth:

- When the CU230P-2 Control Unit is plugged on, the depth increases by
  - 58 mm (2.28 in) for frame size FSC
  - 49 mm (1.93 in) for frame sizes FSD to FSF
- When the CU240E-2 Control Unit is plugged on, the depth increases by
  - 40 mm (1.57 in) for frame size FSC
  - 31 mm (1.22 in) for frame sizes FSD to FSF
- When the CU250S-2 Control Unit is plugged in, the depth increases by
  - 61 mm (2.4 in) for frame size FSC
  - 52 mm (2.05 in) for frame sizes FSD to FSF
- When the IOP-2/BOP-2 is plugged on, the depth increases by a further 12 mm (0.47 in)

<sup>2)</sup> Up to 40 °C (104 °F) without any lateral clearance.

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Line-side components > Line filters

#### Overview



Line filter for PM240-2 Power Modules, frame size FSA

With one of the additional line filters, the Power Module reaches a higher radio interference class.

#### Integration

PM250 Power Modules, frame size FSC, are available only with integrated line filter class A. To achieve class B, these Power Modules must be additionally fitted with a base filter class B.

#### Line filters that are optionally available depending on the Power Module used

|                                                                       | Frame size      |                 |                 |                 |                 |                 |                 |
|-----------------------------------------------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|                                                                       | FSA             | FSB             | FSC             | FSD             | FSE             | FSF             | FSG             |
| <b>PM240-2 Power Module with integrated braking chopper</b>           |                 |                 |                 |                 |                 |                 |                 |
| Available frame sizes                                                 |                 |                 |                 |                 |                 |                 |                 |
| • 200 V versions                                                      | ✓               | ✓               | ✓               | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | ✓ <sup>2)</sup> | –               |
| • 400 V versions                                                      | ✓               | ✓               | ✓               | ✓               | ✓               | ✓               | ✓               |
| • 690 V versions                                                      | –               | –               | –               | ✓               | ✓               | ✓               | ✓               |
| <b>Line-side components</b>                                           |                 |                 |                 |                 |                 |                 |                 |
| Line filter class A                                                   | F               | F               | F               | F <sup>2)</sup> | F <sup>2)</sup> | F <sup>2)</sup> | –               |
| Line filter class B<br>(only for 400 V versions)                      | U <sup>1)</sup> | U <sup>1)</sup> | U <sup>1)</sup> | –               | –               | –               | –               |
| Line filters Category C2 or C3<br>(for 400 V versions frame size FSG) | –               | –               | –               | –               | –               | –               | I               |
| Line filters Category C3 (for<br>690 V versions frame size FSG)       | –               | –               | –               | –               | –               | –               | I <sup>3)</sup> |
| <b>PM250 Power Module with line-commutated energy recovery</b>        |                 |                 |                 |                 |                 |                 |                 |
| Available frame sizes                                                 | –               | –               | ✓               | ✓               | ✓               | ✓               | –               |
| <b>Line-side components</b>                                           |                 |                 |                 |                 |                 |                 |                 |
| Line filter class A                                                   | –               | –               | I               | F               | F               | F               | –               |
| Line filter class B                                                   | –               | –               | U               | –               | –               | –               | –               |

U = Base component

I = Integrated

F = Power Modules available with and without integrated filter class A

– = Not possible

<sup>1)</sup> Lateral mounting is the only possible option for push-through variants.

<sup>2)</sup> PM240-2 200 V versions, frame sizes FSD to FSF are only available without integrated line filter.

<sup>3)</sup> The 690 V versions of the Power Modules PM240-2 frame size FSG are only available with an integrated Category C3 filter. To operate the inverter also within TN systems with grounded outer conductor, you must remove the grounding screw.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

Line-side components &gt; Line filters

## Selection and ordering data

| Rated power               |      | <b>PM240-2 Power Module<br/>standard variant</b> |            | <b>Line filter class B<br/>according to EN 55011</b> |
|---------------------------|------|--------------------------------------------------|------------|------------------------------------------------------|
| kW                        | hp   | Type 6SL3210-...                                 | Frame size | Article No.                                          |
| <b>380 ... 480 V 3 AC</b> |      |                                                  |            |                                                      |
| 0.55                      | 0.75 | 1PE11-8UL1                                       | FSA        | <b>6SL3203-0BE17-7BA0</b>                            |
| 0.75                      | 1    | 1PE12-3UL1                                       |            |                                                      |
| 1.1                       | 1.5  | 1PE13-2UL1                                       |            |                                                      |
| 1.5                       | 2    | 1PE14-3UL1                                       |            |                                                      |
| 2.2                       | 3    | 1PE16-1UL1                                       |            |                                                      |
| 3                         | 4    | 1PE18-0UL1                                       |            |                                                      |
| 4                         | 5    | 1PE21-1UL0                                       | FSB        | <b>6SL3203-0BE21-8BA0</b>                            |
| 5.5                       | 7.5  | 1PE21-4UL0                                       |            |                                                      |
| 7.5                       | 10   | 1PE21-8UL0                                       |            |                                                      |
| 11                        | 15   | 1PE22-7UL0                                       | FSC        | <b>6SL3203-0BE23-8BA0</b>                            |
| 15                        | 20   | 1PE23-3UL0                                       |            |                                                      |

| Rated power               |    | <b>PM240-2 Power Module<br/>push-through variant</b> |            | <b>Line filter class B<br/>according to EN 55011</b> |
|---------------------------|----|------------------------------------------------------|------------|------------------------------------------------------|
| kW                        | hp | Type 6SL3211-...                                     | Frame size | Article No.                                          |
| <b>380 ... 480 V 3 AC</b> |    |                                                      |            |                                                      |
| 3                         | 4  | 1PE18-0UL1                                           | FSA        | <b>6SL3203-0BE17-7BA0</b>                            |
| 7.5                       | 10 | 1PE21-8UL0                                           | FSB        | <b>6SL3203-0BE21-8BA0</b>                            |
| 15                        | 20 | 1PE23-3UL0                                           | FSC        | <b>6SL3203-0BE23-8BA0</b>                            |

| Rated power               |    | <b>PM250 Power Module</b> |            | <b>Line filter class B<br/>according to EN 55011</b> |
|---------------------------|----|---------------------------|------------|------------------------------------------------------|
| kW                        | hp | Type 6SL3225-...          | Frame size | Article No.                                          |
| <b>380 ... 480 V 3 AC</b> |    |                           |            |                                                      |
| 7.5                       | 10 | 0BE25-5AA1                | FSC        | <b>6SL3203-0BD23-8SA0</b>                            |
| 11                        | 15 | 0BE27-5AA1                |            |                                                      |
| 15                        | 20 | 0BE31-1AA1                |            |                                                      |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Line-side components > Line filters

#### Technical specifications

| Line voltage 380 ... 480 V 3 AC                                                                               |                 | Line filter class B                                                                                                              |                                                                |                                          |
|---------------------------------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|------------------------------------------|
|                                                                                                               |                 | 6SL3203-0BE17-7BA0                                                                                                               | 6SL3203-0BE21-8BA0                                             | 6SL3203-0BE23-8BA0                       |
| Rated current                                                                                                 | A               | 11.4                                                                                                                             | 23.5                                                           | 49.4                                     |
| Pulse frequency                                                                                               | kHz             | 4 ... 16                                                                                                                         | 4 ... 16                                                       | 4 ... 16                                 |
| Line supply connection<br>L1, L2, L3                                                                          |                 | Screw terminals                                                                                                                  | Screw terminals                                                | Screw terminals                          |
| • Conductor cross-section                                                                                     | mm <sup>2</sup> | 1 ... 2.5                                                                                                                        | 2.5 ... 6                                                      | 6 ... 16                                 |
| Load connection<br>U, V, W                                                                                    |                 | Shielded cable                                                                                                                   | Shielded cable                                                 | Shielded cable                           |
| • Cable cross-section                                                                                         | mm <sup>2</sup> | 1.5                                                                                                                              | 4                                                              | 10                                       |
| • Length                                                                                                      | m (ft)          | 0.45 (1.48)                                                                                                                      | 0.5 (1.64)                                                     | 0.54 (1.77)                              |
| PE connection                                                                                                 |                 | On housing via M5 screw stud                                                                                                     | On housing via M5 screw stud                                   | On housing via M6 screw studs            |
| • Conductor cross-section                                                                                     | mm <sup>2</sup> | 1 ... 2.5                                                                                                                        | 2.5 ... 6                                                      | 6 ... 16                                 |
| Degree of protection                                                                                          |                 | IP20                                                                                                                             | IP20                                                           | IP20                                     |
| Dimensions                                                                                                    |                 |                                                                                                                                  |                                                                |                                          |
| • Width                                                                                                       | mm (in)         | 73 (2.87)                                                                                                                        | 100 (3.94)                                                     | 140 (5.51)                               |
| • Height                                                                                                      | mm (in)         | 202 (7.95)                                                                                                                       | 297 (11.7)                                                     | 359 (14.1)                               |
| • Depth                                                                                                       | mm (in)         | 65 (2.56)                                                                                                                        | 85 (3.35)                                                      | 95 (3.74)                                |
| Possible as base component                                                                                    |                 | Yes                                                                                                                              | Yes                                                            | Yes                                      |
| Weight, approx.                                                                                               | kg (lb)         | 1.75 (3.86)                                                                                                                      | 4 (8.82)                                                       | 7.3 (16.1)                               |
| Suitable for<br>PM240-2 Power Module<br>standard variant<br>380 ... 480 V 3 AC                                | Type            | 6SL3210-1PE11-8UL1<br>6SL3210-1PE12-3UL1<br>6SL3210-1PE13-2UL1<br>6SL3210-1PE14-3UL1<br>6SL3210-1PE16-1UL1<br>6SL3210-1PE18-0UL1 | 6SL3210-1PE21-1UL0<br>6SL3210-1PE21-4UL0<br>6SL3210-1PE21-8UL0 | 6SL3210-1PE22-7UL0<br>6SL3210-1PE23-3UL0 |
| Suitable for<br>PM240-2 Power Module<br>push-through variant<br>380 ... 480 V 3 AC<br>(lateral mounting only) | Type            | 6SL3211-1PE18-0UL1                                                                                                               | 6SL3211-1PE21-8UL0                                             | 6SL3211-1PE23-3UL0                       |
| • Frame size                                                                                                  |                 | FSA                                                                                                                              | FSB                                                            | FSC                                      |


| Line voltage 380 ... 480 V 3 AC      |                 | Line filter class B                                            |  |  |
|--------------------------------------|-----------------|----------------------------------------------------------------|--|--|
|                                      |                 | 6SL3203-0BD23-8SA0                                             |  |  |
| Rated current                        | A               | 39.4                                                           |  |  |
| Line supply connection<br>L1, L2, L3 |                 | Screw-type terminals                                           |  |  |
| • Conductor cross-section            | mm <sup>2</sup> | 4                                                              |  |  |
| Load connection<br>U, V, W           |                 | Shielded cable                                                 |  |  |
| • Conductor cross-section            | mm <sup>2</sup> | 3 × 4                                                          |  |  |
| • Length                             | m (ft)          | 0.4 (1.31)                                                     |  |  |
| PE connection                        |                 | On housing via M4 screw stud                                   |  |  |
| Degree of protection                 |                 | IP20                                                           |  |  |
| Dimensions                           |                 |                                                                |  |  |
| • Width                              | mm (in)         | 190 (7.48)                                                     |  |  |
| • Height                             | mm (in)         | 362 (14.25)                                                    |  |  |
| • Depth                              | mm (in)         | 55 (2.17)                                                      |  |  |
| Possible as base component           |                 | Yes                                                            |  |  |
| Weight, approx.                      | kg (lb)         | 2.3 (5.07)                                                     |  |  |
| Suitable for<br>PM250 Power Module   | Type            | 6SL3225-0BE25-5AA1<br>6SL3225-0BE27-5AA1<br>6SL3225-0BE31-1AA1 |  |  |
| • Frame size                         |                 | FSC                                                            |  |  |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

Line-side components > Line reactors

### Overview

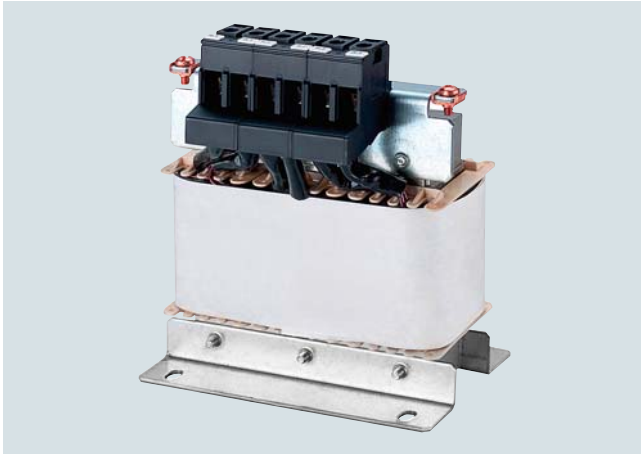

Line reactor for PM240-2 Power Modules, frame size FSA

Line reactors smooth the current drawn by the inverter and thus reduce harmonic components in the line current. Through the reduction of the current harmonics, the thermal load on the power components in the rectifier and in the DC link capacitors is reduced as well as the harmonic effects on the supply. The use of a line reactor increases the service life of the inverter.

A line reactor is not required and must not be used in conjunction with a PM250 Power Module.

### Integration

A DC link reactor is integrated in the PM240-2 Power Modules, frame sizes FSD to FSG, and therefore no line reactor is required.

**Line reactors that are optionally available depending on the Power Module used**

|                                                             | Frame size      |                 |                 |     |     |     |     |
|-------------------------------------------------------------|-----------------|-----------------|-----------------|-----|-----|-----|-----|
|                                                             | FSA             | FSB             | FSC             | FSD | FSE | FSF | FSG |
| <b>PM240-2 Power Module with integrated braking chopper</b> |                 |                 |                 |     |     |     |     |
| Available frame sizes                                       |                 |                 |                 |     |     |     |     |
| • 200 V versions                                            | ✓               | ✓               | ✓               | ✓   | ✓   | ✓   | –   |
| • 400 V versions                                            | ✓               | ✓               | ✓               | ✓   | ✓   | ✓   | ✓   |
| • 690 V versions                                            | –               | –               | –               | ✓   | ✓   | ✓   | ✓   |
| <b>Line-side components</b>                                 |                 |                 |                 |     |     |     |     |
| Line reactors (only for 3-AC versions <sup>1)</sup> )       | S <sup>2)</sup> | S <sup>2)</sup> | S <sup>2)</sup> | I   | I   | I   | I   |

S = Lateral mounting

I = Integrated

– = Not possible

<sup>1)</sup> With the appropriate wiring, the line reactors for 200 V 3 AC can be used for the 200 V versions for 200 V 1 AC. Further information can be found on the Internet at:  
<https://support.industry.siemens.com/cs/document/109486005>  
<https://support.industry.siemens.com/cs/document/109482011>

<sup>2)</sup> For frame sizes FSA to FSC, for lines with  $u_k < 1\%$ , it is recommended that you use a line reactor or the next more powerful Power Module. Further information can be found on the Internet at:  
<https://support.industry.siemens.com/cs/document/109482011>

**SINAMICS G120 standard inverters**

0.37 kW to 250 kW (0.5 hp to 400 hp)

Line-side components &gt; Line reactors

**Selection and ordering data**

| Rated power                      |      | PM240-2 Power Module<br>standard variant |            | Line reactor       |
|----------------------------------|------|------------------------------------------|------------|--------------------|
| kW                               | hp   | Type 6SL3210-...                         | Frame size | Article No.        |
| 200 ... 240 V 3 AC <sup>1)</sup> |      |                                          |            |                    |
| 0.55                             | 0.75 | 1PB13-0 . L0                             | FSA        | 6SL3203-0CE13-2AA0 |
| 0.75                             | 1    | 1PB13-8 . L0                             |            |                    |
| 1.1                              | 1.5  | 1PB15-5 . L0                             | FSB        | 6SL3203-0CE21-0AA0 |
| 1.5                              | 2    | 1PB17-4 . L0                             |            |                    |
| 2.2                              | 3    | 1PB21-0 . L0                             |            |                    |
| 3                                | 4    | 1PB21-4 . L0                             | FSC        | 6SL3203-0CE21-8AA0 |
| 4                                | 5    | 1PB21-8 . L0                             |            |                    |
| 5.5                              | 7.5  | 1PC22-2 . L0                             | FSC        | 6SL3203-0CE23-8AA0 |
| 7.5                              | 10   | 1PC22-8 . L0                             |            |                    |
| 380 ... 480 V 3 AC               |      |                                          |            |                    |
| 0.55                             | 0.75 | 1PE11-8 . L1                             | FSA        | 6SL3203-0CE13-2AA0 |
| 0.75                             | 1    | 1PE12-3 . L1                             |            |                    |
| 1.1                              | 1.5  | 1PE13-2 . L1                             |            |                    |
| 1.5                              | 2    | 1PE14-3 . L1                             | FSA        | 6SL3203-0CE21-0AA0 |
| 2.2                              | 3    | 1PE16-1 . L1                             |            |                    |
| 3                                | 4    | 1PE18-0 . L1                             |            |                    |
| 4                                | 5    | 1PE21-1 . L0                             | FSB        | 6SL3203-0CE21-8AA0 |
| 5.5                              | 7.5  | 1PE21-4 . L0                             |            |                    |
| 7.5                              | 10   | 1PE21-8 . L0                             |            |                    |
| 11                               | 15   | 1PE22-7 . L0                             | FSC        | 6SL3203-0CE23-8AA0 |
| 15                               | 20   | 1PE23-3 . L0                             |            |                    |

| Rated power                             |    | <b>PM240-2 Power Module<br/>push-through variant</b> |            | Line reactor              |
|-----------------------------------------|----|------------------------------------------------------|------------|---------------------------|
| kW                                      | hp | Type 6SL3211-...                                     | Frame size | Article No.               |
| <b>200 ... 240 V 3 AC <sup>1)</sup></b> |    |                                                      |            |                           |
| 0.75                                    | 1  | 1PB13-8 . L0                                         | FSA        | <b>6SL3203-0CE13-2AA0</b> |
| 2.2                                     | 3  | 1PB21-0 . L0                                         | FSB        | <b>6SL3203-0CE21-0AA0</b> |
| 4                                       | 5  | 1PB21-8 . L0                                         | FSC        | <b>6SL3203-0CE21-8AA0</b> |
| <b>380 ... 480 V 3 AC</b>               |    |                                                      |            |                           |
| 3                                       | 4  | 1PE18-0 . L1                                         | FSA        | <b>6SL3203-0CE21-0AA0</b> |
| 7.5                                     | 10 | 1PE21-8 . L0                                         | FSB        | <b>6SL3203-0CE21-8AA0</b> |
| 15                                      | 20 | 1PE23-3 . L0                                         | FSC        | <b>6SL3203-0CE23-8AA0</b> |

<sup>1)</sup> With the appropriate wiring, the line reactors for 200 V 3 AC can be used for the 200 V versions for 200 V 1 AC. Further information can be found on the Internet at:  
<https://support.industry.siemens.com/cs/document/109486005>  
<https://support.industry.siemens.com/cs/document/109482011>

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

Line-side components &gt; Line reactors

## Technical specifications

| Line voltage 200 ... 240 V 3 AC <sup>1)</sup> or 380 ... 480 V 3 AC                               |                 | Line reactor                                                         |                                                                      |                                                                      |                                              |
|---------------------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------|
|                                                                                                   |                 | 6SL3203-OCE13-2AA0                                                   | 6SL3203-OCE21-0AA0                                                   | 6SL3203-OCE21-8AA0                                                   | 6SL3203-OCE23-8AA0                           |
| Rated current                                                                                     | A               | 4                                                                    | 11.3                                                                 | 22.3                                                                 | 47                                           |
| Power loss at 50/60 Hz                                                                            | W               | 23/26                                                                | 36/40                                                                | 53/59                                                                | 88/97                                        |
| Line supply/load connection<br>1L1, 1L2, 1L3<br>2L1, 2L2, 2L3                                     |                 | Screw terminals                                                      | Screw terminals                                                      | Screw terminals                                                      | Screw terminals                              |
| • Conductor cross-section                                                                         | mm <sup>2</sup> | 4                                                                    | 4                                                                    | 10                                                                   | 16                                           |
| PE connection                                                                                     |                 | M4 × 8; U washer;<br>spring lock washer                              | M4 × 8; U washer;<br>spring lock washer                              | M5 × 10; U washer;<br>spring lock washer                             | M5 × 10; U washer;<br>spring lock washer     |
| Degree of protection                                                                              |                 | IP20                                                                 | IP20                                                                 | IP20                                                                 | IP20                                         |
| Dimensions                                                                                        |                 |                                                                      |                                                                      |                                                                      |                                              |
| • Width                                                                                           | mm (in)         | 125 (4.92)                                                           | 125 (4.92)                                                           | 125 (4.92)                                                           | 190 (7.48)                                   |
| • Height                                                                                          | mm (in)         | 120 (4.72)                                                           | 140 (5.51)                                                           | 145 (5.71)                                                           | 220 (8.66)                                   |
| • Depth                                                                                           | mm (in)         | 71 (2.8)                                                             | 71 (2.8)                                                             | 91 (3.58)                                                            | 91 (3.58)                                    |
| Weight, approx.                                                                                   | kg (lb)         | 1.1 (2.43)                                                           | 2.1 (4.63)                                                           | 2.95 (6.5)                                                           | 7.8 (17.2)                                   |
| Suitable for<br>PM240-2 Power Module<br>standard variant<br>200 ... 240 V 3 AC <sup>1)</sup>      | Type            | 6SL3210-1PB13-0 . L0<br>6SL3210-1PB13-8 . L0                         | 6SL3210-1PB15-5 . L0<br>6SL3210-1PB17-4 . L0<br>6SL3210-1PB21-0 . L0 | 6SL3210-1PB21-4 . L0<br>6SL3210-1PB21-8 . L0                         | 6SL3210-1PC22-2 . L0<br>6SL3210-1PC22-8 . L0 |
| • Frame size                                                                                      |                 | FSA                                                                  | FSB                                                                  | FSC                                                                  | FSC                                          |
| Suitable for<br>PM240-2 Power Module<br>standard variant<br>380 ... 480 V 3 AC                    | Type            | 6SL3210-1PE11-8 . L1<br>6SL3210-1PE12-3 . L1<br>6SL3210-1PE13-2 . L1 | 6SL3210-1PE14-3 . L1<br>6SL3210-1PE16-1 . L1<br>6SL3210-1PE18-0 . L1 | 6SL3210-1PE21-1 . L0<br>6SL3210-1PE21-4 . L0<br>6SL3210-1PE21-8 . L0 | 6SL3210-1PE22-7 . L0<br>6SL3210-1PE23-3 . L0 |
| • Frame size                                                                                      |                 | FSA                                                                  | FSA                                                                  | FSB                                                                  | FSC                                          |
| Suitable for<br>PM240-2 Power Module,<br>push-through variant<br>200 ... 240 V 3 AC <sup>1)</sup> | Type            | 6SL3211-1PB13-8 . L0                                                 | 6SL3211-1PB21-0 . L0                                                 | 6SL3211-1PB21-8 . L0                                                 | –                                            |
| • Frame size                                                                                      |                 | FSA                                                                  | FSB                                                                  | FSC                                                                  | –                                            |
| Suitable for<br>PM240-2 Power Module<br>push-through variant<br>380 ... 480 V 3 AC                | Type            | –                                                                    | 6SL3211-1PE18-0 . L1                                                 | 6SL3211-1PE21-8 . L0                                                 | 6SL3211-1PE23-3 . L0                         |
| • Frame size                                                                                      |                 | –                                                                    | FSA                                                                  | FSB                                                                  | FSC                                          |

<sup>1)</sup> With the appropriate wiring, the line reactors for 200 V 3 AC can be used for the 200 V versions for 200 V 1 AC. Further information can be found on the Internet at:  
<https://support.industry.siemens.com/cs/document/109486005>  
<https://support.industry.siemens.com/cs/document/109482011>

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Line-side components > Recommended line-side overcurrent protection devices

#### Selection and ordering data

##### Recommended line-side overcurrent protection devices for PM240-2 Power Modules

Overcurrent protection devices are absolutely necessary for the operation of the inverters. The following tables list recommendations for fuses.

Siemens fuses of type 3NA3 and 3NE1 for use in the area of validity of IEC

UL-listed fuses Class J or Siemens 3NE1 fuses for use in the USA and Canada

Recommendations on further overcurrent protection devices are available at:

<https://support.industry.siemens.com/cs/document/109486009>

The Short Circuit Current Rating (SCCR) according to UL for industrial control panel installations to NEC Article 409 or UL 508A/508C or UL 61800-5-1 is as follows for Class J fuses for

- PM240-2 Power Modules for SINAMICS G120: 100 kA

SCCR and ICC values for combination with further overcurrent protection devices are available at:

<https://support.industry.siemens.com/cs/document/109486009>

##### Notes for installations in Canada:

The inverters are intended for line supply systems with overvoltage category III. More information is available in the technical documentation on the Internet at:

[www.siemens.com/sinamics-g120/documentation](http://www.siemens.com/sinamics-g120/documentation)

More information about the listed Siemens fuses is available in Catalog LV 10 as well as in the Industry Mall.

| Rated power <sup>1)</sup> |      | PM240-2 Power Module<br>standard variant |            | IEC-compliant |             | UL/cUL-compliant                |         |
|---------------------------|------|------------------------------------------|------------|---------------|-------------|---------------------------------|---------|
| kW                        | hp   | Type                                     | Frame size | Fuse          | Article No. | Fuse type                       | Current |
|                           |      | 6SL3210-...                              |            | Current<br>A  |             | Rated voltage 600 V AC<br>Class |         |
| 200 ... 240 V 1 AC/3 AC   |      |                                          |            |               |             |                                 |         |
| 0.55                      | 0.75 | 1PB13-0 . L0                             | FSA        | 16            | 3NA3805     | J                               | 15      |
| 0.75                      | 1    | 1PB13-8 . L0                             | FSA        | 16            | 3NA3805     | J                               | 15      |
| 1.1                       | 1.5  | 1PB15-5 . L0                             | FSB        | 32            | 3NA3812     | J                               | 35      |
| 1.5                       | 2    | 1PB17-4 . L0                             | FSB        | 32            | 3NA3812     | J                               | 35      |
| 2.2                       | 3    | 1PB21-0 . L0                             | FSB        | 32            | 3NA3812     | J                               | 35      |
| 3                         | 4    | 1PB21-4 . L0                             | FSC        | 50            | 3NA3820     | J                               | 50      |
| 4                         | 5    | 1PB21-8 . L0                             | FSC        | 50            | 3NA3820     | J                               | 50      |
| 200 ... 240 V 3 AC        |      |                                          |            |               |             |                                 |         |
| 5.5                       | 7.5  | 1PC22-2 . L0                             | FSC        | 50            | 3NA3820     | J                               | 50      |
| 7.5                       | 10   | 1PC22-8 . L0                             | FSC        | 50            | 3NA3820     | J                               | 50      |
| 11                        | 15   | 1PC24-2UL0                               | FSD        | 63            | 3NA3822     | J                               | 60      |
| 15                        | 20   | 1PC25-4UL0                               | FSD        | 80            | 3NA3824     | J                               | 70      |
| 18.5                      | 25   | 1PC26-8UL0                               | FSD        | 100           | 3NA3830     | J                               | 90      |
| 22                        | 30   | 1PC28-0UL0                               | FSE        | 100           | 3NA3830     | J                               | 100     |
| 30                        | 40   | 1PC31-1UL0                               | FSE        | 160           | 3NA3836     | J                               | 150     |
| 37                        | 50   | 1PC31-3UL0                               | FSF        | 200           | 3NA3140     | J                               | 175     |
| 45                        | 60   | 1PC31-6UL0                               | FSF        | 200           | 3NA3140     | J                               | 200     |
| 55                        | 75   | 1PC31-8UL0                               | FSF        | 224           | 3NA3142     | J                               | 250     |

<sup>1)</sup> Rated power based on the rated output current  $I_{rated}$ . The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Line-side components > Recommended line-side overcurrent protection devices

### Selection and ordering data (continued)

| Rated power <sup>1)</sup> |      | PM240-2 Power Module<br>standard variant |            | IEC-compliant        |             | UL/cUL-compliant       |             |
|---------------------------|------|------------------------------------------|------------|----------------------|-------------|------------------------|-------------|
|                           |      |                                          |            | Fuse                 |             | Fuse type              |             |
| kW                        | hp   | Type                                     | Frame size | Current              | Article No. | Rated voltage 600 V AC |             |
|                           |      |                                          |            | A                    |             | Class                  | Current     |
| 380 ... 480 V 3 AC        |      |                                          |            |                      |             |                        |             |
| 0.55                      | 0.75 | 1PE11-8 . L1                             | FSA        | 10                   | 3NA3803     | J                      | 10          |
| 0.75                      | 1    | 1PE12-3 . L1                             | FSA        | 10                   | 3NA3803     | J                      | 10          |
| 1.1                       | 1.5  | 1PE13-2 . L1                             | FSA        | 16                   | 3NA3805     | J                      | 15          |
| 1.5                       | 2    | 1PE14-3 . L1                             | FSA        | 16                   | 3NA3805     | J                      | 15          |
| 2.2                       | 3    | 1PE16-1 . L1                             | FSA        | 16                   | 3NA3805     | J                      | 15          |
| 3                         | 4    | 1PE18-0 . L1                             | FSA        | 16                   | 3NA3805     | J                      | 15          |
| 4                         | 5    | 1PE21-1 . L0                             | FSB        | 32                   | 3NA3812     | J                      | 35          |
| 5.5                       | 7.5  | 1PE21-4 . L0                             | FSB        | 32                   | 3NA3812     | J                      | 35          |
| 7.5                       | 10   | 1PE21-8 . L0                             | FSB        | 32                   | 3NA3812     | J                      | 35          |
| 11                        | 15   | 1PE22-7 . L0                             | FSC        | 50                   | 3NA3820     | J                      | 50          |
| 15                        | 20   | 1PE23-3 . L0                             | FSC        | 50                   | 3NA3820     | J                      | 50          |
| 18.5                      | 25   | 1PE23-8 . L0                             | FSD        | 63                   | 3NA3822     | J                      | 60          |
| 22                        | 30   | 1PE24-5 . L0                             | FSD        | 80                   | 3NA3824     | J                      | 70          |
| 30                        | 40   | 1PE26-0 . L0                             | FSD        | 100                  | 3NA3830     | J                      | 90          |
| 37                        | 50   | 1PE27-5 . L0                             | FSD        | 100                  | 3NA3830     | J                      | 100         |
| 45                        | 60   | 1PE28-8 . L0                             | FSE        | 125                  | 3NA3832     | J                      | 125         |
| 55                        | 75   | 1PE31-1 . L0                             | FSE        | 160                  | 3NA3836     | J                      | 150         |
| 75                        | 100  | 1PE31-5 . L0                             | FSF        | 200                  | 3NA3140     | J                      | 200         |
| 90                        | 125  | 1PE31-8 . L0                             | FSF        | 224                  | 3NA3142     | J                      | 250         |
| 110                       | 150  | 1PE32-1 . L0                             | FSF        | 300                  | 3NA3250     | J                      | 300         |
| 132                       | 200  | 1PE32-5 . L0                             | FSF        | 315                  | 3NA3252     | J                      | 350         |
| 160                       | 250  | 1PE33-0 . L0                             | FSG        | 355                  | 3NA3254     | J                      | 400         |
| 200                       | 300  | 1PE33-7 . L0                             | FSG        | 400                  | 3NA3260     | J                      | 500         |
| 250                       | 400  | 1PE34-8 . L0                             | FSG        | 630                  | 3NA3372     | J                      | 600         |
| 500 ... 690 V 3 AC        |      |                                          |            |                      |             |                        |             |
| 11                        | 10   | 1PH21-4 . L0                             | FSD        | 20                   | 3NA3807-6   | J                      | 20          |
| 15                        | 15   | 1PH22-0 . L0                             | FSD        | 25                   | 3NA3810-6   | J                      | 25          |
| 18.5                      | 20   | 1PH22-3 . L0                             | FSD        | 32                   | 3NA3812-6   | J                      | 30          |
| 22                        | 25   | 1PH22-7 . L0                             | FSD        | 40                   | 3NA3817-6KJ | J                      | 35          |
| 30                        | 30   | 1PH23-5 . L0                             | FSD        | 50                   | 3NA3820-6KJ | J                      | 50          |
| 37                        | 40   | 1PH24-2 . L0                             | FSD        | 63                   | 3NA3822-6   | J                      | 60          |
| 45                        | 50   | 1PH25-2 . L0                             | FSE        | 80                   | 3NA3824-6   | J                      | 80          |
| 55                        | 60   | 1PH26-2 . L0                             | FSE        | 80                   | 3NA3824-6   | J                      | 80          |
| 75                        | 75   | 1PH28-0 . L0                             | FSF        | 100                  | 3NA3830-6   | J                      | 110         |
| 90                        | 100  | 1PH31-0 . L0                             | FSF        | 125                  | 3NA3132-6   | J                      | 150         |
| 110                       | 100  | 1PH31-2 . L0                             | FSF        | 160                  | 3NA3136-6   | J                      | 150         |
| 132                       | 125  | 1PH31-4 . L0                             | FSF        | 200                  | 3NA3140-6   | J                      | 200         |
|                           |      |                                          |            | IEC and UL-compliant |             |                        |             |
|                           |      |                                          |            | Fuse                 |             | Fuse                   |             |
|                           |      |                                          |            | Current              | Article No. | Current                | Article No. |
| A                         | A    |                                          |            |                      |             |                        |             |
| 160                       | 150  | 1PH31-7CLO                               | FSG        | 250                  | 3NE1331-0   | 250                    | 3NE1331-0   |
| 200                       | 200  | 1PH32-1CLO                               | FSG        | 315                  | 3NE1230-0   | 315                    | 3NE1230-0   |
| 250                       | 250  | 1PH32-5CLO                               | FSG        | 355                  | 3NE1331-0   | 355                    | 3NE1331-0   |

<sup>1)</sup> Rated power based on the rated output current  $I_{rated}$ . The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

**SINAMICS G120 standard inverters**

0.37 kW to 250 kW (0.5 hp to 400 hp)

**Line-side components > Recommended line-side overcurrent protection devices****Selection and ordering data** (continued)

| Rated power <sup>1)</sup>      |     | PM240-2 Power Module<br>push-through variant |            | IEC-compliant |                | UL/cUL-compliant                                   |              |
|--------------------------------|-----|----------------------------------------------|------------|---------------|----------------|----------------------------------------------------|--------------|
|                                |     |                                              |            | Fuse          |                | Fuse type<br>Rated voltage<br>250 V AC or 600 V AC |              |
| kW                             | hp  | Type                                         | Frame size | Current<br>A  | Article No.    | Class                                              | Current<br>A |
| <b>200 ... 240 V 1 AC/3 AC</b> |     |                                              |            |               |                |                                                    |              |
| 0.75                           | 1   | 1PB13-8 . L0                                 | FSA        | 16            | <b>3NA3805</b> | J                                                  | 15           |
| 2.2                            | 3   | 1PB21-0 . L0                                 | FSB        | 32            | <b>3NA3812</b> | J                                                  | 35           |
| 4                              | 5   | 1PB21-8 . L0                                 | FSC        | 50            | <b>3NA3820</b> | J                                                  | 50           |
| <b>200 ... 240 V 3 AC</b>      |     |                                              |            |               |                |                                                    |              |
| 18.5                           | 25  | 1PC26-8UL0                                   | FSD        | 100           | <b>3NA3830</b> | J                                                  | 90           |
| 30                             | 40  | 1PC31-1UL0                                   | FSE        | 160           | <b>3NA3836</b> | J                                                  | 150          |
| 55                             | 75  | 1PC31-8UL0                                   | FSF        | 224           | <b>3NA3142</b> | J                                                  | 250          |
| <b>380 ... 480 V 3 AC</b>      |     |                                              |            |               |                |                                                    |              |
| 3                              | 4   | 1PE18-0 . L1                                 | FSA        | 16            | <b>3NA3805</b> | J                                                  | 15           |
| 7.5                            | 10  | 1PE21-8 . L0                                 | FSB        | 32            | <b>3NA3812</b> | J                                                  | 35           |
| 15                             | 20  | 1PE23-3 . L0                                 | FSC        | 50            | <b>3NA3820</b> | J                                                  | 50           |
| 37                             | 50  | 1PE27-5 . L0                                 | FSD        | 100           | <b>3NA3830</b> | J                                                  | 100          |
| 55                             | 75  | 1PE31-1 . L0                                 | FSE        | 160           | <b>3NA3836</b> | J                                                  | 150          |
| 132                            | 200 | 1PE32-5 . L0                                 | FSF        | 315           | <b>3NA3252</b> | J                                                  | 350          |

<sup>1)</sup> Rated power based on the rated output current  $I_{rated}$ . The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Line-side components > Recommended line-side overcurrent protection devices

### Selection and ordering data (continued)

#### Recommended line-side overcurrent protection devices for PM250 Power Modules

Overcurrent protection devices are absolutely necessary for the operation of the inverters. The following tables list recommendations for fuses.

##### Notes for use in compliance with IEC standards:

The Siemens 3NA3 or 3NE1 fuses and the Siemens 3RV or 3VL circuit breakers are recommended for European countries.

##### Notes for use in compliance with UL regulations:

UL-listed fuses Class J or Siemens 3NE1 fuses with 600 V AC rated voltage (UL-compliant – corresponds to **3NA**) are required for North America.

The Short Circuit Current Rating (SCCR) according to UL for industrial control panel installations according to NEC Article 409 or UL 508A/508C is specified as follows:

- PM250: 40 kA (frame size FSC),  
42 kA (frame sizes FSD to FSF)

##### Notes for installations in Canada:

Overvoltage protection devices in accordance with overvoltage category III and with the following ratings must be connected on the line side of the inverter:

- Rated voltage 480 V (phase-phase), 480 V (phase-ground)
- Voltage limit 4 kV (phase-phase) and 6 kV (phase-ground)

All overvoltage protection devices used must comply with Canadian standards for industrial installations.

More information is available in the technical documentation on the Internet at:

[www.siemens.com/sinamics-g120/documentation](http://www.siemens.com/sinamics-g120/documentation)

More information about the listed Siemens fuses and circuit breakers is available in Catalog LV 10 as well as in the Industry Mall.

| Rated power <sup>1)</sup> |     | PM250 Power Module |            | IEC-compliant Fuse |                       | Circuit breaker                         | UL/cUL-compliant                          |                                  |           |
|---------------------------|-----|--------------------|------------|--------------------|-----------------------|-----------------------------------------|-------------------------------------------|----------------------------------|-----------|
|                           |     | Type               | Frame size | Current A          | Type 3NA3 Article No. | Article No.                             | Fuse Type 3NE1 ( <b>3NA</b> ) Article No. | Fuse type Rated voltage 600 V AC | Current A |
| kW                        | hp  | 6SL3225-...        |            |                    |                       |                                         |                                           | Class                            |           |
| <b>380 ... 480 V 3 AC</b> |     |                    |            |                    |                       |                                         |                                           |                                  |           |
| 7.5                       | 10  | 0BE25-5AA1         | FSC        | 20                 | <b>3NA3807</b>        | <b>3RV2031-4EA10</b>                    | –                                         | K5 <sup>2)</sup>                 | 50        |
| 11                        | 15  | 0BE27-5AA1         | FSC        | 32                 | <b>3NA3812</b>        | <b>3RV2031-4UA10</b>                    | –                                         | K5 <sup>2)</sup>                 | 50        |
| 15                        | 20  | 0BE31-1AA1         | FSC        | 35                 | <b>3NA3814</b>        | <b>3RV2031-4VA10</b>                    | –                                         | K5 <sup>2)</sup>                 | 50        |
| 18.5                      | 25  | 0BE31-5UA0         | FSD        | 50                 | <b>3NA3820</b>        | <b>3RV2042-4KA10</b>                    | –                                         | –                                | –         |
|                           |     | 0BE31-5AA0         |            |                    |                       |                                         | <b>3NE1817-0</b>                          | J                                | 50        |
| 22                        | 30  | 0BE31-8UA0         | FSD        | 63                 | <b>3NA3822</b>        | <b>3RV2042-4KA10</b>                    | –                                         | –                                | –         |
|                           |     | 0BE31-8AA0         |            |                    |                       |                                         | <b>3NE1818-0</b>                          | J                                | 63        |
| 30                        | 40  | 0BE32-2UA0         | FSD        | 80                 | <b>3NA3824</b>        | <b>3RV2042-4MA10</b>                    | –                                         | –                                | –         |
|                           |     | 0BE32-2AA0         |            |                    |                       |                                         | <b>3NE1820-0</b>                          | J                                | 80        |
| 37                        | 50  | 0BE33-0UA0         | FSE        | 100                | <b>3NA3830</b>        | <b>3VA1112-5ED32-.... <sup>*)</sup></b> | –                                         | –                                | –         |
|                           |     | 0BE33-0AA0         |            |                    |                       |                                         | <b>3NE1021-0</b>                          | J                                | 100       |
| 45                        | 60  | 0BE33-7UA0         | FSE        | 125                | <b>3NA3832</b>        | <b>3VA1116-5ED32-.... <sup>*)</sup></b> | –                                         | –                                | –         |
|                           |     | 0BE33-7AA0         |            |                    |                       |                                         | <b>3NE1022-0</b>                          | J                                | 125       |
| 55                        | 75  | 0BE34-5UA0         | FSF        | 160                | <b>3NA3836</b>        | <b>3VA1220-5EF32-.... <sup>*)</sup></b> | –                                         | –                                | –         |
|                           |     | 0BE34-5AA0         |            |                    |                       |                                         | <b>3NE1224-0</b>                          | J                                | 160       |
| 75                        | 100 | 0BE35-5UA0         | FSF        | 200                | <b>3NA3140</b>        | <b>3VA1225-5EF32-.... <sup>*)</sup></b> | –                                         | –                                | –         |
|                           |     | 0BE35-5AA0         |            |                    |                       |                                         | <b>3NE1225-0</b>                          | J                                | 200       |
| 90                        | 125 | 0BE37-5UA0         | FSF        | 250                | <b>3NA3144</b>        | <b>3VA2340-5HL32-.... <sup>*)</sup></b> | –                                         | –                                | –         |
|                           |     | 0BE37-5AA0         |            |                    |                       |                                         | <b>3NE1227-0</b>                          | J                                | 250       |

<sup>1)</sup> Rated power based on the rated output current  $I_{rated}$ . The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> Any UL-listed fuse may be used, e.g. Class K5, Class J, etc.

<sup>\*)</sup> See Catalog LV 10 for Article No. supplements.

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### DC link components > Braking resistors

#### Overview



Braking resistor for PM240-2 Power Modules, frame size FSD



Braking resistor for PM240-2 Power Modules, frame size FSG

Excess energy in the DC link is dissipated in the braking resistor. The braking resistors are intended for use with PM240-2 Power Modules which feature an integrated braking chopper, but cannot regenerate energy to the supply system. For regenerative operation, e.g. the braking of a rotating mass with high moment of inertia, a braking resistor must be connected to convert the resulting energy into heat.

The braking resistors can be installed laterally next to the PM240-2 Power Modules. The braking resistors for the Power Modules, frame sizes FSD to FSG, should be placed outside the control cabinet or outside the switchgear room so that the heat is dissipated away from the Power Modules. The level of air conditioning required is therefore reduced.

Every braking resistor has a temperature switch (UL-listed). The temperature switch should be evaluated to prevent consequential damage if the braking resistor overheats.

A PM250 Power Module is capable of line-commutated energy feedback. A braking resistor cannot be connected and is not necessary.

#### Note:

For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSG.

For more information, see [Shield connection kits in the section Supplementary system components](#).

9

#### Integration

##### Braking resistors that are optionally available depending on the Power Module used

|                                                             | Frame size |     |     |     |     |     |     |
|-------------------------------------------------------------|------------|-----|-----|-----|-----|-----|-----|
|                                                             | FSA        | FSB | FSC | FSD | FSE | FSF | FSG |
| <b>PM240-2 Power Module with integrated braking chopper</b> |            |     |     |     |     |     |     |
| Available frame sizes                                       |            |     |     |     |     |     |     |
| • 200 V versions                                            | ✓          | ✓   | ✓   | ✓   | ✓   | ✓   | –   |
| • 400 V versions                                            | ✓          | ✓   | ✓   | ✓   | ✓   | ✓   | ✓   |
| • 690 V versions                                            | –          | –   | –   | ✓   | ✓   | ✓   | ✓   |
| <b>DC link components</b>                                   |            |     |     |     |     |     |     |
| Braking resistor                                            | S          | S   | S   | S   | S   | S   | S   |

S = Lateral mounting  
– = Not possible

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

DC link components &gt; Braking resistors

## Selection and ordering data

| Rated power                    |      | PM240-2 Power Module<br>standard variant |            | Braking resistor   |
|--------------------------------|------|------------------------------------------|------------|--------------------|
| kW                             | hp   | Type 6SL3210-...                         | Frame size | Article No.        |
| <b>200 ... 240 V 1 AC/3 AC</b> |      |                                          |            |                    |
| 0.55                           | 0.75 | 1PB13-0 . L0                             | FSA        | JJY:023146720008   |
| 0.75                           | 1    | 1PB13-8 . L0                             |            |                    |
| 1.1                            | 1.5  | 1PB15-5 . L0                             | FSB        | JJY:023151720007   |
| 1.5                            | 2    | 1PB17-4 . L0                             |            |                    |
| 2.2                            | 3    | 1PB21-0 . L0                             |            |                    |
| 3                              | 4    | 1PB21-4 . L0                             | FSC        | JJY:023163720018   |
| 4                              | 5    | 1PB21-8 . L0                             |            |                    |
| <b>200 ... 240 V 3 AC</b>      |      |                                          |            |                    |
| 5.5                            | 7.5  | 1PC22-2 . L0                             | FSC        | JJY:023433720001   |
| 7.5                            | 10   | 1PC22-8 . L0                             |            |                    |
| 11                             | 15   | 1PC24-2UL0                               | FSD        | JJY:023422620002   |
| 15                             | 20   | 1PC25-4UL0                               |            |                    |
| 18.5                           | 25   | 1PC26-8UL0                               |            |                    |
| 22                             | 30   | 1PC28-0UL0                               | FSE        | JJY:023423320001   |
| 30                             | 40   | 1PC31-1UL0                               |            |                    |
| 37                             | 50   | 1PC31-3UL0                               | FSF        | JJY:023434020003   |
| 45                             | 60   | 1PC31-6UL0                               |            |                    |
| 55                             | 75   | 1PC31-8UL0                               |            |                    |
| <b>380 ... 480 V 3 AC</b>      |      |                                          |            |                    |
| 0.55                           | 0.75 | 1PE11-8 . L1                             | FSA        | 6SL3201-0BE14-3AA0 |
| 0.75                           | 1    | 1PE12-3 . L1                             |            |                    |
| 1.1                            | 1.5  | 1PE13-2 . L1                             |            |                    |
| 1.5                            | 2    | 1PE14-3 . L1                             |            |                    |
| 2.2                            | 3    | 1PE16-1 . L1                             | FSA        | 6SL3201-0BE21-0AA0 |
| 3                              | 4    | 1PE18-0 . L1                             |            |                    |
| 4                              | 5    | 1PE21-1 . L0                             | FSB        | 6SL3201-0BE21-8AA0 |
| 5.5                            | 7.5  | 1PE21-4 . L0                             |            |                    |
| 7.5                            | 10   | 1PE21-8 . L0                             |            |                    |
| 11                             | 15   | 1PE22-7 . L0                             | FSC        | 6SL3201-0BE23-8AA0 |
| 15                             | 20   | 1PE23-3 . L0                             |            |                    |
| 18.5                           | 25   | 1PE23-8 . L0                             | FSD        | JJY:023422620001   |
| 22                             | 30   | 1PE24-5 . L0                             |            |                    |
| 30                             | 40   | 1PE26-0 . L0                             | FSD        | JJY:023424020001   |
| 37                             | 50   | 1PE27-5 . L0                             |            |                    |
| 45                             | 60   | 1PE28-8 . L0                             | FSE        | JJY:023434020001   |
| 55                             | 75   | 1PE31-1 . L0                             |            |                    |
| 75                             | 100  | 1PE31-5 . L0                             | FSF        | JJY:023454020001   |
| 90                             | 125  | 1PE31-8 . L0                             |            |                    |
| 110                            | 150  | 1PE32-1 . L0                             | FSF        | JJY:023464020001   |
| 132                            | 200  | 1PE32-5 . L0                             |            |                    |
| 160                            | 250  | 1PE33-0 . L0                             | FSG        | 6SL3000-1BE32-5AA0 |
| 200                            | 300  | 1PE33-7 . L0                             |            |                    |
| 250                            | 400  | 1PE34-8 . L0                             |            |                    |

**SINAMICS G120 standard inverters**

0.37 kW to 250 kW (0.5 hp to 400 hp)

**DC link components > Braking resistors****Selection and ordering data** (continued)

| Rated power        |     | PM240-2 Power Module<br>standard variant |            | Braking resistor   |
|--------------------|-----|------------------------------------------|------------|--------------------|
| kW                 | hp  | Type 6SL3210-...                         | Frame size | Article No.        |
| 500 ... 690 V 3 AC |     |                                          |            |                    |
| 11                 | 10  | 1PH21-4 . L0                             | FSD        | JJY:023424020002   |
| 15                 | 15  | 1PH22-0 . L0                             |            |                    |
| 18.5               | 20  | 1PH22-3 . L0                             |            |                    |
| 22                 | 25  | 1PH22-7 . L0                             |            |                    |
| 30                 | 30  | 1PH23-5 . L0                             |            |                    |
| 37                 | 40  | 1PH24-2 . L0                             |            |                    |
| 45                 | 50  | 1PH25-2 . L0                             | FSE        | JJY:023434020002   |
| 55                 | 60  | 1PH26-2 . L0                             |            |                    |
| 75                 | 75  | 1PH28-0 . L0                             | FSF        | JJY:023464020002   |
| 90                 | 100 | 1PH31-0 . L0                             |            |                    |
| 110                | 100 | 1PH31-2 . L0                             |            |                    |
| 132                | 125 | 1PH31-4 . L0                             |            |                    |
| 160                | 150 | 1PH31-7CL0                               | FSG        | 6SL3000-1BH32-5AA0 |
| 200                | 200 | 1PH32-1CL0                               |            |                    |
| 250                | 250 | 1PH32-5CL0                               |            |                    |

| Rated power             |     | PM240-2 Power Module<br>push-through variant |            | Braking resistor   |
|-------------------------|-----|----------------------------------------------|------------|--------------------|
| kW                      | hp  | Type 6SL3211-...                             | Frame size | Article No.        |
| 200 ... 240 V 1 AC/3 AC |     |                                              |            |                    |
| 0.75                    | 1   | 1PB13-8 . L0                                 | FSA        | JJY:023146720008   |
| 2.2                     | 3   | 1PB21-0 . L0                                 | FSB        | JJY:023151720007   |
| 4                       | 5   | 1PB21-8 . L0                                 | FSC        | JJY:023163720018   |
| 200 ... 240 V 3 AC      |     |                                              |            |                    |
| 18.5                    | 25  | 1PC26-8UL0                                   | FSD        | JJY:023422620002   |
| 30                      | 40  | 1PC31-1UL0                                   | FSE        | JJY:023423320001   |
| 55                      | 75  | 1PC31-8UL0                                   | FSF        | JJY:023434020003   |
| 380 ... 480 V 3 AC      |     |                                              |            |                    |
| 3                       | 4   | 1PE18-0 . L1                                 | FSA        | 6SL3201-0BE21-0AA0 |
| 7.5                     | 10  | 1PE21-8 . L0                                 | FSB        | 6SL3201-0BE21-8AA0 |
| 15                      | 20  | 1PE23-3 . L0                                 | FSC        | 6SL3201-0BE23-8AA0 |
| 37                      | 50  | 1PE27-5 . L0                                 | FSD        | JJY:023424020001   |
| 55                      | 75  | 1PE31-1 . L0                                 | FSE        | JJY:023434020001   |
| 132                     | 200 | 1PE32-5 . L0                                 | FSF        | JJY:023464020001   |

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

DC link components > Braking resistors

## Technical specifications

| Line voltage 200 ... 240 V 1 AC/3 AC                                                              |          | Braking resistor                             |                                                                      |                                              |
|---------------------------------------------------------------------------------------------------|----------|----------------------------------------------|----------------------------------------------------------------------|----------------------------------------------|
|                                                                                                   |          | JJY:023146720008                             | JJY:023151720007                                                     | JJY:023163720018                             |
| <b>Resistance</b>                                                                                 | $\Omega$ | 200                                          | 68                                                                   | 37                                           |
| <b>Rated power <math>P_{DB}</math></b><br>(Continuous braking power)                              | kW       | 0.0375                                       | 0.11                                                                 | 0.2                                          |
| <b>Peak power <math>P_{max}</math></b><br>(load duration $t_a = 12$ s with<br>period $t = 240$ s) | kW       | 0.75                                         | 2.2                                                                  | 4                                            |
| <b>Power connection</b>                                                                           |          | Cable                                        | Cable                                                                | Cable                                        |
| <b>Thermostatic switch</b>                                                                        |          | Integrated                                   | Integrated                                                           | Integrated                                   |
| <b>Degree of protection</b>                                                                       |          | IP20                                         | IP20                                                                 | IP20                                         |
| <b>Dimensions</b>                                                                                 |          |                                              |                                                                      |                                              |
| • Width                                                                                           | mm (in)  | 60 (2.36)                                    | 60 (2.36)                                                            | 60 (2.36)                                    |
| • Height                                                                                          | mm (in)  | 167 (6.57)                                   | 217 (8.54)                                                           | 337 (13.27)                                  |
| • Depth                                                                                           | mm (in)  | 30 (1.18)                                    | 30 (1.18)                                                            | 30 (1.18)                                    |
| <b>Weight, approx.</b>                                                                            | kg (lb)  | 0.5 (1.10)                                   | 0.7 (1.54)                                                           | 1.1 (2.43)                                   |
| <b>Suitable for<br/>PM240-2 Power Module<br/>standard variant</b>                                 | Type     | 6SL3210-1PB13-0 . L0<br>6SL3210-1PB13-8 . L0 | 6SL3210-1PB15-5 . L0<br>6SL3210-1PB17-4 . L0<br>6SL3210-1PB21-0 . L0 | 6SL3210-1PB21-4 . L0<br>6SL3210-1PB21-8 . L0 |
| <b>Suitable for<br/>PM240-2 Power Module<br/>push-through variant</b>                             | Type     | 6SL3211-1PB13-8 . L0                         | 6SL3211-1PB21-0 . L0                                                 | 6SL3211-1PB21-8 . L0                         |
| • Frame size                                                                                      |          | FSA                                          | FSB                                                                  | FSC                                          |

| Line voltage 200 ... 240 V 3 AC                                                                   |          | Braking resistor                             |                                                                |                                          |                                                                |
|---------------------------------------------------------------------------------------------------|----------|----------------------------------------------|----------------------------------------------------------------|------------------------------------------|----------------------------------------------------------------|
|                                                                                                   |          | JJY:023433720001                             | JJY:023422620002                                               | JJY:023423320001                         | JJY:023434020003                                               |
| <b>Resistance</b>                                                                                 | $\Omega$ | 20                                           | 7.5                                                            | 4.5                                      | 2.5                                                            |
| <b>Rated power <math>P_{DB}</math></b><br>(Continuous braking power)                              | kW       | 0.375                                        | 0.93                                                           | 1.5                                      | 2.75                                                           |
| <b>Peak power <math>P_{max}</math></b><br>(load duration $t_a = 12$ s with<br>period $t = 240$ s) | kW       | 7.5                                          | 18.5                                                           | 30                                       | 55                                                             |
| <b>Power connection</b>                                                                           |          | Cable                                        | Cable                                                          | Cable                                    | Cable                                                          |
| <b>Thermostatic switch</b>                                                                        |          | Integrated                                   | Integrated                                                     | Integrated                               | Integrated                                                     |
| <b>Degree of protection</b>                                                                       |          | IP20                                         | IP21                                                           | IP21                                     | IP21                                                           |
| <b>Dimensions</b>                                                                                 |          |                                              |                                                                |                                          |                                                                |
| • Width                                                                                           | mm (in)  | 337 (13.27)                                  | 220 (8.66)                                                     | 220 (8.66)                               | 350 (13.78)                                                    |
| • Height                                                                                          | mm (in)  | 120 (4.72)                                   | 470 (18.5)                                                     | 560 (22.05)                              | 630 (24.8)                                                     |
| • Depth                                                                                           | mm (in)  | 30 (1.18)                                    | 180 (7.09)                                                     | 180 (7.09)                               | 180 (7.09)                                                     |
| <b>Weight, approx.</b>                                                                            | kg (lb)  | 2 (4.41)                                     | 7 (15.4)                                                       | 8.5 (18.7)                               | 13.5 (29.8)                                                    |
| <b>Suitable for<br/>PM240-2 Power Module<br/>standard variant</b>                                 | Type     | 6SL3210-1PC22-2 . L0<br>6SL3210-1PC22-8 . L0 | 6SL3210-1PC24-2UL0<br>6SL3210-1PC25-4UL0<br>6SL3210-1PC26-8UL0 | 6SL3210-1PC28-0UL0<br>6SL3210-1PC31-1UL0 | 6SL3210-1PC31-3UL0<br>6SL3210-1PC31-6UL0<br>6SL3210-1PC31-8UL0 |
| <b>Suitable for<br/>PM240-2 Power Module<br/>push-through variant</b>                             | Type     | –                                            | 6SL3211-1PC26-8UL0                                             | 6SL3211-1PC31-1UL0                       | 6SL3211-1PC31-8UL0                                             |
| • Frame size                                                                                      |          | FSC                                          | FSD                                                            | FSE                                      | FSF                                                            |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### DC link components > Braking resistors

#### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                                                                   |                 | Braking resistor                                                                             |                                              |                                                                      |                                              |
|---------------------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------------------------------|----------------------------------------------|
|                                                                                                   |                 | 6SL3201-0BE14-3AA0                                                                           | 6SL3201-0BE21-0AA0                           | 6SL3201-0BE21-8AA0                                                   | 6SL3201-0BE23-8AA0                           |
| <b>Resistance</b>                                                                                 | Ω               | 370                                                                                          | 140                                          | 75                                                                   | 30                                           |
| <b>Rated power <math>P_{DB}</math></b><br>(Continuous braking power)                              | kW              | 0.075                                                                                        | 0.2                                          | 0.375                                                                | 0.925                                        |
| <b>Peak power <math>P_{max}</math></b><br>(load duration $t_a = 12$ s with<br>period $t = 240$ s) | kW              | 1.5                                                                                          | 4                                            | 7.5                                                                  | 18.5                                         |
| <b>Power connection</b>                                                                           |                 | Terminal block                                                                               | Terminal block                               | Terminal block                                                       | Terminal block                               |
| • Conductor cross-section                                                                         | mm <sup>2</sup> | 2.5                                                                                          | 2.5                                          | 2.5                                                                  | 6                                            |
| <b>Thermostatic switch</b>                                                                        |                 | NC contact                                                                                   | NC contact                                   | NC contact                                                           | NC contact                                   |
| • Contact load, max.                                                                              |                 | 250 V AC/2.5 A                                                                               | 250 V AC/2.5 A                               | 250 V AC/2.5 A                                                       | 250 V AC/2.5 A                               |
| • Conductor cross-section                                                                         | mm <sup>2</sup> | 2.5                                                                                          | 2.5                                          | 2.5                                                                  | 2.5                                          |
| <b>PE connection</b>                                                                              |                 |                                                                                              |                                              |                                                                      |                                              |
| • Via terminal block                                                                              |                 | Yes                                                                                          | Yes                                          | Yes                                                                  | Yes                                          |
| • PE connection on housing                                                                        |                 | M4 screw                                                                                     | M4 screw                                     | M4 screw                                                             | M4 screw                                     |
| <b>Degree of protection</b>                                                                       |                 | IP20                                                                                         | IP20                                         | IP20                                                                 | IP20                                         |
| <b>Dimensions</b>                                                                                 |                 |                                                                                              |                                              |                                                                      |                                              |
| • Width                                                                                           | mm (in)         | 105 (4.13)                                                                                   | 105 (4.13)                                   | 175 (6.89)                                                           | 250 (9.84)                                   |
| • Height                                                                                          | mm (in)         | 295 (11.61)                                                                                  | 345 (13.58)                                  | 345 (13.58)                                                          | 490 (19.29)                                  |
| • Depth                                                                                           | mm (in)         | 100 (3.94)                                                                                   | 100 (3.94)                                   | 100 (3.94)                                                           | 140 (5.51)                                   |
| <b>Weight, approx.</b>                                                                            | kg (lb)         | 1.48 (3.26)                                                                                  | 1.8 (3.97)                                   | 2.73 (6.02)                                                          | 6.2 (13.7)                                   |
| <b>Suitable for<br/>PM240-2 Power Module<br/>standard variant</b>                                 | Type            | 6SL3210-1PE11-8 . L1<br>6SL3210-1PE12-3 . L1<br>6SL3210-1PE13-2 . L1<br>6SL3210-1PE14-3 . L1 | 6SL3210-1PE16-1 . L1<br>6SL3210-1PE18-0 . L1 | 6SL3210-1PE21-1 . L0<br>6SL3210-1PE21-4 . L0<br>6SL3210-1PE21-8 . L0 | 6SL3210-1PE22-7 . L0<br>6SL3210-1PE23-3 . L0 |
| <b>Suitable for<br/>PM240-2 Power Module<br/>push-through variant</b>                             | Type            | –                                                                                            | 6SL3211-1PE18-0 . L1                         | 6SL3211-1PE21-8 . L0                                                 | 6SL3211-1PE23-3 . L0                         |
| • Frame size                                                                                      |                 | FSA                                                                                          | FSA                                          | FSB                                                                  | FSC                                          |

| Line voltage 380 ... 480 V 3 AC                                                                   |         | Braking resistor                             |                                              |                                              |                                              |                                              |
|---------------------------------------------------------------------------------------------------|---------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
|                                                                                                   |         | JJY:023422620001                             | JJY:023424020001                             | JJY:023434020001                             | JJY:023454020001 <sup>1)</sup>               | JJY:023464020001 <sup>2)</sup>               |
| <b>Resistance</b>                                                                                 | Ω       | 25                                           | 15                                           | 10                                           | 7.1                                          | 5                                            |
| <b>Rated power <math>P_{DB}</math></b><br>(Continuous braking power)                              | kW      | 1.1                                          | 1.85                                         | 2.75                                         | 3.85                                         | 5.5                                          |
| <b>Peak power <math>P_{max}</math></b><br>(load duration $t_a = 12$ s with<br>period $t = 240$ s) | kW      | 22                                           | 37                                           | 55                                           | 77                                           | 110                                          |
| <b>Power connection</b>                                                                           |         | Cable                                        | Cable                                        | Cable                                        | Cable                                        | Cable                                        |
| <b>Thermostatic switch</b>                                                                        |         | Integrated                                   | Integrated                                   | Integrated                                   | Integrated                                   | Integrated                                   |
| <b>Degree of protection</b>                                                                       |         | IP21                                         | IP21                                         | IP21                                         | IP21                                         | IP21                                         |
| <b>Dimensions</b>                                                                                 |         |                                              |                                              |                                              |                                              |                                              |
| • Width                                                                                           | mm (in) | 220 (8.66)                                   | 220 (8.66)                                   | 350 (13.78)                                  | 1)                                           | 2)                                           |
| • Height                                                                                          | mm (in) | 470 (18.5)                                   | 610 (24.02)                                  | 630 (24.8)                                   | 1)                                           | 2)                                           |
| • Depth                                                                                           | mm (in) | 180 (7.09)                                   | 180 (7.09)                                   | 180 (7.09)                                   | 1)                                           | 2)                                           |
| <b>Weight, approx.</b>                                                                            | kg (lb) | 7 (15.4)                                     | 9.5 (20.9)                                   | 13.5 (29.8)                                  | 20.5 (45.2)                                  | 27 (59.5)                                    |
| <b>Suitable for<br/>PM240-2 Power Module<br/>standard variant</b>                                 | Type    | 6SL3210-1PE23-8 . L0<br>6SL3210-1PE24-5 . L0 | 6SL3210-1PE26-0 . L0<br>6SL3210-1PE27-5 . L0 | 6SL3210-1PE28-8 . L0<br>6SL3210-1PE31-1 . L0 | 6SL3210-1PE31-5 . L0<br>6SL3210-1PE31-8 . L0 | 6SL3210-1PE32-1 . L0<br>6SL3210-1PE32-5 . L0 |
| <b>Suitable for<br/>PM240-2 Power Module<br/>push-through variant</b>                             | Type    | –                                            | 6SL3211-1PE27-5 . L0                         | 6SL3211-1PE31-1 . L0                         | –                                            | 6SL3211-1PE32-5 . L0                         |
| • Frame size                                                                                      |         | FSD                                          | FSD                                          | FSE                                          | FSF                                          | FSF                                          |

<sup>1)</sup> This braking resistor consists of the two braking resistors, JJY:023422620001 and JJY:023434020001, which must be connected in parallel on the plant/system side.

<sup>2)</sup> This braking resistor consists of two JJY:023434020001 braking resistors, which must be connected in parallel on the plant/system side.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)


## DC link components > Braking resistors

### Technical specifications (continued)

| Line voltage 500 ... 690 V 3 AC                                                 |         | Braking resistor                                                                                                                             |                                              |                                                                                              |
|---------------------------------------------------------------------------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------------------------------------------------------|
|                                                                                 |         | JJY:023424020002                                                                                                                             | JJY:023434020002                             | JJY:023464020002 <sup>1)</sup>                                                               |
| Resistance                                                                      | Ω       | 31                                                                                                                                           | 21                                           | 10.5                                                                                         |
| Rated power $P_{DB}$<br>(Continuous braking power)                              | kW      | 1.85                                                                                                                                         | 2.75                                         | 5.5                                                                                          |
| Peak power $P_{max}$<br>(load duration $t_a = 12$ s with<br>period $t = 240$ s) | kW      | 37                                                                                                                                           | 55                                           | 110                                                                                          |
| Power connection                                                                |         | Cable                                                                                                                                        | Cable                                        | Cable                                                                                        |
| Thermostatic switch                                                             |         | Integrated                                                                                                                                   | Integrated                                   | Integrated                                                                                   |
| Degree of protection                                                            |         | IP21                                                                                                                                         | IP21                                         | IP21                                                                                         |
| Dimensions                                                                      |         |                                                                                                                                              |                                              |                                                                                              |
| • Width                                                                         | mm (in) | 220 (8.66)                                                                                                                                   | 350 (13.78)                                  | 1)                                                                                           |
| • Height                                                                        | mm (in) | 610 (24.02)                                                                                                                                  | 630 (24.8)                                   | 1)                                                                                           |
| • Depth                                                                         | mm (in) | 180 (7.09)                                                                                                                                   | 180 (7.09)                                   | 1)                                                                                           |
| Weight, approx.                                                                 | kg (lb) | 9.5 (20.9)                                                                                                                                   | 13.5 (29.8)                                  | 27 (59.5)                                                                                    |
| Suitable for<br>PM240-2 Power Module                                            | Type    | 6SL3210-1PH21-4 . L0<br>6SL3210-1PH22-0 . L0<br>6SL3210-1PH22-3 . L0<br>6SL3210-1PH22-7 . L0<br>6SL3210-1PH23-5 . L0<br>6SL3210-1PH24-2 . L0 | 6SL3210-1PH25-2 . L0<br>6SL3210-1PH26-2 . L0 | 6SL3210-1PH28-0 . L0<br>6SL3210-1PH31-0 . L0<br>6SL3210-1PH31-2 . L0<br>6SL3210-1PH31-4 . L0 |
| • Frame size                                                                    |         | FSD                                                                                                                                          | FSE                                          | FSF                                                                                          |

| Line voltage 380 ... 480 V 3 AC<br>or 500 ... 690 V 3 AC                       |         | Braking resistor                                                               |                                                                          |
|--------------------------------------------------------------------------------|---------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------|
|                                                                                |         | 6SL3000-1BE32-5AA0                                                             | 6SL3000-1BH32-5AA0                                                       |
| Resistance                                                                     | Ω       | 2.2                                                                            | 4.4                                                                      |
| Rated power $P_{DB}$<br>(Continuous braking power)                             | kW      | 50                                                                             | 50                                                                       |
| Peak power $P_{max}$<br>(load duration $t_a = 15$ s with<br>period $t = 90$ s) | kW      | 250                                                                            | 250                                                                      |
| Power connection                                                               |         | M10 screw stud                                                                 | M10 screw stud                                                           |
| Thermostatic switch                                                            |         | NC contact                                                                     | NC contact                                                               |
| • Contact load, max.                                                           |         | 250 V AC/2.5 A                                                                 | 250 V AC/2.5 A                                                           |
| Degree of protection                                                           |         | IP20                                                                           | IP20                                                                     |
| Dimensions                                                                     |         |                                                                                |                                                                          |
| • Width                                                                        | mm (in) | 810 (31.89)                                                                    | 810 (31.89)                                                              |
| • Height                                                                       | mm (in) | 1325 (52.17)                                                                   | 1325 (52.17)                                                             |
| • Depth                                                                        | mm (in) | 485 (19.09)                                                                    | 485 (19.09)                                                              |
| Weight, approx.                                                                | kg (lb) | 120 (265)                                                                      | 120 (265)                                                                |
| Suitable for<br>PM240-2 Power Module                                           | Type    | 400 V:<br>6SL3210-1PE33-0 . L0<br>6SL3210-1PE33-7 . L0<br>6SL3210-1PE34-8 . L0 | 690 V:<br>6SL3210-1PH31-7CL0<br>6SL3210-1PH32-1CL0<br>6SL3210-1PH32-5CL0 |
| • Frame size                                                                   |         | FSG                                                                            | FSG                                                                      |

### Characteristic curves

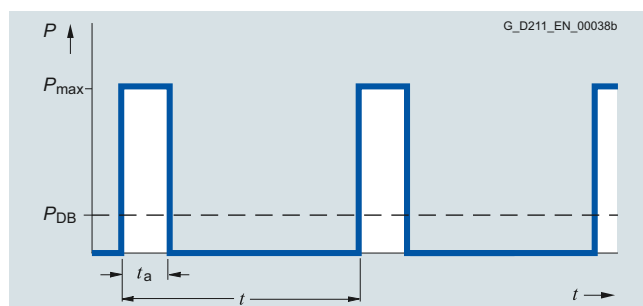

Load diagram for the braking resistors

$t_a = 12$  s or 15 s (see section Technical specifications)  
 $t = 240$  s or 90 s (see section Technical specifications)


<sup>1)</sup> This braking resistor consists of two JJY:023434020002 braking resistors, which must be connected in parallel on the plant/system side.

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Load-side power components > Output reactors

#### Overview

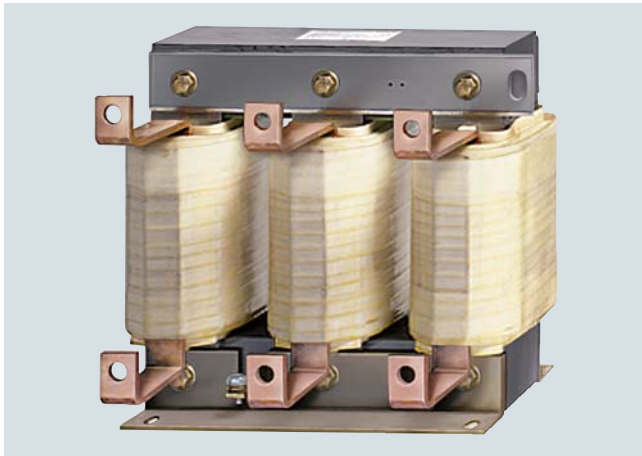

Output reactor for PM240-2 Power Modules, frame size FSG

Output reactors reduce the rate of voltage rise ( $dv/dt$ ) and the height of the current peaks, and enable longer motor cables to be connected.

Owing to the high rates of voltage rise of the fast-switching IGBTs, the capacitance of long motor cables reverses polarity very quickly with every switching operation in the inverter. As a result, the inverter is loaded with additional current peaks of substantial magnitude.

Output reactors reduce the magnitude of these additional peaks because the cable capacitance reverses polarity more slowly across the reactor inductance, thereby attenuating the amplitudes of the current peaks.

When using output reactors, the following should be observed:

- Max. permissible output frequency 150 Hz
- Max. permissible pulse frequency 4 kHz
- The output reactor must be installed as close as possible to the Power Module

#### Integration

*Output reactors that are optionally available depending on the Power Module used*

|                                                                | Frame size |     |     |                 |                 |     |     |
|----------------------------------------------------------------|------------|-----|-----|-----------------|-----------------|-----|-----|
|                                                                | FSA        | FSB | FSC | FSD             | FSE             | FSF | FSG |
| <b>PM240-2 Power Module with integrated braking chopper</b>    |            |     |     |                 |                 |     |     |
| Available frame sizes                                          |            |     |     |                 |                 |     |     |
| • 200 V versions                                               | ✓          | ✓   | ✓   | ✓               | ✓               | ✓   | –   |
| • 400 V versions                                               | ✓          | ✓   | ✓   | ✓               | ✓               | ✓   | ✓   |
| • 690 V versions                                               | –          | –   | –   | ✓ <sup>1)</sup> | ✓ <sup>1)</sup> | ✓   | ✓   |
| <b>Load-side power components</b>                              |            |     |     |                 |                 |     |     |
| Output reactor                                                 | S          | S   | S   | S <sup>1)</sup> | S <sup>1)</sup> | S   | S   |
| <b>PM250 Power Module with line-commutated energy recovery</b> |            |     |     |                 |                 |     |     |
| Available frame sizes                                          |            |     |     |                 |                 |     |     |
| • 200 V versions                                               | –          | –   | ✓   | ✓               | ✓               | ✓   | –   |
| <b>Load-side power components</b>                              |            |     |     |                 |                 |     |     |
| Output reactor                                                 | –          | –   | U   | S               | S               | S   | –   |

U = Base component

S = Lateral mounting

– = Not possible

<sup>1)</sup> There are no optional output reactors available for 690 V versions of PM240-2 Power Modules, frame sizes FSD and FSE.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

Load-side power components &gt; Output reactors

## Selection and ordering data

| Rated power             |      | PM240-2 Power Module<br>standard variant |            | Output reactor     |
|-------------------------|------|------------------------------------------|------------|--------------------|
| kW                      | hp   | Type 6SL3210-...                         | Frame size | Article No.        |
| 200 ... 240 V 1 AC/3 AC |      |                                          |            |                    |
| 0.55                    | 0.75 | 1PB13-0 . L0                             | FSA        | 6SL3202-0AE16-1CA0 |
| 0.75                    | 1    | 1PB13-8 . L0                             |            |                    |
| 1.1                     | 1.5  | 1PB15-5 . L0                             | FSB        | 6SL3202-0AE16-1CA0 |
| 1.5                     | 2    | 1PB17-4 . L0                             | FSB        | 6SL3202-0AE18-8CA0 |
| 2.2                     | 3    | 1PB21-0 . L0                             | FSB        | 6SL3202-0AE21-8CA0 |
| 3                       | 4    | 1PB21-4 . L0                             | FSC        | 6SL3202-0AE21-8CA0 |
| 4                       | 5    | 1PB21-8 . L0                             |            |                    |
| 200 ... 240 V 3 AC      |      |                                          |            |                    |
| 5.5                     | 7.5  | 1PC22-2 . L0                             | FSC        | 6SL3202-0AE23-8CA0 |
| 7.5                     | 10   | 1PC22-8 . L0                             |            |                    |
| 11                      | 15   | 1PC24-2UL0                               | FSD        | 6SE6400-3TC07-5ED0 |
| 15                      | 20   | 1PC25-4UL0                               |            |                    |
| 18.5                    | 25   | 1PC26-8UL0                               |            |                    |
| 22                      | 30   | 1PC28-0UL0                               | FSE        | 6SE6400-3TC14-5FD0 |
| 30                      | 40   | 1PC31-1UL0                               |            |                    |
| 37                      | 50   | 1PC31-3UL0                               | FSF        | 6SE6400-3TC14-5FD0 |
| 45                      | 60   | 1PC31-6UL0                               |            |                    |
| 55                      | 75   | 1PC31-8UL0                               |            |                    |
| 380 ... 480 V 3 AC      |      |                                          |            |                    |
| 0.55                    | 0.75 | 1PE11-8 . L1                             | FSA        | 6SL3202-0AE16-1CA0 |
| 0.75                    | 1    | 1PE12-3 . L1                             |            |                    |
| 1.1                     | 1.5  | 1PE13-2 . L1                             |            |                    |
| 1.5                     | 2    | 1PE14-3 . L1                             |            |                    |
| 2.2                     | 3    | 1PE16-1 . L1                             |            |                    |
| 3                       | 4    | 1PE18-0 . L1                             | FSA        | 6SL3202-0AE18-8CA0 |
| 4                       | 5    | 1PE21-1 . L0                             | FSB        | 6SL3202-0AE21-8CA0 |
| 5.5                     | 7.5  | 1PE21-4 . L0                             |            |                    |
| 7.5                     | 10   | 1PE21-8 . L0                             |            |                    |
| 11                      | 15   | 1PE22-7 . L0                             | FSC        | 6SL3202-0AE23-8CA0 |
| 15                      | 20   | 1PE23-3 . L0                             |            |                    |
| 18.5                    | 25   | 1PE23-8 . L0                             | FSD        | 6SE6400-3TC07-5ED0 |
| 22                      | 30   | 1PE24-5 . L0                             |            |                    |
| 30                      | 40   | 1PE26-0 . L0                             |            |                    |
| 37                      | 50   | 1PE27-5 . L0                             |            |                    |
| 45                      | 60   | 1PE28-8 . L0                             | FSE        | 6SE6400-3TC14-5FD0 |
| 55                      | 75   | 1PE31-1 . L0                             |            |                    |
| 75                      | 100  | 1PE31-5 . L0                             | FSF        | 6SE6400-3TC14-5FD0 |
| 90                      | 125  | 1PE31-8 . L0                             |            |                    |
| 110                     | 150  | 1PE32-1 . L0                             | FSF        | 6SL3000-2BE32-1AA0 |
| 132                     | 200  | 1PE32-5 . L0                             | FSF        | 6SL3000-2BE32-6AA0 |
| 160                     | 250  | 1PE33-0 . L0                             | FSG        | 6SL3000-2BE33-2AA0 |
| 200                     | 300  | 1PE33-7 . L0                             | FSG        | 6SL3000-2BE33-8AA0 |
| 250                     | 400  | 1PE34-8 . L0                             | FSG        | 6SL3000-2BE35-0AA0 |
| 500 ... 690 V 3 AC      |      |                                          |            |                    |
| 75                      | 75   | 1PH28-0 . L0                             | FSF        | 6SL3000-2AH31-0AA0 |
| 90                      | 100  | 1PH31-0 . L0                             |            |                    |
| 110                     | 100  | 1PH31-2 . L0                             | FSF        | 6SL3000-2AH31-5AA0 |
| 132                     | 125  | 1PH31-4 . L0                             |            |                    |
| 160                     | 150  | 1PH31-7CL0                               | FSG        | 6SL3000-2AH31-8AA0 |
| 200                     | 200  | 1PH32-1CL0                               | FSG        | 6SL3000-2AH32-4AA0 |
| 250                     | 250  | 1PH32-5CL0                               | FSG        | 6SL3000-2AH32-6AA0 |

**SINAMICS G120 standard inverters**

0.37 kW to 250 kW (0.5 hp to 400 hp)

Load-side power components &gt; Output reactors

**Selection and ordering data** (continued)

| Rated power                    |     | <b>PM240-2 Power Module<br/>push-through variant</b> |            | Output reactor            |
|--------------------------------|-----|------------------------------------------------------|------------|---------------------------|
| kW                             | hp  | Type 6SL3211-...                                     | Frame size | Article No.               |
| <b>200 ... 240 V 1 AC/3 AC</b> |     |                                                      |            |                           |
| 0.75                           | 1   | 1PB13-8 . L0                                         | FSA        | <b>6SL3202-0AE16-1CA0</b> |
| 2.2                            | 3   | 1PB21-0 . L0                                         | FSB        | <b>6SL3202-0AE21-8CA0</b> |
| 4                              | 5   | 1PB21-8 . L0                                         | FSC        | <b>6SL3202-0AE21-8CA0</b> |
| <b>200 ... 240 V 3 AC</b>      |     |                                                      |            |                           |
| 18.5                           | 25  | 1PC26-8UL0                                           | FSD        | <b>6SE6400-3TC07-5ED0</b> |
| 3                              | 40  | 1PC31-1UL0                                           | FSE        | <b>6SE6400-3TC14-5FD0</b> |
| 55                             | 75  | 1PC31-8UL0                                           | FSF        | <b>6SE6400-3TC14-5FD0</b> |
| <b>380 ... 480 V 3 AC</b>      |     |                                                      |            |                           |
| 3                              | 4   | 1PE18-0 . L1                                         | FSA        | <b>6SL3202-0AE18-8CA0</b> |
| 7.5                            | 10  | 1PE21-8 . L0                                         | FSB        | <b>6SL3202-0AE21-8CA0</b> |
| 15                             | 20  | 1PE23-3 . L0                                         | FSC        | <b>6SL3202-0AE23-8CA0</b> |
| 37                             | 50  | 1PE27-5 . L0                                         | FSD        | <b>6SE6400-3TC07-5ED0</b> |
| 55                             | 75  | 1PE31-1 . L0                                         | FSE        | <b>6SE6400-3TC14-5FD0</b> |
| 132                            | 200 | 1PE32-5 . L0                                         | FSF        | <b>6SL3000-2BE32-6AA0</b> |

| Rated power               |     | <b>PM250 Power Module</b> |            | Output reactor            |
|---------------------------|-----|---------------------------|------------|---------------------------|
| kW                        | hp  | Type 6SL3225-...          | Frame size | Article No.               |
| <b>380 ... 480 V 3 AC</b> |     |                           |            |                           |
| 7.5                       | 10  | 0BE25-5AA1                | FSC        | <b>6SL3202-0AJ23-2CA0</b> |
| 11                        | 15  | 0BE27-5AA1                |            |                           |
| 15                        | 20  | 0BE31-1AA1                |            |                           |
| 18.5                      | 25  | 0BE31-5 . A0              | FSD        | <b>6SE6400-3TC05-4DD0</b> |
| 22                        | 30  | 0BE31-8 . A0              | FSD        | <b>6SE6400-3TC03-8DD0</b> |
| 30                        | 40  | 0BE32-2 . A0              | FSD        | <b>6SE6400-3TC05-4DD0</b> |
| 37                        | 50  | 0BE33-0 . A0              | FSE        | <b>6SE6400-3TC08-0ED0</b> |
| 45                        | 60  | 0BE33-7 . A0              | FSE        | <b>6SE6400-3TC07-5ED0</b> |
| 55                        | 75  | 0BE34-5 . A0              | FSF        | <b>6SE6400-3TC14-5FD0</b> |
| 75                        | 100 | 0BE35-5 . A0              | FSF        | <b>6SE6400-3TC15-4FD0</b> |
| 90                        | 125 | 0BE37-5 . A0              | FSF        | <b>6SE6400-3TC14-5FD0</b> |

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Load-side power components > Output reactors

### Technical specifications

| Line voltage 200 ... 240 V 1 AC/3 AC or 380 ... 480 V 3 AC              |                 | Output reactor (for a 4 kHz pulse frequency)                                                                                |                             |                                                                                        |                                                     |
|-------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------|----------------------------------------------------------------------------------------|-----------------------------------------------------|
|                                                                         |                 | 6SL3202-0AE16-1CA0                                                                                                          | 6SL3202-0AE18-8CA0          | 6SL3202-0AE21-8CA0                                                                     | 6SL3202-0AE23-8CA0                                  |
| Rated current                                                           | A               | 6.1                                                                                                                         | 9                           | 18.5                                                                                   | 39                                                  |
| Power loss                                                              | kW              | 0.09                                                                                                                        | 0.08                        | 0.08                                                                                   | 0.11                                                |
| Connection to the Power Module/<br>motor connection                     |                 | Screw-type terminals                                                                                                        | Screw-type terminals        | Screw-type terminals                                                                   | Screw-type terminals                                |
| • Conductor cross-section                                               | mm <sup>2</sup> | 4                                                                                                                           | 4                           | 10                                                                                     | 16                                                  |
| PE connection                                                           |                 | M4 screw stud                                                                                                               | M4 screw stud               | M5 screw stud                                                                          | M5 screw stud                                       |
| <b>Cable length, max.</b><br>between output reactor and motor           |                 |                                                                                                                             |                             |                                                                                        |                                                     |
| • 200 -10 % ... 240 V +10 % 3 AC and 380 -10 % ... 415 V +10 % 3 AC     |                 |                                                                                                                             |                             |                                                                                        |                                                     |
| - Shielded                                                              | m (ft)          | 150 (492)                                                                                                                   | 150 (492)                   | 150 (492)                                                                              | 150 (492)                                           |
| - Unshielded                                                            | m (ft)          | 225 (738)                                                                                                                   | 225 (738)                   | 225 (738)                                                                              | 225 (738)                                           |
| • 440 ... 480 V 3 AC +10 %                                              |                 |                                                                                                                             |                             |                                                                                        |                                                     |
| - Shielded                                                              | m (ft)          | 100 (328)                                                                                                                   | 100 (328)                   | 100 (328)                                                                              | 100 (328)                                           |
| - Unshielded                                                            | m (ft)          | 150 (492)                                                                                                                   | 150 (492)                   | 150 (492)                                                                              | 150 (492)                                           |
| <b>Dimensions</b>                                                       |                 |                                                                                                                             |                             |                                                                                        |                                                     |
| • Width                                                                 | mm (in)         | 207 (8.15)                                                                                                                  | 207 (8.15)                  | 247 (9.72)                                                                             | 257 (10.12)                                         |
| • Height                                                                | mm (in)         | 175 (6.89)                                                                                                                  | 180 (7.09)                  | 215 (8.46)                                                                             | 235 (9.25)                                          |
| • Depth                                                                 | mm (in)         | 72.5 (2.85)                                                                                                                 | 72.5 (2.85)                 | 100 (3.94)                                                                             | 114.7 (4.52)                                        |
| Degree of protection                                                    |                 | IP20                                                                                                                        | IP20                        | IP20                                                                                   | IP20                                                |
| Weight, approx.                                                         | kg (lb)         | 3.4 (7.5)                                                                                                                   | 3.9 (8.6)                   | 10.1 (22.3)                                                                            | 11.2 (24.7)                                         |
| Suitable for<br>PM240-2 standard variant<br>200 ... 240 V 1 AC/3 AC     | Type            | 6SL3210-1PB13-0 . L0<br>6SL3210-1PB13-8 . L0<br>FSA<br><br>6SL3210-1PB15-5 . L0<br>FSB                                      | 6SL3210-1PB17-4 . L0<br>FSB | 6SL3210-1PB21-0 . L0<br>FSB<br><br>6SL3210-1PB21-4 . L0<br>6SL3210-1PB21-8 . L0<br>FSC | 6SL3210-1PC22-2 . L0<br>6SL3210-1PC22-8 . L0<br>FSC |
| Suitable for<br>PM240-2 standard variant<br>380 ... 480 V 3 AC          | Type            | 6SL3210-1PE11-8 . L1<br>6SL3210-1PE12-3 . L1<br>6SL3210-1PE13-2 . L1<br>6SL3210-1PE14-3 . L1<br>6SL3210-1PE16-1 . L1<br>FSA | 6SL3210-1PE18-0 . L1<br>FSA | 6SL3210-1PE21-1 . L0<br>6SL3210-1PE21-4 . L0<br>6SL3210-1PE21-8 . L0<br>FSB            | 6SL3210-1PE22-7 . L0<br>6SL3210-1PE23-3 . L0<br>FSC |
| Suitable for<br>PM240-2 push-through variant<br>200 ... 240 V 1 AC/3 AC | Type            | 6SL3211-1PB13-8 . L0<br>FSA                                                                                                 | –                           | 6SL3211-1PB21-0 . L0<br>FSB<br><br>6SL3211-1PB21-8 . L0<br>FSC                         | –                                                   |
| Suitable for<br>PM240-2 push-through variant<br>380 ... 480 V 3 AC      | Type            | –                                                                                                                           | 6SL3211-1PE18-0 . L1<br>FSA | 6SL3211-1PE21-8 . L0<br>FSB                                                            | 6SL3211-1PE23-3 . L0<br>FSC                         |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Load-side power components > Output reactors

#### Technical specifications (continued)

| Line voltage 200 ... 240 V 3 AC or 380 ... 480 V 3 AC              |         | Output reactor (for a 4 kHz pulse frequency)                                                        |                                                                                                                              |                                 |                                 |
|--------------------------------------------------------------------|---------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|---------------------------------|---------------------------------|
|                                                                    |         | 6SE6400-3TC07-5ED0                                                                                  | 6SE6400-3TC14-5FD0                                                                                                           | 6SL3000-2BE32-1AA0              | 6SL3000-2BE32-6AA0              |
| Rated current                                                      | A       | 90                                                                                                  | 178                                                                                                                          | 210                             | 260                             |
| Power loss, max.                                                   | kW      | 0.27                                                                                                | 0.47                                                                                                                         | 0.49                            | 0.5                             |
| Connection to the Power Module/<br>motor connection                |         | Flat connector for<br>M6 screw                                                                      | Flat connector for<br>M8 screw                                                                                               | Flat connector for<br>M10 screw | Flat connector for<br>M10 screw |
| PE connection                                                      |         | M6 screw                                                                                            | M8 screw                                                                                                                     | M8 screw                        | M8 screw                        |
| Cable length, max.<br>between output reactor and motor             |         |                                                                                                     |                                                                                                                              |                                 |                                 |
| • Shielded                                                         | m (ft)  | 200 (656)                                                                                           | 200 (656)                                                                                                                    | 300 (984)                       | 300 (984)                       |
| • Unshielded                                                       | m (ft)  | 300 (984)                                                                                           | 300 (984)                                                                                                                    | 450 (1476)                      | 450 (1476)                      |
| Dimensions                                                         |         |                                                                                                     |                                                                                                                              |                                 |                                 |
| • Width                                                            | mm (in) | 270 (10.63)                                                                                         | 350 (13.78)                                                                                                                  | 300 (11.81)                     | 300 (11.81)                     |
| • Height                                                           | mm (in) | 248 (9.76)                                                                                          | 321 (12.64)                                                                                                                  | 285 (11.22)                     | 315 (12.4)                      |
| • Depth                                                            | mm (in) | 209 (8.23)                                                                                          | 288 (11.34)                                                                                                                  | 257 (10.12)                     | 277 (10.91)                     |
| Degree of protection                                               |         | IP00                                                                                                | IP00                                                                                                                         | IP00                            | IP00                            |
| Weight, approx.                                                    | kg (lb) | 27 (59.5)                                                                                           | 57 (126)                                                                                                                     | 60 (132)                        | 66 (146)                        |
| Suitable for<br>PM240-2 standard variant<br>200 ... 240 V 3 AC     | Type    | 6SL3210-1PC24-2UL0<br>6SL3210-1PC25-4UL0<br>6SL3210-1PC26-8UL0<br>FSD                               | 6SL3210-1PC28-0UL0<br>6SL3210-1PC31-1UL0<br>FSE<br><br>6SL3210-1PC31-3UL0<br>6SL3210-1PC31-6UL0<br>6SL3210-1PC31-8UL0<br>FSF | –                               | –                               |
| Suitable for<br>PM240-2 standard variant<br>380 ... 480 V 3 AC     | Type    | 6SL3210-1PE23-8 . LO<br>6SL3210-1PE24-5 . LO<br>6SL3210-1PE26-0 . LO<br>6SL3210-1PE27-5 . LO<br>FSD | 6SL3210-1PE28-8 . LO<br>6SL3210-1PE31-1 . LO<br>FSE<br><br>6SL3210-1PE31-5 . LO<br>6SL3210-1PE31-8 . LO<br>FSF               | 6SL3210-1PE32-1 . LO<br>FSF     | 6SL3210-1PE32-5 . LO<br>FSF     |
| Suitable for<br>PM240-2 push-through variant<br>200 ... 240 V 3 AC | Type    | 6SL3211-1PC26-8UL0<br>FSD                                                                           | 6SL3211-1PC31-1UL0<br>FSE<br><br>6SL3211-1PC31-8UL0<br>FSF                                                                   | –                               | –                               |
| Suitable for<br>PM240-2 push-through variant<br>380 ... 480 V 3 AC | Type    | 6SL3211-1PE27-5 . LO<br>FSD                                                                         | 6SL3211-1PE31-1 . LO<br>FSE                                                                                                  | –                               | 6SL3211-1PE32-5 . LO<br>FSF     |

| Line voltage 380 ... 480 V 3 AC                          |         | Output reactor (for a 4 kHz pulse frequency) |                             |                             |
|----------------------------------------------------------|---------|----------------------------------------------|-----------------------------|-----------------------------|
|                                                          |         | 6SL3000-2BE33-2AA0                           | 6SL3000-2BE33-8AA0          | 6SL3000-2BE35-0AA0          |
| Rated current                                            | A       | 310                                          | 380                         | 490                         |
| Power loss                                               | kW      | 0.47                                         | 0.5                         | 0.5                         |
| Connection to the Power Module                           |         | 1 × hole for M10                             | 1 × hole for M10            | 1 × hole for M12            |
| PE connection                                            |         | M6 screw                                     | M6 screw                    | M6 screw                    |
| Cable length, max.<br>between output reactor and motor   |         |                                              |                             |                             |
| • Shielded                                               | m (ft)  | 300 (984)                                    | 300 (984)                   | 300 (984)                   |
| • Unshielded                                             | m (ft)  | 450 (1476)                                   | 450 (1476)                  | 450 (1476)                  |
| Dimensions                                               |         |                                              |                             |                             |
| • Width                                                  | mm (in) | 300 (11.81)                                  | 300 (11.81)                 | 300 (11.81)                 |
| • Height                                                 | mm (in) | 285 (11.22)                                  | 285 (11.22)                 | 365 (14.37)                 |
| • Depth                                                  | mm (in) | 257 (10.12)                                  | 277 (10.91)                 | 277 (10.91)                 |
| Degree of protection                                     |         | IP00                                         | IP00                        | IP00                        |
| Weight, approx.                                          | kg (lb) | 66 (146)                                     | 73 (161)                    | 100 (220)                   |
| Suitable for<br>PM240-2 Power Module<br>standard variant | Type    | 6SL3210-1PE33-0 . LO<br>FSG                  | 6SL3210-1PE33-7 . LO<br>FSG | 6SL3210-1PE34-8 . LO<br>FSG |

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Load-side power components > Output reactors

### Technical specifications (continued)

| Line voltage 500 ... 690 V 3 AC                        |         | Output reactor (for a 4 kHz pulse frequency)        |                                                     |                              |                              |                              |
|--------------------------------------------------------|---------|-----------------------------------------------------|-----------------------------------------------------|------------------------------|------------------------------|------------------------------|
|                                                        |         | 6SL3000-2AH31-0AA0                                  | 6SL3000-2AH31-5AA0                                  | 6SL3000-2AH31-8AA0           | 6SL3000-2AH32-4AA0           | 6SL3000-2AH32-6AA0           |
| Rated current                                          | A       | 100                                                 | 150                                                 | 175                          | 215                          | 260                          |
| Power loss, max.                                       | kW      | 0.3                                                 | 0.34                                                | 0.4                          | 0.425                        | 0.44                         |
| Connection to the Power Module/<br>motor connection    |         | Flat connector for M10 screw                        | Flat connector for M10 screw                        | Flat connector for M10 screw | Flat connector for M10 screw | Flat connector for M10 screw |
| PE connection                                          |         | M6 screw                                            | M6 screw                                            | M6 screw                     | M6 screw                     | M6 screw                     |
| Cable length, max.<br>between output reactor and motor |         |                                                     |                                                     |                              |                              |                              |
| • Shielded                                             | m (ft)  | 300 (984)                                           | 300 (984)                                           | 300 (984)                    | 300 (984)                    | 300 (984)                    |
| • Unshielded                                           | m (ft)  | 450 (1476)                                          | 450 (1476)                                          | 450 (1476)                   | 450 (1476)                   | 450 (1476)                   |
| Dimensions                                             |         |                                                     |                                                     |                              |                              |                              |
| • Width                                                | mm (in) | 270 (10.63)                                         | 270 (10.63)                                         | 300 (11.81)                  | 300 (11.81)                  | 300 (11.81)                  |
| • Height                                               | mm (in) | 248 (9.76)                                          | 248 (9.76)                                          | 285 (11.22)                  | 285 (11.22)                  | 285 (11.22)                  |
| • Depth                                                | mm (in) | 200 (7.87)                                          | 200 (7.87)                                          | 212 (8.35)                   | 212 (8.35)                   | 212 (8.35)                   |
| Degree of protection                                   |         | IP00                                                | IP00                                                | IP00                         | IP00                         | IP00                         |
| Weight, approx.                                        | kg (lb) | 25 (55.1)                                           | 25.8 (56.9)                                         | 34 (75)                      | 34 (75)                      | 40 (88.2)                    |
| Suitable for PM240-2 standard variant                  | Type    | 6SL3210-1PH28-0 . L0<br>6SL3210-1PH31-0 . L0<br>FSF | 6SL3210-1PH31-2 . L0<br>6SL3210-1PH31-4 . L0<br>FSF | 6SL3210-1PH31-7CLO<br>FSG    | 6SL3210-1PH32-1CLO<br>FSG    | 6SL3210-1PH32-5CLO<br>FSG    |

| Line voltage 380 ... 480 V 3 AC                        |                 | Output reactor (for a 4 kHz pulse frequency)                          |  |
|--------------------------------------------------------|-----------------|-----------------------------------------------------------------------|--|
|                                                        |                 | 6SL3202-0AJ23-2CA0                                                    |  |
| Rated current                                          | A               | 32                                                                    |  |
| Power loss                                             | kW              | 0.06                                                                  |  |
| Connection to the Power Module                         |                 | Cable                                                                 |  |
| • Conductor cross-section                              |                 | 4 × AWG14<br>(1.5 mm <sup>2</sup> )                                   |  |
| • Length, approx.                                      | m (ft)          | 0.35 (1.15)                                                           |  |
| Motor connection                                       |                 | Screw-type terminals                                                  |  |
| • Conductor cross-section                              | mm <sup>2</sup> | 6                                                                     |  |
| PE connection                                          |                 | M5 screw stud                                                         |  |
| Cable length, max.<br>between output reactor and motor |                 |                                                                       |  |
| • 380 -10 % ... 400 V 3 AC                             |                 |                                                                       |  |
| - Shielded                                             | m (ft)          | 150 (492)                                                             |  |
| - Unshielded                                           | m (ft)          | 225 (738)                                                             |  |
| • 401 ... 480 V 3 AC +10 %                             |                 |                                                                       |  |
| - Shielded                                             | m (ft)          | 100 (328)                                                             |  |
| - Unshielded                                           | m (ft)          | 150 (492)                                                             |  |
| Dimensions                                             |                 |                                                                       |  |
| • Width                                                | mm (in)         | 189 (7.44)                                                            |  |
| • Height                                               | mm (in)         | 334 (13.15)                                                           |  |
| • Depth                                                | mm (in)         | 80 (3.15)                                                             |  |
| Possible as base component                             |                 | Yes                                                                   |  |
| Degree of protection                                   |                 | IP00                                                                  |  |
| Weight, approx.                                        | kg (lb)         | 9.1 (20.1)                                                            |  |
| Suitable for PM250 Power Module                        | Type            | 6SL3225-0BE25-5AA1<br>6SL3225-0BE27-5AA1<br>6SL3225-0BE31-1AA1<br>FSC |  |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Load-side power components > Output reactors

#### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                               |         | Output reactor (for a 4 kHz pulse frequency)        |                                 |                                 |                                 |
|---------------------------------------------------------------|---------|-----------------------------------------------------|---------------------------------|---------------------------------|---------------------------------|
|                                                               |         | 6SE6400-3TC05-4DD0                                  | 6SE6400-3TC03-8DD0              | 6SE6400-3TC08-0ED0              | 6SE6400-3TC07-5ED0              |
| Rated current                                                 | A       | 68 <sup>1)</sup>                                    | 45 <sup>1)</sup>                | 104 <sup>1)</sup>               | 90 <sup>1)</sup>                |
| Power loss                                                    | kW      | 0.2                                                 | 0.2                             | 0.17                            | 0.27                            |
| Connection to the Power Module                                |         | Flat connector for M6 cable lug                     | Flat connector for M6 cable lug | Flat connector for M6 cable lug | Flat connector for M6 cable lug |
| Motor connection                                              |         | Flat connector for M6 cable lug                     | Flat connector for M6 cable lug | Flat connector for M6 cable lug | Flat connector for M6 cable lug |
| PE connection                                                 |         | M6 screw                                            | M6 screw                        | M6 screw                        | M6 screw                        |
| <b>Cable length, max.</b><br>between output reactor and motor |         |                                                     |                                 |                                 |                                 |
| • 380 -10 % ... 400 V 3 AC                                    |         |                                                     |                                 |                                 |                                 |
| - Shielded                                                    | m (ft)  | 200 (656)                                           | 200 (656)                       | 200 (656)                       | 200 (656)                       |
| - Unshielded                                                  | m (ft)  | 300 (984)                                           | 300 (984)                       | 300 (984)                       | 300 (984)                       |
| • 401 ... 480 V 3 AC +10 %                                    |         |                                                     |                                 |                                 |                                 |
| - Shielded                                                    | m (ft)  | 200 (656)                                           | 200 (656)                       | 200 (656)                       | 200 (656)                       |
| - Unshielded                                                  | m (ft)  | 300 (984)                                           | 300 (984)                       | 300 (984)                       | 300 (984)                       |
| <b>Dimensions</b>                                             |         |                                                     |                                 |                                 |                                 |
| • Width                                                       | mm (in) | 225 (8.86)                                          | 225 (8.86)                      | 225 (8.86)                      | 270 (10.63)                     |
| • Height                                                      | mm (in) | 210 (8.27)                                          | 210 (8.27)                      | 210 (8.27)                      | 248 (9.76)                      |
| • Depth                                                       | mm (in) | 150 (5.91)                                          | 179 (7.05)                      | 150 (5.91)                      | 209 (8.23)                      |
| Degree of protection                                          |         | IP00                                                | IP00                            | IP00                            | IP00                            |
| Weight, approx.                                               | kg (lb) | 10.7 (23.6)                                         | 16.1 (35.5)                     | 10.4 (22.9)                     | 24.9 (54.9)                     |
| Suitable for PM250 Power Module                               | Type    | 6SL3225-0BE31-5 . A0<br>6SL3225-0BE32-2 . A0<br>FSD | 6SL3225-0BE31-8 . A0<br>FSD     | 6SL3225-0BE33-0 . A0<br>FSE     | 6SL3225-0BE33-7 . A0<br>FSE     |

| Line voltage 380 ... 480 V 3 AC                               |         | Output reactor (for a 4 kHz pulse frequency)        |                                 |
|---------------------------------------------------------------|---------|-----------------------------------------------------|---------------------------------|
|                                                               |         | 6SE6400-3TC14-5FD0                                  | 6SE6400-3TC15-4FD0              |
| Rated current                                                 | A       | 178 <sup>1)</sup>                                   | 178 <sup>1)</sup>               |
| Power loss                                                    | kW      | 0.47                                                | 0.25                            |
| Connection to the Power Module                                |         | Flat connector for M8 cable lug                     | Flat connector for M8 cable lug |
| Motor connection                                              |         | Flat connector for M8 cable lug                     | Flat connector for M8 cable lug |
| PE connection                                                 |         | M8 screw                                            | M6 screw                        |
| <b>Cable length, max.</b><br>between output reactor and motor |         |                                                     |                                 |
| • 380 -10 % ... 400 V 3 AC                                    |         |                                                     |                                 |
| - Shielded                                                    | m (ft)  | 200 (656)                                           | 200 (656)                       |
| - Unshielded                                                  | m (ft)  | 300 (984)                                           | 300 (984)                       |
| • 401 ... 480 V 3 AC +10 %                                    |         |                                                     |                                 |
| - Shielded                                                    | m (ft)  | 200 (656)                                           | 200 (656)                       |
| - Unshielded                                                  | m (ft)  | 300 (984)                                           | 300 (984)                       |
| <b>Dimensions</b>                                             |         |                                                     |                                 |
| • Width                                                       | mm (in) | 350 (13.78)                                         | 270 (10.63)                     |
| • Height                                                      | mm (in) | 321 (12.64)                                         | 248 (9.76)                      |
| • Depth                                                       | mm (in) | 288 (11.34)                                         | 209 (8.23)                      |
| Degree of protection                                          |         | IP00                                                | IP00                            |
| Weight, approx.                                               | kg (lb) | 51.5 (114)                                          | 24 (52.9)                       |
| Suitable for PM250 Power Module                               | Type    | 6SL3225-0BE34-5 . A0<br>6SL3225-0BE37-5 . A0<br>FSF | 6SL3225-0BE35-5 . A0<br>FSF     |

<sup>1)</sup> On the rating plate of the reactor the current is specified according to the duty cycle for high overload (HO). This is lower than the current specified according to the duty cycle for low overload (LO) of the Power Module.

**SINAMICS G120 standard inverters**

0.37 kW to 250 kW (0.5 hp to 400 hp)

Load-side power components &gt; Sine-wave filters

**Overview**

Sine-wave filter

Sine-wave filters limit the rate of voltage rise ( $dv/dt$ ) and the peak voltages on the motor winding. Similar to an output reactor, they enable the connection of longer motor cables.

Bearing currents are also reduced significantly. Using these filters therefore allows standard motors with standard insulation and without insulated bearings to be operated on SINAMICS. As a result, the voltage load on the motor winding is virtually identical to the load on windings of directly mains-fed motors.

Owing to the very low rates of voltage rise on the motor cable, the sine-wave filter also has a positive impact in terms of electro-magnetic compatibility which means that it is not absolutely essential to use shielded cables for short motor cables to achieve the required standard of EMC.

Since the voltage applied to the motor is not pulsed, the inverter-related stray losses and additional noise in the motor are also reduced considerably and the noise level of the motor is similar to the level produced by directly mains-fed motors.

When using sine-wave filters, the following should be observed:

- Pulse frequencies of between 4 kHz and 8 kHz are permissible for rated outputs up to and including 90 kW
- The output frequency is limited to 150 Hz.
- Operation and commissioning may only be performed with the motor connected as the sine-wave filter is not no-load proof
- It must be ensured that the automatic pulse frequency reduction functions are also deactivated

**Integration**

*Sine-wave filters that are optionally available depending on the Power Module used*

|                                                                | Frame size |     |     |     |     |     |     |
|----------------------------------------------------------------|------------|-----|-----|-----|-----|-----|-----|
|                                                                | FSA        | FSB | FSC | FSD | FSE | FSF | FSG |
| <b>PM250 Power Module with line-commutated energy recovery</b> |            |     |     |     |     |     |     |
| Available frame sizes                                          | –          | –   | ✓   | ✓   | ✓   | ✓   | –   |
| <b>Load-side power components</b>                              |            |     |     |     |     |     |     |
| Sine-wave filter                                               | –          | –   | U   | S   | S   | S   | –   |

U = Base component

S = Lateral mounting

– = Not possible

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

Load-side power components > Sine-wave filters

### Selection and ordering data

| Rated power        |     | PM250 Power Module |            | Sine-wave filter   |
|--------------------|-----|--------------------|------------|--------------------|
| kW                 | hp  | Type 6SL3225-...   | Frame size | Article No.        |
| 380 ... 480 V 3 AC |     |                    |            |                    |
| 7.5                | 10  | 0BE25-5AA1         | FSC        | 6SL3202-0AE22-0SA0 |
| 11                 | 15  | 0BE27-5AA1         | FSC        | 6SL3202-0AE23-3SA0 |
| 15                 | 20  | 0BE31-1AA1         |            |                    |
| 18.5               | 25  | 0BE31-5 . A0       | FSD        | 6SL3202-0AE24-6SA0 |
| 22                 | 30  | 0BE31-8 . A0       |            |                    |
| 30                 | 40  | 0BE32-2 . A0       | FSD        | 6SL3202-0AE26-2SA0 |
| 37                 | 50  | 0BE33-0 . A0       | FSE        | 6SL3202-0AE28-8SA0 |
| 45                 | 60  | 0BE33-7 . A0       |            |                    |
| 55                 | 75  | 0BE34-5 . A0       | FSF        | 6SL3202-0AE31-5SA0 |
| 75                 | 100 | 0BE35-5 . A0       |            |                    |
| 90                 | 125 | 0BE37-5 . A0       | FSF        | 6SL3202-0AE31-8SA0 |

### Technical specifications

| Line voltage 380 ... 480 V 3 AC                                 |                 | Sine-wave filter     |                      |                      |
|-----------------------------------------------------------------|-----------------|----------------------|----------------------|----------------------|
|                                                                 |                 | 6SL3202-0AE22-0SA0   | 6SL3202-0AE23-3SA0   |                      |
| <b>Rated current</b>                                            | A               | 20                   | 33                   | 33                   |
| <b>Power loss</b>                                               | kW              | 0.099                | 0.151                | 0.151                |
| <b>Connection to the Power Module</b>                           |                 | Cable                | Cable                | Cable                |
| • Conductor cross-section                                       | mm <sup>2</sup> | 10                   | 10                   | 10                   |
| • Length, approx.                                               | m (ft)          | 0.5 (1.64)           | 0.5 (1.64)           | 0.5 (1.64)           |
| <b>Motor connection</b>                                         |                 | Screw-type terminals | Screw-type terminals | Screw-type terminals |
| • Conductor cross-section                                       | mm <sup>2</sup> | 6                    | 6                    | 6                    |
| <b>PE connection</b>                                            |                 | M5 screw stud        | M5 screw stud        | M5 screw stud        |
| <b>Cable length, max.</b><br>between sine-wave filter and motor |                 |                      |                      |                      |
| • 380 ... 480 V 3 AC ±10 %                                      |                 |                      |                      |                      |
| - Shielded                                                      | m (ft)          | 200 (656)            | 200 (656)            | 200 (656)            |
| - Unshielded                                                    | m (ft)          | 300 (984)            | 300 (984)            | 300 (984)            |
| <b>Dimensions</b>                                               |                 |                      |                      |                      |
| • Width                                                         | mm (in)         | 189 (7.44)           | 189 (7.44)           | 189 (7.44)           |
| • Height                                                        | mm (in)         | 336 (13.23)          | 336 (13.23)          | 336 (13.23)          |
| • Depth                                                         | mm (in)         | 140 (5.51)           | 140 (5.51)           | 140 (5.51)           |
| <b>Possible as base component</b>                               |                 | Yes                  | Yes                  | Yes                  |
| <b>Degree of protection</b>                                     |                 | IP20                 | IP20                 | IP20                 |
| <b>Weight, approx.</b>                                          | kg (lb)         | 12 (26.5)            | 23 (50.7)            | 23 (50.7)            |
| <b>Suitable for PM250 Power Module</b>                          | Type            | 6SL3225-0BE25-5AA1   | 6SL3225-0BE27-5AA1   | 6SL3225-0BE31-1AA1   |
| • Rated power of the Power Module                               | kW              | 7.5                  | 11                   | 15                   |
| • Rated current $I_{rated}$ of the Power Module                 | A               | 18                   | 25                   | 32                   |
| • Frame size                                                    |                 | FSC                  | FSC                  | FSC                  |

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

Load-side power components &gt; Sine-wave filters

## Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                          |                 | Sine-wave filter     |                      |                      |                      |                      |
|----------------------------------------------------------|-----------------|----------------------|----------------------|----------------------|----------------------|----------------------|
|                                                          |                 | 6SL3202-0AE24-6SA0   |                      | 6SL3202-0AE26-2SA0   | 6SL3202-0AE28-8SA0   |                      |
| Rated current                                            | A               | 47                   | 47                   | 61.8                 | 92                   | 92                   |
| Power loss                                               | kW              | 0.185                | 0.185                | 0.152                | 0.251                | 0.251                |
| Connection to the Power Module                           |                 | Screw-type terminals | Screw-type terminals | Screw-type terminals | Screw-type terminals | Screw-type terminals |
| • Conductor cross-section                                | mm <sup>2</sup> | 50                   | 50                   | 50                   | 95                   | 95                   |
| Motor connection                                         |                 | Screw-type terminals | Screw-type terminals | Screw-type terminals | Screw-type terminals | Screw-type terminals |
| • Conductor cross-section                                | mm <sup>2</sup> | 50                   | 50                   | 50                   | 95                   | 95                   |
| PE connection                                            |                 | M6 screw             | M6 screw             | M6 screw             | M8 screw             | M8 screw             |
| Cable length, max.<br>between sine-wave filter and motor |                 |                      |                      |                      |                      |                      |
| • 380 ... 480 V 3 AC ±10 %                               |                 |                      |                      |                      |                      |                      |
| - Shielded                                               | m (ft)          | 200 (656)            | 200 (656)            | 200 (656)            | 200 (656)            | 200 (656)            |
| - Unshielded                                             | m (ft)          | 300 (984)            | 300 (984)            | 300 (984)            | 300 (984)            | 300 (984)            |
| Dimensions                                               |                 |                      |                      |                      |                      |                      |
| • Width                                                  | mm (in)         | 250 (9.84)           | 250 (9.84)           | 250 (9.84)           | 275 (10.83)          | 275 (10.83)          |
| • Height                                                 | mm (in)         | 315 (12.40)          | 315 (12.40)          | 305 (12.01)          | 368 (14.49)          | 368 (14.49)          |
| • Depth                                                  | mm (in)         | 262 (10.31)          | 262 (10.31)          | 262 (10.31)          | 275 (10.83)          | 275 (10.83)          |
| Degree of protection                                     |                 | IP00                 | IP00                 | IP00                 | IP00                 | IP00                 |
| Weight, approx.                                          | kg (lb)         | 24 (52.9)            | 24 (52.9)            | 34 (75)              | 45 (99.2)            | 45 (99.2)            |
| Suitable for<br>PM250 Power Module                       |                 | Type                 | 6SL3225-0BE31-5 . A0 | 6SL3225-0BE31-8 . A0 | 6SL3225-0BE32-2 . A0 | 6SL3225-0BE33-0 . A0 |
| • Rated power of the Power Module                        | kW              | 18.5                 | 22                   | 30                   | 37                   | 45                   |
| • Rated current $I_{rated}$ of the Power Module          | A               | 38                   | 45                   | 60                   | 75                   | 90                   |
| • Frame size                                             |                 | FSD                  | FSD                  | FSD                  | FSE                  | FSE                  |


| Line voltage 380 ... 480 V 3 AC                          |                 | Sine-wave filter (for pulse frequencies 4 ... 8 kHz, only 4 kHz permissible at 110 kW and above – note additional current derating as compared with rated pulse frequency of 2 kHz, <a href="#">see derating data</a> ) |                      |                      |
|----------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------|
|                                                          |                 | 6SL3202-0AE31-5SA0                                                                                                                                                                                                      |                      | 6SL3202-0AE31-8SA0   |
| Rated current                                            | A               | 150                                                                                                                                                                                                                     | 150                  | 182                  |
| Power loss                                               | kW              | 0.43                                                                                                                                                                                                                    | 0.43                 | 0.47                 |
| Connection to the Power Module                           |                 | Screw-type terminals                                                                                                                                                                                                    | Screw-type terminals | Screw-type terminals |
| • Conductor cross-section                                | mm <sup>2</sup> | 150                                                                                                                                                                                                                     | 150                  | 150                  |
| Motor connection                                         |                 | Screw-type terminals                                                                                                                                                                                                    | Screw-type terminals | Screw-type terminals |
| • Conductor cross-section                                | mm <sup>2</sup> | 150                                                                                                                                                                                                                     | 150                  | 150                  |
| PE connection                                            |                 | M8 screw                                                                                                                                                                                                                | M6 screw             | M8 screw             |
| Cable length, max.<br>between sine-wave filter and motor |                 |                                                                                                                                                                                                                         |                      |                      |
| • 380 ... 480 V 3 AC ±10 %                               |                 |                                                                                                                                                                                                                         |                      |                      |
| - Shielded                                               | m (ft)          | 200 (656)                                                                                                                                                                                                               | 200 (656)            | 200 (656)            |
| - Unshielded                                             | m (ft)          | 300 (984)                                                                                                                                                                                                               | 300 (984)            | 300 (984)            |
| Dimensions                                               |                 |                                                                                                                                                                                                                         |                      |                      |
| • Width                                                  | mm (in)         | 350 (13.78)                                                                                                                                                                                                             | 350 (13.78)          | 350 (13.78)          |
| • Height                                                 | mm (in)         | 440 (17.32)                                                                                                                                                                                                             | 440 (17.32)          | 468 (18.43)          |
| • Depth                                                  | mm (in)         | 305 (12.01)                                                                                                                                                                                                             | 305 (12.01)          | 305 (12.01)          |
| Degree of protection                                     |                 | IP00                                                                                                                                                                                                                    | IP00                 | IP00                 |
| Weight, approx.                                          | kg (lb)         | 63 (139)                                                                                                                                                                                                                | 63 (139)             | 80 (176)             |
| Suitable for<br>PM250 Power Module                       |                 | Type                                                                                                                                                                                                                    | 6SL3225-0BE34-5 . A0 | 6SL3225-0BE35-5 . A0 |
| • Rated power of the Power Module                        | kW              | 55                                                                                                                                                                                                                      | 75                   | 90                   |
| • Rated current $I_{rated}$ of the Power Module          | A               | 110                                                                                                                                                                                                                     | 145                  | 178                  |
| • Frame size                                             |                 | FSF                                                                                                                                                                                                                     | FSF                  | FSF                  |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Load-side power components > dv/dt filters plus VPL

#### Overview

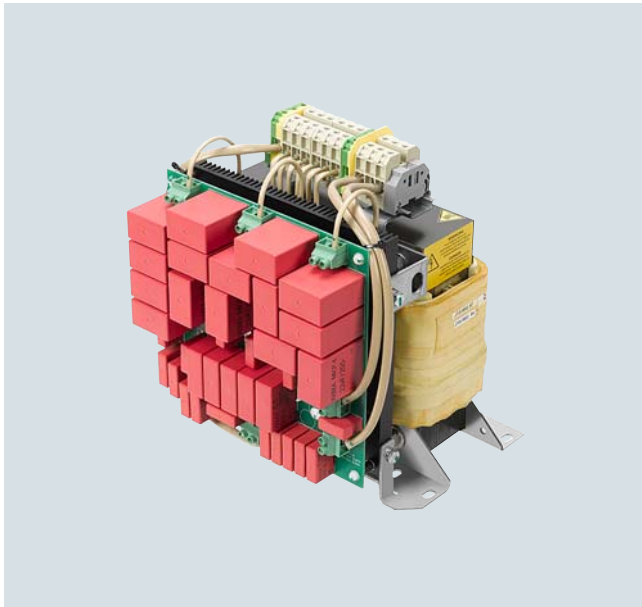

dv/dt filter plus VPL

dv/dt filters plus VPL (**V**oltage **P**eak **L**imiter) limit the voltage rate-of-rise  $dv/dt$  to values  $< 500 \text{ V}/\mu\text{s}$  and the typical voltage peaks to the following values according to the limit value curve to IEC/TS 60034-17: 2006:

- $< 1350 \text{ V}$  phase/phase at the motor terminals with a nominal DC link voltage of 935 V
- $< 1100 \text{ V}$  phase/ground at the motor terminals with a nominal DC link voltage of 935 V

Standard motors with standard insulation and without insulated bearings can be used for inverter operation if a dv/dt filter plus VPL is used.

**JTA** dv/dt filters can be operated with SINAMICS G120 firmware V4.7 SP10 or higher.

#### Design

In terms of function, the dv/dt filter plus VPL consists of two components:

- dv/dt reactor
- Voltage limiting network, which cuts off the voltage peaks and feeds the energy back into the DC link.

#### Integration

##### dv/dt filters plus VPL that are available depending on the Power Module used

|                                                             | Frame size |     |     |     |     |     |     |
|-------------------------------------------------------------|------------|-----|-----|-----|-----|-----|-----|
|                                                             | FSA        | FSB | FSC | FSD | FSE | FSF | FSG |
| <b>PM240-2 Power Module with integrated braking chopper</b> |            |     |     |     |     |     |     |
| Available frame sizes                                       |            |     |     |     |     |     |     |
| • 400 V versions                                            | ✓          | ✓   | ✓   | ✓   | ✓   | ✓   | –   |
| • 690 V versions                                            | –          | –   | –   | ✓   | ✓   | ✓   | ✓   |
| <b>Load-side power components</b>                           |            |     |     |     |     |     |     |
| dv/dt filter plus VPL <sup>1)</sup>                         | S          | S   | S   | S   | S   | S   | S   |

S = Lateral mounting  
– = Not possible

<sup>1)</sup> The 690 V versions of the PM240-2 Power Modules require motors with a suitable isolating system for 690 V inverter operation (IVIC-C premium). The VSD10 line with corresponding SIMOTICS GP 1LE109 General Purpose motors or SIMOTICS SD 1LE159 Severe Duty motors is ideally suited for inverter operation at 690 V.  
[More information is available in Catalog D 81.1.](#)

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

Load-side power components &gt; dv/dt filters plus VPL

## Selection and ordering data

| Rated power        |      | PM240-2 Power Module<br>standard variant | dv/dt filter plus VPL |                     |
|--------------------|------|------------------------------------------|-----------------------|---------------------|
| kW                 | hp   | Type 6SL3210-...                         | Frame size            | Article No.         |
| 380 ... 480 V 3 AC |      |                                          |                       |                     |
| 0.55               | 0.75 | 1PE11-8 . L1                             | FSA                   | NEW JTA:TEF1203-0GB |
| 0.75               | 1    | 1PE12-3 . L1                             |                       |                     |
| 1.1                | 1.5  | 1PE13-2 . L1                             |                       |                     |
| 1.5                | 2    | 1PE14-3 . L1                             |                       |                     |
| 2.2                | 3    | 1PE16-1 . L1                             |                       |                     |
| 3                  | 4    | 1PE18-0 . L1                             |                       |                     |
| 4                  | 5    | 1PE21-1 . L0                             | FSB                   |                     |
| 5.5                | 7.5  | 1PE21-4 . L0                             |                       |                     |
| 7.5                | 10   | 1PE21-8 . L0                             |                       |                     |
| 11                 | 15   | 1PE22-7 . L0                             | FSC                   |                     |
| 15                 | 20   | 1PE23-3 . L0                             |                       |                     |
| 18.5               | 25   | 1PE23-8 . L0                             | FSD                   |                     |
| 22                 | 30   | 1PE24-5 . L0                             | FSD                   | NEW JTA:TEF1203-0JB |
| 30                 | 40   | 1PE26-0 . L0                             |                       |                     |
| 37                 | 50   | 1PE27-5 . L0                             | FSD                   | NEW JTA:TEF1203-0KB |
| 45                 | 60   | 1PE28-8 . L0                             | FSE                   |                     |
| 55                 | 75   | 1PE31-1 . L0                             | FSE                   | NEW JTA:TEF1203-0LB |
| 75                 | 100  | 1PE31-5 . L0                             | FSF                   |                     |
| 90                 | 125  | 1PE31-8 . L0                             | FSF                   | NEW JTA:TEF1203-0MB |
| 110                | 150  | 1PE32-1 . L0                             | FSF                   |                     |
| 132                | 200  | 1PE32-5 . L0                             | FSF                   |                     |
| 500 ... 690 V 3 AC |      |                                          |                       |                     |
| 11                 | 10   | 1PH21-4 . L0                             | FSD                   | NEW JTA:TEF1203-0GB |
| 15                 | 15   | 1PH22-0 . L0                             |                       |                     |
| 18.5               | 20   | 1PH22-3 . L0                             |                       |                     |
| 22                 | 25   | 1PH22-7 . L0                             | FSD                   | NEW JTA:TEF1203-0HB |
| 30                 | 30   | 1PH23-5 . L0                             |                       |                     |
| 37                 | 40   | 1PH24-2 . L0                             |                       |                     |
| 45                 | 50   | 1PH25-2 . L0                             | FSE                   | NEW JTA:TEF1203-0JB |
| 55                 | 60   | 1PH26-2 . L0                             |                       |                     |
| 75                 | 75   | 1PH28-0 . L0                             | FSF                   | NEW JTA:TEF1203-0KB |
| 90                 | 100  | 1PH31-0 . L0                             |                       |                     |
| 110                | 100  | 1PH31-2 . L0                             | FSF                   | NEW JTA:TEF1203-0LB |
| 132                | 125  | 1PH31-4 . L0                             |                       |                     |
| 160                | 150  | 1PH31-7CL0                               | FSG                   | NEW JTA:TEF1203-0MB |
| 200                | 200  | 1PH32-1CL0                               |                       |                     |
| 250                | 250  | 1PH32-5CL0                               |                       |                     |

| Rated power        |     | PM240-2 Power Module<br>push-through variant |            | dv/dt filters plus VPL |                 |
|--------------------|-----|----------------------------------------------|------------|------------------------|-----------------|
| kW                 | hp  | Type 6SL3211-...                             | Frame size | Article No.            |                 |
| 380 ... 480 V 3 AC |     |                                              |            |                        |                 |
| 3                  | 4   | 1PE18-0 . L1                                 | FSA        | NEW                    | JTA:TEF1203-0GB |
| 7.5                | 10  | 1PE21-8 . L0                                 | FSB        |                        |                 |
| 15                 | 20  | 1PE23-3 . L0                                 | FSC        | NEW                    | JTA:TEF1203-0HB |
| 37                 | 50  | 1PE27-5 . L0                                 | FSD        | NEW                    | JTA:TEF1203-0KB |
| 55                 | 75  | 1PE31-1 . L0                                 | FSE        | NEW                    | JTA:TEF1203-0LB |
| 132                | 200 | 1PE32-5 . L0                                 | FSF        | NEW                    | JTA:TEF1203-0MB |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Load-side power components > dv/dt filters plus VPL

#### Technical specifications

| Line voltage 3 AC 380 ... 480 V or<br>3 AC 500 ... 690 V                        |                 | dv/dt filters plus VPL<br>(for rated pulse frequency 2 kHz – max. pulse frequency 4 kHz – max. output frequency 150 Hz)                                                                                                            |                                                                                                                                                               |                                                                                                                                                               |
|---------------------------------------------------------------------------------|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                 |                 | JTA:TEF1203-0GB                                                                                                                                                                                                                    | JTA:TEF1203-0HB                                                                                                                                               | JTA:TEF1203-0JB                                                                                                                                               |
| Rated current                                                                   | A               | 24                                                                                                                                                                                                                                 | 44                                                                                                                                                            | 64                                                                                                                                                            |
| $I_{th \max}$                                                                   | A               | 38                                                                                                                                                                                                                                 | 70                                                                                                                                                            | 104                                                                                                                                                           |
| Power loss<br>at 150 Hz 690 V                                                   | kW              | 0.125                                                                                                                                                                                                                              | 0.303                                                                                                                                                         | 0.404                                                                                                                                                         |
| Power connection<br>input and output side                                       |                 | Screw terminals                                                                                                                                                                                                                    | Screw terminals                                                                                                                                               | Screw terminals                                                                                                                                               |
| • Conductor cross-section, max.                                                 | mm <sup>2</sup> | 16                                                                                                                                                                                                                                 | 35                                                                                                                                                            | 50                                                                                                                                                            |
| DC link connection <sup>1)</sup><br>DCPS, DCNS                                  |                 | Screw terminals                                                                                                                                                                                                                    | Screw terminals                                                                                                                                               | Screw terminals                                                                                                                                               |
| • Conductor cross-section, max.                                                 | mm <sup>2</sup> | 16                                                                                                                                                                                                                                 | 16                                                                                                                                                            | 16                                                                                                                                                            |
| PE connection                                                                   |                 | Screw terminals                                                                                                                                                                                                                    | Screw terminals                                                                                                                                               | Screw terminals                                                                                                                                               |
| • Conductor cross-section, max.                                                 | mm <sup>2</sup> | 16                                                                                                                                                                                                                                 | 35                                                                                                                                                            | 50                                                                                                                                                            |
| Motor cable length, max.                                                        |                 |                                                                                                                                                                                                                                    |                                                                                                                                                               |                                                                                                                                                               |
| • Shielded                                                                      | m (ft)          | 350 (1148)                                                                                                                                                                                                                         | 350 (1148)                                                                                                                                                    | 350 (1148)                                                                                                                                                    |
| • Unshielded                                                                    | m (ft)          | 525 (1723)                                                                                                                                                                                                                         | 525 (1723)                                                                                                                                                    | 525 (1723)                                                                                                                                                    |
| Cable length, max.<br>between the dv/dt filter plus VPL and<br>the Power Module | m (ft)          | 5 (16.4)                                                                                                                                                                                                                           | 5 (16.4)                                                                                                                                                      | 5 (16.4)                                                                                                                                                      |
| Ambient temperature                                                             | °C (°F)         | -20 ... +40 (-4 ... +104)<br>40 ... 50 (104 ... 122) with<br>current derating 1.5 % per 1 K<br>50 ... 60 (122 ... 140) with<br>current derating 1.9 % per 1 K                                                                      | -20 ... +40 (-4 ... +104)<br>40 ... 50 (104 ... 122) with<br>current derating 1.5 % per 1 K<br>50 ... 60 (122 ... 140) with<br>current derating 1.9 % per 1 K | -20 ... +40 (-4 ... +104)<br>40 ... 50 (104 ... 122) with<br>current derating 1.5 % per 1 K<br>50 ... 60 (122 ... 140) with<br>current derating 1.9 % per 1 K |
| Degree of protection                                                            |                 | IP00                                                                                                                                                                                                                               | IP00                                                                                                                                                          | IP00                                                                                                                                                          |
| Dimensions                                                                      |                 |                                                                                                                                                                                                                                    |                                                                                                                                                               |                                                                                                                                                               |
| • Width                                                                         | mm (in)         | 264 (10.39)                                                                                                                                                                                                                        | 264 (10.39)                                                                                                                                                   | 310 (12.20)                                                                                                                                                   |
| • Height                                                                        | mm (in)         | 260 (10.24)                                                                                                                                                                                                                        | 275 (10.83)                                                                                                                                                   | 375 (14.76)                                                                                                                                                   |
| • Depth                                                                         | mm (in)         | 220 (8.66)                                                                                                                                                                                                                         | 245 (9.65)                                                                                                                                                    | 280 (11.02)                                                                                                                                                   |
| Weight, approx.                                                                 | kg (lb)         | 20 (44.1)                                                                                                                                                                                                                          | 29 (63.9)                                                                                                                                                     | 46 (101)                                                                                                                                                      |
| Conformity                                                                      |                 | CE                                                                                                                                                                                                                                 | CE                                                                                                                                                            | CE                                                                                                                                                            |
| Certificates of suitability                                                     |                 | cURus, EAC                                                                                                                                                                                                                         | cURus, EAC                                                                                                                                                    | cURus, EAC                                                                                                                                                    |
| Suitable for<br>PM240-2 standard variant<br>380 ... 480 V 3 AC                  | Type            | 6SL3210-1PE11-8 . L1<br>6SL3210-1PE12-3 . L1<br>6SL3210-1PE13-2 . L1<br>6SL3210-1PE14-3 . L1<br>6SL3210-1PE16-1 . L1<br>6SL3210-1PE18-0 . L1<br>FSA<br>6SL3210-1PE21-1 . L0<br>6SL3210-1PE21-4 . L0<br>6SL3210-1PE21-8 . L0<br>FSB | 6SL3210-1PE22-7 . L0<br>6SL3210-1PE23-3 . L0<br>FSC<br>6SL3210-1PE23-8 . L0<br>FSD                                                                            | 6SL3210-1PE24-5 . L0<br>6SL3210-1PE26-0 . L0<br>FSD                                                                                                           |
| Suitable for<br>PM240-2 push-through variant<br>380 ... 480 V 3 AC              | Type            | 6SL3211-1PE18-0 . L1<br>FSA<br>6SL3211-1PE21-8 . L0<br>FSB                                                                                                                                                                         | 6SL3211-1PE23-3 . L0<br>FSC                                                                                                                                   | –                                                                                                                                                             |
| Suitable for<br>PM240-2 Power Modules<br>500 ... 690 V 3 AC                     | Type            | 6SL3210-1PH21-4 . L0<br>6SL3210-1PH22-0 . L0<br>6SL3210-1PH22-3 . L0<br>FSD                                                                                                                                                        | 6SL3210-1PH22-7 . L0<br>6SL3210-1PH23-5 . L0<br>6SL3210-1PH24-2 . L0<br>FSD                                                                                   | 6SL3210-1PH25-2 . L0<br>6SL3210-1PH26-2 . L0<br>FSE                                                                                                           |

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

Load-side power components &gt; dv/dt filters plus VPL

## Technical specifications (continued)

| Line voltage 3 AC 380 ... 480 V or<br>3 AC 500 ... 690 V                        |                 | dv/dt filters plus VPL<br>(for rated pulse frequency 2 kHz – max. pulse frequency 4 kHz – max. output frequency 150 Hz)                                       |                                                                                                                                                              |                                                                                                                                                               |
|---------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                 |                 | JTA:TEF1203-0KB                                                                                                                                               | JTA:TEF1203-0LB                                                                                                                                              | JTA:TEF1203-0MB                                                                                                                                               |
| Rated current                                                                   | A               | 103                                                                                                                                                           | 146                                                                                                                                                          | 260                                                                                                                                                           |
| $I_{th\ max}$                                                                   | A               | 160                                                                                                                                                           | 230                                                                                                                                                          | 416                                                                                                                                                           |
| Power loss<br>at 150 Hz 690 V                                                   | kW              | 0.415                                                                                                                                                         | 0.520                                                                                                                                                        | 0.857                                                                                                                                                         |
| Power connection<br>input and output side                                       |                 | Flat connector for M8 cable lug                                                                                                                               | Flat connector for M10 cable lug                                                                                                                             | Flat connector for M10 cable lug                                                                                                                              |
| • Conductor cross-section, max.                                                 | mm <sup>2</sup> | 95                                                                                                                                                            | 120                                                                                                                                                          | 2 × 120 or 1 × 185                                                                                                                                            |
| DC link connection <sup>1)</sup><br>DCPS, DCNS                                  |                 | M8 cable lug                                                                                                                                                  | M8 cable lug                                                                                                                                                 | M8 cable lug                                                                                                                                                  |
| • Conductor cross-section, max.                                                 | mm <sup>2</sup> | 25                                                                                                                                                            | 25                                                                                                                                                           | 50                                                                                                                                                            |
| PE connection                                                                   |                 | M6 screw stud                                                                                                                                                 | M6 screw stud                                                                                                                                                | M6 screw stud                                                                                                                                                 |
| • Conductor cross-section, max.                                                 | mm <sup>2</sup> | 50                                                                                                                                                            | 70                                                                                                                                                           | 95                                                                                                                                                            |
| Motor cable length, max.                                                        |                 |                                                                                                                                                               |                                                                                                                                                              |                                                                                                                                                               |
| • Shielded                                                                      | m (ft)          | 450/525 (1476/1723) <sup>2)</sup>                                                                                                                             | 450/525 (1476/1723) <sup>2)</sup>                                                                                                                            | 450/525 (1476/1723) <sup>2)</sup>                                                                                                                             |
| • Unshielded                                                                    | m (ft)          | 650/800 (2133/2625) <sup>2)</sup>                                                                                                                             | 650/800 (2133/2625) <sup>2)</sup>                                                                                                                            | 650/800 (2133/2625) <sup>2)</sup>                                                                                                                             |
| Cable length, max.<br>between the dv/dt filter plus VPL and<br>the Power Module | m (ft)          | 5 (16.4)                                                                                                                                                      | 5 (16.4)                                                                                                                                                     | 5 (16.4)                                                                                                                                                      |
| Ambient temperature                                                             | °C (°F)         | -20 ... +40 (-4 ... +104)<br>40 ... 50 (104 ... 122) with<br>current derating 1.5 % per 1 K<br>50 ... 60 (122 ... 140) with<br>current derating 1.9 % per 1 K | -20 ... +40 (-4 ... 104)<br>40 ... 50 (104 ... 122) with<br>current derating 1.5 % per 1 K<br>50 ... 60 (122 ... 140) with<br>current derating 1.9 % per 1 K | -20 ... +40 (-4 ... +104)<br>40 ... 50 (104 ... 122) with<br>current derating 1.5 % per 1 K<br>50 ... 60 (122 ... 140) with<br>current derating 1.9 % per 1 K |
| Degree of protection                                                            |                 | IP00                                                                                                                                                          | IP00                                                                                                                                                         | IP00                                                                                                                                                          |
| Dimensions                                                                      |                 |                                                                                                                                                               |                                                                                                                                                              |                                                                                                                                                               |
| • Width                                                                         | mm (in)         | 400 (15.75)                                                                                                                                                   | 400 (15.75)                                                                                                                                                  | 460 (18.11)                                                                                                                                                   |
| • Height                                                                        | mm (in)         | 325 (12.80)                                                                                                                                                   | 360 (14.17)                                                                                                                                                  | 435 (17.13)                                                                                                                                                   |
| • Depth                                                                         | mm (in)         | 355 (13.98)                                                                                                                                                   | 380 (14.96)                                                                                                                                                  | 445 (17.52)                                                                                                                                                   |
| Weight, approx.                                                                 | kg (lb)         | 77 (170)                                                                                                                                                      | 97 (214)                                                                                                                                                     | 172 (379)                                                                                                                                                     |
| Conformity                                                                      |                 | CE                                                                                                                                                            | CE                                                                                                                                                           | CE                                                                                                                                                            |
| Certificates of suitability                                                     |                 | cURus, EAC                                                                                                                                                    | cURus, EAC                                                                                                                                                   | cURus, EAC                                                                                                                                                    |
| Suitable for<br>PM240-2 standard variant<br>380 ... 480 V 3 AC                  | Type            | 6SL3210-1PE27-5 . L0<br>FSD<br>6SL3210-1PE28-8 . L0<br>FSE                                                                                                    | 6SL3210-1PE31-1 . L0<br>FSE<br>6SL3210-1PE31-5 . L0<br>FSF                                                                                                   | 6SL3210-1PE31-8 . L0<br>6SL3210-1PE32-1 . L0<br>6SL3210-1PE32-5 . L0<br>FSF                                                                                   |
| Suitable for<br>PM240-2 push-through variant<br>380 ... 480 V 3 AC              | Type            | 6SL3211-1PE27-5 . L0<br>FSD                                                                                                                                   | 6SL3211-1PE31-1 . L0<br>FSE                                                                                                                                  | 6SL3211-1PE32-5 . L0<br>FSF                                                                                                                                   |
| Suitable for<br>PM240-2 Power Modules<br>500 ... 690 V 3 AC                     | Type            | 6SL3210-1PH28-0 . L0<br>6SL3210-1PH31-0 . L0<br>FSF                                                                                                           | 6SL3210-1PH31-2 . L0<br>6SL3210-1PH31-4 . L0<br>FSF                                                                                                          | 6SL3210-1PH31-7CLO<br>6SL3210-1PH32-1CLO<br>6SL3210-1PH32-5CLO<br>FSG                                                                                         |

<sup>1)</sup> Short-circuit-proof cables are required.

<sup>2)</sup> Maximum overvoltage at the motor terminals <1350 V with cable lengths up to 450 m (1476 ft) shielded or 650 m (2133 ft) unshielded – maximum overvoltage at the motor terminals <1500 V with cable lengths up to 525 m (1723 ft) shielded or 800 m (2625 ft) unshielded.

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Supplementary system components > Operator panels

#### Overview

| Operator panel                                               | IOP-2 and IOP-2 Handheld Intelligent Operator Panel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | BOP-2 Basic Operator Panel                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                  |  <p>Thanks to the high-contrast color display, menu-based operation and the wizards, commissioning of the standard drives is easy. Application wizards guide the user through the commissioning of important applications such as pumps, fans, compressors, or conveyor systems.</p>                                                                                                                                                                                                                                                            |  <p>Commissioning of standard drives is easy with the menu-prompted dialog on a 2-line display. Simultaneous display of the parameter and parameter value, as well as parameter filtering, means that basic commissioning of a drive can be performed easily and, in most cases, without a printed parameter list.</p> |
| Possible applications                                        | <ul style="list-style-type: none"> <li>• Can be mounted directly on the inverter</li> <li>• Can be mounted in a control cabinet door using a door mounting kit (achievable degree of protection is IP55/UL Type 12 enclosure)</li> <li>• Available as handheld version</li> <li>• The following languages are integrated in the IOP-2: English, German, French, Italian, Spanish, Portuguese, Dutch, Swedish, Finnish, Russian, Czech, Polish, Turkish, Chinese Simplified</li> </ul>                                                                                                                                            | <ul style="list-style-type: none"> <li>• Can be mounted directly on the inverter</li> <li>• Can be mounted in the control cabinet door using a door mounting kit (achievable degree of protection is IP55/UL Type 12)</li> </ul>                                                                                                                                                                          |
| Quick commissioning without expert knowledge                 | <ul style="list-style-type: none"> <li>• Standard commissioning using the clone function</li> <li>• For quicker access, the parameter block names can be directly entered respectively changed on the IOP-2 using the virtual keyboard.</li> <li>• User-defined parameter list with a reduced number of self-selected parameters</li> <li>• Simple commissioning of standard applications using application-specific wizards; it is not necessary to know the parameter structure</li> <li>• Simple local commissioning using the handheld version</li> <li>• Commissioning is possible largely without documentation</li> </ul> | <ul style="list-style-type: none"> <li>• Standard commissioning using the clone function</li> </ul>                                                                                                                                                                                                                                                                                                       |
| High degree of operator friendliness and intuitive operation | <ul style="list-style-type: none"> <li>• Intuitive navigation by operating with a sensor control field</li> <li>• Graphic color display to show status values such as pressure or flow rate in the form of scalar values, bar-type diagrams, or trend displays</li> <li>• Status display with freely selectable units to specify physical values</li> <li>• Direct manual operation of the drive – you can simply toggle between the automatic and manual modes</li> <li>• Simple cloning of specific settings of the IOP-2 user interface.</li> </ul>                                                                           | <ul style="list-style-type: none"> <li>• 2-line display for showing up to 2 process values with text</li> <li>• Status display of predefined units</li> <li>• Direct manual operation of the drive – you can simply toggle between the automatic and manual modes</li> </ul>                                                                                                                              |
| Minimization of maintenance times                            | <ul style="list-style-type: none"> <li>• Diagnostics using plain text display, can be used locally on-site without documentation</li> <li>• The support function is used to determine the drive data for the Power Module, Control Unit and IOP-2 and makes this available as a two-dimensional code (data matrix/QR code)</li> <li>• Easily upgradable to new functional status via USB interface</li> </ul>                                                                                                                                                                                                                    | <ul style="list-style-type: none"> <li>• Diagnostics with menu prompting with 7-segment display</li> </ul>                                                                                                                                                                                                                                                                                                |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

Supplementary system components > IOP-2 Intelligent Operator Panel

### Overview

#### IOP-2 Intelligent Operator Panel



IOP-2 Intelligent Operator Panel

The Intelligent Operator Panel IOP-2 is a very user-friendly and powerful operator panel for the SINAMICS G120, SINAMICS G120C, SINAMICS G120P, SINAMICS G110D, SINAMICS G120D, SINAMICS G110M and SIMATIC ET 200pro FC-2.

The IOP-2 supports both newcomers and drive experts. Thanks to the membrane keyboard with a central sensor control field, high-contrast color displays, menu-based operation and application wizards, it is easy to commission drives. A drive can be essentially commissioned without having to use a printed parameter list – as the parameters are displayed in plain text, and explanatory help texts and the parameter filtering function are provided.

Application wizards interactively guide you when commissioning important applications such as conveyor technology, pumps, fans and compressors. There is a basic commissioning wizard for general commissioning.

Up to two process values can be graphically visualized and up to four process values can be numerically visualized on the status screen/display. Process values can also be displayed in technological units.

The IOP-2 supports standard commissioning of identical drives. For this purpose, a parameter list can be copied from an inverter into the IOP-2 and downloaded into other drive units of the same type as required.

The IOP-2 can be installed in control cabinet doors using the optionally available door mounting kit.

#### Updating the IOP-2

The IOP-2 can be updated and expanded using the integrated USB interface.

Data to support future drive systems can be transferred from the PC to the IOP-2. Further, the USB interface allows user languages and wizards that will become available in the future to be subsequently downloaded and the firmware to be updated for the IOP-2 <sup>1)</sup>.

The IOP-2 is supplied with power via the USB interface during an update.

#### IOP-2 Handheld



IOP-2 Handheld

A handheld version of the IOP-2 can be ordered for mobile use. In addition to the IOP-2, it includes a housing with rechargeable batteries, a charging unit, an RS232 connecting cable, and a USB cable. The charging unit is supplied with connector adapters for Europe, the US and UK. When the batteries are fully charged, the operating time is up to 10 hours.

To connect the IOP-2 Handheld to SINAMICS G110D, SINAMICS G120D, SINAMICS G110M and SIMATIC ET 200pro FC-2, the RS232 connecting cable with optical interface is required in addition.

<sup>1)</sup> Information on updates for the IOP-2 is available at <https://support.industry.siemens.com/cs/document/67273266>

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Supplementary system components > IOP-2 Intelligent Operator Panel

#### Selection and ordering data

| Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Article No.               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>IOP-2 Intelligent Operator Panel</b><br>For use with<br>SINAMICS G120<br>SINAMICS G120C<br>SINAMICS G120P<br>SINAMICS G110D<br>SINAMICS G120D<br>SINAMICS G110M<br>SIMATIC ET 200pro FC-2<br>Operating languages: English, German, French, Italian, Spanish, Portuguese, Dutch, Swedish, Finnish, Russian, Czech, Polish, Turkish, Chinese Simplified                                                                                                                                                                                                                                     | <b>6SL3255-0AA00-4JA2</b> |
| <b>IOP-2 Handheld</b><br>For use with<br>SINAMICS G120<br>SINAMICS G120C<br>SINAMICS G120P<br>SINAMICS G110D<br>SINAMICS G120D<br>SINAMICS G110M<br>SIMATIC ET 200pro FC-2<br>Included in the scope of delivery: <ul style="list-style-type: none"> <li>• IOP-2</li> <li>• Handheld housing</li> <li>• Rechargeable batteries (4 × AA)</li> <li>• Charging unit (international)</li> <li>• RS232 connecting cable <sup>1)</sup><br/>3 m (9.84 ft) long, can be used in combination with SINAMICS G120, SINAMICS G120C, SINAMICS G120P</li> <li>• USB cable<br/>1 m (3.28 ft) long</li> </ul> | <b>6SL3255-0AA00-4HA1</b> |
| <b>Accessories</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |
| <b>Door mounting kit</b><br>For mounting an operator panel in control cabinet doors with sheet steel thicknesses of 1 ... 3 mm (0.04 in ... 0.12 in)<br>Degree of protection IP55<br>Included in the scope of delivery: <ul style="list-style-type: none"> <li>• Seal</li> <li>• Mounting material</li> <li>• Connecting cable<br/>5 m (16.4 ft) long, also supplies voltage to the IOP-2 directly via the inverter</li> </ul>                                                                                                                                                               | <b>6SL3256-0AP00-0JA0</b> |
| <b>RS232 connecting cable</b><br>2.5 m (8.20 ft) long, with optical interface for connecting the IOP-2 Handheld to SINAMICS G110D, SINAMICS G120D, SINAMICS G110M, SIMATIC ET 200pro FC-2                                                                                                                                                                                                                                                                                                                                                                                                    | <b>3RK1922-2BP00</b>      |

#### Benefits

- New device design
  - Intuitive user interface – membrane keyboard with central sensor control field
  - High-contrast color display with a range of display options
  - IOP-2 device design open for future functional expansions (e.g. device functions, wizards, languages)
  - Easily upgradable to new functional status via USB interface
- Commissioning
  - Simple commissioning via wizards
  - The "Fieldbus Interface Settings" wizard is used for easy configuration of the Ethernet interface
  - Fast standard commissioning of inverters thanks to cloning function
  - For quicker access, the parameter block names can be directly entered respectively changed on the IOP-2 using the virtual keyboard.
  - Simple local commissioning on-site using the handheld version
- Operator control and monitoring
  - Simple, individual local drive control (start/stop, setpoint value specification, change in direction of rotation)
  - Application-specific scenarios such as operator concepts with additional external operating elements can be implemented easily
  - Simple cloning of specific settings of the IOP-2 user interface, such as status screen, language settings, lighting duration, date/time settings, parameter backup mode and "My Parameters" – settings made once can such be easily transferred to many further IOP-2 Intelligent Operator Panels
- Diagnostics
  - Rapid diagnostics thanks to on-site plain text display
  - Integrated plain text help function for local display and resolution of fault messages
- Support function
  - Used to determine the drive data for the Power Module, Control Unit and IOP-2 (article number, serial number, firmware version, error statuses) and makes this available as a two-dimensional code (data matrix/QR code)
  - Allows easy contact with Customer Support via a data matrix/QR code generated on the IOP-2
  - Quick access via mobile devices (e.g. smartphones, tablets) to product information, documentation, FAQs, contact persons via a two-dimensional code generated on the IOP-2 (data matrix/QR code)
  - Scanning and evaluating of the two-dimensional data matrix code using the Industry Online Support app (<https://support.industry.siemens.com/cs/ww/en/sc/2067>), see also: <https://support.industry.siemens.com/cs/document/109748340>

<sup>1)</sup> For use in conjunction with SINAMICS G110D, SINAMICS G120D, SINAMICS G110M and SIMATIC ET 200pro FC-2, the RS232 connecting cable with optical interface is required (Article No.: **3RK1922-2BP00**). The cable must be ordered separately.

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Supplementary system components > IOP-2 Intelligent Operator Panel


### Integration

#### Using the IOP-2 with the inverters

|                                                                                                                                                                                                                       | <ul style="list-style-type: none"> <li>• SINAMICS G120 with CU230P-2, CU240E-2 or CU250S-2</li> <li>• SINAMICS G120C</li> <li>• SINAMICS G120P with CU230P-2</li> </ul> | <ul style="list-style-type: none"> <li>• SINAMICS G110D</li> <li>• SINAMICS G120D</li> <li>• SINAMICS G110M</li> <li>• SIMATIC ET 200pro FC-2</li> </ul> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Plugging the IOP-2 onto the inverter</b><br>(Voltage supply via inverter)                                                                                                                                          | ✓                                                                                                                                                                       | —                                                                                                                                                        |
| <b>Door mounting of the IOP-2 with the door mounting kit</b><br>(Voltage supply via inverter. For this purpose, the IOP-2 must be connected up by means of the connecting cable supplied with the door mounting kit.) | ✓                                                                                                                                                                       | —                                                                                                                                                        |
| <b>Mobile use of the IOP-2 Handheld</b><br>(supplied from rechargeable batteries)                                                                                                                                     | ✓                                                                                                                                                                       | ✓ (RS232 connecting cable with optical interface required, article number 3RK1922-2BP00)                                                                 |

#### Door mounting

Using the optionally available door mounting kit, an operator panel can be simply mounted in a control cabinet door with just a few manual operations. In the case of door mounting, the IOP-2 Operator Panel achieves degree of protection IP55/UL Type 12 enclosure.

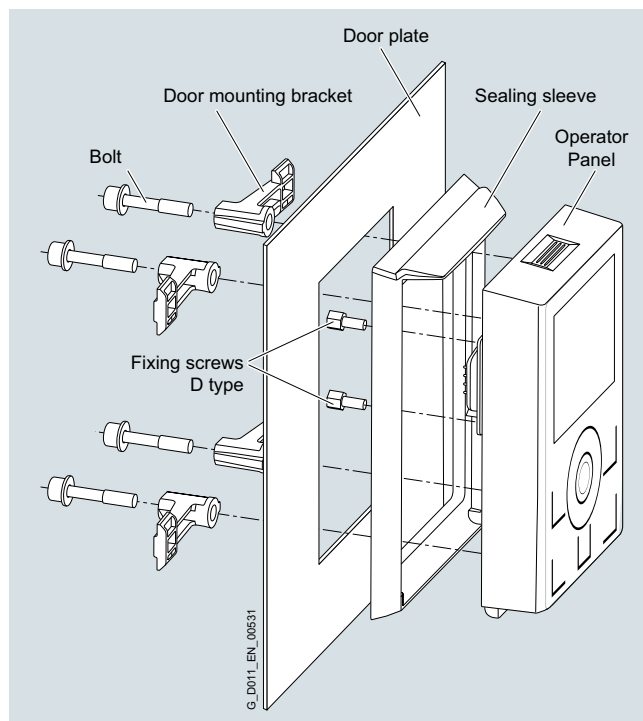

Door mounting kit with plugged-on IOP-2

### Technical specifications

|                                  | IOP-2<br>6SL3255-0AA00-4JA2                                                                                                                                                                                                                                                                                                                       | IOP-2 Handheld<br>6SL3255-0AA00-4HA1              |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|
| <b>Display</b>                   | High-contrast color display, a variety of display options                                                                                                                                                                                                                                                                                         |                                                   |
| • Resolution                     | 320 × 240 pixels                                                                                                                                                                                                                                                                                                                                  |                                                   |
| <b>Operator panel</b>            | Membrane keyboard with central sensor control field                                                                                                                                                                                                                                                                                               |                                                   |
| <b>Operating languages</b>       | English, German, French, Italian, Spanish, Portuguese, Dutch, Swedish, Finnish, Russian, Czech, Polish, Turkish, Chinese Simplified                                                                                                                                                                                                               |                                                   |
| <b>Ambient temperature</b>       | <ul style="list-style-type: none"> <li>• During transport and storage: -40 ... +70 °C (-40 ... +158 °F)</li> <li>• During operation: <ul style="list-style-type: none"> <li>For direct mounting on the inverter: 0 ... 50 °C (32 ... 122 °F)</li> <li>For installation with door mounting kit: 0 ... 55 °C (32 ... 131 °F)</li> </ul> </li> </ul> |                                                   |
| <b>Humidity</b>                  | Relative humidity < 95 %, non-condensing                                                                                                                                                                                                                                                                                                          |                                                   |
| <b>Degree of protection</b>      | For direct mounting on the inverter: IP20<br><br>For installation with door mounting kit: IP55, UL Type 12 enclosure                                                                                                                                                                                                                              | IP20                                              |
| <b>Dimensions (H × W × D)</b>    | 106.86 × 70 × 19.65 mm<br>(4.21 × 2.76 × 0.77 in)                                                                                                                                                                                                                                                                                                 | 195.04 × 70 × 37.58 mm<br>(7.68 × 2.76 × 1.48 in) |
| <b>Weight, approx.</b>           | 0.134 kg (0.3 lb)                                                                                                                                                                                                                                                                                                                                 | 0.724 kg (1.6 lb)                                 |
| <b>Compliance with standards</b> | CE, RCM, cULus, EAC, KC-REM-S49-SINAMICS                                                                                                                                                                                                                                                                                                          |                                                   |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Supplementary system components > BOP-2 Basic Operator Panel

#### Overview



BOP-2 Basic Operator Panel

The Basic Operator Panel BOP-2 can be used to commission drives, monitor drives in operation and input individual parameter settings.

Commissioning of standard drives is easy with the menu-prompted dialog on a 2-line display. Simultaneous display of the parameter and parameter value, as well as parameter filtering, means that basic commissioning of a drive can be performed easily and, in most cases, without a printed parameter list.

The drives are easily controlled manually using directly assigned navigation buttons. The BOP-2 has a dedicated switchover button to switch from automatic to manual mode.

Diagnostics can easily be performed on the connected inverter by following the menus.

Up to two process values can be numerically visualized simultaneously.

BOP-2 supports standard commissioning of identical drives. For this purpose, a parameter list can be copied from an inverter into the BOP-2 and when required, downloaded into other drive units of the same type.

The operating temperature of the BOP-2 is 0 °C ... 50 °C (32 °F ... 122 °F).

#### Selection and ordering data

| Description                                                                                                                                                                                                          | Article No.               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>BOP-2 Basic Operator Panel</b>                                                                                                                                                                                    | <b>6SL3255-0AA00-4CA1</b> |
| <b>Accessories</b>                                                                                                                                                                                                   |                           |
| <b>Door mounting kit</b><br>For mounting an operator panel in control cabinet doors with sheet steel thicknesses of 1 ... 3 mm (0.04 ... 0.12 in)<br>Degree of protection IP55<br>Included in the scope of delivery: | <b>6SL3256-0AP00-0JA0</b> |
| <ul style="list-style-type: none"> <li>• Seal</li> <li>• Mounting material</li> <li>• Connecting cable (5 m/16.4 ft long, also supplies voltage to the operator panel directly via the inverter)</li> </ul>          |                           |

#### Benefits

- Shorten commissioning times – Easy commissioning of standard drives using basic commissioning wizards (setup)
- Minimize standstill times – Fast detection and rectification of faults (Diagnostics)
- Greater transparency in the process – The status display of the BOP-2 makes process variable monitoring easy (Monitoring)
- Direct mounting on the inverter
- User-friendly user interface:
  - Easy navigation using clear menu structure and clearly assigned control keys
  - Two-line display

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Supplementary system components > BOP-2 Basic Operator Panel


#### Integration

##### Using the BOP-2 with SINAMICS G120 inverters

|                                      | CU230P-2 | CU240E-2 | CU250S-2 |
|--------------------------------------|----------|----------|----------|
| Plugging the BOP-2 onto the inverter | ✓        | ✓        | ✓        |
| Door mounting with door mounting kit | ✓        | ✓        | ✓        |

#### Door mounting

Using the optionally available door mounting kit, a BOP-2 can be simply mounted in a control cabinet door with just a few manual operations. Degree of protection IP55 is achieved for door mounting.

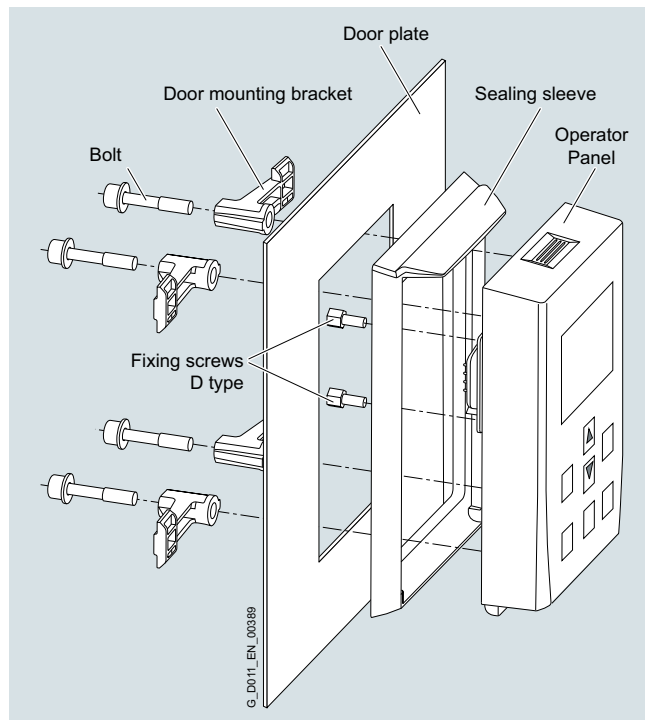

Door mounting kit with plugged-on BOP-2

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Supplementary system components > Push-through mounting frame for PM240-2 Power Modules

#### Overview

It is advisable to use an optionally available mounting frame to install the push-through unit in a control cabinet. This mounting frame includes the necessary seals and frame to ensure compliance with degree of protection IP54.

If the Power Module is installed without use of the optional mounting frame, the user is responsible for ensuring that the requisite degree of protection is provided.

Tightening torque for fixing the mounting frame and the inverter:

- Frame sizes FSA to FSC: 3 to 3.5 Nm
- Frame sizes FSD and FSE: 3.5 Nm
- Frame size FSF: 5.9 Nm

For the push-through power modules, frame sizes FSD to FSF, installation handles are available for insertion without the need for a lifting device.

#### Selection and ordering data

| Description                                                                              | Article No.               |
|------------------------------------------------------------------------------------------|---------------------------|
| <b>Push-through mounting frame</b>                                                       |                           |
| • For PM240-2 Power Modules degree of protection IP20, push-through variants             |                           |
| - Frame size FSA                                                                         | <b>6SL3260-6AA00-0DA0</b> |
| - Frame size FSB                                                                         | <b>6SL3260-6AB00-0DA0</b> |
| - Frame size FSC                                                                         | <b>6SL3260-6AC00-0DA0</b> |
| - Frame size FSD                                                                         | <b>6SL3200-0SM17-0AA0</b> |
| - Frame size FSE                                                                         | <b>6SL3200-0SM18-0AA0</b> |
| - Frame size FSF                                                                         | <b>6SL3200-0SM20-0AA0</b> |
| <b>Accessories</b>                                                                       |                           |
| <b>Installation handles</b><br>for push-through power modules,<br>frame sizes FSD to FSF | <b>6SL3200-0SM22-0AA0</b> |

### Supplementary system components > Memory cards

#### Overview



SINAMICS SD memory card

The parameter settings for an inverter can be stored on the SINAMICS SD memory card. When service is required, e.g. after the inverter has been replaced and the data have been downloaded from the memory card, the drive system is immediately ready for use again.

- Parameter settings can be written from the memory card to the inverter or saved from the inverter to the memory card.
- Up to 100 parameter sets can be stored
- The memory card supports standard commissioning without the use of an operator panel such as the IOP-2, BOP-2 or the STARTER and SINAMICS Startdrive commissioning tools.
- If firmware is stored on the memory card and a Control Unit is installed, the firmware can be upgraded/downgraded during power-up<sup>1)</sup>.

#### Note:

The memory card is not required for operation and does not have to remain inserted.

Licenses can be optionally ordered for CU250S-2 Control Units in order to implement safety technology and positioning capability via the SINAMICS SD card. For further information, refer to section Control Units.

#### Selection and ordering data

| Description                                                                            | Article No.               |
|----------------------------------------------------------------------------------------|---------------------------|
| <b>SINAMICS SD card</b><br><b>512 MB</b>                                               | <b>6SL3054-4AG00-2AA0</b> |
| <b>Optional firmware memory cards</b>                                                  |                           |
| <b>SINAMICS SD card</b><br><b>512 MB + firmware V4.7 SP10</b><br>(Multicard V4.7 SP10) | <b>6SL3054-7TF00-2BA0</b> |

For an overview and more information on all available firmware versions, see

<https://support.industry.siemens.com/cs/document/67364620>

<sup>1)</sup> You can find more information about firmware upgrades/downgrades on the Internet at  
<https://support.industry.siemens.com/cs/document/67364620>

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

Supplementary system components > SINAMICS G120 Smart Access

## Overview



SINAMICS G120 Smart Access

It is also easy and convenient to commission and operate the SINAMICS G120, SINAMICS G120C and SINAMICS G120P inverters of firmware V4.7 SP6 and higher using the web server module SINAMICS G120 Smart Access and a connected smartphone, tablet or laptop.

## Benefits

- Wireless commissioning, operation and diagnostics via mobile device or laptop thanks to the optional SINAMICS G120 Smart Access
- Easy access to the inverter in difficult-to-access areas
- Intuitive user interface and commissioning wizard
- Free choice of terminal devices as the web server works with all common web browsers, such as iOS, Android, Windows, Linux and Mac OS

## Function

- Commissioning using commissioning wizard
- Setting and saving parameters
- Testing motor in JOG mode
- Monitoring of inverter data
- Quick diagnostics
- Saving the settings and restoring to factory settings

## Selection and ordering data

| Description                                                                                                                                                                                                                                                                                                                                                                                                   | Article No.                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| <b>SINAMICS G120 Smart Access</b><br>For wireless commissioning, operation and diagnostics of the following inverters using a smartphone, tablet, or laptop <ul style="list-style-type: none"> <li>• SINAMICS G120C</li> <li>• SINAMICS G120 together with the CU230P-2 and CU240E-2 Control Units (without fail-safe versions)</li> <li>• SINAMICS G120P together with the CU230P-2 Control Units</li> </ul> | <b>NEW 6SL3255-0AA00-5AA0</b> |

## Technical specifications

|                                  | <b>SINAMICS G120 Smart Access</b><br>6SL3255-0AA00-5AA0                                                                                                                                                                               |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating system</b>          | iOS, Android, Windows, Linux, Mac OS                                                                                                                                                                                                  |
| <b>Languages</b>                 | Support of six languages: English, French, German, Italian, Spanish, Chinese                                                                                                                                                          |
| <b>Ambient temperature</b>       | <ul style="list-style-type: none"> <li>• During storage and transport: -40 ... +70 °C (-40 ... +158 °F)</li> <li>• During operation: 0 ... 50 °C (32 ... 122 °F) if the Smart Access is plugged directly into the inverter</li> </ul> |
| <b>Humidity</b>                  | < 95 %, non-condensing                                                                                                                                                                                                                |
| <b>Degree of protection</b>      | Depending on the degree of protection of the inverter, max. IP55/UL Type 12 enclosure                                                                                                                                                 |
| <b>Dimensions</b>                | <ul style="list-style-type: none"> <li>• Width: 70 mm (2.76 in)</li> <li>• Height: 108.9 mm (4.29 in)</li> <li>• Depth: 17.3 mm (0.68 in)</li> </ul>                                                                                  |
| <b>Weight, approx.</b>           | 0.08 kg (0.18 lb)                                                                                                                                                                                                                     |
| <b>Compliance with standards</b> | CE, FCC, SRRG, WPC, ANATEL, BTK                                                                                                                                                                                                       |

## Integration



SINAMICS G120 with PM240-2 Power Module, CU240E-2 PN-F Control Unit and plugged-on SINAMICS G120 Smart Access

The optional SINAMICS G120 Smart Access is simply plugged onto the inverter and is available for the following inverters of firmware V4.7 SP6 and higher.

- SINAMICS G120C
  - SINAMICS G120 together with the CU230P-2 and CU240E-2 Control Units (without fail-safe versions)
  - SINAMICS G120P together with the CU230P-2 Control Units
- [More information can be found in Catalog D 35.](#)

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Supplementary system components > Brake Relay

#### Overview



The Brake Relay allows the Power Module to be connected to an electromechanical motor brake, thereby allowing the motor brake to be driven directly by the Control Unit.

#### Selection and ordering data

| Description                                                                        | Article No.               |
|------------------------------------------------------------------------------------|---------------------------|
| <b>Brake Relay</b><br>Including cable harness for connection with the Power Module | <b>6SL3252-0BB00-0AA0</b> |

#### Technical specifications

|                                                                | <b>Brake Relay</b><br>6SL3252-0BB00-0AA0 |
|----------------------------------------------------------------|------------------------------------------|
| <b>Switching capability of the NO contact, general purpose</b> | 250 V AC / 16 A<br>30 V DC / 12 A        |
| <b>Conductor cross-section, max.</b>                           | 2.5 mm <sup>2</sup>                      |
| <b>Degree of protection</b>                                    | IP20                                     |
| <b>Dimensions</b>                                              |                                          |
| • Width                                                        | 68 mm (2.68 in)                          |
| • Height                                                       | 63 mm (2.48 in)                          |
| • Depth                                                        | 33 mm (1.30 in)                          |
| <b>Weight, approx.</b>                                         | 0.17 kg (0.37 lb)                        |

#### Integration

The Brake Relay has the following interfaces:


- A switch contact (NO contact) to control the motor brake solenoid
- A connection for the cable harness (CTRL) for connection to the Power Module

The Brake Relay can be installed on the shield connection plate near the power terminals of the Power Module.


The supplied Brake Relay includes the cable harness for connection with the Power Module.

The 24 V DC solenoid of the motor brake is connected via an external power supply. For 24 V DC, external surge arrestors are required (e.g. varistor, transil diode).

9

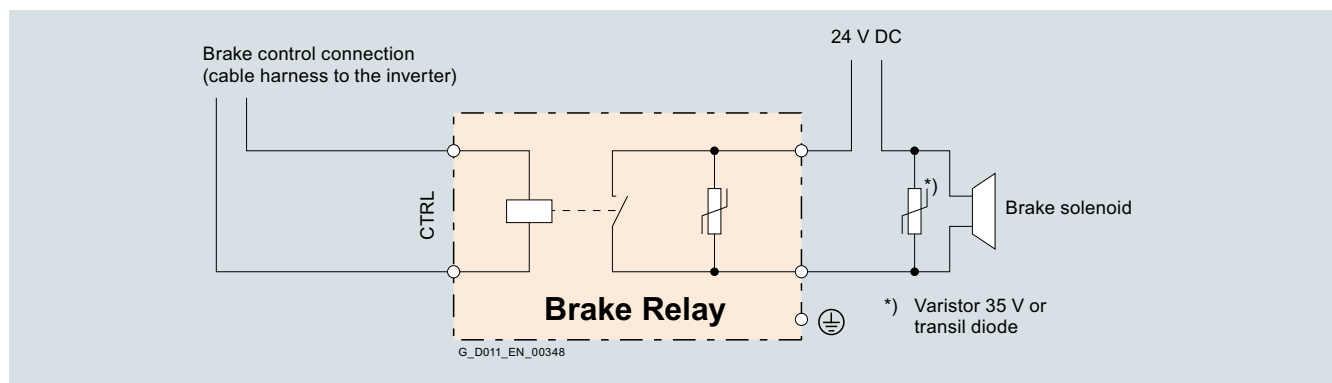

Connection example of 24 V DC Brake Relay

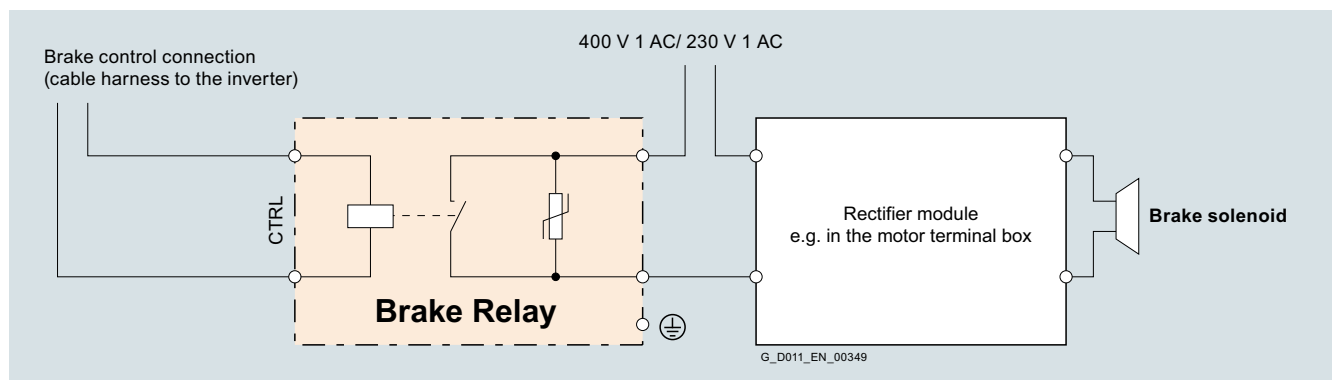

Connection example of 230 ... 400 V 1 AC Brake Relay

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

## Supplementary system components > Safe Brake Relay

### Overview



Safe Brake Relay

With the Safe Brake Relay, the brake is controlled in accordance with IEC 61508 SIL 2 and EN ISO 13849-1 PL d and Category 3.

### Design

The Safe Brake Relay can be installed below the Power Module on the shield connection plate.

The Safe Brake Relay has the following connections and interfaces:

- 1 two-channel transistor output stage to control the motor brake solenoid
- 1 connection for the cable harness (CTRL) to the Power Module in blocksize format
- 1 connection for the 24 V DC power supply

The connection between the 24 V DC supply and the Safe Brake Relay must be kept as short as possible.

The scope of supply of a Safe Brake Relay includes the following:

- 3 cable harnesses for connecting to the CTRL socket of the Power Module
  - Length 0.32 m (1.05 ft) for frame sizes FSA to FSC
  - Length 0.55 m (1.80 ft) for frame sizes FSD and FSE
  - Length 0.8 m (2.62 ft) for frame size FSF (available soon for frame size FSG).


### Selection and ordering data

| Description                                                                       | Article No.               |
|-----------------------------------------------------------------------------------|---------------------------|
| <b>Safe Brake Relay</b><br>Including cable harness for connection to Power Module | <b>6SL3252-0BB01-0AA0</b> |

### Technical specifications

|                                      | Safe Brake Relay<br>6SL3252-0BB01-0AA0                                                                                                             |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power supply</b>                  | 20.4 ... 28.8 V DC<br>Recommended rated supply voltage 26 V DC<br>(to compensate for voltage drop in feeder cable to 24 V DC motor brake solenoid) |
| <b>Current requirement, max.</b>     | <ul style="list-style-type: none"> <li>• Motor brake 2.5 A</li> <li>• At 24 V DC 0.05 A + the current requirement of motor brake</li> </ul>        |
| <b>Conductor cross-section, max.</b> | 2.5 mm <sup>2</sup>                                                                                                                                |
| <b>Dimensions</b>                    | <ul style="list-style-type: none"> <li>• Width 69 mm (2.72 in)</li> <li>• Height 63 mm (2.48 in)</li> <li>• Depth 33 mm (1.30 in)</li> </ul>       |
| <b>Weight, approx.</b>               | 0.17 kg (0.37 lb)                                                                                                                                  |

### Integration

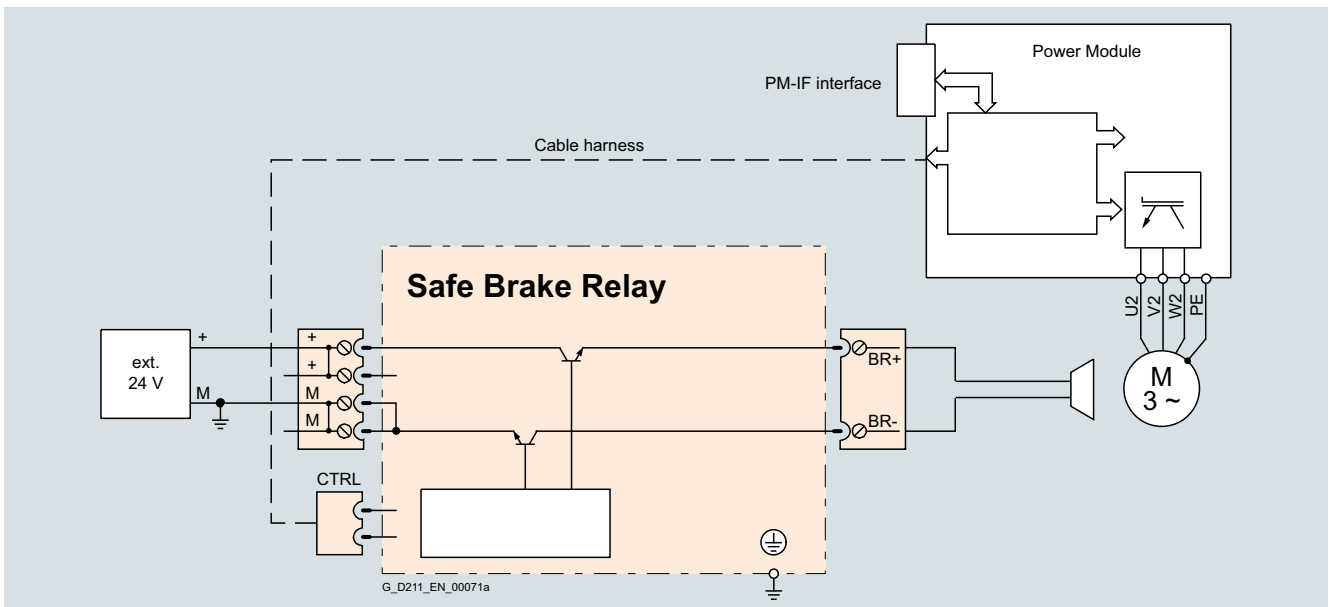

Connection example of a Safe Brake Relay

The 24 V DC solenoid of the motor brake is directly connected to the Safe Brake Relay. External overvoltage limiters are not required.

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Supplementary system components > CM240NE chemical industry module

#### Application

Inverters for 400 V, 500 V and 690 V are required in the chemical industry that meet the special demands and requirements of this industry. The essential requirements and demands of the chemical industry are fulfilled using the SINAMICS G120 series of inverters supplemented by the CM240NE chemical industry module (with ATEX-certified PTC evaluation and a NAMUR terminal strip).



CM240NE chemical industry module

#### Design

- Isolated analog inputs and outputs in the chemical industry module (1 setpoint / 2 measured values)
- Isolated digital inputs and outputs in the Control Unit
- Protective separation of the motor sensor cable with respect to the enclosure and other connections using reinforced insulation of the creepage and clearances (rated impulse voltage 12 kV) according to EN 60664 1
- Certified power disconnection (94/9/EC, ATEX) of the inverter without main contactor
- Forced inverter inhibit (EMERGENCY STOP function via STO)
- NAMUR terminal strip according to NE 37



The CM240NE chemical industry module has the following interfaces:

| Designation | Description                                                                                                                                                                                                            |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PROFIBUS    | 9-pin, SUB-D connector or socket to connect PROFIBUS <sup>1)</sup>                                                                                                                                                     |
| X11 and X12 | Parallel connection of the CM240NE chemical industry module with the Control Unit                                                                                                                                      |
| X2          | Terminal strip in accordance with NAMUR recommendation NE 37 (2.5 mm <sup>2</sup> screw terminals) <ul style="list-style-type: none"> <li>• Digital inputs and outputs</li> <li>• Analog inputs and outputs</li> </ul> |
| X3          | Terminal strip in accordance with NAMUR recommendation NE 37 (2.5 mm <sup>2</sup> screw terminals) to connect the motor temperature sensor                                                                             |

<sup>1)</sup> Cannot be used with CU250S-2 (must be mounted on a DIN rail).

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Supplementary system components > CM240NE chemical industry module

#### Function

- Thermal motor protection (TMP) using the PTC thermistor integrated in the motor (incl. protective separation up to 690 V line supplies)
- The analog inputs and outputs are electrically isolated (MW1 to 3)
- Provision of NAMUR terminal strip (-X2; -X3)

#### Integration

A chemical industry inverter comprises a SINAMICS G120 inverter (Power Module and Control Unit) and the CM240NE chemical industry module.

The CU250S-2 DP is a suitable Control Unit for this application. This is a Control Unit with integrated safety-related functions and PROFIBUS DP interface.

The following Power Module versions are used:

- PM240 Power Module with DC braking function and braking chopper, 400 V line supply voltage
- PM250 Power Module with energy recovery capability, 400 V line supply voltage

Depending on the power unit, additional components may be necessary to complete the system.



Chemical industry inverter comprising PM250 Power Module, CU250S-2 Control Unit and CM240NE chemical industry module

#### Selection and ordering data

|                                                                                                                                                              | Article No.               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>CM240NE chemical industry module</b>                                                                                                                      | <b>6SL3255-0BT01-0PA0</b> |
| <b>Accessories</b>                                                                                                                                           |                           |
| <b>Supplementary kit for rail mounting</b>                                                                                                                   | <b>6SL3260-4TA00-1AA6</b> |
| contains                                                                                                                                                     |                           |
| <ul style="list-style-type: none"> <li>• Adapter for rail mounting (acc. to DIN 50022, 35 × 15 mm (1.38 × 0.59 in))</li> <li>• Long cable harness</li> </ul> |                           |

#### More information

A script file to parameterize the interconnections in line with the NAMUR assignment is available as a download to commission the system using the STARTER commissioning tool.

<https://support.industry.siemens.com/cs/document/37141544>

**SINAMICS G120 standard inverters**

0.37 kW to 250 kW (0.5 hp to 400 hp)

**Supplementary system components > PC inverter connection kit 2****Overview**

PC inverter connection kit 2

For controlling and commissioning an inverter directly from a PC if the STARTER<sup>1)</sup> commissioning tool or SINAMICS Startdrive has been installed on the PC. With this, the inverter can be

- parameterized (commissioning, optimization)
- monitored (diagnostics)
- controlled (master control via the STARTER or SINAMICS Startdrive commissioning tool for test purposes)

A USB cable (3 m/9.84 ft) is included in the scope of delivery.

The PC inverter connection kit 2 is compatible with the following Control Units and inverters (all communication methods):

- SINAMICS G120C
- SINAMICS G120 Control Units
  - CU230P-2
  - CU240E-2
  - CU250S-2
- SINAMICS G110M Control Units
  - CU240M
- SINAMICS G120D Control Units
  - CU240D-2
  - CU250D-2

**Selection and ordering data**

| Description                         | Article No.               |
|-------------------------------------|---------------------------|
| <b>PC inverter connection kit 2</b> | <b>6SL3255-0AA00-2CA0</b> |
| USB cable (3 m/9.84 ft long) for    |                           |
| • SINAMICS G120C                    |                           |
| • SINAMICS G120 Control Units       |                           |
| - CU230P-2                          |                           |
| - CU240E-2                          |                           |
| - CU250S-2                          |                           |
| • SINAMICS G110M Control Units      |                           |
| - CU240M                            |                           |
| • SINAMICS G120D Control Units      |                           |
| - CU240D-2                          |                           |
| - CU250D-2                          |                           |

<sup>1)</sup> The STARTER commissioning tool is available on the Internet at [www.siemens.com/starter](http://www.siemens.com/starter)

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Supplementary system components > Shield connection kits for Control Units

#### Overview

The shield connection kit offers for all signal and communication cables

- Optimum shield connection
- Strain relief

A shield connection kit contains the following:

- A matching shield connection plate
- All of the necessary connecting and retaining elements for mounting

The shield connection kits are suitable for the following SINAMICS G120 Control Units:


- CU230P-2
- CU240E-2
- CU250S-2

#### Selection and ordering data

| Description                                                                                    | Article No.               |
|------------------------------------------------------------------------------------------------|---------------------------|
| <b>Shield connection kit 1</b><br>For CU230P-2 HVAC and CU230P-2 DP Control Units              | <b>6SL3264-1EA00-0FA0</b> |
| <b>Shield connection kit 2</b><br>For the CU240E-2 Control Unit                                | <b>6SL3264-1EA00-0HA0</b> |
| <b>Shield connection kit 3</b><br>for CU230P-2 PN, CU240E-2 PN and CU240E-2 PN-F Control Units | <b>6SL3264-1EA00-0HB0</b> |
| <b>Shield connection kit 4</b><br>for CU250S-2 Control Units                                   | <b>6SL3264-1EA00-0LA0</b> |

### Supplementary system components > Shield connection kits for Power Modules

#### Overview

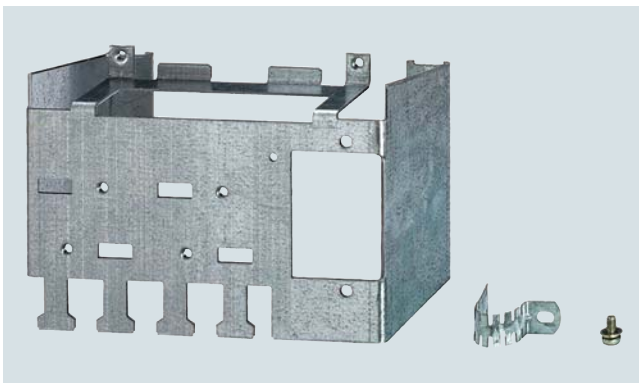

Shield connection kit for Power Module frame size FSB

The shield connection kit

- makes it easier to connect the shields of supply and control cables
- provides mechanical strain relief
- ensures optimum EMC performance
- is used to attach the Brake Relay

The shield connection kit includes

- A shield connection plate for the required Power Module
- Connection elements and clamps for mounting
- Mounting device for Brake Relay, frame sizes FSD to FSG

A shield connection kit is supplied as standard with PM240-2 Power Modules in frame sizes FSA to FSC.

A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size for the frame sizes FSD to FSG. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSG.

#### Selection and ordering data

| Description                                                                                                                                                                                                                                                                                                            | Article No.                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| <b>Shield connection kit</b><br>for PM240-2 Power Modules                                                                                                                                                                                                                                                              | Supplied with the Power Modules, available as a spare part |
| • Frame sizes FSA to FSC                                                                                                                                                                                                                                                                                               |                                                            |
| • Frame sizes FSD to FSG<br>A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size.<br>For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered. |                                                            |
| • Frame size FSD                                                                                                                                                                                                                                                                                                       |                                                            |
| • Frame size FSE                                                                                                                                                                                                                                                                                                       |                                                            |
| • Frame size FSF                                                                                                                                                                                                                                                                                                       | <b>6SL3262-1AF01-0DA0</b>                                  |
| • Frame size FSG <b>NEW</b>                                                                                                                                                                                                                                                                                            | <b>6SL3262-1AG01-0DA0</b>                                  |
| <b>Shield connection kit</b><br>for PM250 Power Modules                                                                                                                                                                                                                                                                |                                                            |
| • Frame size FSC                                                                                                                                                                                                                                                                                                       |                                                            |
| • Frame sizes FSD and FSE                                                                                                                                                                                                                                                                                              |                                                            |
| • Frame size FSF                                                                                                                                                                                                                                                                                                       | <b>6SL3262-1AF00-0DA0</b>                                  |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Spare parts > Spare parts kit for Control Units

#### Overview

The spare parts kit contains small parts for all variants of the following SINAMICS G120 Control Units:

- CU230P-2
- CU240E-2
- CU240E-2 F
- CU250S-2

Included in the scope of delivery:

- Label set for all variants of the CU230P-2, CU240E-2, CU240E-2 F and CU250S-2 Control Units
- 2 × replacement doors (top/bottom)
- 2 × labeling strips for use on the doors
- 1 × 4, 5, 6, 7, 8, 9, 10 and 11-pole terminal blocks
- 1 × protective element for memory card slot
- 1 × screw for SUB-D interface

#### Selection and ordering data

| Description                                                                             | Article No.               |
|-----------------------------------------------------------------------------------------|---------------------------|
| <b>Spare parts kit for Control Units</b><br>CU230P-2, CU240E-2, CU240E-2 F and CU250S-2 | <b>6SL3200-0SK01-0AA0</b> |

### Spare parts > Shield connection kits for PM240-2 Power Modules

#### Overview

A shield connection kit is supplied as standard with PM240-2 Power Modules (and SINAMICS G120C) in frame sizes FSA to FSC. These shield connection kits can be ordered as spare parts.

A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size for the frame sizes FSD to FSG. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSG.

#### Selection and ordering data

| Description                                                                       | Article No.                   |
|-----------------------------------------------------------------------------------|-------------------------------|
| <b>Shield connection kit</b><br>for PM240-2 Power Modules<br>(and SINAMICS G120C) |                               |
| • Frame size FSA                                                                  | <b>6SL3266-1EA00-0KA0</b>     |
| • Frame size FSB                                                                  | <b>6SL3266-1EB00-0KA0</b>     |
| • Frame size FSC                                                                  | <b>6SL3266-1EC00-0KA0</b>     |
| • Frame size FSD                                                                  | <b>6SL3262-1AD01-0DA0</b>     |
| • Frame size FSE                                                                  | <b>6SL3262-1AE01-0DA0</b>     |
| • Frame size FSF                                                                  | <b>6SL3262-1AF01-0DA0</b>     |
| • Frame size FSG                                                                  | <b>NEW 6SL3262-1AG01-0DA0</b> |

### Spare parts > Mounting set for PM240-2 Power Modules

#### Overview

A **mounting set** can be ordered for the PM240-2 Power Modules (and SINAMICS G120C), frame sizes FSD to FSF, in degree of protection IP20. It contains the following parts:

- 1 SUB-D connector with mounting material
- 1 motor connector and 1 power supply connector
- 2 serrated strips including mounting material for connecting the shield
- 3 sleeves for inserting in the cutouts for the signal cables of the cable bonding plate
- Ferrite cores  
(only necessary for devices with integrated line filter class B)
- Screws for fixing the cable bonding plate and the cover

#### Selection and ordering data

| Description                                                                                           | Article No.               |
|-------------------------------------------------------------------------------------------------------|---------------------------|
| <b>Mounting set</b><br>For PM240-2 Power Modules<br>(and SINAMICS G120C)<br>in frame sizes FSD to FSF | <b>6SL3200-0SK08-0AA0</b> |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

### Spare parts > Terminal cover kits for frame sizes FSD to FSG

#### Overview

The terminal cover kit includes a replacement cover for the connecting terminals.

Terminal cover kits, which are suitable for the following SINAMICS G120 Power Modules (and SINAMICS G120C), frame sizes FSD to FSG, are available:

- PM240-2
- PM250

#### Selection and ordering data

| Description                                                               | Article No.                   |
|---------------------------------------------------------------------------|-------------------------------|
| <b>Terminal cover kits for PM240-2 Power Modules (and SINAMICS G120C)</b> |                               |
| • For frame size FSD                                                      | <b>6SL3200-0SM13-0AA0</b>     |
| • For frame size FSE                                                      | <b>6SL3200-0SM14-0AA0</b>     |
| • For frame size FSF                                                      | <b>6SL3200-0SM15-0AA0</b>     |
| • For frame size FSG                                                      | <b>NEW 6SL3200-0SM16-0AA0</b> |
| <b>Terminal cover kits for PM250 Power Modules</b>                        |                               |
| • For frame sizes FSD and FSE                                             | <b>6SL3200-0SM11-0AA0</b>     |
| • For frame size FSF                                                      | <b>6SL3200-0SM12-0AA0</b>     |

### Spare parts > Replacement connectors

#### Overview

A set of replacement connectors for the line feeder cable, braking resistor and motor cable is available for SINAMICS G120 PM240-2 Power Modules (and SINAMICS G120C) in frame sizes FSAA (SINAMICS G120C), FSA, FSB and FSC.

#### Selection and ordering data

| Description                                                                | Article No.               |
|----------------------------------------------------------------------------|---------------------------|
| <b>Replacement connectors For SINAMICS G120 PM240-2 and SINAMICS G120C</b> |                           |
| • For frame sizes FSAA and FSA                                             | <b>6SL3200-0ST05-0AA0</b> |
| • For frame size FSB                                                       | <b>6SL3200-0ST06-0AA0</b> |
| • For frame size FSC                                                       | <b>6SL3200-0ST07-0AA0</b> |

## SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

Spare parts > Fan units

### Overview

The Power Module fans are designed for extra long service life.  
For special requirements, replacement fans are available that  
can be exchanged quickly and easily.

### Selection and ordering data

| Rated power             |     | PM240-2 Power Module<br>standard variant | External fan unit |                    |
|-------------------------|-----|------------------------------------------|-------------------|--------------------|
| kW                      | hp  | Type 6SL3210-...                         | Frame size        | Article No.        |
| 200 ... 240 V 1 AC/3 AC |     |                                          |                   |                    |
| 0.75                    | 1   | 1PB13-8 . L0                             | FSA               | 6SL3200-0SF12-0AA0 |
| 1.1                     | 1.5 | 1PB15-5 . L0                             | FSB               | 6SL3200-0SF13-0AA0 |
| 1.5                     | 2   | 1PB17-4 . L0                             |                   |                    |
| 2.2                     | 3   | 1PB21-0 . L0                             |                   |                    |
| 3                       | 4   | 1PB21-4 . L0                             | FSC               | 6SL3200-0SF14-0AA0 |
| 4                       | 5   | 1PB21-8 . L0                             |                   |                    |
| 200 ... 240 V 3 AC      |     |                                          |                   |                    |
| 5.5                     | 7.5 | 1PC22-2 . L0                             | FSC               | 6SL3200-0SF14-0AA0 |
| 7.5                     | 10  | 1PC22-8 . L0                             | FSD               | 6SL3200-0SF15-0AA0 |
| 11                      | 15  | 1PC24-2UL0                               |                   |                    |
| 15                      | 20  | 1PC25-4UL0                               |                   |                    |
| 18.5                    | 25  | 1PC26-8UL0                               |                   |                    |
| 22                      | 30  | 1PC28-0UL0                               | FSE               | 6SL3200-0SF16-0AA0 |
| 30                      | 40  | 1PC31-1UL0                               | FSF               | 6SL3200-0SF17-0AA0 |
| 37                      | 50  | 1PC31-3UL0                               |                   |                    |
| 45                      | 60  | 1PC31-6UL0                               |                   |                    |
| 55                      | 75  | 1PC31-8UL0                               |                   |                    |
| 380 ... 480 V 3 AC      |     |                                          |                   |                    |
| 0.75                    | 1   | 1PE12-3 . L1                             | FSA               | 6SL3200-0SF12-0AA0 |
| 1.1                     | 1.5 | 1PE13-2 . L1                             | FSB               | 6SL3200-0SF13-0AA0 |
| 1.5                     | 2   | 1PE14-3 . L1                             |                   |                    |
| 2.2                     | 3   | 1PE16-1 . L1                             |                   |                    |
| 3                       | 4   | 1PE18-0 . L1                             |                   |                    |
| 4                       | 5   | 1PE21-1 . L0                             | FSC               | 6SL3200-0SF14-0AA0 |
| 5.5                     | 7.5 | 1PE21-4 . L0                             |                   |                    |
| 7.5                     | 10  | 1PE21-8 . L0                             |                   |                    |
| 11                      | 15  | 1PE22-7 . L0                             | FSD               | 6SL3200-0SF15-0AA0 |
| 15                      | 20  | 1PE23-3 . L0                             |                   |                    |
| 18.5                    | 25  | 1PE23-8 . L0                             |                   |                    |
| 22                      | 30  | 1PE24-5 . L0                             |                   |                    |
| 30                      | 40  | 1PE26-0 . L0                             | FSE               | 6SL3200-0SF16-0AA0 |
| 37                      | 50  | 1PE27-5 . L0                             |                   |                    |
| 45                      | 60  | 1PE28-8 . L0                             |                   |                    |
| 55                      | 75  | 1PE31-1 . L0                             |                   |                    |
| 75                      | 100 | 1PE31-5 . L0                             | FSF               | 6SL3200-0SF17-0AA0 |
| 90                      | 125 | 1PE31-8 . L0                             |                   |                    |
| 110                     | 150 | 1PE32-1 . L0                             |                   |                    |
| 132                     | 200 | 1PE32-5 . L0                             |                   |                    |
| 160                     | 250 | 1PE33-0 . L0                             | FSG               | 6SL3200-0SF18-0AA0 |
| 200                     | 300 | 1PE33-7 . L0                             |                   |                    |
| 250                     | 400 | 1PE34-8 . L0                             |                   |                    |

# SINAMICS G120 standard inverters

0.37 kW to 250 kW (0.5 hp to 400 hp)

Spare parts &gt; Fan units

## Selection and ordering data (continued)

| Rated power               |     | PM240-2 Power Module<br>standard variant |            | External fan unit         |
|---------------------------|-----|------------------------------------------|------------|---------------------------|
| kW                        | hp  | Type 6SL3210-...                         | Frame size | Article No.               |
| <b>500 ... 690 V 3 AC</b> |     |                                          |            |                           |
| 11                        | 10  | 1PH21-4 . L0                             | FSD        | <b>6SL3200-0SF15-0AA0</b> |
| 15                        | 15  | 1PH22-0 . L0                             |            |                           |
| 18.5                      | 20  | 1PH22-3 . L0                             |            |                           |
| 22                        | 25  | 1PH22-7 . L0                             |            |                           |
| 30                        | 30  | 1PH23-5 . L0                             |            |                           |
| 37                        | 40  | 1PH24-2 . L0                             |            |                           |
| 45                        | 50  | 1PH25-2 . L0                             | FSE        | <b>6SL3200-0SF16-0AA0</b> |
| 55                        | 60  | 1PH26-2 . L0                             |            |                           |
| 75                        | 75  | 1PH28-0 . L0                             | FSF        | <b>6SL3200-0SF17-0AA0</b> |
| 90                        | 100 | 1PH31-0 . L0                             |            |                           |
| 110                       | 100 | 1PH31-2 . L0                             |            |                           |
| 132                       | 125 | 1PH31-4 . L0                             |            |                           |
| 160                       | 150 | 1PH31-7CL0                               | FSG        | <b>6SL3200-0SF18-0AA0</b> |
| 200                       | 200 | 1PH32-1CL0                               |            |                           |
| 250                       | 250 | 1PH32-5CL0                               |            |                           |

| Rated power                    |     | PM240-2 Power Module<br>push-through variant |            | External fan unit         |
|--------------------------------|-----|----------------------------------------------|------------|---------------------------|
| kW                             | hp  | Type 6SL3211-...                             | Frame size | Article No.               |
| <b>200 ... 240 V 1 AC/3 AC</b> |     |                                              |            |                           |
| 0.75                           | 1   | 1PB13-8 . L0                                 | FSA        | <b>6SL3200-0SF12-0AA0</b> |
| 2.2                            | 3   | 1PB21-0 . L0                                 | FSB        | <b>6SL3200-0SF13-0AA0</b> |
| 4                              | 5   | 1PB21-8 . L0                                 | FSC        | <b>6SL3200-0SF14-0AA0</b> |
| <b>200 ... 240 V 3 AC</b>      |     |                                              |            |                           |
| 18.5                           | 25  | 1PC26-8UL0                                   | FSD        | <b>6SL3200-0SF25-0AA0</b> |
| 30                             | 40  | 1PC31-1UL0                                   | FSE        | <b>6SL3200-0SF27-0AA0</b> |
| 55                             | 75  | 1PC31-8UL0                                   | FSF        | <b>6SL3200-0SF28-0AA0</b> |
| <b>380 ... 480 V 3 AC</b>      |     |                                              |            |                           |
| 3                              | 4   | 1PE18-0 . L1                                 | FSA        | <b>6SL3200-0SF12-0AA0</b> |
| 7.5                            | 10  | 1PE21-8 . L0                                 | FSB        | <b>6SL3200-0SF13-0AA0</b> |
| 15                             | 20  | 1PE23-3 . L0                                 | FSC        | <b>6SL3200-0SF14-0AA0</b> |
| 37                             | 50  | 1PE27-5 . L0                                 | FSD        | <b>6SL3200-0SF25-0AA0</b> |
| 55                             | 75  | 1PE31-1 . L0                                 | FSE        | <b>6SL3200-0SF27-0AA0</b> |
| 132                            | 200 | 1PE32-5 . L0                                 | FSF        | <b>6SL3200-0SF28-0AA0</b> |

### Note:

The fan units for the push-through variants in frame sizes FSD to FSF contain the internal fans of the corresponding standard variants and an IP55 push-through fan outside the control cabinet.

**SINAMICS G120 standard inverters**

0.37 kW to 250 kW (0.5 hp to 400 hp)

**Spare parts > Replacement fans****Overview**

The Power Module fans are designed for extra long service life.  
Replacement fans can be ordered.

**Selection and ordering data**

| Rated power               |     | <b>PM250 Power Module</b> |                               | <b>Replacement fan</b>        |
|---------------------------|-----|---------------------------|-------------------------------|-------------------------------|
| kW                        | hp  | Type 6SL3225-...          | Frame size and number of fans | Article No.                   |
| <b>380 ... 480 V 3 AC</b> |     |                           |                               |                               |
| 7.5                       | 10  | 0BE25-5AA1                | FSC, 2 fans <sup>1)</sup>     | <b>6SL3200-0SF03-0AA0</b>     |
| 11                        | 15  | 0BE27-5AA1                |                               | (includes 1 replacement fan)  |
| 15                        | 20  | 0BE31-1AA1                |                               |                               |
| 18.5                      | 25  | 0BE31-5 . A0              | FSD, 2 fans                   | <b>6SL3200-0SF04-0AA0</b>     |
| 22                        | 30  | 0BE31-8 . A0              |                               | (includes 2 replacement fans) |
| 30                        | 40  | 0BE32-2 . A0              |                               | <b>6SL3200-0SF05-0AA0</b>     |
|                           |     |                           |                               | (includes 2 replacement fans) |
| 37                        | 50  | 0BE33-0 . A0              | FSE, 2 fans                   | <b>6SL3200-0SF04-0AA0</b>     |
|                           |     |                           |                               | (includes 2 replacement fans) |
| 45                        | 60  | 0BE33-7 . A0              |                               | <b>6SL3200-0SF05-0AA0</b>     |
|                           |     |                           |                               | (includes 2 replacement fans) |
| 55                        | 75  | 0BE34-5 . A0              | FSF, 2 fans                   | <b>6SL3200-0SF06-0AA0</b>     |
| 75                        | 100 | 0BE35-5 . A0              |                               | (includes 2 replacement fans) |
| 90                        | 125 | 0BE37-5 . A0              |                               | <b>6SL3200-0SF08-0AA0</b>     |
|                           |     |                           |                               | (includes 2 replacement fans) |

<sup>1)</sup> Recommendation: Even if only one fan on the Power Module is defective, it is advisable to replace both. In this case, the order quantity must be doubled.

## SINAMICS S110 servo drives

### 0.55 kW to 132 kW (0.75 hp to 150 hp)












|              |                                                             |
|--------------|-------------------------------------------------------------|
| <b>10/2</b>  | <b>Introduction</b>                                         |
| 10/2         | Application                                                 |
| 10/2         | More information                                            |
| <b>10/3</b>  | <b>SINAMICS S110 servo drives</b>                           |
| 10/3         | Overview                                                    |
| 10/4         | Function                                                    |
| 10/5         | Configuration                                               |
| 10/5         | Technical specifications                                    |
| 10/5         | More information                                            |
| <b>10/6</b>  | <b>CU305 Control Unit</b>                                   |
| 10/6         | Overview                                                    |
| 10/6         | Design                                                      |
| 10/6         | Integration                                                 |
| 10/8         | Selection and ordering data                                 |
| 10/8         | Technical specifications                                    |
| <b>10/9</b>  | <b>Air-cooled PM240-2 Power Modules in blocksize format</b> |
| 10/9         | Overview                                                    |
| 10/9         | Integration                                                 |
| 10/11        | Selection and ordering data                                 |
| 10/13        | Technical specifications                                    |
| 10/23        | Characteristic curves                                       |
| <b>10/26</b> | <b>Line-side components</b>                                 |
| 10/26        | Line filters                                                |
| 10/28        | Line reactors                                               |
| 10/30        | Recommended line-side overcurrent protection devices        |
| <b>10/32</b> | <b>DC link components</b>                                   |
| 10/32        | Braking resistors                                           |
| <b>10/36</b> | <b>Load-side power components</b>                           |
| 10/36        | Output reactors                                             |
| <b>10/40</b> | <b>Supplementary system components</b>                      |
| 10/40        | Push-through mounting frame                                 |
| 10/40        | Shield connection kits for Power Modules                    |
| 10/41        | BOP20 Basic Operator Panel                                  |
| 10/42        | Safe Brake Relay                                            |
| <b>10/43</b> | <b>Encoder system connection</b>                            |
| 10/44        | SMC10 Sensor Module Cabinet-Mounted                         |
| 10/45        | SMC20 Sensor Module Cabinet-Mounted                         |
| 10/46        | SMC30 Sensor Module Cabinet-Mounted                         |

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Introduction

## Application

| Use                                                                                                                           | Requirements for torque accuracy/speed accuracy/position accuracy/coordination of axes/functionality |                                                                                                                                                                                  |                                                                                                               |                                                                                                          |                                                                                                          |                                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                               | Continuous motion                                                                                    |                                                                                                                                                                                  |                                                                                                               | Non-continuous motion                                                                                    |                                                                                                          |                                                                                                                                             |
|                                                                                                                               | Basic                                                                                                | Medium                                                                                                                                                                           | High                                                                                                          | Basic                                                                                                    | Medium                                                                                                   | High                                                                                                                                        |
|                                                                                                                               |                     |                                                                                                 |                              |                         |                       |                                                          |
| <b>Pumping, ventilating, compressing</b><br> | Centrifugal pumps<br>Radial / axial fans<br>Compressors                                              | Centrifugal pumps<br>Radial / axial fans<br>Compressors                                                                                                                          | Eccentric screw pumps                                                                                         | Hydraulic pumps<br>Metering pumps                                                                        | Hydraulic pumps<br>Metering pumps                                                                        | Descaling pumps<br>Hydraulic pumps                                                                                                          |
|                                                                                                                               | V20<br>G120C<br>G120P                                                                                | G120P<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                         | S120                                                                                                          | G120                                                                                                     | <b>S110</b>                                                                                              | S120                                                                                                                                        |
| <b>Moving</b><br>                            | Conveyor belts<br>Roller conveyors<br>Chain conveyors                                                | Conveyor belts<br>Roller conveyors<br>Chain conveyors<br>Lifting/lowering devices<br>Elevators<br>Escalators/moving walkways<br>Indoor cranes<br>Marine drives<br>Cable railways | Elevators<br>Container cranes<br>Mining hoists<br>Excavators for open-cast mining<br>Test bays                | Acceleration conveyors<br>Storage and retrieval machines                                                 | Acceleration conveyors<br>Storage and retrieval machines<br>Cross cutters<br>Reel changers               | Storage and retrieval machines<br>Robotics<br>Pick & place<br>Rotary indexing tables<br>Cross cutters<br>Roll feeds<br>Engagers/disengagers |
|                                                                                                                               | V20<br>G110D<br>G110M<br>G120C<br>ET 200pro FC-2 <sup>2)</sup>                                       | G120<br>G120D<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                 | S120<br>S150<br>DCM                                                                                           | V90<br>G120<br>G120D                                                                                     | <b>S110</b><br>S210<br>DCM                                                                               | S120<br>S210<br>DCM                                                                                                                         |
| <b>Processing</b><br>                      | Mills<br>Mixers<br>Kneaders<br>Crushers<br>Agitators<br>Centrifuges                                  | Mills<br>Mixers<br>Kneaders<br>Crushers<br>Agitators<br>Centrifuges<br>Extruders<br>Rotary furnaces                                                                              | Extruders<br>Winders/unwinders<br>Lead/follower drives<br>Calenders<br>Main press drives<br>Printing machines | Tubular bagging machines<br>Single-axis motion control such as<br>• Position profiles<br>• Path profiles | Tubular bagging machines<br>Single-axis motion control such as<br>• Position profiles<br>• Path profiles | Servo presses<br>Rolling mill drives<br>Multi-axis motion control such as<br>• Multi-axis positioning<br>• Cams<br>• Interpolations         |
|                                                                                                                               | V20<br>G120C                                                                                         | G120<br>G130/G150<br>G180 <sup>1)</sup>                                                                                                                                          | S120<br>S150<br>DCM                                                                                           | V90<br>G120                                                                                              | <b>S110</b><br>S210                                                                                      | S120<br>S210<br>DCM                                                                                                                         |
| <b>Machining</b><br>                       | Main drives for<br>• Turning<br>• Milling<br>• Drilling                                              | Main drives for<br>• Drilling<br>• Sawing                                                                                                                                        | Main drives for<br>• Turning<br>• Milling<br>• Drilling<br>• Gear cutting<br>• Grinding                       | Axis drives for<br>• Turning<br>• Milling<br>• Drilling                                                  | Axis drives for<br>• Drilling<br>• Sawing                                                                | Axis drives for<br>• Turning<br>• Milling<br>• Drilling<br>• Laser cutting<br>• Gear cutting<br>• Grinding<br>• Nibbling and punching       |
|                                                                                                                               | <b>S110</b>                                                                                          | <b>S110</b><br>S120                                                                                                                                                              | S120                                                                                                          | <b>S110</b>                                                                                              | <b>S110</b><br>S120                                                                                      | S120                                                                                                                                        |

Many applications in mechanical engineering and plant construction require machine axes to be positioned quickly and precisely by the simplest possible method. It is often simply a case of moving a machine axis from position X to position Y reliably and with the required level of performance. The SINAMICS S110 drive is ideally suited to this type of application. It is specially designed to position single axes accurately and effectively.

Practical application examples and descriptions are available on the Internet at [www.siemens.com/sinamics-applications](http://www.siemens.com/sinamics-applications)

## More information

You may also be interested in these drives:

- Higher performance, more functionality ⇒ SINAMICS S120 ([Catalog D 21.4](#))
- I/O extension using additional modules ⇒ SINAMICS S120 ([Catalog D 21.4](#))
- Operation of linear and torque motors ⇒ SINAMICS S120 ([Catalog D 21.4](#))
- Reduced functionality for basic applications with standard asynchronous (induction) motors ⇒ SINAMICS G120

<sup>1)</sup> Industry-specific inverters.

<sup>2)</sup> Information on the SIMATIC ET 200pro FC-2 frequency converter is available in Catalog D 31.2 and at [www.siemens.com/et200pro-fc](http://www.siemens.com/et200pro-fc)

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### SINAMICS S110 servo drives

#### Overview

#### *SINAMICS S110 – the basic positioning drive for single-axis applications*



SINAMICS S110: PM240-2 Power Modules in blocksize format with CU305 Control Unit and BOP20

SINAMICS S110 can be used in numerous applications. Typical examples are:

- Handling equipment
- Feed and withdrawal devices
- Stacking units
- Automatic assembly machines
- Laboratory automation
- Metalworking
- Woodworking, glass and ceramic industries
- Printing machines
- Plastics processing machines

The SINAMICS S110 servo drive is designed for connection to both synchronous servomotors and asynchronous (induction) motors. It supports all the most popular types of encoder.

A variety of fieldbus interfaces is provided for linking the unit to a higher-level control system. Alternatively, it can be controlled via  $\pm 10$  V and a pulse direction interface.

The so-called basic positioner (EPos) is an integral component of SINAMICS S110. It provides a simple method of solving positioning tasks.

#### **Flexible in application**

SINAMICS S110 is a flexible, versatile system.

Synchronous servomotors and asynchronous (induction) motors with outputs up to 132 kW can be used to implement rotary or linear axes. DRIVE-CLiQ motors can be connected simply by means of the integrated DRIVE-CLiQ interface. This means that the electronic rating plate of the motor is easy to read out, reducing the engineering time and cost involved in commissioning the drive.

Furthermore, the SINAMICS S110 features an integrated encoder interface for optional use. It is capable of evaluating HTL/TTL and SSI encoders.

In addition to pure point-to-point positioning, SINAMICS S110 naturally also offers on-the-fly changeover from continuous operation to positioning mode in order, for example, to precisely position objects transported randomly on a conveyor belt. Even simple traversing profiles with different motion cycles and wait times can be executed automatically by SINAMICS S110.

The CU305 Control Unit of the SINAMICS S110 is equipped with an integrated communication interface for linking the inverter to an automation system. A PROFINET or PROFIBUS interface can be ordered. Standardized protocols for linking to a higher-level control are supported – the PROFIdrive profile for positioning mode and the PROFIsafe profile for safety-related communication.

The inverter is thus perfectly coordinated with the SIMATIC S7 automation system. The devices are linked by means of PROFIBUS and the SIMATIC S7 uses standard function blocks to communicate with the drive. In addition, the STARTER commissioning tool can be seamlessly integrated into STEP 7, the SIMATIC's programming software.

#### **BICO technology**

Every drive object contains a large number of input and output variables which can be freely and independently interconnected using Binector Connector Technology (BICO). A binector is a logic signal which can assume the value 0 or 1. A connector is a numerical value, e.g. the actual speed or current setpoint.

#### **Basic positioner (EPos)**

The EPos basic positioner provides powerful and precise positioning functions. Due to its flexibility and adaptability, the EPos basic positioner can be used for a wide range of positioning tasks. The functions are easy to use during both commissioning and operation, and the comprehensive monitoring functions are very powerful. Many applications can be implemented without external position control systems.

[Additional information about the basic positioner \(EPos\) is provided in the section Technology functions.](#)

#### **Free function blocks**

The drive can be adapted easily and precisely to a wide range of customized requirements using the "free function blocks" integrated in the CU305 Control Unit. The available range of blocks includes simple logic blocks such as AND/OR elements, as well as more complex devices such as smoothing elements or limit-value monitors. All blocks can be flexibly interconnected using BICO (Binector-Connector) technology, ensuring that signals are processed quickly and close to the drive which helps reduce the load on the higher-level control.

[Additional information about Free Function Blocks \(FBB\) is provided in the section Technology functions.](#)

#### **Diagnostics optimally supported by trace function**

The time characteristics of input and output variables associated with drives can be measured by the integrated trace function and displayed using the STARTER commissioning tool. The trace can record up to 4 signals simultaneously. Recording can be triggered as a function of freely selectable boundary conditions, e.g. the value of an input or output variable.

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### SINAMICS S110 servo drives

#### Overview (continued)

##### Integral safety functions (Safety Integrated)

The Control Unit supports comprehensive safety functions. The integrated safety functions are the

##### Safety Integrated Basic functions

- STO = Safe Torque Off
- SBC = Safe Brake Control
- SS1 = Safe Stop 1

and the

##### Safety Integrated Extended functions under license

- SS2 = Safe Stop 2
- SOS = Safe Operating Stop
- SLS = Safely-Limited Speed
- SSM = Safe Speed Monitor
- SDI = Safe Direction

(abbreviations in accordance with IEC 61800-5-2)

If the integrated safety functions are used, licenses, supplementary system components such as Safe Brake Relay, or suitable safety controls will be necessary.

[Additional information about the integrated safety functions is provided in the section Safety Integrated.](#)

##### Memory cards

The memory card can be used as an option for SINAMICS S110. The relevant slot is located underneath the CU305 Control Unit. The complete functionality of SINAMICS S110 can be saved on the memory card: the parameter settings and the firmware. When service is required, e.g. after the inverter has been replaced and the data has been downloaded from the memory card, the drive system is immediately ready for use once more.

A SINAMICS Micro Memory Card (MMC) is essential if the optional Safety Integrated Extended functions are used. The necessary license is saved on the MMC.

##### Varnished modules

The following units are equipped as standard with varnished or partially varnished modules:

- Blocksize format units
- Control Units
- Sensor Modules

The varnish coating protects the sensitive SMD components against corrosive gases, chemically active dust and moisture.

#### Function

##### SINAMICS S110 – Summary of the most important functions

|                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Control method</b>                         | Servo control                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| • Asynchronous (induction) motor              | Torque control with encoder<br>Speed control with and without encoder<br>Position control with encoder                                                                                                                                                                                                                                                                                                                                                                                   |
| • Synchronous motor                           | Torque control with encoder<br>Speed control with encoder<br>Position control with encoder                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Control function</b>                       | V/f characteristic                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| • Asynchronous (induction) motor              | Basic linear                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| • Synchronous motor                           | –                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Basic positioner (EPos)</b>                | Absolute and relative positioning<br>Linear and rotary axes<br>Motor encoder or direct measuring system<br>4 referencing modes<br>16 traversing blocks<br>Direct setpoint specification (MDI)<br>Jog mode<br>Backlash compensation<br>Following error monitoring<br>Cam signals<br>Position tracking for extended position range<br>....                                                                                                                                                 |
| <b>Safety Integrated</b>                      | Safe Torque OFF (STO)<br>Safe Brake Control (SBC)<br>Safe Stop 1 (SS1)<br>Safe Stop 2 (SS2)<br>Safe Operating Stop (SOS)<br>Safely-Limited Speed (SLS)<br>Safe Speed Monitor (SSM)<br>Safe Direction (SDI)                                                                                                                                                                                                                                                                               |
| <b>Protection functions</b>                   | Undervoltage DC link voltage<br>Overvoltage DC link voltage<br>Overcurrent power unit<br>Overcurrent motor<br>Overload power unit ( $I^2t$ )<br>Short circuit<br>Ground fault<br>Overtemperature motor<br>Overtemperature power unit                                                                                                                                                                                                                                                     |
| <b>Functions for simplified commissioning</b> | Electronic rating plate for motors with DRIVE-CLiQ<br>Motor data identification<br>Pole position identification<br>Automatic controller optimization with STARTER                                                                                                                                                                                                                                                                                                                        |
| <b>Free function blocks</b>                   | Logic and arithmetic blocks                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Data sets</b>                              | 2 command data sets<br>2 drive data sets<br>2 motor data sets<br>1 encoder data set                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Further software functions</b>             | BICO interconnection<br>Technology controller (PID)<br>Extended setpoint channel<br>Automatic restart<br>Armature short-circuit brake<br>DC brake<br>Brake control<br>$V_{dc\_min}$ control (kinetic buffering)<br>$V_{dc\_max}$ control<br>Travel to fixed stop<br>Vertical axis<br>Variable signaling functions<br>Central measuring probe evaluation<br>Pulse direction interface<br>Efficiency optimization for asynchronous (induction) motors<br>Runtime (operating hours counter) |

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## SINAMICS S110 servo drives

### Configuration

The following electronic configuring aids and engineering tools are available for the SINAMICS S110 servo drives:

#### **Drive Technology Configurator (DT Configurator) within the CA 01**

The interactive catalog CA 01 – the offline Industry Mall of Siemens – contains over 100000 products with approximately 5 million possible drive system product variants. The Drive Technology Configurator (DT Configurator) has been developed to facilitate selection of the correct motor and/or inverter from the wide spectrum of drives. It is integrated as a selection tool in Catalog CA 01.

#### **Online DT Configurator**

In addition, the DT Configurator can be used on the Internet without requiring any installation. The DT Configurator can be found in the Siemens Industry Mall at the following address:  
[www.siemens.com/dt-configurator](http://www.siemens.com/dt-configurator)

#### **SIZER for Siemens Drives engineering tool**

The SIZER for Siemens Drives engineering tool makes it easy to configure the SINAMICS drive family. It provides support when selecting the hardware and firmware components necessary to implement a drive task. SIZER for Siemens Drives is designed to support configuring of the entire drive system.

You can find further information on the SIZER for Siemens Drives engineering tool in the section Engineering tools.

The SIZER for Siemens Drives engineering tool is available free on the Internet at  
[www.siemens.com/sizer](http://www.siemens.com/sizer)

#### **STARTER commissioning tool**

The STARTER commissioning tool allows menu-prompted commissioning, optimization and diagnostics. Apart from the SINAMICS drives, STARTER is also suitable for MICROMASTER 4 devices.

You can find further information about the STARTER commissioning tool in the section Engineering tools.

Additional information about the STARTER commissioning tool is available on the Internet at  
[www.siemens.com/starter](http://www.siemens.com/starter)

#### **Drive ES engineering system**

Drive ES is the engineering system that can be used to integrate the communication, configuration and data management functions of Siemens drive technology into the SIMATIC automation world easily, efficiently and cost-effectively. Two software packages are available for SINAMICS – Drive ES Basic Maintenance and Drive ES PCS.

You can find further information about the Drive ES engineering system in the section Engineering tools.

Additional information about the Drive ES engineering system is available on the Internet at  
[www.siemens.com/drive-es](http://www.siemens.com/drive-es)

### Technical specifications

The most important directives and standards are listed below. These are used as basis for the SINAMICS S110 servo drives and must be carefully observed to achieve an EMC-compliant configuration that is safe both functionally and in operation.

#### **European standards**

|                  |                                                                                                                                       |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| EN 61508-1       | Functional safety of electrical/electronic/programmable electronic safety-related systems<br>Part 1: General requirements             |
| EN 60204-1       | Electrical equipment of machines<br>Part 1: General definitions                                                                       |
| EN 61800-3       | Adjustable speed electrical power drive systems<br>Part 3: EMC product standard including specific test methods                       |
| IEC/EN 61800-5-1 | Adjustable speed electrical power drive systems<br>Part 5: Safety requirements<br>Main section 1: Electrical and thermal requirements |

#### **North American standards**

|                  |                                                 |
|------------------|-------------------------------------------------|
| UL 508C          | Power Conversion Equipment                      |
| UL 61800-5-1     | Adjustable Speed Electrical Power Drive Systems |
| CSA C22.2 No. 14 | Industrial Control Equipment                    |

#### **Certificates of suitability**

|       |                                                                                                                          |
|-------|--------------------------------------------------------------------------------------------------------------------------|
| cULus | Testing by UL (Underwriters Laboratories, <a href="http://www.ul.com">www.ul.com</a> ) according to UL and CSA standards |
|-------|--------------------------------------------------------------------------------------------------------------------------|

### More information

For reliable operation of the drive system, original components of the SINAMICS drive system and the original Siemens accessories as described in this Catalog and the Configuration Manuals, in the functional descriptions or user manuals must be used.

The user must observe the configuring instructions.

Combinations that differ from the configuring instructions (also in conjunction with non-Siemens products) require a special agreement.

If no original components are used, for example, for repairs, approvals such as UL, EN and Safety Integrated can become invalid. This may also result in the operating authorization for the machine in which the non-Siemens components are installed becoming invalid.

All of the certificates of suitability, approvals, certificates, declarations of conformity, test certificates, e.g. CE, UL, Safety Integrated, have been performed with the associated system components as they are described in the Catalogs and Configuration Manuals. The certificates are only valid if the products are used with the described system components, are installed according to the Installation Guidelines and are used for their intended purpose. In other cases, the vendor of these products is responsible for arranging that new certificates are issued.

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### CU305 Control Unit

#### Overview



CU305 PN Control Unit

The CU305 Control Unit for the communication and open-loop/closed-loop control functions of a SINAMICS S110 is combined with the PM240-2 Power Module in blocksize format (usable as of firmware V4.4 SP3) to create a powerful single drive.

#### Design

The CU305 Control Unit features the following connections and interfaces as standard:

- Fieldbus interface
  - CU305 PN: 1 PROFINET interface with 2 ports (RJ45 sockets) with PROFIdrive V4 profile
  - CU305 DP: 1 PROFIBUS interface with PROFIdrive V4 profile
- 1 DRIVE-CLiQ socket, used solely to connect a DRIVE-CLiQ motor or a Sensor Module
- 1 onboard encoder evaluation for evaluating the following encoder signals
  - Incremental encoder TTL/HTL
  - SSI encoder without incremental signals
- 1 PE/protective conductor connection
- 1 connection for the electronics power supply via the 24 V DC power supply connector
- 1 temperature sensor input (KTY84-130 or PTC)
- 3 parameterizable, fail-safe digital inputs (isolated), or alternatively 6 parameterizable digital inputs (isolated)
- 5 parameterizable digital inputs (isolated)
- 1 parameterizable, fail-safe digital output (isolated), or alternatively 1 digital output (isolated)
- 4 parameterizable bidirectional digital inputs/outputs
- 1 analog input  $\pm 10$  V, resolution 12 bit + sign
- 1 serial RS232 interface
- 1 slot for the memory card on which the firmware, parameters and licenses can be stored
- 1 PM-IF interface for communication with the PM240-2 Power Modules in blocksize format (usable as of firmware V4.4 SP3)
- 2 test sockets and one reference ground for commissioning support
- 1 interface to the BOP20 Basic Operator Panel

#### Integration

The CU305 Control Unit controls the PM240-2 Power Module in blocksize format (usable as of firmware V4.4 SP3) via the PM-IF interface.

A BOP20 Basic Operator Panel can also be snapped directly onto the CU305 for diagnostic purposes.

DRIVE-CLiQ motors can be connected to the integrated DRIVE-CLiQ socket as well as Sensor Modules (SMC) to permit the operation of motors without a DRIVE-CLiQ interface.

The status of the CU305 is indicated via multi-color LEDs.

The CU305 can be operated optionally with memory card. The firmware and project data are stored on the memory card plugable from below, so that the CU305 can be replaced without the support of software tools. This memory card can also be used to perform standard commissioning on multiple drives of identical type. The card is available as an empty memory card or containing the latest drive firmware version. The card also contains the safety license for the Extended Safety Functions. To use these Extended Safety Functions, a memory card containing the safety license must be permanently inserted.


The CU305 and other connected components are commissioned and diagnosed with the STARTER commissioning tool.

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## CU305 Control Unit

### Integration (continued)

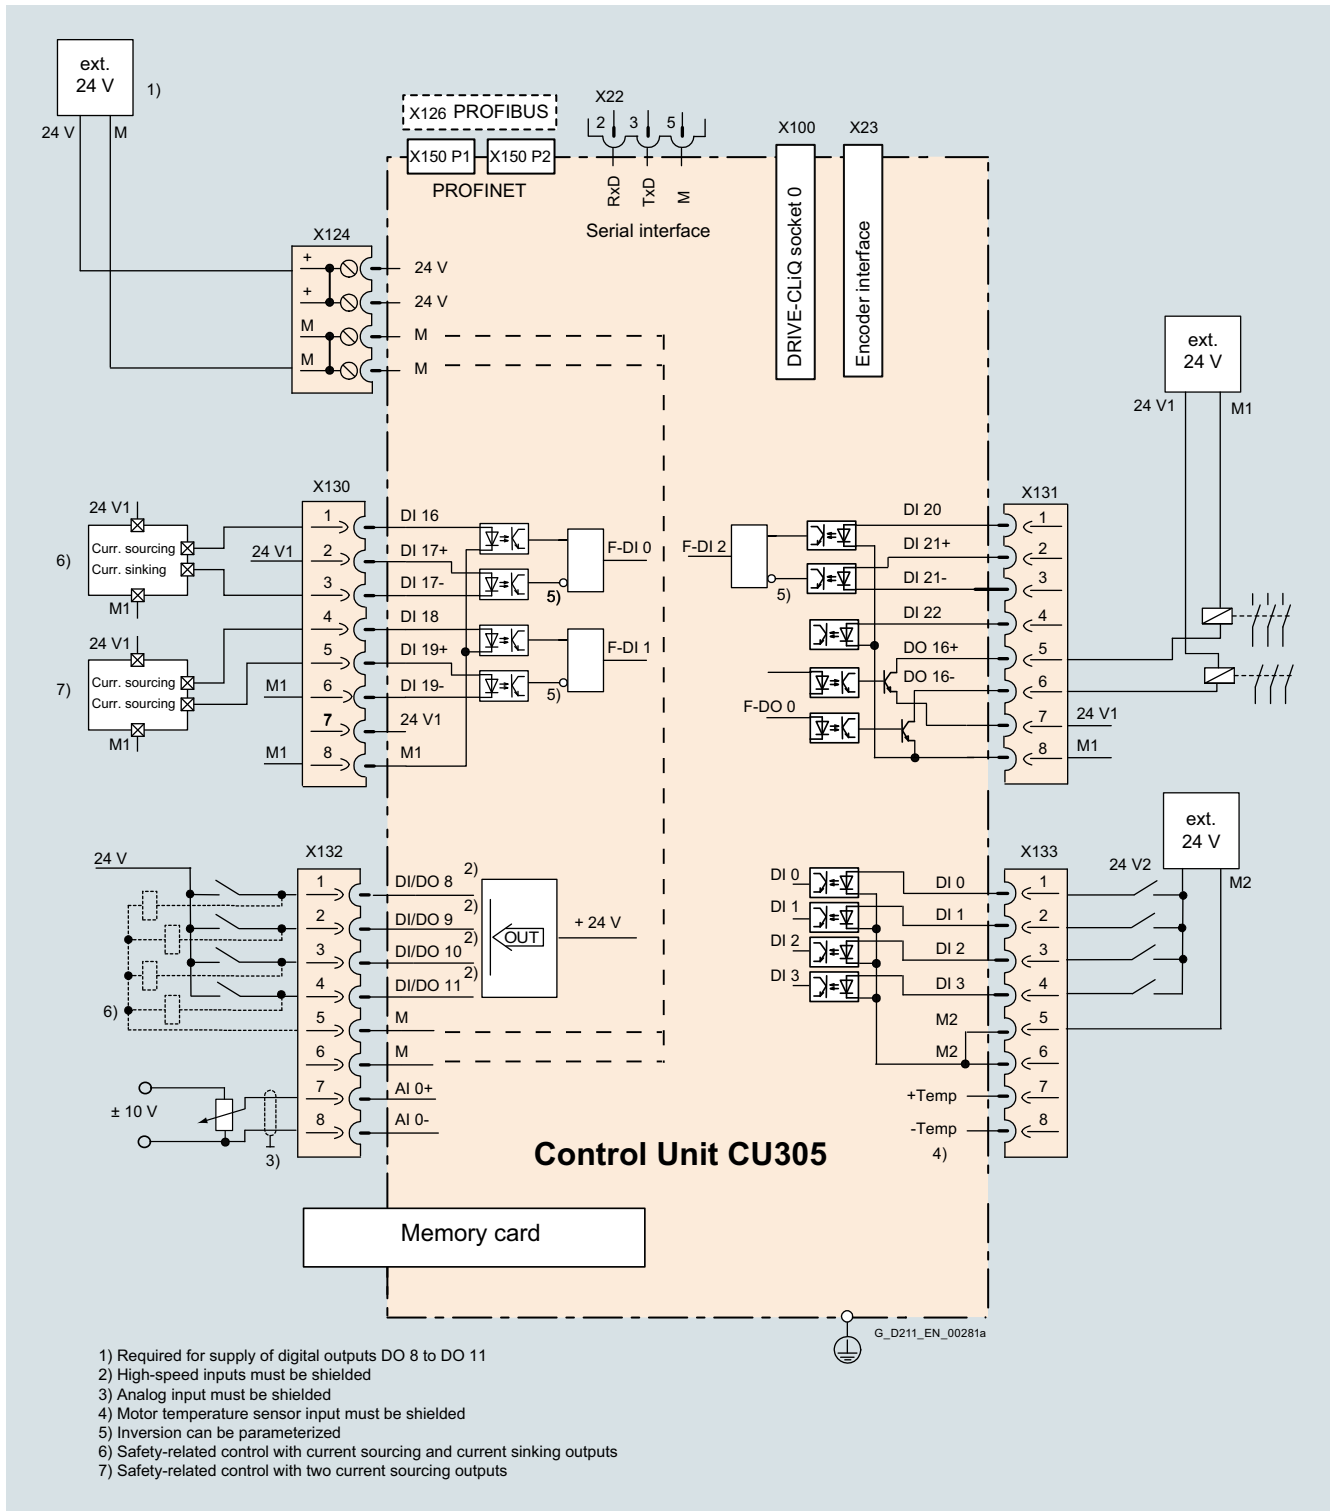

Connection example of CU305 Control Unit

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## CU305 Control Unit

### Selection and ordering data

| Description                                         | Article No.               |
|-----------------------------------------------------|---------------------------|
| <b>CU305 PN Control Unit</b><br>Without memory card | <b>6SL3040-0JA01-0AA0</b> |
| <b>CU305 DP Control Unit</b><br>Without memory card | <b>6SL3040-0JA00-0AA0</b> |

| Description                                                              | Article No.                     |
|--------------------------------------------------------------------------|---------------------------------|
| <b>Accessories</b>                                                       |                                 |
| <b>Memory card for CU305 PN / CU305 DP Control Units</b><br>64 MB        |                                 |
| • Empty                                                                  | <b>6SL3054-4AG00-0AA0</b>       |
| • With firmware version V4.4 SP3                                         | <b>6SL3054-4TC00-2AA0</b>       |
| • With firmware version V4.4 SP3 and safety license (Extended Functions) | <b>6SL3054-4TC00-2AA0-Z F01</b> |
| <b>Safety license (Extended Functions) <sup>1)</sup></b>                 | <b>6SL3074-0AA10-0AA0</b>       |
| <b>STARTER commissioning tool <sup>2)</sup></b><br>on DVD-ROM            | <b>6SL3072-0AA00-0AG0</b>       |

### Technical specifications

#### CU305 PN / CU305 DP Control Units

PROFINET: 6SL3040-0JA01-0AA0  
PROFIBUS: 6SL3040-0JA00-0AA0

|                                                                                                                                        |                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Current requirement</b><br>At 24 V DC, max.<br>without taking account of digital outputs<br>and DRIVE-CLiQ supply                   | 0.8 A for CU305 incl. 350 mA<br>for HTL encoder + 0.5 A for<br>PM240-2 Power Module |
| <b>Conductor cross-section, max.</b>                                                                                                   | 2.5 mm <sup>2</sup>                                                                 |
| <b>Fuse protection, max.</b>                                                                                                           | 20 A                                                                                |
| <b>Digital inputs</b>                                                                                                                  | in accordance with<br>IEC 61131-2 Type 1                                            |
|                                                                                                                                        | 3 isolated fail-safe inputs                                                         |
|                                                                                                                                        | 5 isolated digital inputs                                                           |
| • Voltage                                                                                                                              | -3 ... +30 V                                                                        |
| • Low level (an open digital input is<br>interpreted as "low")                                                                         | -3 ... +5 V                                                                         |
| • High level                                                                                                                           | 15 ... 30 V                                                                         |
| • Current consumption at 24 V DC, typ.                                                                                                 | 6 mA                                                                                |
| • Delay time of digital inputs <sup>3)</sup> , approx.                                                                                 |                                                                                     |
| - L → H                                                                                                                                | 15 μs                                                                               |
| - H → L                                                                                                                                | 55 μs                                                                               |
| • Delay time of high-speed digital inputs <sup>3)</sup> ,<br>approx. (high-speed digital inputs can be<br>used for position detection) |                                                                                     |
| - L → H                                                                                                                                | 5 μs                                                                                |
| - H → L                                                                                                                                | 5 μs                                                                                |
| • Conductor cross-section, max.                                                                                                        | 1.5 mm <sup>2</sup>                                                                 |
| <b>Digital outputs</b><br>(continuously short-circuit-proof)                                                                           | 1 fail-safe digital output                                                          |
|                                                                                                                                        | 4 bidirectional digital inputs/<br>digital outputs, not isolated                    |
| • Voltage                                                                                                                              | 24 V DC                                                                             |
| • Load current per digital output <sup>4)</sup> , max.                                                                                 | 100 mA                                                                              |
| • Delay time <sup>3)</sup> , approx.                                                                                                   | 150 μs                                                                              |
| • Conductor cross-section, max.                                                                                                        | 1.5 mm <sup>2</sup>                                                                 |
| <b>Analog input</b>                                                                                                                    | -10 ... +10 V<br>Resolution 12 bits + sign                                          |
| • Internal resistance                                                                                                                  | 15 kΩ                                                                               |

#### CU305 PN / CU305 DP Control Units

PROFINET: 6SL3040-0JA01-0AA0  
PROFIBUS: 6SL3040-0JA00-0AA0

|                                    |                                                                                                                                        |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Encoder evaluation</b>          | <ul style="list-style-type: none"> <li>Incremental encoder<br/>TTL/HTL</li> <li>SSI encoder without<br/>incremental signals</li> </ul> |
| • Encoder supply                   | 24 V DC/0.35 A or<br>5 V DC/0.35 A                                                                                                     |
| • Input current range TTL/HTL      | 2 ... 10 mA (typ. 5 mA)                                                                                                                |
| • Encoder frequency, max.          | 500 kHz                                                                                                                                |
| • SSI baud rate                    | 100 ... 250 kBaud<br>depending on cable length                                                                                         |
| • Resolution absolute position SSI | 30 bit                                                                                                                                 |
| • Cable length, max.               |                                                                                                                                        |
| - TTL encoder                      | 100 m (328 ft)<br>(only bipolar signals<br>permitted) <sup>5)</sup>                                                                    |
| - HTL encoder                      | 100 m (328 ft) for unipolar<br>signals<br>300 m (984 ft) for bipolar<br>signals <sup>5)</sup>                                          |
| - SSI encoder                      | 100 m (328 ft)                                                                                                                         |
| <b>Power loss</b>                  | <20 W                                                                                                                                  |
| <b>PE connection</b>               | M5 screw                                                                                                                               |
| <b>Dimensions</b>                  |                                                                                                                                        |
| • Width                            | 73 mm (2.87 in)                                                                                                                        |
| • Height                           |                                                                                                                                        |
| - CU305 PN                         | 195 mm (7.68 in)                                                                                                                       |
| - CU305 DP                         | 183.2 mm (7.21 in)                                                                                                                     |
| • Depth                            |                                                                                                                                        |
| - CU305 PN                         | 71 mm (2.80 in)                                                                                                                        |
| - CU305 DP                         | 55 mm (2.17 in)                                                                                                                        |
| <b>Weight, approx.</b>             | 0.95 kg (2.09 lb)                                                                                                                      |
| <b>Certificate of suitability</b>  | cULus                                                                                                                                  |

<sup>1)</sup> Extended function for an existing memory card. The memory card is not included with the scope of delivery. By specifying the Z option **F01** it is possible to order the safety license together with a memory card.

<sup>2)</sup> The STARTER commissioning tool is also available on the Internet at <https://support.industry.siemens.com/cs/ww/en/ps/13437/dl>

<sup>3)</sup> The specified delay times refer to the hardware. The actual reaction time depends on the time slice in which the digital input or output is processed.

<sup>4)</sup> In order to use the digital outputs, an external 24 V power supply must be connected to terminal X124.

<sup>5)</sup> Signal cables twisted in pairs and shielded.

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Air-cooled PM240-2 Power Modules in blocksize format

### Overview



PM240-2 Power Modules, frame sizes FSA to FSF (with Control Unit and BOP-20 Operator Panel)

The PM240-2 Power Modules in blocksize format feature the following connections and interfaces as standard:

- Line supply connection
- PM-IF interface to connect the PM240-2 Power Module to the CU305 Control Unit. The PM240-2 Power Module also supplies power to the CU305 Control Unit using an integrated power supply
- Terminals DCP/R1 and R2 for connection of an external braking resistor
- Motor connection made with screw terminals or screw studs
- Control circuit for the Safe Brake Relay for controlling a holding brake
- 2 PE/protective conductor connections

Power Modules without integrated line filter can be connected to grounded TN/TT systems and non-grounded IT systems. Power Modules with integrated line filter are suitable only for connection to TN systems with grounded neutral point.

#### Push-through variant

The push-through variant allows the cooling fins of the Power Module to be pushed through the rear panel of the control cabinet. Push-through variants should be used in applications where the amount of power loss generated inside the control cabinet itself must be minimized.

#### Note:

Shield connection kits are available for EMC-compliant installation of Power Modules.

A shield connection kit is supplied as standard with PM240-2 Power Modules in frame sizes FSA to FSC. A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size for the frame sizes FSD to FSF. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSF.

For more information, see [Shield connection kits for Power Modules](#) in the section [Supplementary system components](#).


#### Additional options

Further selected accessories are available from "Siemens Product Partner for Drives Options":


[www.siemens.com/drives-options-partner](http://www.siemens.com/drives-options-partner)

### Integration

PM240-2 Power Modules in blocksize format communicate via the PM-IF interface with the CU305 Control Unit

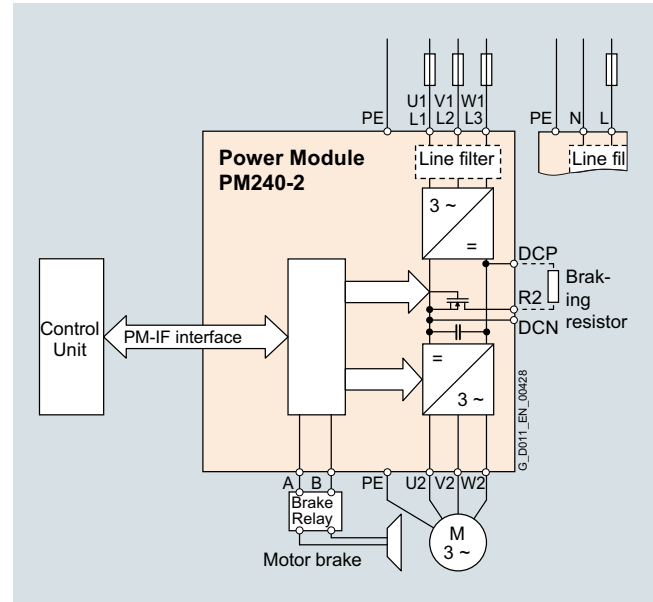

Connection example for PM240-2 Power Modules, frame sizes FSA to FSC, with or without integrated line filter

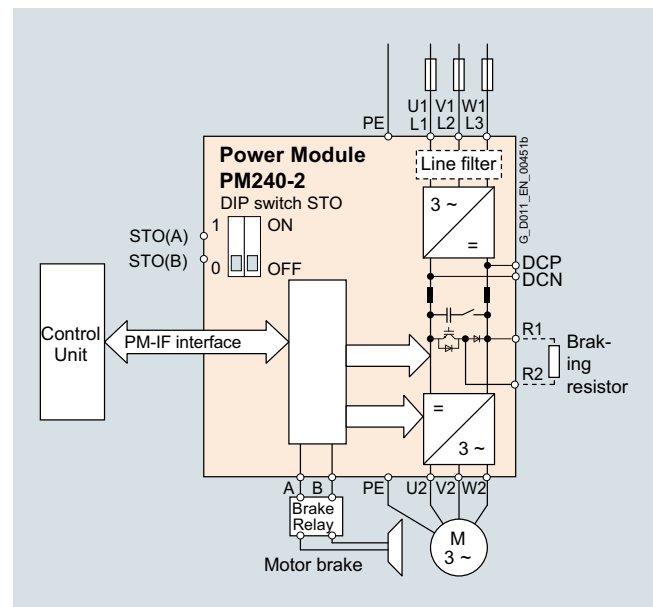

Connection example for PM240-2 Power Modules, frame sizes FSD to FSF, with or without integrated line filter

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Air-cooled PM240-2 Power Modules in blocksize format

#### Integration (continued)

##### Power and DC link components that are optionally available depending on the Power Module used

The following line-side components, DC link components and load-side power components are optionally available in the appropriate frames sizes for the Power Modules:

|                                                      | Frame size      |                 |                 |                 |                 |                 |
|------------------------------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|                                                      | FSA             | FSB             | FSC             | FSD             | FSE             | FSF             |
| PM240-2 Power Module with integrated braking chopper |                 |                 |                 |                 |                 |                 |
| <b>Line-side components</b>                          |                 |                 |                 |                 |                 |                 |
| Line filter class A                                  | F               | F               | F               | F <sup>2)</sup> | F <sup>2)</sup> | F <sup>2)</sup> |
| Line filter class B<br>(only for 400 V versions)     | U <sup>1)</sup> | U <sup>1)</sup> | U <sup>1)</sup> | –               | –               | –               |
| Line reactor (only for 3 AC versions)                | S               | S               | S               | I               | I               | I               |
| <b>DC link components</b>                            |                 |                 |                 |                 |                 |                 |
| Braking resistor                                     | S               | S               | S               | S               | S               | S               |
| <b>Load-side power components</b>                    |                 |                 |                 |                 |                 |                 |
| Output reactor                                       | S               | S               | S               | S               | S               | S               |

F = Power Modules available with and without integrated filter class A


U = Base component

S = Lateral mounting

I = Integrated

– = Not possible

#### General design information

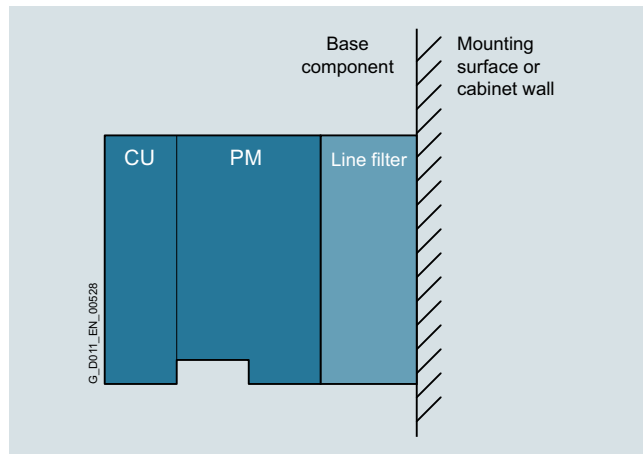

- If at all possible, the line filter should be mounted directly below the inverter<sup>1)</sup>
- With lateral mounting, the line-side components have to be mounted on the left side of the inverter, and the load-side components on the right side
- Braking resistors have to be mounted directly on the control cabinet wall due to heating issues

Frequency inverter comprising a Power Module (PM), a Control Unit (CU), and a line filter as base components (side view)

#### Recommended installation combinations of the inverter and optional power and DC link components

| Power Module | Base        | Lateral mounting                                   |                                                                                  |
|--------------|-------------|----------------------------------------------------|----------------------------------------------------------------------------------|
| Frame size   |             | Left of the inverter<br>(for line-side components) | Right of the inverter<br>(for load-side power components and DC link components) |
| FSA to FSC   | Line filter | Line reactor                                       | Output reactor and/or braking resistor                                           |
| FSD to FSF   | –           | Line filter                                        | Output reactor and/or braking resistor                                           |

<sup>1)</sup> Lateral mounting is the only possible option for push-through variants.

<sup>2)</sup> PM240-2 200 V versions, frame sizes FSD to FSF are only available without integrated line filter.

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Air-cooled PM240-2 Power Modules in blocksize format

### Selection and ordering data

To ensure that a suitable Power Module is selected, the following currents should be used for applications:

- Rated output current for applications with low overload (LO)
- Base-load current for applications with high overload (HO)

With reference to the rated output current, the modules support at least 2-pole to 6-pole low-voltage motors, e.g. the SIMOTICS 1LE1 motor series. The type rating is merely a guide value. For a description of the overload performance, please refer to the general technical specifications of the Power Modules.

### PM240-2 Power Modules standard variant

| Type rating <sup>1)</sup>        |      | Rated output current $I_{rated}$ <sup>2)</sup> | Power based on the base-load current <sup>3)</sup> |      | Base-load current $I_H$ <sup>3)</sup> | Frame size | PM240-2 Power Module standard variant without integrated line filter | PM240-2 Power Module standard variant with integrated line filter class A |             |             |
|----------------------------------|------|------------------------------------------------|----------------------------------------------------|------|---------------------------------------|------------|----------------------------------------------------------------------|---------------------------------------------------------------------------|-------------|-------------|
| kW                               | hp   |                                                | A                                                  | kW   |                                       |            | hp                                                                   | A                                                                         | Article No. | Article No. |
| 200 ... 240 V 1 AC/3 AC          |      |                                                |                                                    |      |                                       |            |                                                                      |                                                                           |             |             |
| 0.55                             | 0.75 | 3.2                                            | 0.37                                               | 0.5  | 2.3                                   | FSA        | 6SL3210-1PB13-0UL0                                                   | 6SL3210-1PB13-0AL0                                                        |             |             |
| 0.75                             | 1    | 4.2                                            | 0.55                                               | 0.75 | 3.2                                   | FSA        | 6SL3210-1PB13-8UL0                                                   | 6SL3210-1PB13-8AL0                                                        |             |             |
| 1.1                              | 1.5  | 6                                              | 0.75                                               | 1    | 4.2                                   | FSB        | 6SL3210-1PB15-5UL0                                                   | 6SL3210-1PB15-5AL0                                                        |             |             |
| 1.5                              | 2    | 7.4                                            | 1.1                                                | 1.5  | 6                                     | FSB        | 6SL3210-1PB17-4UL0                                                   | 6SL3210-1PB17-4AL0                                                        |             |             |
| 2.2                              | 3    | 10.4                                           | 1.5                                                | 2    | 7.4                                   | FSB        | 6SL3210-1PB21-0UL0                                                   | 6SL3210-1PB21-0AL0                                                        |             |             |
| 3                                | 4    | 13.6                                           | 2.2                                                | 3    | 10.4                                  | FSC        | 6SL3210-1PB21-4UL0                                                   | 6SL3210-1PB21-4AL0                                                        |             |             |
| 4                                | 5    | 17.5                                           | 3                                                  | 4    | 13.6                                  | FSC        | 6SL3210-1PB21-8UL0                                                   | 6SL3210-1PB21-8AL0                                                        |             |             |
| 380 ... 480 V 3 AC <sup>4)</sup> |      |                                                |                                                    |      |                                       |            |                                                                      |                                                                           |             |             |
| 0.55                             | 0.75 | 1.7                                            | 0.37                                               | 0.5  | 1.3                                   | FSA        | 6SL3210-1PE11-8UL1                                                   | 6SL3210-1PE11-8AL1                                                        |             |             |
| 0.75                             | 1    | 2.2                                            | 0.55                                               | 0.75 | 1.7                                   | FSA        | 6SL3210-1PE12-3UL1                                                   | 6SL3210-1PE12-3AL1                                                        |             |             |
| 1.1                              | 1.5  | 3.1                                            | 0.75                                               | 1    | 2.2                                   | FSA        | 6SL3210-1PE13-2UL1                                                   | 6SL3210-1PE13-2AL1                                                        |             |             |
| 1.5                              | 2    | 4.1                                            | 1.1                                                | 1.5  | 3.1                                   | FSA        | 6SL3210-1PE14-3UL1                                                   | 6SL3210-1PE14-3AL1                                                        |             |             |
| 2.2                              | 3    | 5.9                                            | 1.5                                                | 2    | 4.1                                   | FSA        | 6SL3210-1PE16-1UL1                                                   | 6SL3210-1PE16-1AL1                                                        |             |             |
| 3                                | 4    | 7.7                                            | 2.2                                                | 3    | 5.9                                   | FSA        | 6SL3210-1PE18-0UL1                                                   | 6SL3210-1PE18-0AL1                                                        |             |             |
| 4                                | 5    | 10.2                                           | 3                                                  | 4    | 7.7                                   | FSB        | 6SL3210-1PE21-1UL0                                                   | 6SL3210-1PE21-1AL0                                                        |             |             |
| 5.5                              | 7.5  | 13.2                                           | 4                                                  | 5    | 10.2                                  | FSB        | 6SL3210-1PE21-4UL0                                                   | 6SL3210-1PE21-4AL0                                                        |             |             |
| 7.5                              | 10   | 18                                             | 5.5                                                | 7.5  | 13.2                                  | FSB        | 6SL3210-1PE21-8UL0                                                   | 6SL3210-1PE21-8AL0                                                        |             |             |
| 11                               | 15   | 26                                             | 7.5                                                | 10   | 18                                    | FSC        | 6SL3210-1PE22-7UL0                                                   | 6SL3210-1PE22-7AL0                                                        |             |             |
| 15                               | 20   | 32                                             | 11                                                 | 15   | 26                                    | FSC        | 6SL3210-1PE23-3UL0                                                   | 6SL3210-1PE23-3AL0                                                        |             |             |
| 18.5                             | 25   | 38                                             | 15                                                 | 20   | 32                                    | FSD        | 6SL3210-1PE23-8UL0                                                   | 6SL3210-1PE23-8AL0                                                        |             |             |
| 22                               | 30   | 45                                             | 18.5                                               | 25   | 38                                    | FSD        | 6SL3210-1PE24-5UL0                                                   | 6SL3210-1PE24-5AL0                                                        |             |             |
| 30                               | 40   | 60                                             | 22                                                 | 30   | 45                                    | FSD        | 6SL3210-1PE26-0UL0                                                   | 6SL3210-1PE26-0AL0                                                        |             |             |
| 37                               | 50   | 75                                             | 30                                                 | 40   | 60                                    | FSD        | 6SL3210-1PE27-5UL0                                                   | 6SL3210-1PE27-5AL0                                                        |             |             |
| 45                               | 60   | 90                                             | 37                                                 | 50   | 75                                    | FSE        | 6SL3210-1PE28-8UL0                                                   | 6SL3210-1PE28-8AL0                                                        |             |             |
| 55                               | 75   | 110                                            | 45                                                 | 60   | 90                                    | FSE        | 6SL3210-1PE31-1UL0                                                   | 6SL3210-1PE31-1AL0                                                        |             |             |
| 75                               | 100  | 145                                            | 55                                                 | 75   | 110                                   | FSF        | 6SL3210-1PE31-5UL0                                                   | 6SL3210-1PE31-5AL0                                                        |             |             |
| 90                               | 125  | 178                                            | 75                                                 | 100  | 145                                   | FSF        | 6SL3210-1PE31-8UL0                                                   | 6SL3210-1PE31-8AL0                                                        |             |             |
| 110                              | 150  | 205                                            | 90                                                 | 125  | 178                                   | FSF        | 6SL3210-1PE32-1UL0                                                   | 6SL3210-1PE32-1AL0                                                        |             |             |
| 132                              | 200  | 250                                            | 110                                                | 150  | 205                                   | FSF        | 6SL3210-1PE32-5UL0                                                   | 6SL3210-1PE32-5AL0                                                        |             |             |

<sup>1)</sup> Type rating based on the rated output current  $I_{rated}$ . The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO). These current values are valid for 200 V or 400 V and are specified on the rating plate of the Power Module.

<sup>3)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>4)</sup> SIPLUS components for extreme requirements are available. Additional information is available on the Internet at [www.siemens.com/siplus-drives](http://www.siemens.com/siplus-drives)

**SINAMICS S110 servo drives**

0.55 kW to 132 kW (0.75 hp to 150 hp)

**Air-cooled PM240-2 Power Modules in blocksize format****Selection and ordering data** (continued)**PM240-2 Power Modules push-through variant**

| Type rating <sup>1)</sup>      |           | Rated output current $I_{rated}$ <sup>2)</sup> | Power based on the base-load current <sup>3)</sup> |             | Base-load current $I_H$ <sup>3)</sup> | Frame size | PM240-2 Power Module push-through variant <u>without</u> integrated line filter | PM240-2 Power Module push-through variant <u>with</u> integrated line filter class <u>A</u> |
|--------------------------------|-----------|------------------------------------------------|----------------------------------------------------|-------------|---------------------------------------|------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| kW                             | hp        | A                                              | kW                                                 | hp          | A                                     |            | Article No.                                                                     | Article No.                                                                                 |
| <b>200 ... 240 V 1 AC/3 AC</b> |           |                                                |                                                    |             |                                       |            |                                                                                 |                                                                                             |
| <b>0.75</b>                    | <b>1</b>  | <b>4.2</b>                                     | <b>0.55</b>                                        | <b>0.75</b> | <b>3.2</b>                            | FSA        | <b>6SL3211-1PB13-8UL0</b>                                                       | <b>6SL3211-1PB13-8AL0</b>                                                                   |
| <b>2.2</b>                     | <b>3</b>  | <b>10.4</b>                                    | <b>1.5</b>                                         | <b>2</b>    | <b>7.4</b>                            | FSB        | <b>6SL3211-1PB21-0UL0</b>                                                       | <b>6SL3211-1PB21-0AL0</b>                                                                   |
| <b>4</b>                       | <b>5</b>  | <b>17.5</b>                                    | <b>3</b>                                           | <b>4</b>    | <b>13.6</b>                           | FSC        | <b>6SL3211-1PB21-8UL0</b>                                                       | <b>6SL3211-1PB21-8AL0</b>                                                                   |
| <b>380 ... 480 V 3 AC</b>      |           |                                                |                                                    |             |                                       |            |                                                                                 |                                                                                             |
| <b>3</b>                       | <b>4</b>  | <b>7.7</b>                                     | <b>2.2</b>                                         | <b>7.5</b>  | <b>5.9</b>                            | FSA        | <b>6SL3211-1PE18-0UL1</b>                                                       | <b>6SL3211-1PE18-0AL1</b>                                                                   |
| <b>7.5</b>                     | <b>10</b> | <b>18</b>                                      | <b>5.5</b>                                         | <b>7.5</b>  | <b>13.2</b>                           | FSB        | <b>6SL3211-1PE21-8UL0</b>                                                       | <b>6SL3211-1PE21-8AL0</b>                                                                   |
| <b>15</b>                      | <b>20</b> | <b>32</b>                                      | <b>11</b>                                          | <b>15</b>   | <b>26</b>                             | FSC        | <b>6SL3211-1PE23-3UL0</b>                                                       | <b>6SL3211-1PE23-3AL0</b>                                                                   |

**Shield connection kit for Power Modules**

The shield connection kit makes it easier to connect the shields of supply and control cables, provides mechanical strain relief and thus ensures optimum EMC performance.

A shield connection kit is supplied as standard with PM240-2 Power Modules in frame sizes FSA to FSC. A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size for the frame sizes FSD to FSF. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSF.

For more information, see [Shield connection kits for Power Modules](#) in the section [Supplementary system components](#).

<sup>1)</sup> Type rating based on the rated output current  $I_{rated}$ . The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO). These current values are valid for 200 V or 400 V and are specified on the rating plate of the Power Module.

<sup>3)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Air-cooled PM240-2 Power Modules in blocksize format

### Technical specifications

#### General technical specifications

Unless explicitly specified otherwise, the following technical specifications are valid for all PM240-2 Power Modules in blocksize format, frame sizes FSA to FSF.

#### Note:

When configuring the complete SINAMICS S110 drive, the system data of the associated Control Units, supplementary system components, DC link components and Sensor Modules must be taken into consideration.

| Electrical specifications                                                                                                                                                       |                                                                                                                                                              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Line voltage</b>                                                                                                                                                             |                                                                                                                                                              |
| • Blocksize format FSA ... FSC                                                                                                                                                  | 200 ... 240 V 1 AC $\pm 10\%$<br>200 ... 240 V 3 AC $\pm 10\%$<br>380 ... 480 V 3 AC $\pm 10\%$                                                              |
| • Blocksize format FSD ... FSF                                                                                                                                                  | 380 ... 480 V 3 AC $\pm 10\%$ (in operation $-20\% < 1$ min)                                                                                                 |
| <b>Line system configurations</b>                                                                                                                                               | Grounded TN/TT systems and non-grounded IT systems                                                                                                           |
| <b>Line frequency</b>                                                                                                                                                           | 47 ... 63 Hz                                                                                                                                                 |
| <b>Line power factor</b><br>for a 3 AC line supply voltage and type rating                                                                                                      |                                                                                                                                                              |
| • Blocksize format FSA ... FSC                                                                                                                                                  |                                                                                                                                                              |
| - Fundamental power factor ( $\cos \varphi_1$ )                                                                                                                                 | $> 0.96$                                                                                                                                                     |
| - Total ( $\lambda$ )                                                                                                                                                           | $> 0.7 \dots 0.85$                                                                                                                                           |
| • Blocksize format FSD ... FSF                                                                                                                                                  |                                                                                                                                                              |
| - Fundamental power factor ( $\cos \varphi_1$ )                                                                                                                                 | $> 0.98 \dots 0.99$                                                                                                                                          |
| - Total ( $\lambda$ )                                                                                                                                                           | $> 0.9 \dots 0.92$                                                                                                                                           |
| <b>Electromagnetic compatibility<sup>1)</sup></b>                                                                                                                               |                                                                                                                                                              |
| • Interference immunity                                                                                                                                                         | All PM240-2 Power Modules are suitable for use in both the first and second environments.                                                                    |
| • Interference emission acc. to EN 61800-3<br><b>second environment</b>                                                                                                         |                                                                                                                                                              |
| - For devices with integrated radio suppression interference filter                                                                                                             | Category C2                                                                                                                                                  |
| - For devices without integrated radio interference suppression filter with optional external radio interference filter for grounded line supplies                              | Category C2<br>(recommended for operation in conjunction with a residual current protective device RCD)                                                      |
| - For devices without integrated radio interference suppression filter for operation on IT line supplies                                                                        | Category C4                                                                                                                                                  |
| • Interference emission acc. to EN 61800-3<br><b>first environment</b>                                                                                                          | Can be used in the first environment when taking into consideration the additional secondary conditions listed in the EMC notes                              |
| <b>Overvoltage category</b><br>acc. to IEC/EN 61800-5-1                                                                                                                         | III                                                                                                                                                          |
| <b>Electronics power supply</b><br>implemented as PELV circuit<br>according to IEC/EN 61800-5-1                                                                                 | 24 V DC, $-15\% +20\%$<br>Ground = negative pole grounded via the electronics                                                                                |
| <b>Short-circuit current rating (SCCR)</b><br>(Short Circuit Current Rating)<br>Applies to industrial control cabinet installations<br>according to NEC Article 409 or UL 508A. | 100 kA<br><a href="#">See the Recommended line-side overcurrent protection devices section</a> –<br>the value depends on the fuses and circuit breakers used |
| <b>Rated pulse frequency</b>                                                                                                                                                    |                                                                                                                                                              |
| • For devices with a rated voltage of<br>200 V 1/3 AC, 400 V 3 AC and a type rating<br>$\leq 55$ kW based on $I_{rated}$                                                        | 4 kHz                                                                                                                                                        |
| • For devices with a type rating $\geq 75$ kW<br>based on $I_{rated}$                                                                                                           | 2 kHz                                                                                                                                                        |
| <b>Output voltage, max.</b>                                                                                                                                                     | Approximately $0.95 \times$ line voltage<br>(at 200 V 1 AC, approximately $0.74 \times$ line voltage)                                                        |
| <b>Output frequency</b>                                                                                                                                                         | 0 ... 550 Hz<br>(dependencies on the control mode and pulse frequency must be taken into account)                                                            |

<sup>1)</sup> For EMC-compliant installation, observe the information in the Configuration Manual EMC installation guidelines:  
<https://support.industry.siemens.com/cs/document/60612658>

**SINAMICS S110 servo drives**

0.55 kW to 132 kW (0.75 hp to 150 hp)

**Air-cooled PM240-2 Power Modules in blocksize format****Technical specifications (continued)**

| Mechanical specifications                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                       |                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Degree of protection<br>acc. to EN 60529                                                                                                                                                                                                            | IP20                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                       |                                                                                                                                                                                                                                                                                                                      |
| Protection class                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                       |                                                                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"><li>Line circuits with protective conductor connection according to IEC/EN 61800-5-1</li><li>Electronic circuits</li></ul>                                                                                        | I<br><br>Safety extra low-voltage PELV/SELV                                                                                                                                                                                                                                                                                                                                                                             |                                                                       |                                                                                                                                                                                                                                                                                                                      |
| Type of cooling                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                       |                                                                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"><li>Internal air cooling</li><li>External air cooling</li></ul>                                                                                                                                                   | Forced air cooling AF to EN 60146<br><br>Push-through cooling for push-through device versions                                                                                                                                                                                                                                                                                                                          |                                                                       |                                                                                                                                                                                                                                                                                                                      |
| Ambient conditions                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                       |                                                                                                                                                                                                                                                                                                                      |
|                                                                                                                                                                                                                                                     | Storage                                                                                                                                                                                                                                                                                                                                                                                                                 | Transport                                                             | Operation                                                                                                                                                                                                                                                                                                            |
|                                                                                                                                                                                                                                                     | In product packaging                                                                                                                                                                                                                                                                                                                                                                                                    | In transport packaging                                                |                                                                                                                                                                                                                                                                                                                      |
| Ambient temperature                                                                                                                                                                                                                                 | Class 1K4<br>acc. to EN 60721-3-1<br>-25 ... +55 °C (-13 ... +131 °F)                                                                                                                                                                                                                                                                                                                                                   | Class 2K4<br>acc. to EN 60721-3-2<br>-40 ... +70 °C (-40 ... +158 °F) | Class 3K3 <sup>1)</sup><br>acc. to EN 60721-3-3<br>For operation without derating <sup>2)</sup> :<br>-10 ... +40 °C (14 ... 104 °F)<br>(for operation with low overload)<br>-10 ... +50 °C (14 ... 122 °F)<br>(for operation with high overload)<br>For operation with derating:<br>>40 ... +60 °C (>104 ... 140 °F) |
| Relative humidity<br>(oil mist, salt mist, ice, condensation, dripping water, spraying water and water jets are not permitted)                                                                                                                      | Class 1K4<br>acc. to EN 60721-3-1<br>5 ... 95 %                                                                                                                                                                                                                                                                                                                                                                         | Class 2K3<br>acc. to EN 60721-3-2<br>5 ... 95 % at 40 °C (104 °F)     | Class 3K3 <sup>1)</sup><br>acc. to EN 60721-3-3<br>5 ... 95 %                                                                                                                                                                                                                                                        |
| Environmental class/harmful chemical substances                                                                                                                                                                                                     | Class 1C2<br>acc. to EN 60721-3-1                                                                                                                                                                                                                                                                                                                                                                                       | Class 2C2<br>acc. to EN 60721-3-2                                     | Class 3C2<br>acc. to EN 60721-3-3                                                                                                                                                                                                                                                                                    |
| Organic/biological influences                                                                                                                                                                                                                       | Class 1B1<br>acc. to EN 60721-3-1                                                                                                                                                                                                                                                                                                                                                                                       | Class 2B1<br>acc. to EN 60721-3-2                                     | Class 3B1<br>acc. to EN 60721-3-3                                                                                                                                                                                                                                                                                    |
| Degree of pollution<br>acc. to IEC/EN 61800-5-1<br>(condensation not permissible)                                                                                                                                                                   | 2                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                       |                                                                                                                                                                                                                                                                                                                      |
| Installation altitude                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                       |                                                                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"><li>For operation with low overload</li><li>For operation with high overload</li><li>From 2000 m (6562 ft) up to 4000 m (13124 ft) above sea level <a href="#">observe the derating characteristics</a></li></ul> | Up to 1000 m (3281 ft) above sea level without derating<br><br>Up to 2000 m (6562 ft) above sea level without derating<br><br><a href="#">See characteristic for current derating as a function of the installation altitude</a> and/or reduction of the ambient temperature by 3.5 K per 500 m (1640 ft)                                                                                                               |                                                                       |                                                                                                                                                                                                                                                                                                                      |
| Mechanical strength                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                       |                                                                                                                                                                                                                                                                                                                      |
|                                                                                                                                                                                                                                                     | Storage                                                                                                                                                                                                                                                                                                                                                                                                                 | Transport                                                             | Operation                                                                                                                                                                                                                                                                                                            |
|                                                                                                                                                                                                                                                     | In product packaging                                                                                                                                                                                                                                                                                                                                                                                                    | In transport packaging                                                |                                                                                                                                                                                                                                                                                                                      |
| Vibratory load                                                                                                                                                                                                                                      | Class 1M2<br>acc. to EN 60721-3-1                                                                                                                                                                                                                                                                                                                                                                                       | Class 2M3<br>acc. to EN 60721-3-2                                     | Class 3M1<br>acc. to EN 60721-3-3<br>Test values acc. to EN 60068-2-6                                                                                                                                                                                                                                                |
| Shock load                                                                                                                                                                                                                                          | Class 1M2<br>acc. to EN 60721-3-1                                                                                                                                                                                                                                                                                                                                                                                       | Class 2M3<br>acc. to EN 60721-3-2                                     | Class 3M1<br>acc. to EN 60721-3-3<br>Test values acc. to EN 60068-2-27                                                                                                                                                                                                                                               |
| Certificates                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                       |                                                                                                                                                                                                                                                                                                                      |
| Declarations of conformity                                                                                                                                                                                                                          | CE (Low Voltage, EMC and Machinery Directives)                                                                                                                                                                                                                                                                                                                                                                          |                                                                       |                                                                                                                                                                                                                                                                                                                      |
| Certificates of suitability                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                       |                                                                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"><li>Blocksize format FSA ... FSC</li><li>Blocksize format FSD ... FSF</li></ul>                                                                                                                                   | cULus according to UL 61800-5-1; CSA only with external surge voltage protection device; RCM; SEMI F47 KC (only with internal or external line filters of Category C2); RoHS; EAC<br><br>cULus acc. to UL 61800-5-1; CSA only with external surge voltage protection device; RCM; SEMI F47 KC (only with internal or external line filters of Category C2); RoHS; EAC<br>WEEE (Waste Electrical & Electronic Equipment) |                                                                       |                                                                                                                                                                                                                                                                                                                      |

<sup>1)</sup> Better than 3K3 through increased ruggedness regarding the temperature range and humidity.

<sup>2)</sup> Also carefully observe the permissible temperatures for the Control Unit and where relevant, the operator panel.

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Air-cooled PM240-2 Power Modules in blocksize format

### Technical specifications (continued)

#### PM240-2 Power Modules standard variant

| Line voltage 200 ... 240 V 1 AC/3 AC                 |                                        | PM240-2 Power Modules standard variant |                                |                                |                                |                                |
|------------------------------------------------------|----------------------------------------|----------------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Without integrated line filter                       |                                        | 6SL3210-1PB13-0UL0                     | 6SL3210-1PB13-8UL0             | 6SL3210-1PB15-5UL0             | 6SL3210-1PB17-4UL0             | 6SL3210-1PB21-0UL0             |
| With integrated line filter class A                  |                                        | 6SL3210-1PB13-0AL0                     | 6SL3210-1PB13-8AL0             | 6SL3210-1PB15-5AL0             | 6SL3210-1PB17-4AL0             | 6SL3210-1PB21-0AL0             |
| <b>Output current</b><br>at 50 Hz 230 V 1 AC         |                                        |                                        |                                |                                |                                |                                |
| • Rated current $I_{\text{rated}}$ <sup>1)</sup>     | A                                      | 3.2                                    | 4.2                            | 6                              | 7.4                            | 10.4                           |
| • For S6 duty (40 %) $I_{\text{S6}}$                 | A                                      | 3.3                                    | 4.3                            | 6.1                            | 8.2                            | 11.5                           |
| • Base-load current $I_{\text{H}}$ <sup>2)</sup>     | A                                      | 2.3                                    | 3.2                            | 4.2                            | 6                              | 7.4                            |
| • Maximum current $I_{\text{max}}$                   | A                                      | 4.6                                    | 6                              | 8.3                            | 11.1                           | 15.6                           |
| <b>Type rating</b>                                   |                                        |                                        |                                |                                |                                |                                |
| • Based on $I_{\text{rated}}$                        | kW (hp)                                | 0.55 (0.75)                            | 0.75 (1)                       | 1.1 (1.5)                      | 1.5 (2)                        | 2.2 (3)                        |
| • Based on $I_{\text{H}}$                            | kW (hp)                                | 0.37 (0.5)                             | 0.55 (0.75)                    | 0.75 (1)                       | 1.1 (1.5)                      | 1.5 (2)                        |
| <b>Rated pulse frequency</b>                         | kHz                                    | 4                                      | 4                              | 4                              | 4                              | 4                              |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >96                                    | >96                            | >96                            | >96                            | >96                            |
| <b>Power loss</b> <sup>3)</sup><br>at rated current  | kW                                     | 0.04                                   | 0.04                           | 0.05                           | 0.07                           | 0.12                           |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.005 (0.18)                           | 0.005 (0.18)                   | 0.0092 (0.325)                 | 0.0092 (0.325)                 | 0.0092 (0.325)                 |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m) | dB                                     | <50                                    | <50                            | <62                            | <62                            | <62                            |
| <b>Input current</b> <sup>4)</sup>                   |                                        |                                        |                                |                                |                                |                                |
| • Rated current 1 AC/3 AC                            | A                                      | 7.5/4.3                                | 9.6/5.5                        | 13.5/7.8                       | 18.1/10.5                      | 24/13.9                        |
| • Based on $I_{\text{H}}$ 1 AC/3 AC                  | A                                      | 6.6/3.8                                | 8.4/4.8                        | 11.8/6.8                       | 15.8/9.1                       | 20.9/12.1                      |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | Terminal connector                     | Terminal connector             | Terminal connector             | Terminal connector             | Terminal connector             |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 1.5 ... 2.5                            | 1.5 ... 2.5                    | 1.5 ... 6                      | 1.5 ... 6                      | 1.5 ... 6                      |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | Terminal connector                     | Terminal connector             | Terminal connector             | Terminal connector             | Terminal connector             |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 1.5 ... 2.5                            | 1.5 ... 2.5                    | 1.5 ... 6                      | 1.5 ... 6                      | 1.5 ... 6                      |
| <b>PE connection</b>                                 |                                        | Included in terminal connector         | Included in terminal connector | Included in terminal connector | Included in terminal connector | Included in terminal connector |
| <b>Motor cable length, max.</b>                      |                                        |                                        |                                |                                |                                |                                |
| • Shielded                                           | m (ft)                                 | 50 (164)                               | 50 (164)                       | 50 (164)                       | 50 (164)                       | 50 (164)                       |
| • Unshielded                                         | m (ft)                                 | 100 (328)                              | 100 (328)                      | 100 (328)                      | 100 (328)                      | 100 (328)                      |
| <b>Degree of protection</b>                          |                                        | IP20                                   | IP20                           | IP20                           | IP20                           | IP20                           |
| <b>Dimensions</b>                                    |                                        |                                        |                                |                                |                                |                                |
| • Width                                              | mm (in)                                | 73 (2.87)                              | 73 (2.87)                      | 100 (3.94)                     | 100 (3.94)                     | 100 (3.94)                     |
| • Height                                             | mm (in)                                | 196 (7.72)                             | 196 (7.72)                     | 292 (11.5)                     | 292 (11.5)                     | 292 (11.5)                     |
| • Depth without operator panel                       | mm (in)                                | 165 (6.50)                             | 165 (6.50)                     | 165 (6.50)                     | 165 (6.50)                     | 165 (6.50)                     |
| <b>Frame size</b>                                    |                                        | FSA                                    | FSA                            | FSB                            | FSB                            | FSB                            |
| <b>Weight, approx.</b>                               |                                        |                                        |                                |                                |                                |                                |
| • Without integrated line filter                     | kg (lb)                                | 1.4 (3.09)                             | 1.4 (3.09)                     | 2.9 (6.39)                     | 2.9 (6.39)                     | 2.9 (6.39)                     |
| • With integrated line filter                        | kg (lb)                                | 1.6 (3.53)                             | 1.6 (3.53)                     | 3.1 (6.84)                     | 3.1 (6.84)                     | 3.1 (6.84)                     |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_{\text{H}}$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. More information can be found on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load with the type rating (based on  $I_{\text{rated}}$ ) for a line impedance corresponding to  $u_k = 1\%$ . The current values are specified on the rating plate of the Power Module.

**SINAMICS S110 servo drives**

0.55 kW to 132 kW (0.75 hp to 150 hp)

**Air-cooled PM240-2 Power Modules in blocksize format****Technical specifications (continued)**

| <b>Line voltage 200 ... 240 V 1 AC/3 AC</b>          |                                        | <b>PM240-2 Power Modules standard variant</b> |                                |
|------------------------------------------------------|----------------------------------------|-----------------------------------------------|--------------------------------|
| Without integrated line filter                       |                                        | 6SL3210-1PB21-4UL0                            | 6SL3210-1PB21-8UL0             |
| With integrated line filter class A                  |                                        | 6SL3210-1PB21-4AL0                            | 6SL3210-1PB21-8AL0             |
| <b>Output current</b><br>at 50 Hz 230 V 1 AC         |                                        |                                               |                                |
| • Rated current $I_{rated}$ <sup>1)</sup>            | A                                      | 13.6                                          | 17.5                           |
| • For S6 duty (40 %) $I_{S6}$                        | A                                      | 15                                            | 19.3                           |
| • Base-load current $I_H$ <sup>2)</sup>              | A                                      | 10.4                                          | 13.6                           |
| • Maximum current $I_{max}$                          | A                                      | 20.8                                          | 27.2                           |
| <b>Type rating</b>                                   |                                        |                                               |                                |
| • Based on $I_{rated}$                               | kW (hp)                                | 3 (4)                                         | 4 (5)                          |
| • Based on $I_H$                                     | kW (hp)                                | 2.2 (3)                                       | 3 (4)                          |
| <b>Rated pulse frequency</b>                         | kHz                                    | 4                                             | 4                              |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >96                                           | >96                            |
| <b>Power loss</b> <sup>3)</sup><br>at rated current  | kW                                     | 0.14                                          | 0.18                           |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.0185 (0.65)                                 | 0.0185 (0.65)                  |
| <b>Sound pressure level</b><br>$L_{pA}$ (1 m)        | dB                                     | <65                                           | <65                            |
| <b>Input current</b> <sup>4)</sup>                   |                                        |                                               |                                |
| • Rated current 1 AC/3 AC                            | A                                      | 35.9/20.7                                     | 43/24.8                        |
| • Based on $I_H$ 1 AC/3 AC                           | A                                      | 31.3/18.1                                     | 37.5/21.7                      |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | Terminal connector                            | Terminal connector             |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 6 ... 16                                      | 6 ... 16                       |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | Terminal connector                            | Terminal connector             |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 6 ... 16                                      | 6 ... 16                       |
| <b>PE connection</b>                                 |                                        | Included in terminal connector                | Included in terminal connector |
| <b>Motor cable length, max.</b>                      |                                        |                                               |                                |
| • Shielded                                           | m (ft)                                 | 50 (164)                                      | 50 (164)                       |
| • Unshielded                                         | m (ft)                                 | 100 (328)                                     | 100 (328)                      |
| <b>Degree of protection</b>                          |                                        | IP20                                          | IP20                           |
| <b>Dimensions</b>                                    |                                        |                                               |                                |
| • Width                                              | mm (in)                                | 140 (5.51)                                    | 140 (5.51)                     |
| • Height                                             | mm (in)                                | 355 (13.98)                                   | 355 (13.98)                    |
| • Depth without operator panel                       | mm (in)                                | 165 (6.50)                                    | 165 (6.50)                     |
| <b>Frame size</b>                                    |                                        | FSC                                           | FSC                            |
| <b>Weight, approx.</b>                               |                                        |                                               |                                |
| • Without integrated line filter                     | kg (lb)                                | 5 (11)                                        | 5 (11)                         |
| • With integrated line filter                        | kg (lb)                                | 5.2 (11.5)                                    | 5.2 (11.5)                     |

<sup>1)</sup> The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. More information can be found on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load with the type rating (based on  $I_{rated}$ ) for a line impedance corresponding to  $u_k = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Air-cooled PM240-2 Power Modules in blocksize format

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                       |                                        | PM240-2 Power Modules standard variant |                                |                                |                                |                                |                                |
|-------------------------------------------------------|----------------------------------------|----------------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Without integrated line filter                        |                                        | 6SL3210-1PE11-8UL1                     | 6SL3210-1PE12-3UL1             | 6SL3210-1PE13-2UL1             | 6SL3210-1PE14-3UL1             | 6SL3210-1PE16-1UL1             | 6SL3210-1PE18-0UL1             |
| With integrated line filter class A                   |                                        | 6SL3210-1PE11-8AL1                     | 6SL3210-1PE12-3AL1             | 6SL3210-1PE13-2AL1             | 6SL3210-1PE14-3AL1             | 6SL3210-1PE16-1AL1             | 6SL3210-1PE18-0AL1             |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC          |                                        |                                        |                                |                                |                                |                                |                                |
| • Rated current $I_{\text{rated}}^{1)}$               | A                                      | 1.7                                    | 2.2                            | 3.1                            | 4.1                            | 5.9                            | 7.7                            |
| • For S6 duty (40 %) $I_{\text{S6}}$                  | A                                      | 2                                      | 2.5                            | 3.5                            | 4.5                            | 6.5                            | 8.5                            |
| • Base-load current $I_{\text{H}}^{2)}$               | A                                      | 1.3                                    | 1.7                            | 2.2                            | 3.1                            | 4.1                            | 5.9                            |
| • Maximum current $I_{\text{max}}$                    | A                                      | 2.6                                    | 3.4                            | 4.7                            | 6.2                            | 8.9                            | 11.8                           |
| <b>Type rating</b>                                    |                                        |                                        |                                |                                |                                |                                |                                |
| • Based on $I_{\text{rated}}$                         | kW (hp)                                | 0.55 (0.75)                            | 0.75 (1)                       | 1.1 (1.5)                      | 1.5 (2)                        | 2.2 (3)                        | 3 (4)                          |
| • Based on $I_{\text{H}}$                             | kW (hp)                                | 0.37 (0.5)                             | 0.55 (0.75)                    | 0.75 (1)                       | 1.1 (1.5)                      | 1.5 (2)                        | 2.2 (3)                        |
| <b>Rated pulse frequency</b>                          | kHz                                    | 4                                      | 4                              | 4                              | 4                              | 4                              | 4                              |
| <b>Efficiency <math>\eta</math></b>                   | %                                      | >96                                    | >96                            | >96                            | >96                            | >96                            | >96                            |
| <b>Power loss <sup>3)</sup></b><br>at rated current   | kW                                     | 0.04                                   | 0.04                           | 0.04                           | 0.07                           | 0.1                            | 0.12                           |
| <b>Cooling air requirement</b>                        | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.005 (0.18)                           | 0.005 (0.18)                   | 0.005 (0.18)                   | 0.005 (0.18)                   | 0.005 (0.18)                   | 0.005 (0.18)                   |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m)  | dB                                     | <50                                    | <50                            | <50                            | <50                            | <57                            | <57                            |
| <b>Input current <sup>4)</sup></b>                    |                                        |                                        |                                |                                |                                |                                |                                |
| • Rated current                                       | A                                      | 2.3                                    | 2.9                            | 4.1                            | 5.5                            | 7.7                            | 10.1                           |
| • Based on $I_{\text{H}}$                             | A                                      | 2                                      | 2.6                            | 3.3                            | 4.7                            | 6.1                            | 8.8                            |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3  |                                        | Terminal connector                     | Terminal connector             | Terminal connector             | Terminal connector             | Terminal connector             | Terminal connector             |
| • Conductor cross-section                             | mm <sup>2</sup>                        | 1 ... 2.5                              | 1 ... 2.5                      | 1 ... 2.5                      | 1 ... 2.5                      | 1 ... 2.5                      | 1 ... 2.5                      |
| <b>Motor connection</b><br>U2, V2, W2                 |                                        | Terminal connector                     | Terminal connector             | Terminal connector             | Terminal connector             | Terminal connector             | Terminal connector             |
| • Conductor cross-section                             | mm <sup>2</sup>                        | 1 ... 2.5                              | 1 ... 2.5                      | 1 ... 2.5                      | 1 ... 2.5                      | 1 ... 2.5                      | 1 ... 2.5                      |
| <b>PE connection</b>                                  |                                        | Included in terminal connector         | Included in terminal connector | Included in terminal connector | Included in terminal connector | Included in terminal connector | Included in terminal connector |
| <b>Motor cable length, max.</b>                       |                                        |                                        |                                |                                |                                |                                |                                |
| • Without filter, shielded/unshielded                 | m (ft)                                 | 150/150 (492/492)                      | 150/150 (492/492)              | 150/150 (492/492)              | 150/150 (492/492)              | 150/150 (492/492)              | 150/150 (492/492)              |
| • With integrated filter class A, shielded/unshielded | m (ft)                                 | 50/100 (164/328)                       | 50/100 (164/328)               | 50/100 (164/328)               | 50/100 (164/328)               | 50/100 (164/328)               | 50/100 (164/328)               |
| <b>Degree of protection</b>                           |                                        | IP20                                   | IP20                           | IP20                           | IP20                           | IP20                           | IP20                           |
| <b>Dimensions</b>                                     |                                        |                                        |                                |                                |                                |                                |                                |
| • Width                                               | mm (in)                                | 73 (2.87)                              | 73 (2.87)                      | 73 (2.87)                      | 73 (2.87)                      | 73 (2.87)                      | 73 (2.87)                      |
| • Height                                              | mm (in)                                | 196 (7.72)                             | 196 (7.72)                     | 196 (7.72)                     | 196 (7.72)                     | 196 (7.72)                     | 196 (7.72)                     |
| • Depth without operator panel                        | mm (in)                                | 165 (6.50)                             | 165 (6.50)                     | 165 (6.50)                     | 165 (6.50)                     | 165 (6.50)                     | 165 (6.50)                     |
| <b>Frame size</b>                                     |                                        | FSA                                    | FSA                            | FSA                            | FSA                            | FSA                            | FSA                            |
| <b>Weight, approx.</b>                                |                                        |                                        |                                |                                |                                |                                |                                |
| • Without integrated line filter                      | kg (lb)                                | 1.3 (2.87)                             | 1.3 (2.87)                     | 1.3 (2.87)                     | 1.4 (3.09)                     | 1.4 (3.09)                     | 1.4 (3.09)                     |
| • With integrated line filter                         | kg (lb)                                | 1.5 (3.31)                             | 1.5 (2.01)                     | 1.5 (2.01)                     | 1.6 (3.53)                     | 1.6 (3.53)                     | 1.6 (3.53)                     |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_{\text{H}}$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. More information can be found on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load with the type rating (based on  $I_{\text{rated}}$ ) for a line impedance corresponding to  $u_k = 1\%$ . The current values are specified on the rating plate of the Power Module.

**SINAMICS S110 servo drives**

0.55 kW to 132 kW (0.75 hp to 150 hp)

**Air-cooled PM240-2 Power Modules in blocksize format****Technical specifications (continued)**

| <b>Line voltage 380 ... 480 V 3 AC</b>                |                                        | <b>PM240-2 Power Modules standard variant</b> |                                 |                                 |                                 |                                 |
|-------------------------------------------------------|----------------------------------------|-----------------------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| Without integrated line filter                        |                                        | 6SL3210-1PE21-1UL0                            | 6SL3210-1PE21-4UL0              | 6SL3210-1PE21-8UL0              | 6SL3210-1PE22-7UL0              | 6SL3210-1PE23-3UL0              |
| With integrated line filter class A                   |                                        | 6SL3210-1PE21-1AL0                            | 6SL3210-1PE21-4AL0              | 6SL3210-1PE21-8AL0              | 6SL3210-1PE22-7AL0              | 6SL3210-1PE23-3AL0              |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC          |                                        |                                               |                                 |                                 |                                 |                                 |
| • Rated current $I_{\text{rated}}^{1)}$               | A                                      | 10.2                                          | 13.2                            | 18                              | 26                              | 32                              |
| • For S6 duty (40 %) $I_{\text{S6}}$                  | A                                      | 11.2                                          | 14.5                            | 19.8                            | 28.6                            | 37.1                            |
| • Base-load current $I_{\text{H}}^{2)}$               | A                                      | 7.7                                           | 10.2                            | 13.2                            | 18                              | 26                              |
| • Maximum current $I_{\text{max}}$                    | A                                      | 15.4                                          | 20.4                            | 27                              | 39                              | 52                              |
| <b>Type rating</b>                                    |                                        |                                               |                                 |                                 |                                 |                                 |
| • Based on $I_{\text{rated}}$                         | kW (hp)                                | 4 (5)                                         | 5.5 (7.5)                       | 7.5 (10)                        | 11 (15)                         | 15 (20)                         |
| • Based on $I_{\text{H}}$                             | kW (hp)                                | 3 (4)                                         | 4 (5)                           | 5.5 (7.5)                       | 7.5 (10)                        | 11 (15)                         |
| <b>Rated pulse frequency</b>                          | kHz                                    | 4                                             | 4                               | 4                               | 4                               | 4                               |
| <b>Efficiency <math>\eta</math></b>                   | %                                      | >97                                           | >97                             | >97                             | >97                             | >97                             |
| <b>Power loss <sup>3)</sup></b><br>at rated current   | kW                                     | 0.11                                          | 0.15                            | 0.2                             | 0.3                             | 0.37                            |
| <b>Cooling air requirement</b>                        | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.0092 (0.325)                                | 0.0092 (0.325)                  | 0.0092 (0.325)                  | 0.0185 (0.65)                   | 0.0185 (0.65)                   |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m)  | dB                                     | <62                                           | <62                             | <62                             | <65                             | <65                             |
| <b>Input current <sup>4)</sup></b>                    |                                        |                                               |                                 |                                 |                                 |                                 |
| • Rated current                                       | A                                      | 13.3                                          | 17.2                            | 22.2                            | 32.6                            | 39.9                            |
| • Based on $I_{\text{H}}$                             | A                                      | 11.6                                          | 15.3                            | 19.8                            | 27                              | 36                              |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3  |                                        | Terminal connector                            | Terminal connector              | Terminal connector              | Terminal connector              | Terminal connector              |
| • Conductor cross-section                             | mm <sup>2</sup>                        | 1.5 ... 6                                     | 1.5 ... 6                       | 1.5 ... 6                       | 6 ... 16                        | 6 ... 16                        |
| <b>Motor connection</b><br>U2, V2, W2                 |                                        | Terminal connector                            | Terminal connector              | Terminal connector              | Terminal connector              | Terminal connector              |
| • Conductor cross-section                             | mm <sup>2</sup>                        | 1.5 ... 6                                     | 1.5 ... 6                       | 1.5 ... 6                       | 6 ... 16                        | 6 ... 16                        |
| <b>PE connection</b>                                  |                                        | Included in terminal connector                | Included in terminal connector  | Included in terminal connector  | Included in terminal connector  | Included in terminal connector  |
| <b>Motor cable length, max.</b>                       |                                        |                                               |                                 |                                 |                                 |                                 |
| • Without filter, shielded/unshielded                 | m (ft)                                 | 150/150 (492/492)                             | 150/150 (492/492)               | 150/150 (492/492)               | 150/150 (492/492)               | 150/150 (492/492)               |
| • With integrated filter class A, shielded/unshielded | m (ft)                                 | 100/100 (328/328) <sup>5)</sup>               | 100/100 (328/328) <sup>5)</sup> | 100/100 (328/328) <sup>5)</sup> | 150/150 (492/492) <sup>5)</sup> | 150/150 (492/492) <sup>5)</sup> |
| <b>Degree of protection</b>                           |                                        | IP20                                          | IP20                            | IP20                            | IP20                            | IP20                            |
| <b>Dimensions</b>                                     |                                        |                                               |                                 |                                 |                                 |                                 |
| • Width                                               | mm (in)                                | 100 (3.94)                                    | 100 (3.94)                      | 100 (3.94)                      | 140 (5.51)                      | 140 (5.51)                      |
| • Height                                              | mm (in)                                | 292 (11.5)                                    | 292 (11.5)                      | 292 (11.5)                      | 355 (13.98)                     | 355 (13.98)                     |
| • Depth without operator panel                        | mm (in)                                | 165 (6.50)                                    | 165 (6.50)                      | 165 (6.50)                      | 165 (6.50)                      | 165 (6.50)                      |
| <b>Frame size</b>                                     |                                        | FSB                                           | FSB                             | FSB                             | FSC                             | FSC                             |
| <b>Weight, approx.</b>                                |                                        |                                               |                                 |                                 |                                 |                                 |
| • Without integrated line filter                      | kg (lb)                                | 2.9 (6.39)                                    | 2.9 (6.39)                      | 3 (6.62)                        | 4.7 (10.4)                      | 4.8 (10.6)                      |
| • With integrated line filter                         | kg (lb)                                | 3.1 (6.84)                                    | 3.1 (6.84)                      | 3.2 (7.06)                      | 5.3 (11.7)                      | 5.4 (11.91)                     |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_{\text{H}}$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. More information can be found on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load with the type rating (based on  $I_{\text{rated}}$ ) for a line impedance corresponding to  $u_k = 1\%$ . The current values are specified on the rating plate of the Power Module.

<sup>5)</sup> The values are applicable for low capacitance cables, e.g. MOTION-CONNECT. For standard CY cables the max. permissible motor cable length is 50 m (164 ft) (shielded) and 100 m (328 ft) (unshielded).

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Air-cooled PM240-2 Power Modules in blocksize format

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                      |                                        | PM240-2 Power Modules standard variant |                         |                         |                         |                         |                         |
|------------------------------------------------------|----------------------------------------|----------------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Without integrated line filter                       |                                        | 6SL3210-1PE23-8UL0                     | 6SL3210-1PE24-5UL0      | 6SL3210-1PE26-0UL0      | 6SL3210-1PE27-5UL0      | 6SL3210-1PE28-8UL0      | 6SL3210-1PE31-1UL0      |
| With integrated line filter class A                  |                                        | 6SL3210-1PE23-8AL0                     | 6SL3210-1PE24-5AL0      | 6SL3210-1PE26-0AL0      | 6SL3210-1PE27-5AL0      | 6SL3210-1PE28-8AL0      | 6SL3210-1PE31-1AL0      |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC         |                                        |                                        |                         |                         |                         |                         |                         |
| • Rated current $I_{rated}^{1)}$                     | A                                      | 38                                     | 45                      | 60                      | 75                      | 90                      | 110                     |
| • For S6 duty (40 %) $I_{S6}$                        | A                                      | 45                                     | 54                      | 72                      | 90                      | 108                     | 132                     |
| • Base-load current $I_H^{2)}$                       | A                                      | 32                                     | 38                      | 45                      | 60                      | 75                      | 90                      |
| • Maximum current $I_{max}$                          | A                                      | 64                                     | 76                      | 90                      | 120                     | 150                     | 180                     |
| <b>Type rating</b>                                   |                                        |                                        |                         |                         |                         |                         |                         |
| • Based on $I_{rated}$                               | kW (hp)                                | 18.5 (25)                              | 22 (30)                 | 30 (40)                 | 37 (50)                 | 45 (60)                 | 55 (75)                 |
| • Based on $I_H$                                     | kW (hp)                                | 15 (20)                                | 18.5 (25)               | 22 (30)                 | 30 (40)                 | 37 (50)                 | 45 (60)                 |
| <b>Rated pulse frequency</b>                         | kHz                                    | 4                                      | 4                       | 4                       | 4                       | 4                       | 4                       |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >97                                    | >97                     | >97                     | >97                     | >97                     | >97                     |
| <b>Power loss <sup>3)</sup></b><br>at rated current  |                                        |                                        |                         |                         |                         |                         |                         |
| • Without integrated line filter                     | kW                                     | 0.57                                   | 0.7                     | 0.82                    | 1.09                    | 1.29                    | 1.65                    |
| • With integrated line filter                        | kW                                     | 0.58                                   | 0.71                    | 0.83                    | 1.1                     | 1.3                     | 1.67                    |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.055 (1.94)                           | 0.055 (1.94)            | 0.055 (1.94)            | 0.055 (1.94)            | 0.083 (2.93)            | 0.083 (2.93)            |
| <b>Sound pressure level</b><br>$L_{pA}$ (1 m)        | dB                                     | 45 ... 65 <sup>4)</sup>                | 45 ... 65 <sup>4)</sup> | 45 ... 65 <sup>4)</sup> | 45 ... 65 <sup>4)</sup> | 44 ... 62 <sup>4)</sup> | 44 ... 62 <sup>4)</sup> |
| <b>Input current <sup>5)</sup></b>                   |                                        |                                        |                         |                         |                         |                         |                         |
| • Rated current                                      | A                                      | 36                                     | 42                      | 57                      | 70                      | 86                      | 104                     |
| • Based on $I_H$                                     | A                                      | 33                                     | 38                      | 47                      | 62                      | 78                      | 94                      |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | Screw terminals                        | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 10 ... 35                              | 10 ... 35               | 10 ... 35               | 10 ... 35               | 25 ... 70               | 25 ... 70               |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | Screw terminals                        | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 10 ... 35                              | 10 ... 35               | 10 ... 35               | 10 ... 35               | 25 ... 70               | 25 ... 70               |
| <b>PE connection</b>                                 |                                        | Screw terminals                        | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         | Screw terminals         |
| <b>Motor cable length, max.</b>                      |                                        |                                        |                         |                         |                         |                         |                         |
| • Shielded                                           | m (ft)                                 | 200 (656)                              | 200 (656)               | 200 (656)               | 200 (656)               | 200 (656)               | 200 (656)               |
| • Unshielded                                         | m (ft)                                 | 300 (984)                              | 300 (984)               | 300 (984)               | 300 (984)               | 300 (984)               | 300 (984)               |
| <b>Degree of protection</b>                          |                                        | IP20                                   | IP20                    | IP20                    | IP20                    | IP20                    | IP20                    |
| <b>Dimensions</b>                                    |                                        |                                        |                         |                         |                         |                         |                         |
| • Width                                              | mm (in)                                | 200 (7.87)                             | 200 (7.87)              | 200 (7.87)              | 200 (7.87)              | 275 (10.83)             | 275 (10.83)             |
| • Height                                             | mm (in)                                | 472 (18.58)                            | 472 (18.58)             | 472 (18.58)             | 472 (18.58)             | 551 (21.69)             | 551 (21.69)             |
| • Depth without operator panel                       | mm (in)                                | 237 (9.33)                             | 237 (9.33)              | 237 (9.33)              | 237 (9.33)              | 237 (9.33)              | 237 (9.33)              |
| <b>Frame size</b>                                    |                                        | FSD                                    | FSD                     | FSD                     | FSD                     | FSE                     | FSE                     |
| <b>Weight, approx.</b>                               |                                        |                                        |                         |                         |                         |                         |                         |
| • Without integrated line filter                     | kg (lb)                                | 16 (35.3)                              | 16 (35.3)               | 17 (37.5)               | 17 (37.5)               | 26 (57.3)               | 26 (57.3)               |
| • With integrated line filter                        | kg (lb)                                | 17.5 (38.6)                            | 17.5 (38.6)             | 18.5 (40.8)             | 18.5 (40.8)             | 28 (61.7)               | 28 (61.7)               |

<sup>1)</sup> The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. More information can be found on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> Values dependent on ambient temperature and utilization.

<sup>5)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load with the type rating (based on  $I_{rated}$ ) for a line impedance corresponding to  $u_k = 1\%$ . The current values are specified on the rating plate of the Power Module.

**SINAMICS S110 servo drives**

0.55 kW to 132 kW (0.75 hp to 150 hp)

**Air-cooled PM240-2 Power Modules in blocksize format****Technical specifications (continued)**

| <b>Line voltage 380 ... 480 V 3 AC</b>               |                                        | <b>PM240-2 Power Modules standard variant</b> |                         |                         |                         |
|------------------------------------------------------|----------------------------------------|-----------------------------------------------|-------------------------|-------------------------|-------------------------|
| Without integrated line filter                       |                                        | 6SL3210-1PE31-5UL0                            | 6SL3210-1PE31-8UL0      | 6SL3210-1PE32-1UL0      | 6SL3210-1PE32-5UL0      |
| With integrated line filter class A                  |                                        | 6SL3210-1PE31-5AL0                            | 6SL3210-1PE31-8AL0      | 6SL3210-1PE32-1AL0      | 6SL3210-1PE32-5AL0      |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC         |                                        |                                               |                         |                         |                         |
| • Rated current $I_{\text{rated}}^{1)}$              | A                                      | 145                                           | 178                     | 205                     | 250                     |
| • For S6 duty (40 %) $I_{\text{S6}}$                 | A                                      | 174                                           | 213                     | 246                     | 300                     |
| • Base-load current $I_{\text{H}}^{2)}$              | A                                      | 110                                           | 145                     | 178                     | 205                     |
| • Maximum current $I_{\text{max}}$                   | A                                      | 220                                           | 290                     | 356                     | 410                     |
| <b>Type rating</b>                                   |                                        |                                               |                         |                         |                         |
| • Based on $I_{\text{rated}}$                        | kW (hp)                                | 75 (100)                                      | 90 (125)                | 110 (150)               | 132 (200)               |
| • Based on $I_{\text{H}}$                            | kW (hp)                                | 55 (75)                                       | 75 (100)                | 90 (125)                | 110 (150)               |
| <b>Rated pulse frequency</b>                         | kHz                                    | 2                                             | 2                       | 2                       | 2                       |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >97                                           | >97                     | >97                     | >97                     |
| <b>Power loss <sup>3)</sup></b><br>at rated current  |                                        |                                               |                         |                         |                         |
| • Without integrated line filter                     | kW                                     | 1.91                                          | 2.46                    | 2.28                    | 2.98                    |
| • With integrated line filter                        | kW                                     | 1.93                                          | 2.48                    | 2.3                     | 3.02                    |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.153 (5.40)                                  | 0.153 (5.40)            | 0.153 (5.40)            | 0.153 (5.40)            |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m) | dB                                     | 56 ... 68 <sup>4)</sup>                       | 56 ... 68 <sup>4)</sup> | 56 ... 68 <sup>4)</sup> | 56 ... 68 <sup>4)</sup> |
| <b>Input current <sup>5)</sup></b>                   |                                        |                                               |                         |                         |                         |
| • Rated current                                      | A                                      | 140                                           | 172                     | 198                     | 242                     |
| • Based on $I_{\text{H}}$                            | A                                      | 117                                           | 154                     | 189                     | 218                     |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | M10 screw stud                                | M10 screw stud          | M10 screw stud          | M10 screw stud          |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 35 ... 2 × 120                                | 35 ... 2 × 120          | 35 ... 2 × 120          | 35 ... 2 × 120          |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | M10 screw stud                                | M10 screw stud          | M10 screw stud          | M10 screw stud          |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 35 ... 2 × 120                                | 35 ... 2 × 120          | 35 ... 2 × 120          | 35 ... 2 × 120          |
| <b>PE connection</b>                                 |                                        | M10 screw stud                                | M10 screw stud          | M10 screw stud          | M10 screw stud          |
| <b>Motor cable length, max.</b>                      |                                        |                                               |                         |                         |                         |
| • Shielded                                           | m (ft)                                 | 300 (984)                                     | 300 (984)               | 300 (984)               | 300 (984)               |
| • Unshielded                                         | m (ft)                                 | 450 (1476)                                    | 450 (1476)              | 450 (1476)              | 450 (1476)              |
| <b>Degree of protection</b>                          |                                        | IP20                                          | IP20                    | IP20                    | IP20                    |
| <b>Dimensions</b>                                    |                                        |                                               |                         |                         |                         |
| • Width                                              | mm (in)                                | 305 (12.01)                                   | 305 (12.01)             | 305 (12.01)             | 305 (12.01)             |
| • Height                                             | mm (in)                                | 708 (27.87)                                   | 708 (27.87)             | 708 (27.87)             | 708 (27.87)             |
| • Depth without operator panel                       | mm (in)                                | 357 (14.06)                                   | 357 (14.06)             | 357 (14.06)             | 357 (14.06)             |
| <b>Frame size</b>                                    |                                        | FSF                                           | FSF                     | FSF                     | FSF                     |
| <b>Weight, approx.</b>                               |                                        |                                               |                         |                         |                         |
| • Without integrated line filter                     | kg (lb)                                | 57 (126)                                      | 57 (126)                | 61 (135)                | 61 (135)                |
| • With integrated line filter                        | kg (lb)                                | 63 (139)                                      | 63 (139)                | 65 (143)                | 65 (143)                |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_{\text{H}}$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. More information can be found on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> Values dependent on ambient temperature and utilization.

<sup>5)</sup> The input current depends on the motor load and line impedance. The input currents apply for a load with the type rating (based on  $I_{\text{rated}}$ ) for a line impedance corresponding to  $u_k = 1\%$ . The current values are specified on the rating plate of the Power Module.

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Air-cooled PM240-2 Power Modules in blocksize format

### Technical specifications (continued)

#### PM240-2 Power Modules push-through variant

| Line voltage 200 ... 240 V 1 AC/3 AC                 |                                        | PM240-2 Power Modules push-through variant |                          |                          |
|------------------------------------------------------|----------------------------------------|--------------------------------------------|--------------------------|--------------------------|
| Without integrated line filter                       |                                        | 6SL3211-1PB13-8UL0                         | 6SL3211-1PB21-0UL0       | 6SL3211-1PB21-8UL0       |
| With integrated line filter class A                  |                                        | 6SL3211-1PB13-8AL0                         | 6SL3211-1PB21-0AL0       | 6SL3211-1PB21-8AL0       |
| <b>Output current</b>                                |                                        |                                            |                          |                          |
| At 50 Hz 230 V 1 AC/3 AC                             |                                        |                                            |                          |                          |
| • Rated current $I_{\text{rated}}$ <sup>1)</sup>     | A                                      | 4.2                                        | 10.4                     | 17.5                     |
| • For S6 duty (40 %) $I_{\text{S6}}$                 | A                                      | 3.3                                        | 11.5                     | 19.3                     |
| • Base-load current $I_{\text{H}}$ <sup>2)</sup>     | A                                      | 3.2                                        | 7.4                      | 13.6                     |
| • Maximum current $I_{\text{max}}$                   | A                                      | 6                                          | 15.6                     | 27.2                     |
| <b>Type rating</b>                                   |                                        |                                            |                          |                          |
| • Based on $I_{\text{rated}}$                        | kW (hp)                                | 0.75 (1)                                   | 2.2 (3)                  | 4 (5)                    |
| • Based on $I_{\text{H}}$                            | kW (hp)                                | 0.55 (0.75)                                | 1.5 (2)                  | 3 (4)                    |
| <b>Rated pulse frequency</b>                         | kHz                                    | 4                                          | 4                        | 4                        |
| <b>Efficiency <math>\eta</math></b>                  | %                                      | >96                                        | >96                      | >96                      |
| <b>Power loss</b> <sup>3)</sup><br>at rated current  | kW                                     | 0.04                                       | 0.12                     | 0.18                     |
| <b>Cooling air requirement</b>                       | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.005 (0.18)                               | 0.0092 (0.325)           | 0.0185 (0.65)            |
| <b>Sound pressure level</b><br>$L_{\text{pA}}$ (1 m) | dB                                     | <56                                        | <62                      | <65                      |
| <b>Input current</b> <sup>4)</sup>                   |                                        |                                            |                          |                          |
| • Rated current 1 AC/3 AC                            | A                                      | 9.6/5.5                                    | 24/13.9                  | 43/24.8                  |
| • Based on $I_{\text{H}}$ 1 AC/3 AC                  | A                                      | 8.4/4.8                                    | 20.9/12.1                | 37.5/21.7                |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3 |                                        | Screw terminals, plug-in                   | Screw terminals, plug-in | Screw terminals, plug-in |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 1.5 ... 2.5                                | 1.5 ... 6                | 6 ... 16                 |
| <b>Motor connection</b><br>U2, V2, W2                |                                        | Screw terminals, plug-in                   | Screw terminals, plug-in | Screw terminals, plug-in |
| • Conductor cross-section                            | mm <sup>2</sup>                        | 1.5 ... 2.5                                | 1.5 ... 6                | 6 ... 16                 |
| <b>Motor cable length, max.</b>                      |                                        |                                            |                          |                          |
| • Shielded                                           | m (ft)                                 | 150 (492)                                  | 150 (492)                | 150 (492)                |
| • Unshielded                                         | m (ft)                                 | 150 (492)                                  | 150 (492)                | 150 (492)                |
| <b>Degree of protection</b>                          |                                        | IP20                                       | IP20                     | IP20                     |
| <b>Dimensions</b>                                    |                                        |                                            |                          |                          |
| • Width                                              | mm (in)                                | 126 (4.96)                                 | 154 (6.06)               | 200 (7.87)               |
| • Height                                             | mm (in)                                | 238 (9.37)                                 | 345 (13.58)              | 411 (16.18)              |
| • Depth without operator panel                       | mm (in)                                | 171 (6.73)                                 | 171 (6.73)               | 171 (6.73)               |
| <b>Frame size</b>                                    |                                        | FSA                                        | FSB                      | FSC                      |
| <b>Weight, approx.</b>                               |                                        |                                            |                          |                          |
| With integrated line filter                          |                                        |                                            |                          |                          |
| • Without integrated line filter                     | kg (lb)                                | 1.8 (3.97)                                 | 3.4 (7.50)               | 5.9 (13.0)               |
| • With integrated line filter                        | kg (lb)                                | 2 (4.41)                                   | 3.7 (8.16)               | 6.2 (13.7)               |

<sup>1)</sup> The rated output current  $I_{\text{rated}}$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_{\text{H}}$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. More information can be found on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance and applies for a line impedance corresponding to  $u_K = 1\%$ . The rated input currents apply for a load with the type rating (based on  $I_{\text{rated}}$ ) – these current values are specified on the rating plate.

**SINAMICS S110 servo drives**

0.55 kW to 132 kW (0.75 hp to 150 hp)

**Air-cooled PM240-2 Power Modules in blocksize format****Technical specifications (continued)**

| <b>Line voltage 380 ... 480 V 3 AC</b>                   |                                        | <b>PM240-2 Power Modules push-through variant</b> |                                 |                                 |
|----------------------------------------------------------|----------------------------------------|---------------------------------------------------|---------------------------------|---------------------------------|
| Without integrated line filter                           |                                        | 6SL3211-1PE18-0UL1                                | 6SL3211-1PE21-8UL0              | 6SL3211-1PE23-3UL0              |
| With integrated line filter class A                      |                                        | 6SL3211-1PE18-0AL1                                | 6SL3211-1PE21-8AL0              | 6SL3211-1PE23-3AL0              |
| <b>Output current</b><br>at 50 Hz 400 V 3 AC             |                                        |                                                   |                                 |                                 |
| • Rated current $I_{rated}^{1)}$                         | A                                      | 7.7                                               | 18                              | 32                              |
| • For S6 duty (40 %) $I_{S6}$                            | A                                      | 8.5                                               | 19.8                            | 37.1                            |
| • Base-load current $I_H^{2)}$                           | A                                      | 5.9                                               | 13.2                            | 26                              |
| • Maximum current $I_{max}$                              | A                                      | 11.8                                              | 27                              | 52                              |
| <b>Type rating</b>                                       |                                        |                                                   |                                 |                                 |
| • Based on $I_{rated}$                                   | kW (hp)                                | 3 (4)                                             | 7.5 (10)                        | 15 (20)                         |
| • Based on $I_H$                                         | kW (hp)                                | 2.2 (7.5)                                         | 5.5 (7.5)                       | 11 (15)                         |
| <b>Rated pulse frequency</b>                             | kHz                                    | 4                                                 | 4                               | 4                               |
| <b>Efficiency <math>\eta</math></b>                      | %                                      | >96                                               | >97                             | >97                             |
| <b>Power loss <math>^{3)}</math></b><br>at rated current | kW                                     | 0.12                                              | 0.2                             | 0.37                            |
| <b>Cooling air requirement</b>                           | m <sup>3</sup> /s (ft <sup>3</sup> /s) | 0.007 (0.25)                                      | 0.0092 (0.325)                  | 0.0185 (0.65)                   |
| <b>Sound pressure level</b><br>$L_{pA}$ (1 m)            | dB                                     | <56                                               | <62                             | <65                             |
| <b>Input current <math>^{4)}</math></b>                  |                                        |                                                   |                                 |                                 |
| • Rated current                                          | A                                      | 10.1                                              | 22.2                            | 39.9                            |
| • Based on $I_H$                                         | A                                      | 8.8                                               | 19.8                            | 36                              |
| <b>Line supply connection</b><br>U1/L1, V1/L2, W1/L3     |                                        | Screw terminals, plug-in                          | Screw terminals, plug-in        | Screw terminals, plug-in        |
| • Conductor cross-section                                | mm <sup>2</sup>                        | 1.5 ... 2.5                                       | 1.5 ... 6                       | 6 ... 16                        |
| <b>Motor connection</b><br>U2, V2, W2                    |                                        | Screw terminals, plug-in                          | Screw terminals, plug-in        | Screw terminals, plug-in        |
| • Conductor cross-section                                | mm <sup>2</sup>                        | 1.5 ... 2.5                                       | 1.5 ... 6                       | 6 ... 16                        |
| <b>Motor cable length, max.</b>                          |                                        |                                                   |                                 |                                 |
| • Without filter, shielded/unshielded                    | m (ft)                                 | 150/150 (492/492)                                 | 150/150 (492/492)               | 150/150 (492/492)               |
| • With integrated filter class A, shielded/unshielded    | m (ft)                                 | 50/100 (164/328)                                  | 100/100 (328/328) <sup>5)</sup> | 150/150 (492/492) <sup>5)</sup> |
| <b>Degree of protection</b>                              |                                        | IP20                                              | IP20                            | IP20                            |
| <b>Dimensions</b>                                        |                                        |                                                   |                                 |                                 |
| • Width                                                  | mm (in)                                | 126 (4.96)                                        | 154 (6.06)                      | 200 (7.87)                      |
| • Height                                                 | mm (in)                                | 238 (9.37)                                        | 345 (13.58)                     | 411 (16.18)                     |
| • Depth without operator panel                           | mm (in)                                | 171 (6.73)                                        | 171 (6.73)                      | 171 (6.73)                      |
| <b>Frame size</b>                                        |                                        | FSA                                               | FSB                             | FSC                             |
| <b>Weight, approx.</b><br>With integrated line filter    |                                        |                                                   |                                 |                                 |
| • Without integrated line filter                         | kg (lb)                                | 1.8 (3.97)                                        | 3.6 (7.94)                      | 5.8 (12.8)                      |
| • With integrated line filter                            | kg (lb)                                | 12 (26.5)                                         | 3.9 (8.60)                      | 6.3 (14)                        |

<sup>1)</sup> The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

<sup>2)</sup> The base-load current  $I_H$  is based on the duty cycle for high overload (HO).

<sup>3)</sup> Typical values. More information can be found on the Internet at <https://support.industry.siemens.com/cs/document/94059311>

<sup>4)</sup> The input current depends on the motor load and line impedance and applies for a line impedance corresponding to  $u_K = 1\%$ . The rated input currents apply for a load with the type rating (based on  $I_{rated}$ ) – these current values are specified on the rating plate.

<sup>5)</sup> The values are applicable for low capacitance cables, e.g. MOTION-CONNECT. For standard CY cables the max. permissible motor cable length is 50 m (164 ft) (shielded) and 100 m (328 ft) (unshielded).


# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)


Air-cooled PM240-2 Power Modules in blocksize format

## Characteristic curves


### Overload capability

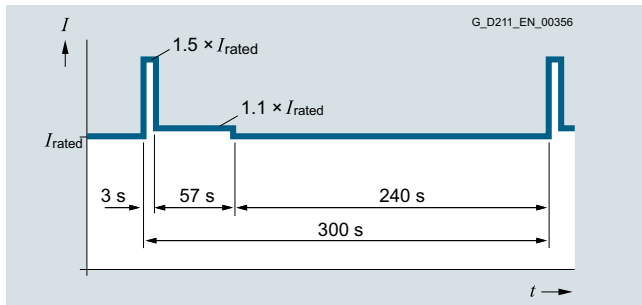


300 s duty cycle based on low overload

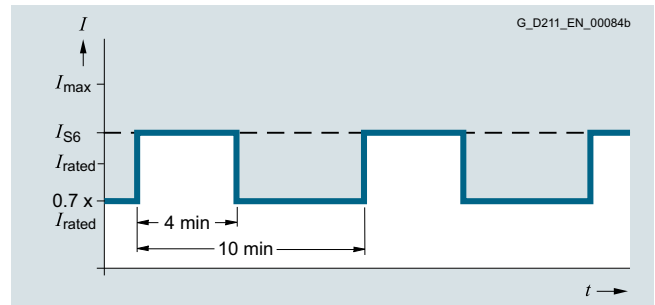


S6 duty cycle with initial load with a duty cycle duration of 600 s

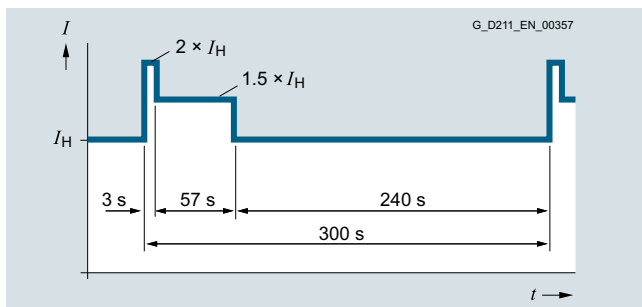


300 s duty cycle based on high overload

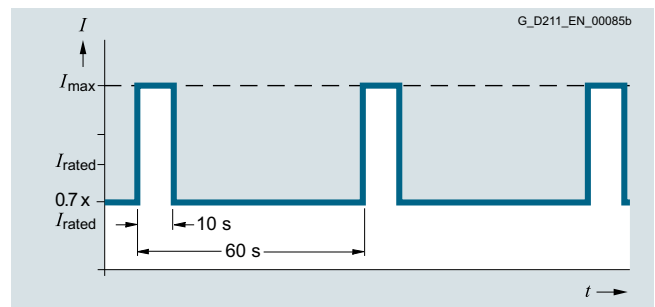


S6 duty cycle with initial load with a duty cycle duration of 60 s

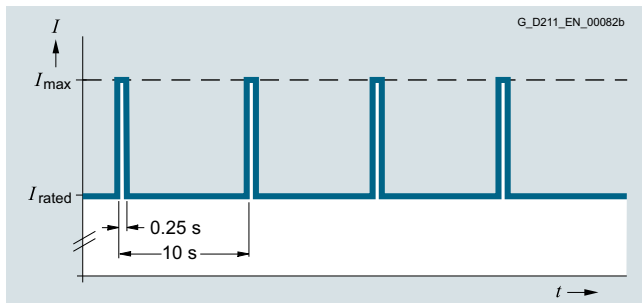


Duty cycle with initial load

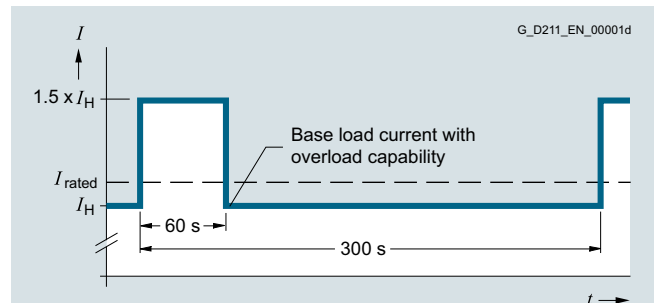

Duty cycle with 60 s overload with a duty cycle duration of 300 s

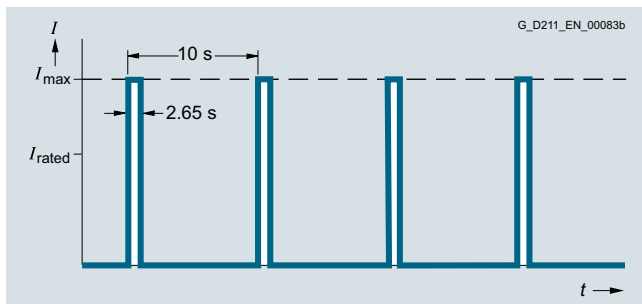

Duty cycle without initial load

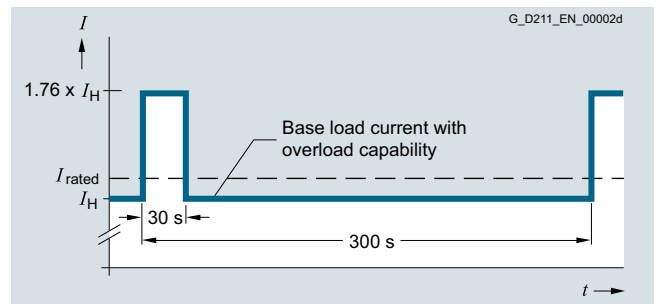

Duty cycle with 30 s overload with a duty cycle duration of 300 s

**SINAMICS S110 servo drives**

0.55 kW to 132 kW (0.75 hp to 150 hp)

**Air-cooled PM240-2 Power Modules in blocksize format****Characteristic curves** (continued)**Derating data**Pulse frequency

| Type rating <sup>1)</sup><br>at 50 Hz 200 V 1 AC/3 AC |      | Rated output current in A<br>for a pulse frequency of |       |       |       |        |        |        |        |
|-------------------------------------------------------|------|-------------------------------------------------------|-------|-------|-------|--------|--------|--------|--------|
| kW                                                    | hp   | 2 kHz                                                 | 4 kHz | 6 kHz | 8 kHz | 10 kHz | 12 kHz | 14 kHz | 16 kHz |
| 0.55                                                  | 0.75 | 3.2                                                   | 3.2   | 2.7   | 2.2   | 1.9    | 1.6    | 1.4    | 1.3    |
| 0.75                                                  | 1    | 4.2                                                   | 4.2   | 3.6   | 2.9   | 2.5    | 2.1    | 1.9    | 1.7    |
| 1.1                                                   | 1.5  | 6                                                     | 6     | 5.1   | 4.2   | 3.6    | 3      | 2.7    | 2.4    |
| 1.5                                                   | 2    | 7.4                                                   | 7.4   | 6.3   | 5.2   | 4.4    | 3.7    | 3.3    | 3      |
| 2.2                                                   | 3    | 10.4                                                  | 10.4  | 8.8   | 7.3   | 6.2    | 5.2    | 4.7    | 4.2    |
| 3                                                     | 4    | 13.6                                                  | 13.6  | 11.6  | 9.5   | 8.2    | 6.8    | 6.1    | 5.4    |
| 4                                                     | 5    | 17.5                                                  | 17.5  | 14.9  | 12.3  | 10.5   | 8.8    | 7.9    | 7      |
| 5.5                                                   | 7.5  | 22                                                    | 22    | 18.7  | 15.4  | 13.2   | 11     | 9.9    | 8.8    |
| 7.5                                                   | 10   | 28                                                    | 28    | 23.8  | 19.6  | 16.8   | 14     | 12.6   | 11.2   |
| 11                                                    | 15   | 42                                                    | 42    | 35.7  | 29.4  | 25.2   | 21     | 18.9   | 16.8   |
| 15                                                    | 20   | 54                                                    | 54    | 45.9  | 37.8  | 32.4   | 27     | 24.3   | 21.6   |
| 18.5                                                  | 25   | 68                                                    | 68    | 57.8  | 47.6  | 40.8   | 34     | 30.6   | 27.2   |
| 22                                                    | 30   | 80                                                    | 80    | 68    | 56    | 48     | 40     | 36     | 32     |
| 30                                                    | 40   | 104                                                   | 104   | 88.4  | 72.8  | 62.4   | 52     | 46.8   | 41.6   |
| 37                                                    | 50   | 130                                                   | 130   | 110.5 | 91    | –      | –      | –      | –      |
| 45                                                    | 60   | 154                                                   | 154   | 130.9 | 107.8 | –      | –      | –      | –      |
| 55                                                    | 75   | 178                                                   | 178   | 151.3 | 124.6 | –      | –      | –      | –      |

| Type rating <sup>1)</sup><br>at 50 Hz 400 V 3 AC |      | Rated output current in A<br>for a pulse frequency of |       |       |       |        |        |        |        |
|--------------------------------------------------|------|-------------------------------------------------------|-------|-------|-------|--------|--------|--------|--------|
| kW                                               | hp   | 2 kHz                                                 | 4 kHz | 6 kHz | 8 kHz | 10 kHz | 12 kHz | 14 kHz | 16 kHz |
| 0.55                                             | 0.75 | 1.7                                                   | 1.7   | 1.4   | 1.2   | 1      | 0.9    | 0.8    | 0.7    |
| 0.75                                             | 1    | 2.2                                                   | 2.2   | 1.9   | 1.5   | 1.3    | 1.1    | 1      | 0.9    |
| 1.1                                              | 1.5  | 3.1                                                   | 3.1   | 2.6   | 2.2   | 1.9    | 1.6    | 1.4    | 1.2    |
| 1.5                                              | 2    | 4.1                                                   | 4.1   | 3.5   | 2.9   | 2.5    | 2.1    | 1.8    | 1.6    |
| 2.2                                              | 3    | 5.9                                                   | 5.9   | 5     | 4.1   | 3.5    | 3      | 2.7    | 2.4    |
| 3                                                | 4    | 7.7                                                   | 7.7   | 6.5   | 5.4   | 4.6    | 3.9    | 3.5    | 3.1    |
| 4                                                | 5    | 10.2                                                  | 10.2  | 8.7   | 7.1   | 6.1    | 5.1    | 4.6    | 4.1    |
| 5.5                                              | 7.5  | 13.2                                                  | 13.2  | 11.2  | 9.2   | 7.9    | 6.6    | 5.9    | 5.3    |
| 7.5                                              | 10   | 18                                                    | 18    | 15.3  | 12.6  | 10.8   | 9      | 8.1    | 7.2    |
| 11                                               | 15   | 26                                                    | 26    | 22.1  | 18.2  | 15.6   | 13     | 11.7   | 10.4   |
| 15                                               | 20   | 32                                                    | 32    | 27.2  | 22.4  | 19.2   | 16     | 14.4   | 12.8   |
| 18.5                                             | 25   | 38                                                    | 38    | 32.3  | 26.6  | 22.8   | 19     | 17.1   | 15.2   |
| 22                                               | 30   | 45                                                    | 45    | 38.3  | 31.5  | 27     | 22.5   | 20.3   | 18     |
| 30                                               | 40   | 60                                                    | 60    | 51    | 42    | 36     | 30     | 27     | 24     |
| 37                                               | 50   | 75                                                    | 75    | 63.8  | 52.5  | 45     | 37.5   | 33.8   | 30     |
| 45                                               | 60   | 90                                                    | 90    | 76.5  | 63    | 54     | 45     | 40.5   | 36     |
| 55                                               | 75   | 110                                                   | 110   | 93.5  | 77    | –      | –      | –      | –      |
| 75                                               | 100  | 145                                                   | 145   | 123.3 | 101.5 | –      | –      | –      | –      |
| 90                                               | 125  | 178                                                   | 178   | 151.3 | 124.6 | –      | –      | –      | –      |
| 110                                              | 150  | 205                                                   | 143.5 | –     | –     | –      | –      | –      | –      |
| 132                                              | 200  | 250                                                   | 175   | –     | –     | –      | –      | –      | –      |

<sup>1)</sup> Type rating based on the rated output current  $I_{\text{rated}}$ . The rated output current  $I_{\text{rated}}$  is based on the duty cycle for low overload (LO).

# SINAMICS S110 servo drives


0.55 kW to 132 kW (0.75 hp to 150 hp)

## Air-cooled PM240-2 Power Modules in blocksize format


### Characteristic curves (continued)

#### Derating data (continued)


##### Ambient temperature

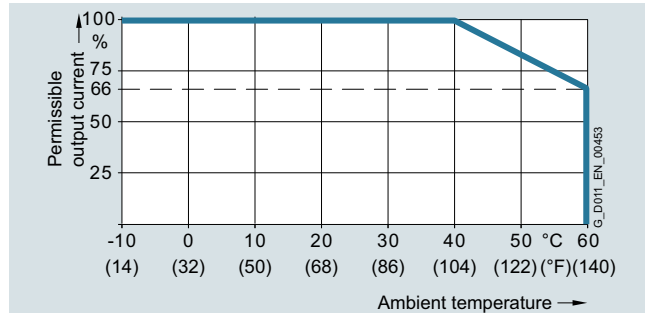


Permissible output current as a function of ambient temperature for low overload (LO) for PM240-2 Power Modules, frame sizes FSA to FSC

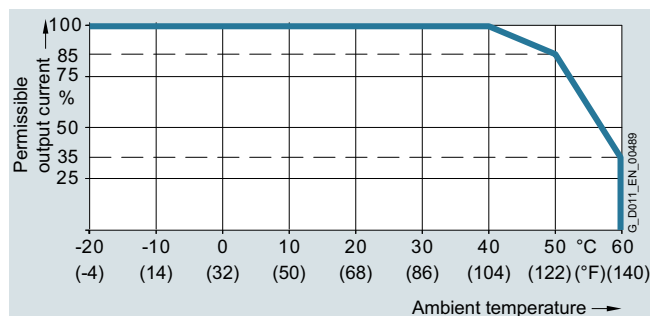

Permissible output current as a function of ambient temperature for low overload (LO) for PM240-2 Power Modules, frame sizes FSD to FSF

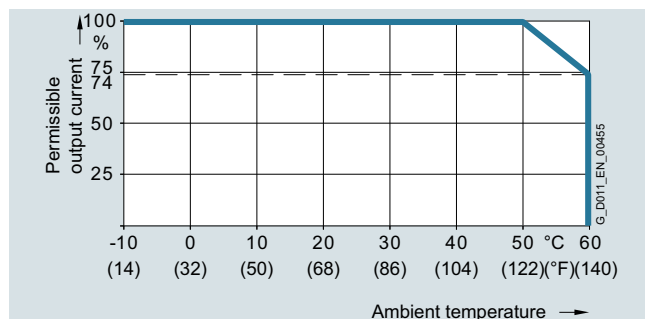

Permissible output current as a function of ambient temperature for high overload (HO) for PM240-2 Power Modules, frame sizes FSA to FSC

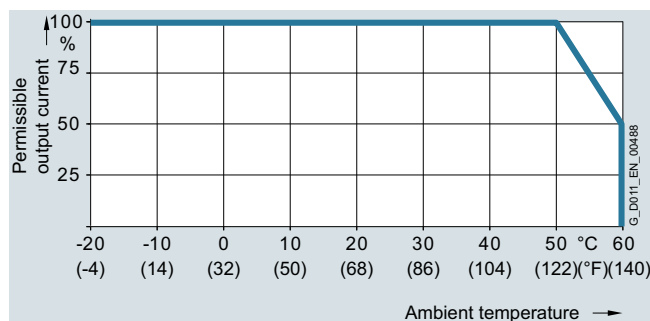

Permissible output current as a function of ambient temperature for high overload (HO) for PM240-2 Power Modules, frame sizes FSD to FSF


The operating temperature ranges of the Control Units should be taken into account.

##### Installation altitude

Permissible line supplies depending on the installation altitude

- Installation altitude up to 2000 m (6562 ft) above sea level
  - Connection to every supply system permitted for the inverter
- Installation altitudes between 2000 m and 4000 m (6562 ft and 13124 ft) above sea level
  - Connection only to a TN system with grounded neutral point
  - TN systems with grounded line conductor are not permitted
  - The TN line system with grounded neutral point can also be supplied using an isolation transformer
  - The phase-to-phase voltage does not have to be reduced

The connected motors, power elements and components must be considered separately.

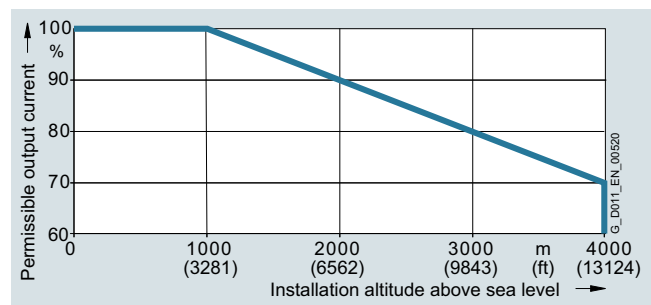

Permissible output current as a function of the installation altitude for PM240-2 Power Modules at 40 °C for low overload (LO)

##### System operating voltage

The rated output current remains constant over the 380 V to 480 V 3 AC voltage range.

More information on the derating data of the PM240-2 Power Modules is available in the Hardware Installation Manual on the Internet at:

[www.siemens.com/sinamics-g120/documentation](http://www.siemens.com/sinamics-g120/documentation)

**SINAMICS S110 servo drives**

0.55 kW to 132 kW (0.75 hp to 150 hp)

**Line-side components > Line filters****Overview**

Line filter for PM240-2 Power Modules

With one of the additional line filters, the Power Module attains a higher radio interference class.

**Integration**

*Line filters that are optionally available depending on the Power Module used*

|                                                                     | Frame size            |                       |                       |                       |                       |                       |
|---------------------------------------------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
|                                                                     | FSA                   | FSB                   | FSC                   | FSD                   | FSE                   | FSF                   |
| PM240-2 Power Module with integrated braking chopper                |                       |                       |                       |                       |                       |                       |
| <b>Line-side components</b>                                         |                       |                       |                       |                       |                       |                       |
| Line filter class A according to EN 55011                           | <b>F</b>              | <b>F</b>              | <b>F</b>              | <b>F<sup>2)</sup></b> | <b>F<sup>2)</sup></b> | <b>F<sup>2)</sup></b> |
| Line filter class B according to EN 55011 (only for 400 V versions) | <b>U<sup>1)</sup></b> | <b>U<sup>1)</sup></b> | <b>U<sup>1)</sup></b> | –                     | –                     | –                     |

F = Power Modules available with and without integrated filter class A

U = Base component

– = Not possible

**Selection and ordering data**

| Type rating               |      | PM240-2 Power Module standard variant |            | Line filter class B according to EN 55011 |
|---------------------------|------|---------------------------------------|------------|-------------------------------------------|
| kW                        | hp   | Type 6SL3210-...                      | Frame size | Article No.                               |
| <b>380 ... 480 V 3 AC</b> |      |                                       |            |                                           |
| 0.55                      | 0.75 | 1PE11-8UL1                            | FSA        | <b>6SL3203-0BE17-7BA0</b>                 |
| 0.75                      | 1    | 1PE12-3UL1                            |            |                                           |
| 1.1                       | 1.5  | 1PE13-2UL1                            |            |                                           |
| 1.5                       | 2    | 1PE14-3UL1                            |            |                                           |
| 2.2                       | 3    | 1PE16-1UL1                            |            |                                           |
| 3                         | 4    | 1PE18-0UL1                            |            |                                           |
| 4                         | 5    | 1PE21-1UL0                            | FSB        | <b>6SL3203-0BE21-8BA0</b>                 |
| 5.5                       | 7.5  | 1PE21-4UL0                            |            |                                           |
| 7.5                       | 10   | 1PE21-8UL0                            |            |                                           |
| 11                        | 15   | 1PE22-7UL0                            | FSC        | <b>6SL3203-0BE23-8BA0</b>                 |
| 15                        | 20   | 1PE23-3UL0                            |            |                                           |

<sup>1)</sup> Lateral mounting is the only possible option for push-through variants.

<sup>2)</sup> PM240-2 200 V versions, frame sizes FSD to FSF are only available without integrated line filter.

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

Line-side components &gt; Line filters

## Selection and ordering data (continued)

| Type rating               |    | PM240-2 Power Module<br>push-through variant | Line filter class B<br>according to EN 55011 |                           |
|---------------------------|----|----------------------------------------------|----------------------------------------------|---------------------------|
| kW                        | hp | Type 6SL3211-...                             | Frame size                                   | Article No.               |
| <b>380 ... 480 V 3 AC</b> |    |                                              |                                              |                           |
| 3                         | 4  | 1PE18-0UL1                                   | FSA                                          | <b>6SL3203-0BE17-7BA0</b> |
| 7.5                       | 10 | 1PE21-8UL0                                   | FSB                                          | <b>6SL3203-0BE21-8BA0</b> |
| 15                        | 20 | 1PE23-3UL0                                   | FSC                                          | <b>6SL3203-0BE23-8BA0</b> |

## Technical specifications


| Line voltage 380 ... 480 V 3 AC                                                                                          |                 | Line filter class B                                                                                                              |                                                                |                                          |
|--------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|------------------------------------------|
|                                                                                                                          |                 | 6SL3203-0BE17-7BA0                                                                                                               | 6SL3203-0BE21-8BA0                                             | 6SL3203-0BE23-8BA0                       |
| <b>Rated current</b>                                                                                                     | A               | 11.4                                                                                                                             | 23.5                                                           | 49.4                                     |
| <b>Pulse frequency</b>                                                                                                   | kHz             | 4 ... 16                                                                                                                         | 4 ... 16                                                       | 4 ... 16                                 |
| <b>Line supply connection</b><br>L1, L2, L3                                                                              |                 | Screw terminals                                                                                                                  | Screw terminals                                                | Screw terminals                          |
| • Conductor cross-section                                                                                                | mm <sup>2</sup> | 1 ... 2.5                                                                                                                        | 2.5 ... 6                                                      | 6 ... 16                                 |
| <b>Load connection</b><br>U, V, W                                                                                        |                 | Shielded cable                                                                                                                   | Shielded cable                                                 | Shielded cable                           |
| • Cable cross-section                                                                                                    | mm <sup>2</sup> | 1.5                                                                                                                              | 4                                                              | 10                                       |
| • Length                                                                                                                 | m (ft)          | 0.45 (1.48)                                                                                                                      | 0.5 (1.64)                                                     | 0.54 (1.77)                              |
| <b>PE connection</b>                                                                                                     |                 | On housing via M5 screw stud                                                                                                     | On housing via M5 screw stud                                   | On housing via M6 screw studs            |
| • Conductor cross-section                                                                                                | mm <sup>2</sup> | 1 ... 2.5                                                                                                                        | 2.5 ... 6                                                      | 6 ... 16                                 |
| <b>Degree of protection</b>                                                                                              |                 | IP20                                                                                                                             | IP20                                                           | IP20                                     |
| <b>Dimensions</b>                                                                                                        |                 |                                                                                                                                  |                                                                |                                          |
| • Width                                                                                                                  | mm (in)         | 73 (2.87)                                                                                                                        | 100 (3.94)                                                     | 140 (5.51)                               |
| • Height                                                                                                                 | mm (in)         | 202 (7.95)                                                                                                                       | 297 (11.69)                                                    | 359 (14.13)                              |
| • Depth                                                                                                                  | mm (in)         | 65 (2.56)                                                                                                                        | 85 (3.35)                                                      | 95 (3.74)                                |
| <b>Possible as base component</b>                                                                                        |                 | Yes                                                                                                                              | Yes                                                            | Yes                                      |
| <b>Weight, approx.</b>                                                                                                   | kg (lb)         | 1.75 (3.86)                                                                                                                      | 4 (8.82)                                                       | 7.3 (16.1)                               |
| <b>Suitable for<br/>PM240-2 Power Module<br/>standard variant<br/>380 ... 480 V 3 AC</b>                                 | Type            | 6SL3210-1PE11-8UL1<br>6SL3210-1PE12-3UL1<br>6SL3210-1PE13-2UL1<br>6SL3210-1PE14-3UL1<br>6SL3210-1PE16-1UL1<br>6SL3210-1PE18-0UL1 | 6SL3210-1PE21-1UL0<br>6SL3210-1PE21-4UL0<br>6SL3210-1PE21-8UL0 | 6SL3210-1PE22-7UL0<br>6SL3210-1PE23-3UL0 |
| <b>Suitable for<br/>PM240-2 Power Module<br/>push-through variant<br/>380 ... 480 V 3 AC<br/>(lateral mounting only)</b> | Type            | 6SL3211-1PE18-0UL1                                                                                                               | 6SL3211-1PE21-8UL0                                             | 6SL3211-1PE23-3UL0                       |
| • Frame size                                                                                                             |                 | FSA                                                                                                                              | FSB                                                            | FSC                                      |

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Line-side components > Line reactors

#### Overview

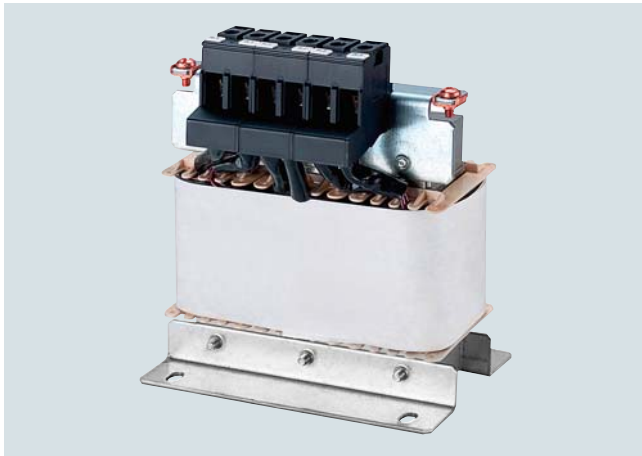

Line reactor for PM240-2 Power Modules, frame size FSA

Line reactors smooth the current drawn by the inverter and thus reduce harmonic components in the line current. Through the reduction of the current harmonics, the thermal load on the power components in the rectifier and in the DC link capacitors is reduced as well as the harmonic effects on the supply. The use of a line reactor increases the service life of the inverter.

#### Integration

A DC link reactor is integrated in the PM240-2 Power Modules, frame sizes FSD to FSF, and therefore no line reactor is required.

**Line reactors that are optionally available depending on the Power Module used**

|                                                      | Frame size |     |     |     |     |     |
|------------------------------------------------------|------------|-----|-----|-----|-----|-----|
|                                                      | FSA        | FSB | FSC | FSD | FSE | FSF |
| PM240-2 Power Module with integrated braking chopper |            |     |     |     |     |     |
| <b>Line-side components</b>                          |            |     |     |     |     |     |
| Line reactor (only for 3 AC versions)                | S          | S   | S   | I   | I   | I   |
| S = Lateral mounting<br>I = Integrated               |            |     |     |     |     |     |

#### Selection and ordering data

| Type rating        |      | PM240-2 Power Module<br>standard variant | Line reactor |                    |
|--------------------|------|------------------------------------------|--------------|--------------------|
| kW                 | hp   | Type 6SL3210-...                         | Frame size   | Article No.        |
| 200 ... 240 V 3 AC |      |                                          |              |                    |
| 0.55               | 0.75 | 1PB13-0 . L0                             | FSA          | 6SL3203-0CE13-2AA0 |
| 0.75               | 1    | 1PB13-8 . L0                             |              |                    |
| 1.1                | 1.5  | 1PB15-5 . L0                             | FSB          |                    |
| 1.5                | 2    | 1PB17-4 . L0                             |              |                    |
| 2.2                | 3    | 1PB21-0 . L0                             |              | 6SL3203-0CE21-0AA0 |
| 3                  | 4    | 1PB21-4 . L0                             | FSC          |                    |
| 4                  | 5    | 1PB21-8 . L0                             |              |                    |
| 380 ... 480 V 3 AC |      |                                          |              |                    |
| 0.55               | 0.75 | 1PE11-8 . L1                             | FSA          | 6SL3203-0CE13-2AA0 |
| 0.75               | 1    | 1PE12-3 . L1                             |              |                    |
| 1.1                | 1.5  | 1PE13-2 . L1                             |              |                    |
| 1.5                | 2    | 1PE14-3 . L1                             | FSA          |                    |
| 2.2                | 3    | 1PE16-1 . L1                             |              | 6SL3203-0CE21-0AA0 |
| 3                  | 4    | 1PE18-0 . L1                             |              |                    |
| 4                  | 5    | 1PE21-1 . L0                             | FSB          |                    |
| 5.5                | 7.5  | 1PE21-4 . L0                             |              |                    |
| 7.5                | 10   | 1PE21-8 . L0                             |              | 6SL3203-0CE23-8AA0 |
| 11                 | 15   | 1PE22-7 . L0                             | FSC          |                    |
| 15                 | 20   | 1PE23-3 . L0                             |              |                    |

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Line-side components > Line reactors

### Selection and ordering data (continued)

| Type rating               |    | PM240-2 Power Module<br>push-through variant |            | Line reactor              |
|---------------------------|----|----------------------------------------------|------------|---------------------------|
| kW                        | hp | Type 6SL3211-...                             | Frame size | Article No.               |
| <b>200 ... 240 V 3 AC</b> |    |                                              |            |                           |
| 0.75                      | 1  | 1PB13-8 . L0                                 | FSA        | <b>6SL3203-0CE13-2AA0</b> |
| 2.2                       | 3  | 1PB21-0 . L0                                 | FSB        | <b>6SL3203-0CE21-0AA0</b> |
| 4                         | 5  | 1PB21-8 . L0                                 | FSC        | <b>6SL3203-0CE21-8AA0</b> |
| <b>380 ... 480 V 3 AC</b> |    |                                              |            |                           |
| 3                         | 4  | 1PE18-0 . L1                                 | FSA        | <b>6SL3203-0CE21-0AA0</b> |
| 7.5                       | 10 | 1PE21-8 . L0                                 | FSB        | <b>6SL3203-0CE21-8AA0</b> |
| 15                        | 20 | 1PE23-3 . L0                                 | FSC        | <b>6SL3203-0CE23-8AA0</b> |

### Technical specifications

| Line voltage 200 ... 240 V 3 AC<br>or 380 ... 480 V 3 AC                                     |                 | Line reactor                                                         |                                                                      |                                                                      |                                              |
|----------------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------|
|                                                                                              |                 | 6SL3203-0CE13-2AA0                                                   | 6SL3203-0CE21-0AA0                                                   | 6SL3203-0CE21-8AA0                                                   | 6SL3203-0CE23-8AA0                           |
| <b>Rated current</b>                                                                         | A               | 4                                                                    | 11.3                                                                 | 22.3                                                                 | 47                                           |
| <b>Power loss</b><br>at 50/60 Hz                                                             | W               | 23/26                                                                | 36/40                                                                | 53/59                                                                | 88/97                                        |
| <b>Line supply/load connection</b><br>1L1, 1L2, 1L3<br>2L1, 2L2, 2L3                         |                 | Screw terminals                                                      | Screw terminals                                                      | Screw terminals                                                      | Screw terminals                              |
| • Conductor cross-section                                                                    | mm <sup>2</sup> | 4                                                                    | 4                                                                    | 10                                                                   | 16                                           |
| <b>PE connection</b>                                                                         |                 | M4 × 8; U washer;<br>spring lock washer                              | M4 × 8; U washer;<br>spring lock washer                              | M5 × 10; U washer;<br>spring lock washer                             | M5 × 10; U washer;<br>spring lock washer     |
| <b>Degree of protection</b>                                                                  |                 | IP20                                                                 | IP20                                                                 | IP20                                                                 | IP20                                         |
| <b>Dimensions</b>                                                                            |                 |                                                                      |                                                                      |                                                                      |                                              |
| • Width                                                                                      | mm (in)         | 125 (4.92)                                                           | 125 (4.92)                                                           | 125 (4.92)                                                           | 190 (7.48)                                   |
| • Height                                                                                     | mm (in)         | 120 (4.72)                                                           | 140 (5.51)                                                           | 145 (5.71)                                                           | 220 (8.66)                                   |
| • Depth                                                                                      | mm (in)         | 71 (2.80)                                                            | 71 (2.80)                                                            | 91 (3.58)                                                            | 91 (3.58)                                    |
| <b>Weight, approx.</b>                                                                       | kg (lb)         | 1.1 (2.43)                                                           | 2.1 (4.63)                                                           | 2.95 (6.50)                                                          | 7.8 (17.2)                                   |
| <b>Suitable for<br/>PM240-2 Power Module<br/>standard variant<br/>200 ... 240 V 3 AC</b>     | Type            | 6SL3210-1PB13-0 . L0<br>6SL3210-1PB13-8 . L0                         | 6SL3210-1PB15-5 . L0<br>6SL3210-1PB17-4 . L0<br>6SL3210-1PB21-0 . L0 | 6SL3210-1PB21-4 . L0<br>6SL3210-1PB21-8 . L0                         | –                                            |
| • Frame size                                                                                 |                 | FSA                                                                  | FSB                                                                  | FSC                                                                  | –                                            |
| <b>Suitable for<br/>PM240-2 Power Module<br/>standard variant<br/>380 ... 480 V 3 AC</b>     | Type            | 6SL3210-1PE11-8 . L1<br>6SL3210-1PE12-3 . L1<br>6SL3210-1PE13-2 . L1 | 6SL3210-1PE14-3 . L1<br>6SL3210-1PE16-1 . L1<br>6SL3210-1PE18-0 . L1 | 6SL3210-1PE21-1 . L0<br>6SL3210-1PE21-4 . L0<br>6SL3210-1PE21-8 . L0 | 6SL3210-1PE22-7 . L0<br>6SL3210-1PE23-3 . L0 |
| • Frame size                                                                                 |                 | FSA                                                                  | FSA                                                                  | FSB                                                                  | FSC                                          |
| <b>Suitable for<br/>PM240-2 Power Module<br/>push-through variant<br/>200 ... 240 V 3 AC</b> | Type            | 6SL3211-1PB13-8 . L0                                                 | 6SL3211-1PB21-0 . L0                                                 | 6SL3211-1PB21-8 . L0                                                 | –                                            |
| • Frame size                                                                                 |                 | FSA                                                                  | FSB                                                                  | FSC                                                                  | –                                            |
| <b>Suitable for<br/>PM240-2 Power Module<br/>push-through variant<br/>380 ... 480 V 3 AC</b> | Type            | –                                                                    | 6SL3211-1PE18-0 . L1                                                 | 6SL3211-1PE21-8 . L0                                                 | 6SL3211-1PE23-3 . L0                         |
| • Frame size                                                                                 |                 | –                                                                    | FSA                                                                  | FSB                                                                  | FSC                                          |

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Line-side components > Recommended line-side overcurrent protection devices

#### Selection and ordering data

Overcurrent protection devices are absolutely necessary for the operation of the inverters. The following tables list recommendations for fuses.

- Siemens fuses of type 3NA3 for use in the area of validity of IEC
- UL-listed fuses Class J for use in USA and Canada

Recommendations on further overcurrent protection devices are available at:

<https://support.industry.siemens.com/cs/document/109486009>

The Short Circuit Current Rating (SCCR) according to UL for industrial control panel installations to NEC Article 409 or UL 508A/508C or UL 61800-5-1 is as follows for Class J fuses for

- PM240-2 Power Modules for SINAMICS G120: 100 kA

SCCR and ICC values for combination with further overcurrent protection devices are available at:

<https://support.industry.siemens.com/cs/document/109486009>

#### Notes for installations in Canada:

The inverters are intended for line supply systems with overvoltage category III. More information is available in the technical documentation on the Internet at:

[www.siemens.com/sinamics-s110/documentation](http://www.siemens.com/sinamics-s110/documentation)

More information about the listed Siemens fuses is available in Catalog LV 10 as well as in the Industry Mall.

| Type rating <sup>1)</sup>      |      | PM240-2 Power Module standard variant |            | IEC-compliant Fuse |                | UL/cUL-compliant Fuse type   |           |
|--------------------------------|------|---------------------------------------|------------|--------------------|----------------|------------------------------|-----------|
| kW (hp)                        | hp   | Type 6SL3210-...                      | Frame size | Current A          | Article No.    | Rated voltage 600 V AC Class | Current A |
| <b>200 ... 240 V 1 AC/3 AC</b> |      |                                       |            |                    |                |                              |           |
| 0.55                           | 0.75 | 1PB13-0 . L0                          | FSA        | 16                 | <b>3NA3805</b> | J                            | 15        |
| 0.75                           | 1    | 1PB13-8 . L0                          | FSA        | 16                 | <b>3NA3805</b> | J                            | 15        |
| 1.1                            | 1.5  | 1PB15-5 . L0                          | FSB        | 32                 | <b>3NA3812</b> | J                            | 35        |
| 1.5                            | 2    | 1PB17-4 . L0                          | FSB        | 32                 | <b>3NA3812</b> | J                            | 35        |
| 2.2                            | 3    | 1PB21-0 . L0                          | FSB        | 32                 | <b>3NA3812</b> | J                            | 35        |
| 3                              | 4    | 1PB21-4 . L0                          | FSC        | 50                 | <b>3NA3820</b> | J                            | 50        |
| 4                              | 5    | 1PB21-8 . L0                          | FSC        | 50                 | <b>3NA3820</b> | J                            | 50        |
| <b>380 ... 480 V 3 AC</b>      |      |                                       |            |                    |                |                              |           |
| 0.55                           | 0.75 | 1PE11-8 . L1                          | FSA        | 10                 | <b>3NA3803</b> | J                            | 10        |
| 0.75                           | 1    | 1PE12-3 . L1                          | FSA        | 10                 | <b>3NA3803</b> | J                            | 10        |
| 1.1                            | 1.5  | 1PE13-2 . L1                          | FSA        | 16                 | <b>3NA3805</b> | J                            | 15        |
| 1.5                            | 2    | 1PE14-3 . L1                          | FSA        | 16                 | <b>3NA3805</b> | J                            | 15        |
| 2.2                            | 3    | 1PE16-1 . L1                          | FSA        | 16                 | <b>3NA3805</b> | J                            | 15        |
| 3                              | 4    | 1PE18-0 . L1                          | FSA        | 16                 | <b>3NA3805</b> | J                            | 15        |
| 4                              | 5    | 1PE21-1 . L0                          | FSB        | 32                 | <b>3NA3812</b> | J                            | 35        |
| 5.5                            | 7.5  | 1PE21-4 . L0                          | FSB        | 32                 | <b>3NA3812</b> | J                            | 35        |
| 7.5                            | 10   | 1PE21-8 . L0                          | FSB        | 32                 | <b>3NA3812</b> | J                            | 35        |
| 11                             | 15   | 1PE22-7 . L0                          | FSC        | 50                 | <b>3NA3820</b> | J                            | 50        |
| 15                             | 20   | 1PE23-3 . L0                          | FSC        | 50                 | <b>3NA3820</b> | J                            | 50        |
| 18.5                           | 25   | 1PE23-8 . L0                          | FSD        | 63                 | <b>3NA3822</b> | J                            | 60        |
| 22                             | 30   | 1PE24-5 . L0                          | FSD        | 80                 | <b>3NA3824</b> | J                            | 70        |
| 30                             | 40   | 1PE26-0 . L0                          | FSD        | 100                | <b>3NA3830</b> | J                            | 90        |
| 37                             | 50   | 1PE27-5 . L0                          | FSD        | 100                | <b>3NA3830</b> | J                            | 100       |
| 45                             | 60   | 1PE28-8 . L0                          | FSE        | 125                | <b>3NA3832</b> | J                            | 125       |
| 55                             | 75   | 1PE31-1 . L0                          | FSE        | 160                | <b>3NA3836</b> | J                            | 150       |

<sup>1)</sup> Type rating based on the rated output current  $I_{rated}$ . The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Line-side components > Recommended line-side overcurrent protection devices

### Selection and ordering data (continued)

| Type rating <sup>1)</sup>             |     | PM240-2 Power Module<br>standard variant |            | IEC-compliant<br>Fuse |                | UL/cUL-compliant<br>Fuse type<br>Rated voltage 600 V AC |              |
|---------------------------------------|-----|------------------------------------------|------------|-----------------------|----------------|---------------------------------------------------------|--------------|
| kW (hp)                               | hp  | Type                                     | Frame size | Current<br>A          | Article No.    | Class                                                   | Current<br>A |
| <b>380 ... 480 V 3 AC (continued)</b> |     |                                          |            |                       |                |                                                         |              |
| 75                                    | 100 | 1PE31-5 . L0                             | FSF        | 200                   | <b>3NA3140</b> | J                                                       | 200          |
| 90                                    | 125 | 1PE31-8 . L0                             | FSF        | 224                   | <b>3NA3142</b> | J                                                       | 250 (335)    |
| 110                                   | 150 | 1PE32-1 . L0                             | FSF        | 300                   | <b>3NA3250</b> | J                                                       | 300          |
| 132                                   | 200 | 1PE32-5 . L0                             | FSF        | 315                   | <b>3NA3252</b> | J                                                       | 350          |

| Type rating <sup>1)</sup>      |    | PM240-2 Power Module<br>push-through variant |            | IEC-compliant<br>Fuse |                | UL/cUL-compliant<br>Fuse type<br>Rated voltage 600 V AC |              |
|--------------------------------|----|----------------------------------------------|------------|-----------------------|----------------|---------------------------------------------------------|--------------|
| kW                             | hp | Type                                         | Frame size | Current<br>A          | Article No.    | Class                                                   | Current<br>A |
| <b>200 ... 240 V 1 AC/3 AC</b> |    |                                              |            |                       |                |                                                         |              |
| 0.75                           | 1  | 1PB13-8 . L0                                 | FSA        | 16                    | <b>3NA3805</b> | J                                                       | 15           |
| 2.2                            | 3  | 1PB21-0 . L0                                 | FSB        | 32                    | <b>3NA3812</b> | J                                                       | 35           |
| 4                              | 5  | 1PB21-8 . L0                                 | FSC        | 50                    | <b>3NA3820</b> | J                                                       | 50           |
| <b>380 ... 480 V 3 AC</b>      |    |                                              |            |                       |                |                                                         |              |
| 3                              | 4  | 1PE18-0 . L1                                 | FSA        | 16                    | <b>3NA3805</b> | J                                                       | 15           |
| 7.5                            | 10 | 1PE21-8 . L0                                 | FSB        | 32                    | <b>3NA3812</b> | J                                                       | 35           |
| 15                             | 20 | 1PE23-3 . L0                                 | FSC        | 50                    | <b>3NA3820</b> | J                                                       | 50           |

<sup>1)</sup> Type rating based on the rated output current  $I_{rated}$ . The rated output current  $I_{rated}$  is based on the duty cycle for low overload (LO).

**SINAMICS S110 servo drives**

0.55 kW to 132 kW (0.75 hp to 150 hp)

**DC link components > Braking resistors****Overview**

Braking resistor for PM240-2 Power Modules, frame size FSD

Excess energy in the DC link is dissipated in the braking resistor. The braking resistors are intended for use with PM240-2 Power Modules which feature an integrated braking chopper, but cannot regenerate energy to the supply system. For regenerative operation, e.g. the braking of a rotating mass with high moment of inertia, a braking resistor must be connected to convert the resulting energy into heat.

The braking resistors can be installed laterally next to the PM240-2 Power Modules. The braking resistors for the Power Modules, frame sizes FSD to FSF, should be placed outside the control cabinet or outside the switchgear room so that the heat is dissipated away from the Power Modules. The level of air conditioning required is therefore reduced.

Every braking resistor has a temperature switch (UL-listed). The temperature switch should be evaluated to prevent consequential damage if the braking resistor overheats.

Note:

Shield connection kits are available for EMC-compliant installation of Power Modules.

A shield connection kit is supplied as standard with PM240-2 Power Modules in frame sizes FSA to FSC. A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size for the frame sizes FSD to FSF. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSF.

For more information, see [Shield connection kits for Power Modules in the section Supplementary system components](#).

**Integration*****Braking resistors that are optionally available depending on the Power Module used***

|                                                      | Frame size |     |     |     |     |     |
|------------------------------------------------------|------------|-----|-----|-----|-----|-----|
|                                                      | FSA        | FSB | FSC | FSD | FSE | FSF |
| PM240-2 Power Module with integrated braking chopper |            |     |     |     |     |     |
| <b>DC link components</b>                            |            |     |     |     |     |     |
| Braking resistor                                     | S          | S   | S   | S   | S   | S   |

S = Lateral mounting

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

DC link components &gt; Braking resistors

## Selection and ordering data

| Type rating             |      | PM240-2 Power Module<br>standard variant |            | Braking resistor   |
|-------------------------|------|------------------------------------------|------------|--------------------|
| kW                      | hp   | Type 6SL3210-...                         | Frame size | Article No.        |
| 200 ... 240 V 1 AC/3 AC |      |                                          |            |                    |
| 0.55                    | 0.75 | 1PB13-0 . L0                             | FSA        | JJY:023146720008   |
| 0.75                    | 1    | 1PB13-8 . L0                             |            |                    |
| 1.1                     | 1.5  | 1PB15-5 . L0                             | FSB        |                    |
| 1.5                     | 2    | 1PB17-4 . L0                             |            |                    |
| 2.2                     | 3    | 1PB21-0 . L0                             |            | JJY:023151720007   |
| 3                       | 4    | 1PB21-4 . L0                             | FSC        |                    |
| 4                       | 5    | 1PB21-8 . L0                             |            |                    |
| 380 ... 480 V 3 AC      |      |                                          |            |                    |
| 0.55                    | 0.75 | 1PE11-8 . L1                             | FSA        | 6SL3201-0BE14-3AA0 |
| 0.75                    | 1    | 1PE12-3 . L1                             |            |                    |
| 1.1                     | 1.5  | 1PE13-2 . L1                             |            |                    |
| 1.5                     | 2    | 1PE14-3 . L1                             |            |                    |
| 2.2                     | 3    | 1PE16-1 . L1                             | FSA        | 6SL3201-0BE21-0AA0 |
| 3                       | 4    | 1PE18-0 . L1                             |            |                    |
| 4                       | 5    | 1PE21-1 . L0                             | FSB        |                    |
| 5.5                     | 7.5  | 1PE21-4 . L0                             |            |                    |
| 7.5                     | 10   | 1PE21-8 . L0                             |            | 6SL3201-0BE21-8AA0 |
| 11                      | 15   | 1PE22-7 . L0                             | FSC        |                    |
| 15                      | 20   | 1PE23-3 . L0                             |            |                    |
| 18.5                    | 25   | 1PE23-8 . L0                             | FSD        |                    |
| 22                      | 30   | 1PE24-5 . L0                             |            | JJY:023422620001   |
| 30                      | 40   | 1PE26-0 . L0                             | FSD        |                    |
| 37                      | 50   | 1PE27-5 . L0                             |            |                    |
| 45                      | 60   | 1PE28-8 . L0                             | FSE        |                    |
| 55                      | 75   | 1PE31-1 . L0                             |            | JJY:023434020001   |
| 75                      | 100  | 1PE31-5 . L0                             | FSF        |                    |
| 90                      | 125  | 1PE31-8 . L0                             |            |                    |
| 110                     | 150  | 1PE32-1 . L0                             | FSF        |                    |
| 132                     | 200  | 1PE32-5 . L0                             |            | JJY:023464020001   |

| Type rating             |    | PM240-2 Power Module<br>push-through variant |            | Braking resistor |
|-------------------------|----|----------------------------------------------|------------|------------------|
| kW                      | hp | Type 6SL3211-...                             | Frame size | Article No.      |
| 200 ... 240 V 1 AC/3 AC |    |                                              |            |                  |
| 0.75                    | 1  | 1PB13-8 . L0                                 | FSA        | JJY:023146720008 |
| 2.2                     | 3  | 1PB21-0 . L0                                 | FSB        | JJY:023151720007 |
| 4                       | 5  | 1PB21-8 . L0                                 | FSC        | JJY:023163720018 |

| Type rating        |    | PM240-2 Power Module<br>push-through variant |            | Braking resistor   |
|--------------------|----|----------------------------------------------|------------|--------------------|
| kW                 | hp | Type 6SL3211-...                             | Frame size | Article No.        |
| 380 ... 480 V 3 AC |    |                                              |            |                    |
| 3                  | 4  | 1PE18-0 . L1                                 | FSA        | 6SL3201-0BE21-0AA0 |
| 7.5                | 10 | 1PE21-8 . L0                                 | FSB        | 6SL3201-0BE21-8AA0 |
| 15                 | 20 | 1PE23-3 . L0                                 | FSC        | 6SL3201-0BE23-8AA0 |

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### DC link components > Braking resistors

#### Technical specifications

| Line voltage 200 V ... 240 V 1 AC/3 AC                                       |         | Braking resistor                             |                                                                      |                                              |
|------------------------------------------------------------------------------|---------|----------------------------------------------|----------------------------------------------------------------------|----------------------------------------------|
|                                                                              |         | JJY:023146720008                             | JJY:023151720007                                                     | JJY:023163720018                             |
| Resistance                                                                   | Ω       | 200                                          | 68                                                                   | 37                                           |
| Rated power $P_{DB}$<br>(Continuous braking power)                           | kW      | 0.0375                                       | 0.11                                                                 | 0.2                                          |
| Peak power $P_{max}$<br>(load duration $t_a = 12$ s with period $t = 240$ s) | kW      | 0.75                                         | 2.2                                                                  | 4                                            |
| Power connection                                                             |         | Cable                                        | Cable                                                                | Cable                                        |
| Thermostatic switch                                                          |         | Integrated                                   | Integrated                                                           | Integrated                                   |
| Degree of protection                                                         |         | IP20                                         | IP20                                                                 | IP20                                         |
| Dimensions                                                                   |         |                                              |                                                                      |                                              |
| • Width                                                                      | mm (in) | 60 (2.36)                                    | 60 (2.36)                                                            | 60 (2.36)                                    |
| • Height                                                                     | mm (in) | 167 (6.57)                                   | 217 (8.54)                                                           | 337 (13.27)                                  |
| • Depth                                                                      | mm (in) | 30 (1.18)                                    | 30 (1.18)                                                            | 30 (1.18)                                    |
| Weight, approx.                                                              | kg (lb) | 0.5 (1.10)                                   | 0.7 (1.54)                                                           | 1.1 (2.43)                                   |
| Suitable for<br>PM240-2 Power Module<br>standard variant                     | Type    | 6SL3210-1PB13-0 . L0<br>6SL3210-1PB13-8 . L0 | 6SL3210-1PB15-5 . L0<br>6SL3210-1PB17-4 . L0<br>6SL3210-1PB21-0 . L0 | 6SL3210-1PB21-4 . L0<br>6SL3210-1PB21-8 . L0 |
| Suitable for<br>PM240-2 Power Module<br>push-through variant                 | Type    | 6SL3211-1PB13-8 . L0                         | 6SL3211-1PB21-0 . L0                                                 | 6SL3211-1PB21-8 . L0                         |
| • Frame size                                                                 |         | FSA                                          | FSB                                                                  | FSC                                          |

| Line voltage 380 ... 480 V 3 AC                                              |                 | Braking resistor                                                                             |                                              |                                                                      |                                              |
|------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------------------------------|----------------------------------------------|
|                                                                              |                 | 6SL3201-0BE14-3AA0                                                                           | 6SL3201-0BE21-0AA0                           | 6SL3201-0BE21-8AA0                                                   | 6SL3201-0BE23-8AA0                           |
| Resistance                                                                   | Ω               | 370                                                                                          | 140                                          | 75                                                                   | 30                                           |
| Rated power $P_{DB}$<br>(Continuous braking power)                           | kW              | 0.075                                                                                        | 0.2                                          | 0.375                                                                | 0.925                                        |
| Peak power $P_{max}$<br>(load duration $t_a = 12$ s with period $t = 240$ s) | kW              | 1.5                                                                                          | 4                                            | 7.5                                                                  | 18.5                                         |
| Power connection                                                             |                 | Terminal block                                                                               | Terminal block                               | Terminal block                                                       | Terminal block                               |
| • Conductor cross-section                                                    | mm <sup>2</sup> | 2.5                                                                                          | 2.5                                          | 4                                                                    | 6                                            |
| Thermostatic switch                                                          |                 | NC contact                                                                                   | NC contact                                   | NC contact                                                           | NC contact                                   |
| • Contact load, max.                                                         |                 | 250 V AC/2.5 A                                                                               | 250 V AC/2.5 A                               | 250 V AC/2.5 A                                                       | 250 V AC/2.5 A                               |
| • Conductor cross-section                                                    | mm <sup>2</sup> | 2.5                                                                                          | 2.5                                          | 2.5                                                                  | 2.5                                          |
| PE connection                                                                |                 |                                                                                              |                                              |                                                                      |                                              |
| • Via terminal block                                                         |                 | Yes                                                                                          | Yes                                          | Yes                                                                  | Yes                                          |
| • PE connection on housing                                                   |                 | M4 screw                                                                                     | M4 screw                                     | M4 screw                                                             | M4 screw                                     |
| Degree of protection                                                         |                 | IP20                                                                                         | IP20                                         | IP20                                                                 | IP20                                         |
| Dimensions                                                                   |                 |                                                                                              |                                              |                                                                      |                                              |
| • Width                                                                      | mm (in)         | 105 (4.13)                                                                                   | 105 (4.13)                                   | 175 (6.89)                                                           | 250 (9.84)                                   |
| • Height                                                                     | mm (in)         | 295 (11.61)                                                                                  | 345 (13.58)                                  | 345 (13.58)                                                          | 490 (19.29)                                  |
| • Depth                                                                      | mm (in)         | 100 (3.94)                                                                                   | 100 (3.94)                                   | 100 (3.94)                                                           | 140 (5.51)                                   |
| Weight, approx.                                                              | kg (lb)         | 1.5 (3.31)                                                                                   | 1.8 (3.97)                                   | 2.7 (5.95)                                                           | 6.2 (13.7)                                   |
| Suitable for<br>PM240-2 Power Modules<br>standard variant                    | Type            | 6SL3210-1PE11-8 . L1<br>6SL3210-1PE12-3 . L1<br>6SL3210-1PE13-2 . L1<br>6SL3210-1PE14-3 . L1 | 6SL3210-1PE16-1 . L1<br>6SL3210-1PE18-0 . L1 | 6SL3210-1PE21-1 . L0<br>6SL3210-1PE21-4 . L0<br>6SL3210-1PE21-8 . L0 | 6SL3210-1PE22-7 . L0<br>6SL3210-1PE23-3 . L0 |
| Suitable for<br>PM240-2 Power Modules<br>push-through variant                | Type            | –                                                                                            | 6SL3211-1PE18-0 . L1                         | 6SL3211-1PE21-8 . L0                                                 | 6SL3211-1PE23-3 . L0                         |
| • Frame size                                                                 |                 | FSA                                                                                          | FSA                                          | FSB                                                                  | FSC                                          |

# SINAMICS S110 servo drives


0.55 kW to 132 kW (0.75 hp to 150 hp)

## DC link components > Braking resistors

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                                              |         | Braking resistor                             |                                              |                                              |                                              |                                              |
|------------------------------------------------------------------------------|---------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
|                                                                              |         | JJY:023422620001                             | JJY:023424020001                             | JJY:023434020001                             | JJY:023454020001 <sup>1)</sup>               | JJY:023464020001 <sup>2)</sup>               |
| Resistance                                                                   | Ω       | 25                                           | 15                                           | 10                                           | 7.1                                          | 5                                            |
| Rated power $P_{DB}$<br>(Continuous braking power)                           | kW      | 1.1                                          | 1.85                                         | 2.75                                         | 3.85                                         | 5.5                                          |
| Peak power $P_{max}$<br>(load duration $t_a = 12$ s with period $t = 240$ s) | kW      | 22                                           | 37                                           | 55                                           | 77                                           | 110                                          |
| Power connection                                                             |         | Cable                                        | Cable                                        | Cable                                        | Cable                                        | Cable                                        |
| Thermostatic switch                                                          |         | Integrated                                   | Integrated                                   | Integrated                                   | Integrated                                   | Integrated                                   |
| Degree of protection                                                         |         | IP21                                         | IP21                                         | IP21                                         | IP21                                         | IP21                                         |
| Dimensions                                                                   |         |                                              |                                              |                                              |                                              |                                              |
| • Width                                                                      | mm (in) | 220 (8.66)                                   | 220 (8.66)                                   | 350 (13.78)                                  | <sup>1)</sup>                                | <sup>2)</sup>                                |
| • Height                                                                     | mm (in) | 470 (18.5)                                   | 610 (24.02)                                  | 630 (24.8)                                   | <sup>1)</sup>                                | <sup>2)</sup>                                |
| • Depth                                                                      | mm (in) | 180 (7.09)                                   | 180 (7.09)                                   | 180 (7.09)                                   | <sup>1)</sup>                                | <sup>2)</sup>                                |
| Weight, approx.                                                              | kg (lb) | 7 (15.4)                                     | 9.5 (20.9)                                   | 13.5 (29.8)                                  | 20.5 (45.2)                                  | 27 (59.5)                                    |
| Suitable for<br>PM240-2 Power Module                                         | Type    | 6SL3210-1PE23-8 . L0<br>6SL3210-1PE24-5 . L0 | 6SL3210-1PE26-0 . L0<br>6SL3210-1PE27-5 . L0 | 6SL3210-1PE28-8 . L0<br>6SL3210-1PE31-1 . L0 | 6SL3210-1PE31-5 . L0<br>6SL3210-1PE31-8 . L0 | 6SL3210-1PE32-1 . L0<br>6SL3210-1PE32-5 . L0 |
| • Frame size                                                                 |         | FSD                                          | FSD                                          | FSE                                          | FSF                                          | FSF                                          |

### Characteristic curves

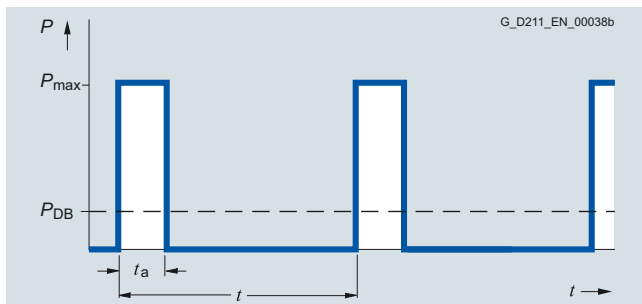

Load diagram for the braking resistors

$t_a = 12$  s (see section Technical specifications)  
 $t = 240$  s (see section Technical specifications)


<sup>1)</sup> This braking resistor consists of the two braking resistors, JJY:023422620001 and JJY:023434020001, which must be connected in parallel on the plant/system side.

<sup>2)</sup> This braking resistor consists of two JJY:023434020001 braking resistors, which must be connected in parallel on the plant/system side.

SINAMICS S110 servo drives  
0.55 kW to 132 kW (0.75 hp to 150 hp)

Load-side power components > Output reactors

Overview

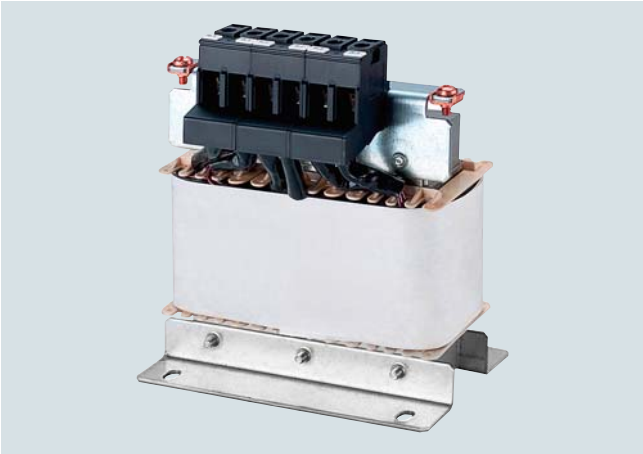

Output reactor for PM240-2 Power Modules, frame size FSA

Output reactors reduce the rate of voltage rise ( $dv/dt$ ) and the height of the current peaks, and enable longer motor cables to be connected.

Owing to the high rates of voltage rise of the fast-switching IGBTs, the capacitance of long motor cables reverses polarity very quickly with every switching operation in the inverter. As a result, the inverter is loaded with additional current peaks of substantial magnitude.

Output reactors reduce the magnitude of these additional peaks because the cable capacitance reverses polarity more slowly across the reactor inductance, thereby attenuating the amplitudes of the current peaks.

When using output reactors, the following should be observed:

- Max. permissible output frequency 150 Hz
- Max. permissible pulse frequency 4 kHz
- The output reactor must be installed as close as possible to the Power Module

Integration

*Output reactors that are optionally available depending on the Power Module used*

|                                                      | Frame size |     |     |     |     |     |
|------------------------------------------------------|------------|-----|-----|-----|-----|-----|
|                                                      | FSA        | FSB | FSC | FSD | FSE | FSF |
| PM240-2 Power Module with integrated braking chopper |            |     |     |     |     |     |
| Load-side power components                           |            |     |     |     |     |     |
| Output reactor                                       | S          | S   | S   | S   | S   | S   |

S = Lateral mounting

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

Load-side power components &gt; Output reactors

## Selection and ordering data

| Type rating             |      | PM240-2 Power Module<br>standard variant |            | Output reactor     |
|-------------------------|------|------------------------------------------|------------|--------------------|
| kW                      | hp   | Type 6SL3210-...                         | Frame size | Article No.        |
| 200 ... 240 V 1 AC/3 AC |      |                                          |            |                    |
| 0.55                    | 0.75 | 1PB13-0 . L0                             | FSA        | 6SL3202-0AE16-1CA0 |
| 0.75                    | 1    | 1PB13-8 . L0                             |            |                    |
| 1.1                     | 1.5  | 1PB15-5 . L0                             | FSB        | 6SL3202-0AE16-1CA0 |
| 1.5                     | 2    | 1PB17-4 . L0                             | FSB        | 6SL3202-0AE18-8CA0 |
| 2.2                     | 3    | 1PB21-0 . L0                             | FSB        | 6SL3202-0AE21-8CA0 |
| 3                       | 4    | 1PB21-4 . L0                             | FSC        | 6SL3202-0AE21-8CA0 |
| 4                       | 5    | 1PB21-8 . L0                             |            |                    |
| 380 ... 480 V 3 AC      |      |                                          |            |                    |
| 0.55                    | 0.75 | 1PE11-8 . L1                             | FSA        | 6SL3202-0AE16-1CA0 |
| 0.75                    | 1    | 1PE12-3 . L1                             |            |                    |
| 1.1                     | 1.5  | 1PE13-2 . L1                             |            |                    |
| 1.5                     | 2    | 1PE14-3 . L1                             |            |                    |
| 2.2                     | 3    | 1PE16-1 . L1                             |            |                    |
| 3                       | 4    | 1PE18-0 . L1                             | FSA        | 6SL3202-0AE18-8CA0 |
| 4                       | 5    | 1PE21-1 . L0                             | FSB        | 6SL3202-0AE21-8CA0 |
| 5.5                     | 7.5  | 1PE21-4 . L0                             |            |                    |
| 7.5                     | 10   | 1PE21-8 . L0                             |            |                    |
| 11                      | 15   | 1PE22-7 . L0                             | FSC        |                    |
| 15                      | 20   | 1PE23-3 . L0                             |            |                    |
| 18.5                    | 25   | 1PE23-8 . L0                             | FSD        | 6SE6400-3TC07-5ED0 |
| 22                      | 30   | 1PE24-5 . L0                             |            |                    |
| 30                      | 40   | 1PE26-0 . L0                             |            |                    |
| 37                      | 50   | 1PE27-5 . L0                             |            |                    |
| 45                      | 60   | 1PE28-8 . L0                             | FSE        |                    |
| 55                      | 75   | 1PE31-1 . L0                             |            | 6SE6400-3TC14-5FD0 |
| 75                      | 100  | 1PE31-5 . L0                             | FSF        |                    |
| 90                      | 125  | 1PE31-8 . L0                             |            | 6SE6400-3TC14-5FD0 |
| 110                     | 150  | 1PE32-1 . L0                             | FSF        |                    |
| 132                     | 200  | 1PE32-5 . L0                             | FSF        |                    |

| Type rating             |    | PM240-2 Power Module<br>push-through variant |            | Output reactor     |
|-------------------------|----|----------------------------------------------|------------|--------------------|
| kW                      | hp | Type 6SL3211-...                             | Frame size | Article No.        |
| 200 ... 240 V 1 AC/3 AC |    |                                              |            |                    |
| 0.75                    | 1  | 1PB13-8 . L0                                 | FSA        | 6SL3202-0AE16-1CA0 |
| 2.2                     | 3  | 1PB21-0 . L0                                 | FSB        | 6SL3202-0AE21-8CA0 |
| 4                       | 5  | 1PB21-8 . L0                                 | FSC        | 6SL3202-0AE21-8CA0 |
| 380 ... 480 V 3 AC      |    |                                              |            |                    |
| 3                       | 4  | 1PE18-0 . L1                                 | FSA        | 6SL3202-0AE18-8CA0 |
| 7.5                     | 10 | 1PE21-8 . L0                                 | FSB        | 6SL3202-0AE21-8CA0 |
| 15                      | 20 | 1PE23-3 . L0                                 | FSC        | 6SL3202-0AE23-8CA0 |

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Load-side power components > Output reactors

#### Technical specifications

| Line voltage 200 ... 240 V 1 AC/3 AC<br>or 380 ... 480 V 3 AC              |                 | Output reactor (for a 4 kHz pulse frequency)                                                                                |                             |                                                                                        |                                                      |
|----------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------|----------------------------------------------------------------------------------------|------------------------------------------------------|
|                                                                            |                 | 6SL3202-0AE16-1CA0                                                                                                          | 6SL3202-0AE18-8CA0          | 6SL3202-0AE21-8CA0                                                                     | 6SL3202-0AE23-8CA0                                   |
| Rated current                                                              | A               | 6.1                                                                                                                         | 9                           | 18.5                                                                                   | 39                                                   |
| Power loss, max.                                                           | kW              | 0.09                                                                                                                        | 0.08                        | 0.08                                                                                   | 0.11                                                 |
| Connection to the Power Module/<br>motor connection                        |                 | Screw terminals                                                                                                             | Screw terminals             | Screw terminals                                                                        | Screw terminals                                      |
| • Conductor cross-section                                                  | mm <sup>2</sup> | 4                                                                                                                           | 4                           | 10                                                                                     | 16                                                   |
| PE connection                                                              |                 | M4 screw stud                                                                                                               | M4 screw stud               | M5 screw stud                                                                          | M5 screw stud                                        |
| Cable length, max.<br>between output reactor and motor                     |                 |                                                                                                                             |                             |                                                                                        |                                                      |
| • 200 -10 % ... 240 V +10 % 3 AC and<br>380 -10 % ... 415 V +10 % 3 AC     |                 |                                                                                                                             |                             |                                                                                        |                                                      |
| - Shielded                                                                 | m (ft)          | 150 (492)                                                                                                                   | 150 (492)                   | 150 (492)                                                                              | 150 (492)                                            |
| - Unshielded                                                               | m (ft)          | 225 (738)                                                                                                                   | 225 (738)                   | 225 (738)                                                                              | 225 (738)                                            |
| • 440 ... 480 V 3 AC +10 %                                                 |                 |                                                                                                                             |                             |                                                                                        |                                                      |
| - Shielded                                                                 | m (ft)          | 100 (328)                                                                                                                   | 100 (328)                   | 100 (328)                                                                              | 100 (328)                                            |
| - Unshielded                                                               | m (ft)          | 150 (492)                                                                                                                   | 150 (492)                   | 150 (492)                                                                              | 150 (492)                                            |
| Dimensions                                                                 |                 |                                                                                                                             |                             |                                                                                        |                                                      |
| • Width                                                                    | mm (in)         | 207 (8.15)                                                                                                                  | 207 (8.15)                  | 247 (9.72)                                                                             | 257 (10.1)                                           |
| • Height                                                                   | mm (in)         | 175 (6.89)                                                                                                                  | 180 (7.09)                  | 215 (8.46)                                                                             | 235 (9.25)                                           |
| • Depth                                                                    | mm (in)         | 72.5 (2.85)                                                                                                                 | 72.5 (2.85)                 | 100 (3.94)                                                                             | 114.7 (4.52)                                         |
| Degree of protection                                                       |                 | IP20                                                                                                                        | IP20                        | IP20                                                                                   | IP20                                                 |
| Weight, approx.                                                            | kg (lb)         | 3.4 (7.5)                                                                                                                   | 3.9 (8.6)                   | 10.1 (22.3)                                                                            | 11.2 (24.7)                                          |
| Suitable for<br>PM240-2<br>standard variant<br>200 ... 240 V 1 AC/3 AC     | Type            | 6SL3210-1PB13-0 . L0<br>6SL3210-1PB13-8 . L0<br>FSA<br><br>6SL3210-1PB15-5 . L0<br>FSB                                      | 6SL3210-1PB17-4 . L0<br>FSB | 6SL3210-1PB21-0 . L0<br>6SL3210-1PB21-4 . L0<br>FSB<br><br>6SL3210-1PB21-8 . L0<br>FSC | –                                                    |
| Suitable for<br>PM240-2<br>standard variant<br>380 ... 480 V 3 AC          | Type            | 6SL3210-1PE11-8 . L1<br>6SL3210-1PE12-3 . L1<br>6SL3210-1PE13-2 . L1<br>6SL3210-1PE14-3 . L1<br>6SL3210-1PE16-1 . L1<br>FSA | 6SL3210-1PE18-0 . L1<br>FSA | 6SL3210-1PE21-1 . L0<br>6SL3210-1PE21-4 . L0<br>6SL3210-1PE21-8 . L0<br>FSB            | 6SL3210-1PE22-7 . L0<br>6SL3210-1PE23-3 . L0°<br>FSC |
| Suitable for<br>PM240-2<br>push-through variant<br>200 ... 240 V 1 AC/3 AC | Type            | 6SL3211-1PB13-8 . L0<br>FSA                                                                                                 | –                           | 6SL3211-1PB21-0 . L0<br>FSB<br><br>6SL3211-1PB21-8 . L0<br>FSC                         | –                                                    |
| Suitable for<br>PM240-2<br>push-through variant<br>380 ... 480 V 3 AC      | Type            | –                                                                                                                           | 6SL3211-1PE18-0 . L1<br>FSA | 6SL3211-1PE21-8 . L0<br>FSB                                                            | 6SL3211-1PE23-3 . L0<br>FSC                          |

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Load-side power components > Output reactors

### Technical specifications (continued)

| Line voltage 380 ... 480 V 3 AC                        |         | Output reactor (for a 4 kHz pulse frequency)                                                        |                                                                                                                |                                 |                                 |
|--------------------------------------------------------|---------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|---------------------------------|---------------------------------|
|                                                        |         | 6SE6400-3TC07-5ED0                                                                                  | 6SE6400-3TC14-5FD0                                                                                             | 6SL3000-2BE32-1AA0              | 6SL3000-2BE32-6AA0              |
| Rated current                                          | A       | 90                                                                                                  | 178                                                                                                            | 210                             | 260                             |
| Power loss, max.                                       | kW      | 0.27                                                                                                | 0.47                                                                                                           | 0.49                            | 0.5                             |
| Connection to the Power Module/<br>motor connection    |         | Flat connector for<br>M6 screw                                                                      | Flat connector for<br>M8 screw                                                                                 | Flat connector for<br>M10 screw | Flat connector for<br>M10 screw |
| PE connection                                          |         | M6 screw                                                                                            | M8 screw                                                                                                       | M8 screw                        | M8 screw                        |
| Cable length, max.<br>between output reactor and motor |         |                                                                                                     |                                                                                                                |                                 |                                 |
| • Shielded                                             | m (ft)  | 200 (656)                                                                                           | 200 (656)                                                                                                      | 300 (984)                       | 300 (984)                       |
| • Unshielded                                           | m (ft)  | 300 (984)                                                                                           | 300 (984)                                                                                                      | 450 (1476)                      | 450 (1476)                      |
| Dimensions                                             |         |                                                                                                     |                                                                                                                |                                 |                                 |
| • Width                                                | mm (in) | 270 (10.63)                                                                                         | 350 (13.78)                                                                                                    | 300 (11.81)                     | 300 (11.81)                     |
| • Height                                               | mm (in) | 248 (9.76)                                                                                          | 321 (12.64)                                                                                                    | 285 (11.22)                     | 315 (12.4)                      |
| • Depth                                                | mm (in) | 209 (8.23)                                                                                          | 288 (11.34)                                                                                                    | 257 (10.12)                     | 277 (10.91)                     |
| Degree of protection                                   |         | IP00                                                                                                | IP00                                                                                                           | IP00                            | IP00                            |
| Weight, approx.                                        | kg (lb) | 27 (59.5)                                                                                           | 57 (126)                                                                                                       | 60 (132)                        | 66 (146)                        |
| Suitable for<br>PM240-2<br>standard variant            | Type    | 6SL3210-1PE23-8 . L0<br>6SL3210-1PE24-5 . L0<br>6SL3210-1PE26-0 . L0<br>6SL3210-1PE27-5 . L0<br>FSD | 6SL3210-1PE28-8 . L0<br>6SL3210-1PE31-1 . L0<br>FSE<br><br>6SL3210-1PE31-5 . L0<br>6SL3210-1PE31-8 . L0<br>FSF | 6SL3210-1PE32-1 . L0<br>FSF     | 6SL3210-1PE32-5 . L0<br>FSF     |

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Supplementary system components > Push-through mounting frame

#### Overview

It is advisable to use an optionally available mounting frame to install the push-through unit in a control cabinet. This mounting frame includes the necessary seals and frame to ensure compliance with degree of protection IP54.

If the Power Module is installed without use of the optional mounting frame, the user is responsible for ensuring that the requisite degree of protection is provided.

Tightening torque for fixing the mounting frame and the inverter: 3 ... 3.5 Nm.

#### Selection and ordering data

| Description                                                                                                                  | Article No.               |
|------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>Push-through mounting frame</b>                                                                                           |                           |
| <ul style="list-style-type: none"> <li>For PM240-2 Power Modules degree of protection IP20, push-through variants</li> </ul> |                           |
| - Frame size FSA                                                                                                             | <b>6SL3260-6AA00-0DA0</b> |
| - Frame size FSB                                                                                                             | <b>6SL3260-6AB00-0DA0</b> |
| - Frame size FSC                                                                                                             | <b>6SL3260-6AC00-0DA0</b> |

### Supplementary system components > Shield connection kits for Power Modules

#### Overview

Shield connection kits are available for EMC-compliant installation of Power Modules. The shield connection kit makes it easier to connect the shields of supply and control cables, provides mechanical strain relief and thus ensures optimum EMC performance.

A shield connection kit is supplied as standard with PM240-2 Power Modules in frame sizes FSA to FSC. A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size for the frame sizes FSD to FSF. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered for frame sizes FSD to FSF.

#### Selection and ordering data

| Description                                                                                                                                                                                                                                                                                                                                                          | Article No.                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| <b>Shield connection kit</b><br>for PM240-2 Power Modules                                                                                                                                                                                                                                                                                                            |                                                            |
| <ul style="list-style-type: none"> <li>Frame sizes FSA to FSC</li> </ul>                                                                                                                                                                                                                                                                                             | Supplied with the Power Modules, available as a spare part |
| <ul style="list-style-type: none"> <li>Frame sizes FSD to FSF<br/>A set of shield plates is included in the scope of delivery for the motor and signal cables corresponding to the frame size. For the electromagnetically compatible connection of an optionally connectable braking resistor, the corresponding shield connection kit is to be ordered.</li> </ul> |                                                            |
| - Frame size FSD                                                                                                                                                                                                                                                                                                                                                     | <b>6SL3262-1AD01-0DA0</b>                                  |
| - Frame size FSE                                                                                                                                                                                                                                                                                                                                                     | <b>6SL3262-1AE01-0DA0</b>                                  |
| - Frame size FSF                                                                                                                                                                                                                                                                                                                                                     | <b>6SL3262-1AF01-0DA0</b>                                  |

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Supplementary system components > BOP20 Basic Operator Panel

#### Overview



BOP20 Basic Operator Panel

Parameters can be set, diagnostics information (e.g. alarm and fault messages) read out and faults acknowledged using the BOP20 Basic Operator Panel.

#### Design

The BOP20 Basic Operator Panel has a backlit two-line display area with six keys.

The integrated plug connector on the rear of the BOP20 Basic Operator Panel provides its power and establishes communication with the Control Unit.

#### Selection and ordering data

| Description                       | Article No.               |
|-----------------------------------|---------------------------|
| <b>BOP20 Basic Operator Panel</b> | <b>6SL3055-0AA00-4BA0</b> |

#### Integration

The BOP20 Basic Operator Panel can be inserted on the following Control Units:

- SINAMICS S110
  - CU305
- SINAMICS S120
  - CU310-2
  - CU320-2



Control Unit CU305 with attached BOP20 Basic Operator Panel

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Supplementary system components > Safe Brake Relay

#### Overview



Safe Brake Relay

With the Safe Brake Relay, the brake is controlled in accordance with IEC 61508 SIL 2 and EN ISO 13849-1 PL d and Category 3.

#### Design

The Safe Brake Relay can be installed below the Power Module on the shield connection plate.

The Safe Brake Relay has the following connections and interfaces:

- 1 two-channel transistor output stage to control the motor brake solenoid
- 1 connection for the cable harness (CTRL) to the Power Module in blocksize format
- 1 connection for the 24 V DC power supply

The connection between the 24 V DC supply and the Safe Brake Relay must be kept as short as possible.

The scope of supply of a Safe Brake Relay includes the following:

- 3 cable harnesses for connecting to the CTRL socket of the Power Module
  - Length 0.32 m (1.05 ft) for frame sizes FSA to FSC
  - Length 0.55 m (1.80 ft) for frame sizes FSD and FSE
  - Length 0.8 m (2.62 ft) for frame size FSF (available soon for frame size FSG)


#### Selection and ordering data

| Description                                                                       | Article No.               |
|-----------------------------------------------------------------------------------|---------------------------|
| <b>Safe Brake Relay</b><br>Including cable harness for connection to Power Module | <b>6SL3252-0BB01-0AA0</b> |

#### Technical specifications

|                                      | Safe Brake Relay<br>6SL3252-0BB01-0AA0                                                                                                             |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power supply</b>                  | 20.4 ... 28.8 V DC<br>Recommended rated supply voltage 26 V DC<br>(to compensate for voltage drop in feeder cable to 24 V DC motor brake solenoid) |
| <b>Current requirement, max.</b>     | <ul style="list-style-type: none"> <li>• Motor brake: 2.5 A</li> <li>• At 24 V DC: 0.05 A + the current requirement of motor brake</li> </ul>      |
| <b>Conductor cross-section, max.</b> | 2.5 mm <sup>2</sup>                                                                                                                                |
| <b>Dimensions</b>                    | <ul style="list-style-type: none"> <li>• Width: 69 mm (2.72 in)</li> <li>• Height: 63 mm (2.48 in)</li> <li>• Depth: 33 mm (1.30 in)</li> </ul>    |
| <b>Weight, approx.</b>               | 0.17 kg (0.37 lb)                                                                                                                                  |

#### Integration

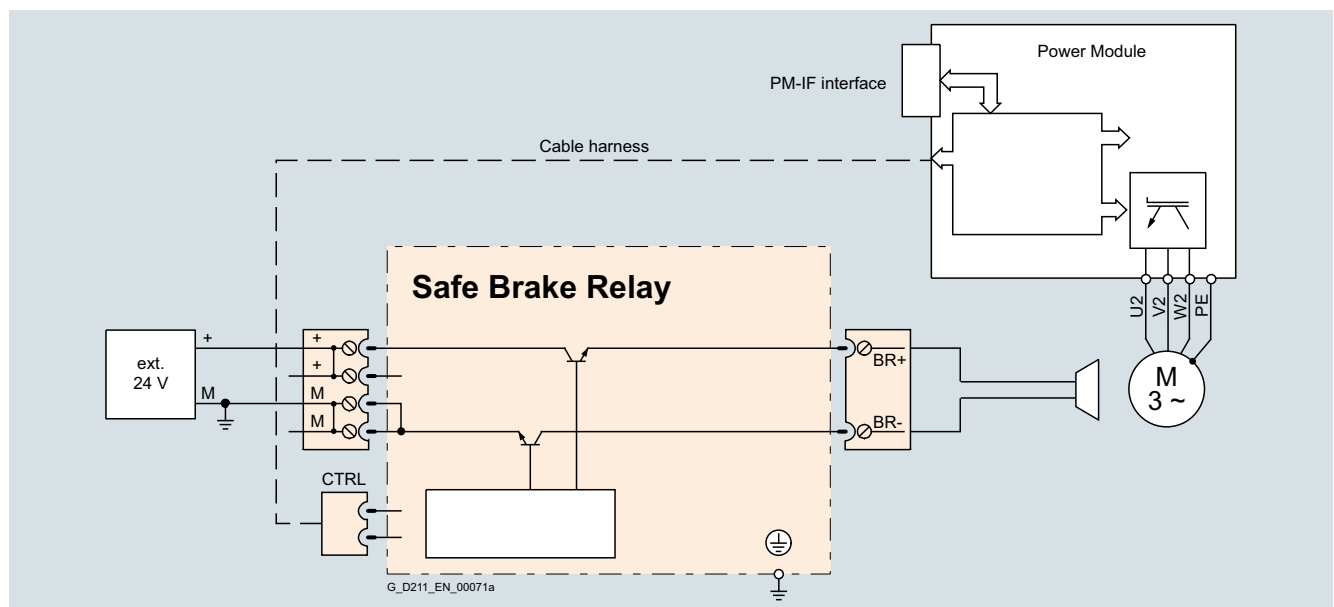

Connection example of a Safe Brake Relay

The 24 V DC solenoid of the motor brake is directly connected to the Safe Brake Relay. External overvoltage limiters are not required.

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Encoder system connection

#### Overview

##### Motors with DRIVE-CLiQ interface



DRIVE-CLiQ is the preferred method for connecting the encoder systems to SINAMICS S110 or SINAMICS S120.

Motors with DRIVE-CLiQ interface are available for this purpose, e.g.

- SIMOTICS M-1PH8 and SIMOTICS S-1FT7/1FK7 synchronous motors
- SIMOTICS M-1PH8 asynchronous motors (induction motors)
- SIMOTICS T-1FW3 torque motors

Motors with a DRIVE-CLiQ interface can be directly connected to the SINAMICS S110 Control Unit CU305 or, in case of the SINAMICS S120 drive system, to the associated Motor Module using MOTION-CONNECT DRIVE-CLiQ cables. The MOTION-CONNECT DRIVE-CLiQ cable connection at the motor has degree of protection IP67.

The DRIVE-CLiQ interface supplies the motor encoder via the integrated 24 V DC supply and transfers the motor encoder and temperature signals and the electronic rating plate data, e.g. a unique identification number and rated data (voltage, current, torque) to the Control Unit. This means that for the various encoder types – e.g. resolver or absolute encoder – different encoder cables with varying permissible lengths are no longer required; just one cable type, MOTION-CONNECT DRIVE-CLiQ with varying permissible lengths, can be used for all encoders.

These motors simplify commissioning and diagnostics, as the motor and encoder type are identified automatically.

##### Motors without DRIVE-CLiQ interface

The encoder and temperature signals of motors without DRIVE-CLiQ interface, as well as those of external encoders, must be connected via Sensor Modules. Sensor Modules Cabinet-Mounted are available in degree of protection IP20 for control cabinet installation, as well as Sensor Modules External-Mounted in degree of protection IP67.

Only one encoder system can be connected to each Sensor Module.

#### More information

Motor encoder and temperature signals must be connected when possible to the corresponding Motor Module or Power Module and external encoders to the Control Unit. However, the DRIVE-CLiQ connections can also be bundled via DRIVE-CLiQ Hub Modules.

##### Safety Integrated

The Safety Integrated extended functions of the SINAMICS drive system require suitable encoders ([see Catalog D 21.4, SIMOTICS servomotors section](#)).

##### Motors driving a load via a belt

Unfavorable material combinations generate static electricity between the belt pulley and the belt. Electrostatic charging must be prevented, since this can discharge via the motor shaft and the encoder, thereby causing disturbances in the encoder signals. One countermeasure is to manufacture belts out of an antistatic material, for example.

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Encoder system connection > SMC10 Sensor Module Cabinet-Mounted

#### Overview



SMC10 Sensor Module Cabinet-Mounted

The SMC10 Sensor Module Cabinet-Mounted is required to evaluate the encoder signals of motors without a DRIVE-CLiQ interface. External encoders can also be connected via the SMC10.

The following encoder signals can be evaluated:

- 2-pole resolver
- Multi-pole resolver

#### Design

The SMC10 Sensor Module Cabinet-Mounted features the following connections and interfaces as standard:

- 1 encoder connection including motor temperature sensing (KTY84-130, Pt1000<sup>1)</sup> or PTC) via SUB-D connector
- 1 DRIVE-CLiQ interface
- 1 connection for the electronics power supply via the 24 V DC supply connector
- 1 PE connection

The status of the SMC10 Sensor Module Cabinet-Mounted is indicated via a multi-color LED.

The SMC10 Sensor Module Cabinet-Mounted can be snapped onto a TH 35 standard mounting rail according to EN 60715 (IEC 60715).

The signal cable shield is connected via the encoder system connector and can also be connected to the SMC10 Sensor Module Cabinet-Mounted via a shield connection terminal, e.g. Phoenix Contact type SK8 or Weidmüller type KLBÜ CO 1. The shield connection terminal must not be used as a strain relief mechanism.

#### Integration

SMC10 Sensor Modules Cabinet-Mounted communicate with a Control Unit via DRIVE-CLiQ.

#### Selection and ordering data

| Description                                                                | Article No.               |
|----------------------------------------------------------------------------|---------------------------|
| <b>SMC10 Sensor Module Cabinet-Mounted</b><br>Without DRIVE-CLiQ cable     | <b>6SL3055-0AA00-5AA3</b> |
| <b>Accessories for re-ordering</b>                                         |                           |
| <b>Dust protection blanking plugs</b><br>(50 units)<br>For DRIVE-CLiQ port | <b>6SL3066-4CA00-0AA0</b> |

#### Technical specifications

| <b>SMC10 Sensor Module Cabinet-Mounted</b><br>6SL3055-0AA00-5AA3                       |                                                                                                                                          |
|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Current requirement, max.</b><br>at 24 V DC,<br>without taking encoder into account | 0.2 A                                                                                                                                    |
| • Conductor cross-section, max.                                                        | 2.5 mm <sup>2</sup>                                                                                                                      |
| • Fuse protection, max.                                                                | 20 A                                                                                                                                     |
| <b>Power loss, max.</b>                                                                | 10 W                                                                                                                                     |
| <b>Encoders which can be evaluated</b>                                                 | <ul style="list-style-type: none"> <li>• 2-pole resolvers</li> <li>• Multi-pole resolver</li> </ul>                                      |
| • Excitation voltage, rms                                                              | 4.1 V                                                                                                                                    |
| • Excitation frequency                                                                 | 5 ... 16 kHz depending on the current controller clock cycle of the Motor Module or Power Module                                         |
| • Transformation ratio                                                                 | 0.5                                                                                                                                      |
| • Encoder frequency, max.                                                              | 2 kHz (120000 rpm) depending on the number of resolver pole pairs and current controller clock cycle of the Motor Module or Power Module |
| • Signal subdivision (interpolation), max.                                             | 16384 times (14 bits)                                                                                                                    |
| • Cable length to encoder, max.                                                        | 130 m (427 ft)                                                                                                                           |
| <b>PE connection</b>                                                                   | M4 screw                                                                                                                                 |
| <b>Dimensions</b>                                                                      |                                                                                                                                          |
| • Width                                                                                | 30 mm (1.18 in)                                                                                                                          |
| • Height                                                                               | 150 mm (5.91 in)                                                                                                                         |
| • Depth                                                                                | 111 mm (4.37 in)                                                                                                                         |
| <b>Weight, approx.</b>                                                                 | 0.45 kg (0.99 lb)                                                                                                                        |
| <b>Certificate of suitability</b>                                                      | cULus                                                                                                                                    |

<sup>1)</sup> The Pt1000 sensor is not supported when combined with a Control Unit CU305.

# SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

## Encoder system connection > SMC20 Sensor Module Cabinet-Mounted

### Overview



SMC20 Sensor Module Cabinet-Mounted

The SMC20 Sensor Module Cabinet-Mounted is required to evaluate the encoder signals of motors without a DRIVE-CLiQ interface. External encoders can also be connected via the SMC20.

The following encoder signals can be evaluated:

- Incremental encoder sin/cos 1 V<sub>pp</sub>
- Absolute encoder EnDat 2.1
- SSI encoder with incremental signals sin/cos 1 V<sub>pp</sub> (firmware version 2.4 and later)

The motor temperature can also be sensed using a PTC thermistor KTY84-130, Pt1000<sup>1)</sup> or PTC.

### Design

The SMC20 Sensor Module Cabinet-Mounted features the following connections and interfaces as standard:

- 1 encoder connection including motor temperature sensing (KTY84-130, Pt1000<sup>1)</sup> or PTC) via SUB-D connector
- 1 DRIVE-CLiQ interface
- 1 connection for the electronics power supply via the 24 V DC supply connector
- 1 PE connection

The status of the SMC20 Sensor Module Cabinet-Mounted is indicated via a multi-color LED.

The SMC20 Sensor Module Cabinet-Mounted can be snapped onto a TH 35 standard mounting rail according to EN 60715 (IEC 60715).

The signal cable shield is connected via the encoder system connector and can also be connected to the SMC20 Sensor Module Cabinet-Mounted via a shield connection terminal, e.g. Phoenix Contact type SK8 or Weidmüller type KLBÜ CO 1. The shield connection terminal must not be used as a strain relief mechanism.

### Integration

SMC20 Sensor Modules Cabinet-Mounted communicate with a Control Unit via DRIVE-CLiQ.

### Selection and ordering data

| Description                                                                | Article No.               |
|----------------------------------------------------------------------------|---------------------------|
| <b>SMC20 Sensor Module Cabinet-Mounted</b><br>Without DRIVE-CLiQ cable     | <b>6SL3055-0AA00-5BA3</b> |
| <b>Accessories for re-ordering</b>                                         |                           |
| <b>Dust protection blanking plugs</b><br>(50 units)<br>For DRIVE-CLiQ port | <b>6SL3066-4CA00-0AA0</b> |

### Technical specifications

| <b>SMC20 Sensor Module Cabinet-Mounted</b><br>6SL3055-0AA00-5BA3                       |                                                                                                                                                                                                                                                  |
|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Current requirement, max.</b><br>at 24 V DC,<br>without taking encoder into account | 0.2 A                                                                                                                                                                                                                                            |
| • Conductor cross-section, max.                                                        | 2.5 mm <sup>2</sup>                                                                                                                                                                                                                              |
| • Fuse protection, max.                                                                | 20 A                                                                                                                                                                                                                                             |
| <b>Power loss, max.</b>                                                                | 10 W                                                                                                                                                                                                                                             |
| <b>Encoders which can be evaluated</b>                                                 | <ul style="list-style-type: none"> <li>• Incremental encoder sin/cos 1 V<sub>pp</sub></li> <li>• Absolute encoder EnDat 2.1</li> <li>• SSI encoder with incremental signals sin/cos 1 V<sub>pp</sub> (firmware version 2.4 and later)</li> </ul> |
| • Encoder supply                                                                       | 5 V DC/0.35 A                                                                                                                                                                                                                                    |
| • Encoder frequency incremental signals, max.                                          | 500 kHz                                                                                                                                                                                                                                          |
| • Signal subdivision (interpolation), max.                                             | 16384 times (14 bits)                                                                                                                                                                                                                            |
| • SSI baud rate                                                                        | 100 ... 1000 kBaud                                                                                                                                                                                                                               |
| • Cable length to encoder, max.                                                        | 100 m (328 ft)                                                                                                                                                                                                                                   |
| <b>PE connection</b>                                                                   | M4 screw                                                                                                                                                                                                                                         |
| <b>Dimensions</b>                                                                      |                                                                                                                                                                                                                                                  |
| • Width                                                                                | 30 mm (1.18 in)                                                                                                                                                                                                                                  |
| • Height                                                                               | 150 mm (5.91 in)                                                                                                                                                                                                                                 |
| • Depth                                                                                | 111 mm (4.37 in)                                                                                                                                                                                                                                 |
| <b>Weight, approx.</b>                                                                 | 0.45 kg (0.99 lb)                                                                                                                                                                                                                                |
| <b>Certificate of suitability</b>                                                      | cULus                                                                                                                                                                                                                                            |

<sup>1)</sup> The Pt1000 sensor is not supported when combined with a Control Unit CU305.

## SINAMICS S110 servo drives

0.55 kW to 132 kW (0.75 hp to 150 hp)

### Encoder system connection > SMC30 Sensor Module Cabinet-Mounted

#### Overview



SMC30 Sensor Module Cabinet-Mounted

The SMC30 Sensor Module Cabinet-Mounted is required to evaluate the encoder signals of motors without a DRIVE-CLiQ interface. External encoders can also be connected via the SMC30.

The following encoder signals can be evaluated:

- Incremental encoders TTL/HTL with/without open-circuit detection (open-circuit detection is only available with bipolar signals)
- SSI encoder with TTL/HTL incremental signals
- SSI encoder without incremental signals

The motor temperature can also be sensed using a PTC thermistor KTY84-130, Pt1000<sup>1)</sup> or PTC.

#### Design

The SMC30 Sensor Module Cabinet-Mounted features the following connections and interfaces as standard:

- 1 encoder connection including motor temperature sensing (KTY84-130, Pt1000<sup>1)</sup> or PTC) either via SUB-D connector or via terminals
- 1 DRIVE-CLiQ interface
- 1 connection for the electronics power supply via the 24 V DC supply connector
- 1 PE connection

The status of the SMC30 Sensor Module Cabinet-Mounted is indicated via a multi-color LED.

The SMC30 Sensor Module Cabinet-Mounted can be snapped onto a TH 35 standard mounting rail according to EN 60715 (IEC 60715).

The maximum encoder cable length between SMC30 modules and encoders is 100 m. For HTL encoders, this length can be increased to 300 m if the A+/A- and B+/B- signals are evaluated and the power supply cable has a minimum cross-section of 0.5 mm<sup>2</sup>.

The signal cable shield can be connected to the SMC30 Sensor Module Cabinet-Mounted via a shield connection terminal, e.g., Phoenix Contact type SK8 or Weidmüller type KLBÜ CO 1. The shield connection terminal must not be used as a strain relief mechanism.

#### Integration

SMC30 Sensor Modules Cabinet-Mounted communicate with a Control Unit via DRIVE-CLiQ.

#### Selection and ordering data

| Description                                                                | Article No.               |
|----------------------------------------------------------------------------|---------------------------|
| <b>SMC30 Sensor Module Cabinet-Mounted</b><br>Without DRIVE-CLiQ cable     | <b>6SL3055-0AA00-5CA2</b> |
| <b>Accessories for re-ordering</b>                                         |                           |
| <b>Dust protection blanking plugs</b><br>(50 units)<br>For DRIVE-CLiQ port | <b>6SL3066-4CA00-0AA0</b> |

#### Technical specifications

| <b>SMC30 Sensor Module Cabinet-Mounted</b><br>6SL3055-0AA00-5CA2                       |                                                                                                                                                                                            |
|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Current requirement, max.</b><br>at 24 V DC,<br>without taking encoder into account | 0.2 A                                                                                                                                                                                      |
| • Conductor cross-section, max.                                                        | 2.5 mm <sup>2</sup>                                                                                                                                                                        |
| • Fuse protection, max.                                                                | 20 A                                                                                                                                                                                       |
| <b>Power loss, max.</b>                                                                | 10 W                                                                                                                                                                                       |
| <b>Encoders which can be evaluated</b>                                                 | <ul style="list-style-type: none"> <li>• Incremental encoder TTL/HTL</li> <li>• SSI encoder with TTL/HTL incremental signals</li> <li>• SSI encoder without incremental signals</li> </ul> |
| • Input current range TTL/HTL                                                          | 4 ... 20 mA (typ. 10 mA)                                                                                                                                                                   |
| • Encoder supply                                                                       | 24 V DC/0.35 A or 5 V DC/0.35 A                                                                                                                                                            |
| • Encoder frequency, max.                                                              | 300 kHz                                                                                                                                                                                    |
| • SSI baud rate                                                                        | 100 ... 1000 kBaud                                                                                                                                                                         |
| • Limiting frequency                                                                   | 300 kHz                                                                                                                                                                                    |
| • Resolution absolute position SSI                                                     | 30 bit                                                                                                                                                                                     |
| • Cable length, max.                                                                   |                                                                                                                                                                                            |
| - TTL encoder                                                                          | 100 m (328 ft)<br>(only bipolar signals permitted) <sup>2)</sup>                                                                                                                           |
| - HTL encoder                                                                          | 100 m (328 ft) for unipolar signals<br>300 m (984 ft) for bipolar signals <sup>2)</sup>                                                                                                    |
| - SSI encoder                                                                          | 100 m (328 ft)                                                                                                                                                                             |
| <b>PE connection</b>                                                                   | M4 screw                                                                                                                                                                                   |
| <b>Dimensions</b>                                                                      |                                                                                                                                                                                            |
| • Width                                                                                | 30 mm (1.18 in)                                                                                                                                                                            |
| • Height                                                                               | 150 mm (5.91 in)                                                                                                                                                                           |
| • Depth                                                                                | 111 mm (4.37 in)                                                                                                                                                                           |
| <b>Weight, approx.</b>                                                                 | 0.45 kg (0.99 lb)                                                                                                                                                                          |
| <b>Certificate of suitability</b>                                                      | cULus                                                                                                                                                                                      |

<sup>1)</sup> The Pt1000 sensor is not supported when combined with a Control Unit CU305.

<sup>2)</sup> Signal cables twisted in pairs and shielded.





## SIMOTICS motors and geared motors



|              |                                                                                                                                                                 |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>11/2</b>  | <b>Overview</b>                                                                                                                                                 |
| <b>11/8</b>  | <b>SIMOTICS S-1FK7 servomotors for SINAMICS S110/SINAMICS S120</b>                                                                                              |
| 11/8         | SIMOTICS S-1FK7 Compact synchronous motors – Natural cooling                                                                                                    |
| <b>11/16</b> | <b>SIMOTICS M-1PH8 main motors for SINAMICS S110/SINAMICS S120</b>                                                                                              |
| 11/16        | SIMOTICS M-1PH8 asynchronous (induction) motors – Forced ventilation                                                                                            |
| 11/18        | SIMOTICS M-1PH8 asynchronous (induction) motors – Water cooling                                                                                                 |
| 11/20        | Article No. supplements                                                                                                                                         |
| <b>11/22</b> | <b>Mechatronic components</b>                                                                                                                                   |
| 11/22        | Electric cylinders                                                                                                                                              |
| 11/24        | LTS and LTSE complete linear motor axes                                                                                                                         |
|              | You can find more information on motors/ geared motors on the Internet at: <a href="http://www.siemens.com/industrymall">www.siemens.com/industrymall</a>       |
|              | <b>Drive Technology Configurator</b><br>Product selection via selectors<br><a href="http://www.siemens.com/dt-configurator">www.siemens.com/dt-configurator</a> |
|              | <b>SIZER for Siemens Drives</b><br>Engineering tool<br><a href="http://www.siemens.com/sizer">www.siemens.com/sizer</a>                                         |
|              | <b>CAD CREATOR</b><br>Dimensional drawing and 2D/3D CAD generator<br><a href="http://www.siemens.com/cadcreator">www.siemens.com/cadcreator</a>                 |

# SIMOTICS motors and geared motors

## Overview

| Motor type                                                                                                                    | Features                                                           | Degree of protection | Cooling method                      |
|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|----------------------|-------------------------------------|
| <b>SIMOTICS S servomotors</b>                                                                                                 |                                                                    |                      |                                     |
|  <b>SIMOTICS S-1FT7</b>                      | Compact<br>Very high power density                                 | IP64, IP65, IP67     | Natural cooling                     |
|                                                                                                                               |                                                                    | IP64, IP65           | Forced ventilation                  |
|                                                                                                                               |                                                                    | IP64, IP65, IP67     | Water cooling                       |
|                                                                                                                               | High Dynamic<br>Very low rotor moment of inertia                   | IP64, IP65           | Forced ventilation                  |
|                                                                                                                               |                                                                    | IP64, IP65, IP67     | Water cooling                       |
|  <b>SIMOTICS S-1FK7</b>                      | Compact<br>High power density                                      | IP64, IP65           | Natural cooling                     |
|                                                                                                                               | Compact for<br>Power Modules 230 V 1 AC                            |                      |                                     |
|                                                                                                                               | High Dynamic<br>Very low rotor moment of inertia                   | IP64, IP65           | Natural cooling                     |
|                                                                                                                               | High Dynamic for<br>Power Modules 230 V 1 AC                       |                      |                                     |
|                                                                                                                               | High Inertia<br>High or variable load moment of inertia            | IP64, IP65           | Natural cooling                     |
| Motor type                                                                                                                    | Features                                                           | Degree of protection | Gear ratio<br>(transmission stages) |
| <b>SIMOTICS S-1FG1 servo geared motors</b>                                                                                    |                                                                    |                      |                                     |
|  <b>Servo helical geared motors</b>        | 2-stage and 3-stage<br>Solid shaft designs                         | IP65                 | <i>Z29 ... Z129</i><br>(2-stage)    |
|                                                                                                                               |                                                                    |                      | <i>D29 ... D129</i><br>(3-stage)    |
|  <b>Servo parallel shaft geared motors</b> | 2-stage and 3-stage<br>Hollow shaft designs<br>Solid shaft designs | IP65                 | <i>FZ29 ... FZ129</i><br>(2-stage)  |
|                                                                                                                               |                                                                    |                      | <i>FD29 ... FD129</i><br>(3-stage)  |
|  <b>Servo bevel geared motors</b>          | 2-stage and 3-stage<br>Hollow shaft designs<br>Solid shaft designs | IP65                 | <i>B29 ... B49</i><br>(2-stage)     |
|                                                                                                                               |                                                                    |                      | <i>K39 ... K149</i><br>(3-stage)    |
|  <b>Servo helical worm geared motors</b>   | Two-stage<br>Hollow shaft designs<br>Solid shaft design            | IP65                 | <i>C29 ... C89</i><br>(2-stage)     |






## SIMOTICS motors and geared motors

## Overview

| Shaft height (SH)                    | Rated power $P_{\text{rated}}$ for S1 duty<br>kW (hp)               |            |             |             |             |      |       | Rated torque<br>$M_{\text{rated}}$                     | Catalog         |
|--------------------------------------|---------------------------------------------------------------------|------------|-------------|-------------|-------------|------|-------|--------------------------------------------------------|-----------------|
|                                      | 0.01                                                                | 0.1        | 1           | 10          | 100         | 1000 | 10000 |                                                        |                 |
| 36, 48, 63, 80, 100, 132             |                                                                     |            | 0.88 (1.18) | 17 (22.8)   |             |      |       | 1.4 ... 108 Nm<br>(1.03 ... 79.7 lb <sub>f</sub> -ft)  | D 21.4<br>NC 62 |
| 80, 100, 132                         |                                                                     |            |             | 5 (6.71)    | 45.5 (61.0) |      |       | 21 ... 250 Nm<br>(15.5 ... 184 lb <sub>f</sub> -ft)    |                 |
| 63, 80, 100                          |                                                                     |            |             | 3.1 (4.16)  | 34.2 (45.9) |      |       | 9.2 ... 125 Nm<br>(6.79 ... 92.2 lb <sub>f</sub> -ft)  |                 |
| 63, 80, 100                          |                                                                     |            |             | 3.8 (5.10)  | 17.2 (23.1) |      |       | 11 ... 82 Nm<br>(8.11 ... 60.5 lb <sub>f</sub> -ft)    |                 |
| 63, 80                               |                                                                     |            |             | 5.7 (7.64)  | 21.7 (29.1) |      |       | 16.5 ... 51 Nm<br>(12.2 ... 37.6 lb <sub>f</sub> -ft)  |                 |
| 20, 28, 36, 48, 63, 80, 100          | 0.05 (0.07)                                                         |            |             | 8.2 (11.0)  |             |      |       | 0.08 ... 37 Nm<br>(0.06 ... 27.3 lb <sub>f</sub> -ft)  |                 |
| 20, 28, 36, 48                       | 0.05 (0.07)                                                         | 0.8 (1.07) |             |             |             |      |       | 0.08 ... 2.6 Nm<br>(0.06 ... 1.92 lb <sub>f</sub> -ft) |                 |
| 36, 48, 63, 80                       |                                                                     |            | 0.6 (0.80)  | 3.8 (5.10)  |             |      |       | 0.9 ... 18 Nm<br>(0.66 ... 13.3 lb <sub>f</sub> -ft)   |                 |
| 36, 48                               |                                                                     |            | 0.4 (0.54)  | 0.9 (1.21)  |             |      |       | 1.2 ... 3 Nm<br>(0.89 ... 2.21 lb <sub>f</sub> -ft)    |                 |
| 48, 63, 80, 100                      |                                                                     |            | 0.9 (1.21)  | 7.7 (10.3)  |             |      |       | 1.5 ... 37 Nm<br>(1.11 ... 27.3 lb <sub>f</sub> -ft)   |                 |
| Gearbox size                         | Maximum output torque $M_{2\text{max}}$<br>Nm (lb <sub>f</sub> -ft) |            |             |             |             |      |       | Gear ratio<br>$i$                                      | Catalog         |
|                                      | 10                                                                  | 100        | 1000        | 10000       |             |      |       |                                                        |                 |
| 29, 39, 49, 59, 69, 79, 89, 109, 129 | 14 (10.3)                                                           |            |             | 5200 (3835) |             |      |       | 3.4 ... 62.5                                           | D 41            |
| 29, 39, 49, 59, 69, 79, 89, 109, 129 |                                                                     | 146 (108)  |             | 5000 (3688) |             |      |       | 39.9 ... 373                                           |                 |
| 29, 39, 49, 69, 79, 89, 109, 129     | 17 (12.5)                                                           |            |             | 5140 (3791) |             |      |       | 3.6 ... 70.7                                           |                 |
| 29, 39, 49, 69, 79, 89, 109, 129     |                                                                     | 163 (120)  |             | 5010 (3695) |             |      |       | 46.4 ... 413                                           |                 |
| 29, 39, 49                           | 15 (11.1)                                                           |            |             | 465 (343)   |             |      |       | 3.5 ... 59.3                                           |                 |
| 39, 49, 69, 79, 89, 109, 129, 149    | 24 (17.7)                                                           |            |             | 8160 (6019) |             |      |       | 5.2 ... 244.3                                          |                 |
| 29, 39, 49, 69, 89                   | 46 (33.9)                                                           |            |             | 1480 (1092) |             |      |       | 6.2 ... 102.5                                          |                 |

# SIMOTICS motors and geared motors

## Overview

| Motor type                                                                          |                                                                                                                    | Features                                                                                                                                                 | Degree of protection | Cooling method                         |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------------------------|
| SIMOTICS M main motors                                                              |                                                                                                                    |                                                                                                                                                          |                      |                                        |
|    | SIMOTICS M-1PH8 asynchronous motor                                                                                 | Three-phase squirrel-cage motor without housing<br>Compact unit with high power density                                                                  | IP55                 | Forced ventilation                     |
|                                                                                     |                                                                                                                    |                                                                                                                                                          | IP23                 | Forced ventilation                     |
|                                                                                     |                                                                                                                    |                                                                                                                                                          | IP55/IP65            | Water cooling                          |
|    | SIMOTICS M-1PH8 synchronous motor                                                                                  | Permanent-magnet synchronous motor<br>Excellent performance features<br>Compact unit with extremely high power density                                   | IP55                 | Forced ventilation                     |
|                                                                                     |                                                                                                                    |                                                                                                                                                          | IP55/IP65            | Water cooling                          |
| SIMOTICS GP and SD low voltage motors                                               |                                                                                                                    |                                                                                                                                                          |                      |                                        |
|   | SIMOTICS GP 1LE10 and VSD10 line 1LE10 standard motors<br>SIMOTICS GP VSD4000 line 1FP10 reluctance motors         | For general purpose applications<br>Motors with aluminum housing                                                                                         | IP55                 | Natural cooling/<br>forced ventilation |
|                                                                                     | SIMOTICS SD 1LE15, 1LE16, and VSD10 line 1LE15 standard motors<br>SIMOTICS SD VSD4000 line 1FP15 reluctance motors | For severe duty applications<br>Motors with cast-iron housing                                                                                            | IP55                 | Natural cooling                        |
| Motor type                                                                          |                                                                                                                    | Features                                                                                                                                                 | Type of protection   | Cooling method                         |
| SIMOTICS XP explosion-proof motors                                                  |                                                                                                                    |                                                                                                                                                          |                      |                                        |
|  | SIMOTICS XP 1MB10 explosion-proof motors                                                                           | Comprehensive series of explosion-proof motors for protection against gas and dust in potentially explosive atmospheres<br>Motors with aluminum housing  | Ex tb, Ex tc, Ex nA  | Natural cooling                        |
|  | SIMOTICS XP 1MB15, 1MB16 explosion-proof motors                                                                    | Comprehensive series of explosion-proof motors for protection against gas and dust in potentially explosive atmospheres<br>Motors with cast-iron housing | Ex tb, Ex tc, Ex nA  | Natural cooling                        |

## SIMOTICS motors and geared motors

Overview

| Shaft height (SH)                                                  | Rated power $P_{\text{rated}}$ for S1 duty<br>kW (hp) |     |   |    |     |      |       | Rated torque<br>$M_{\text{rated}}$                     | Catalog                 |
|--------------------------------------------------------------------|-------------------------------------------------------|-----|---|----|-----|------|-------|--------------------------------------------------------|-------------------------|
|                                                                    | 0.01                                                  | 0.1 | 1 | 10 | 100 | 1000 | 10000 |                                                        |                         |
| 80, 100, 132, 160,<br>180, 225, 280                                |                                                       |     |   |    |     |      |       | 13 ... 2475 Nm<br>(9.59 ... 1825 lb <sub>f</sub> -ft)  | <b>D 21.4<br/>NC 62</b> |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
| 180, 225, 280                                                      |                                                       |     |   |    |     |      |       | 317 ... 3710 Nm<br>(234 ... 2736 lb <sub>f</sub> -ft)  |                         |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
| 80, 100, 132, 160,<br>180, 225, 280                                |                                                       |     |   |    |     |      |       | 20 ... 2610 Nm<br>(14.8 ... 1925 lb <sub>f</sub> -ft)  |                         |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
| 132, 160, 180, 225                                                 |                                                       |     |   |    |     |      |       | 94 ... 1091 Nm<br>(69.3 ... 805 lb <sub>f</sub> -ft)   | <b>D 81.1</b>           |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
| 132, 160, 180, 225                                                 |                                                       |     |   |    |     |      |       | 107 ... 1650 Nm<br>(78.9 ... 1217 lb <sub>f</sub> -ft) |                         |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
| 80, 90, 100, 112,<br>132, 160, 180, 200                            |                                                       |     |   |    |     |      |       | 2.1 ... 294 Nm<br>(1.55 ... 217 lb <sub>f</sub> -ft)   | <b>D 81.1</b>           |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
| 70, 80, 90, 100, 112,<br>132, 160, 180, 200,<br>225, 250, 280, 315 |                                                       |     |   |    |     |      |       | 1.0 ... 1703 Nm<br>(0.74 ... 1256 lb <sub>f</sub> -ft) |                         |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
| Shaft height (SH)                                                  | Rated power $P_{\text{rated}}$ for S1 duty<br>kW (hp) |     |   |    |     |      |       | Rated torque<br>$M_{\text{rated}}$                     | Catalog                 |
|                                                                    | 0.01                                                  | 0.1 | 1 | 10 | 100 | 1000 | 10000 |                                                        |                         |
| 80, 90, 100, 112,<br>132, 160                                      |                                                       |     |   |    |     |      |       | 2.5 ... 109 Nm<br>(1.84 ... 80.4 lb <sub>f</sub> -ft)  | <b>D 81.1</b>           |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
| 71, 80, 90, 100, 112,<br>132, 160, 180, 200,<br>225, 250, 280, 315 |                                                       |     |   |    |     |      |       | 1.2 ... 1703 Nm<br>(0.89 ... 1256 lb <sub>f</sub> -ft) | <b>D 81.1</b>           |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |
|                                                                    |                                                       |     |   |    |     |      |       |                                                        |                         |

# SIMOTICS motors and geared motors

## Overview

| Motor type                                                                        | Features                     | Degree of protection | Gearbox designation                                                                                                                                                                         |
|-----------------------------------------------------------------------------------|------------------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SIMOGEAR 2KJ geared motors                                                        |                              |                      |                                                                                                                                                                                             |
|  | Helical geared motors        | IP55                 | <i>Z19 ... Z189</i><br>(2-stage)<br><i>D19 ... D189</i><br>(3-stage)<br><br><i>E39 ... E149</i><br>(1-stage)<br><i>D29-Z19 ... D189-D69</i><br>(double geared motors<br>4-stage to 6-stage) |
|                                                                                   | Parallel shaft geared motors | IP55                 | <i>FZ29 ... FZ189</i><br>(2-stage)<br><br><i>FD29 ... FD189</i><br>(3-stage)<br><br><i>FZ29-Z19 ... FD189-D69</i><br>(double geared motors<br>4-stage to 6-stage)                           |
|                                                                                   | Bevel geared motors          | IP55                 | <i>B19 ... B49</i><br>(2-stage)<br><i>K39 ... K129</i><br>(3-stage)<br><br><i>K39-D/Z19 ... K189-D/Z69</i><br>(double geared motors<br>5-stage and 6-stage)                                 |
|                                                                                   | Helical worm geared motors   | IP55                 | <i>C29 ... C89</i><br>(2-stage)<br><br><i>C29-D/Z19 ... C89-D/Z39</i><br>(double geared motors<br>4-stage and 5-stage)                                                                      |
|                                                                                   | Worm geared motors           | IP55                 | <i>S09 ... S29</i><br>(1-stage)                                                                                                                                                             |
|                                                                                   |                              |                      |                                                                                                                                                                                             |
|                                                                                   |                              |                      |                                                                                                                                                                                             |
|                                                                                   |                              |                      |                                                                                                                                                                                             |
|                                                                                   |                              |                      |                                                                                                                                                                                             |
|                                                                                   |                              |                      |                                                                                                                                                                                             |

## SIMOTICS motors and geared motors

Overview

| Gearbox size                                                  | Maximum output torque $M_{2max}$<br>Nm (lb <sub>r</sub> -ft)                                                    |     |      |       |        | Gear ratio<br>$i$ | Catalog |
|---------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|-----|------|-------|--------|-------------------|---------|
|                                                               | 10                                                                                                              | 100 | 1000 | 10000 | 100000 |                   |         |
| 19, 29, 39, 49, 59,<br>69, 79, 89, 109, 129,<br>149, 169, 189 | <br>30 (22.1) 19000 (14014)    |     |      |       |        | 1.29 ... 27816    | MD 50.1 |
| 29, 39, 49, 69, 79,<br>89, 109, 129, 149,<br>169, 189         | <br>150 (111) 19000 (14014)    |     |      |       |        | 4 ... 29900       |         |
| 19, 29, 39, 49, 69,<br>79, 89, 109, 129,<br>149, 169, 189     | <br>50 (36.9) 19500 (14383) |     |      |       |        | 3.6 ... 14900     |         |
| 29, 39, 49, 69, 89                                            | <br>61 (45.0) 1450 (1069)    |     |      |       |        | 6.5 ... 19000     |         |
| 09, 19, 29                                                    | <br>33 (24.3) 116 (85.6)     |     |      |       |        | 5.0 ... 100       |         |

## SIMOTICS motors and geared motors

SIMOTICS S-1FK7 servomotors for SINAMICS S110/SINAMICS S120

### SIMOTICS S-1FK7 Compact synchronous motors – Natural cooling > Preferred type

#### Selection and ordering data

| Rated speed                                                                | Shaft height | Rated power                     | Static torque                                  | Rated torque                    | Rated current                   | <b>SIMOTICS S-1FK7 Compact synchronous motors</b> | Number of pole pairs | Moment of inertia of rotor (without brake)                                        | Weight (without brake) |
|----------------------------------------------------------------------------|--------------|---------------------------------|------------------------------------------------|---------------------------------|---------------------------------|---------------------------------------------------|----------------------|-----------------------------------------------------------------------------------|------------------------|
| $n_{rated}$                                                                | SH           | $P_{rated}$ at $\Delta T=100$ K | $M_0$ at $\Delta T=100$ K                      | $M_{rated}$ at $\Delta T=100$ K | $I_{rated}$ at $\Delta T=100$ K | <b>Preferred type</b>                             | $p$                  | $J$                                                                               | $m$                    |
| rpm                                                                        |              | kW (hp)                         | Nm (lb <sub>f</sub> -ft)                       | Nm (lb <sub>f</sub> -ft)        | A                               | Article No.                                       |                      | $10^{-4}$ kgm <sup>2</sup> (10 <sup>-3</sup> lb <sub>f</sub> -in-s <sup>2</sup> ) | kg (lb)                |
| <b>1FK7 Compact for DC link voltage 510 ... 720 V DC – Natural cooling</b> |              |                                 |                                                |                                 |                                 |                                                   |                      |                                                                                   |                        |
| <b>6000</b>                                                                | 28           | 0.38 (0.51)                     | 0.85 (0.63)                                    | 0.6 (0.44)                      | 1.4                             | <b>1FK7022-5AK71-1 V ■ 3</b>                      | 3                    | 0.28 (0.25)                                                                       | 1.8 (3.97)             |
|                                                                            | 36           | 0.5 (0.67)                      | 1.15 (0.85)                                    | 0.8 (0.59)                      | 1.3                             | <b>1FK7032-2AK71-1 ■ ■ 0</b>                      | 3                    | 0.65 (0.58)                                                                       | 2.7 (5.95)             |
| <b>3000</b>                                                                | 48           | 0.8 (1.07)                      | 3 (2.21)                                       | 2.6 (1.92)                      | 2                               | <b>1FK7042-2AF71-1 ■ ■ 0</b>                      | 4                    | 2.9 (2.57)                                                                        | 4.6 (10.1)             |
|                                                                            | 63           | 1.5 (2.01)                      | 6 (4.43)                                       | 4.7 (3.47)                      | 3.7                             | <b>1FK7060-2AF71-1 ■ ■ 0</b>                      | 4                    | 7.7 (6.82)                                                                        | 7.1 (15.7)             |
|                                                                            |              | 2.3 (3.08)                      | 11 (8.11)                                      | 7.3 (5.38)                      | 5.6                             | <b>1FK7063-2AF71-1 ■ ■ 0</b>                      | 4                    | 14.7 (13.0)                                                                       | 11.1 (24.5)            |
| <b>2000</b>                                                                | 80           | 2.6 (3.49)                      | 16 (11.8)                                      | 12.5 (9.22)                     | 6.3                             | <b>1FK7083-2AC71-1 ■ ■ 0</b>                      | 4                    | 26 (23.0)                                                                         | 15.6 (34.4)            |
|                                                                            | 100          | 4.3 (5.77)                      | 27 (19.9)                                      | 20.5 (15.1)                     | 9.7                             | <b>1FK7101-2AC71-1 ■ ■ 0</b>                      | 4                    | 79 (69.9)                                                                         | 23 (50.7)              |
| <b>Encoder systems for motors with DRIVE-CLiQ interface:</b>               |              |                                 | AS20DQI encoder – single-turn absolute encoder |                                 |                                 | <b>Q</b>                                          |                      |                                                                                   |                        |
|                                                                            |              |                                 | AM20DQI encoder – multi-turn absolute encoder  |                                 |                                 | <b>R</b>                                          |                      |                                                                                   |                        |
|                                                                            |              |                                 | AM15DQ encoder – multi-turn absolute encoder   |                                 |                                 | <b>V</b>                                          |                      |                                                                                   |                        |
| <b>Shaft extension:</b>                                                    |              |                                 | <b>Shaft and flange accuracy:</b>              |                                 |                                 |                                                   |                      |                                                                                   |                        |
| Feather key                                                                |              |                                 | Tolerance N                                    |                                 |                                 |                                                   |                      |                                                                                   | <b>A</b>               |
| Feather key                                                                |              |                                 | Tolerance N                                    |                                 |                                 |                                                   |                      |                                                                                   | <b>B</b>               |
| Plain shaft                                                                |              |                                 | Tolerance N                                    |                                 |                                 |                                                   |                      |                                                                                   | <b>G</b>               |
| Plain shaft                                                                |              |                                 | Tolerance N                                    |                                 |                                 |                                                   |                      |                                                                                   | <b>H</b>               |
| <b>Holding brake:</b>                                                      |              |                                 | Without                                        |                                 |                                 |                                                   |                      |                                                                                   |                        |
|                                                                            |              |                                 | With                                           |                                 |                                 |                                                   |                      |                                                                                   |                        |
|                                                                            |              |                                 | Without                                        |                                 |                                 |                                                   |                      |                                                                                   |                        |
|                                                                            |              |                                 | With                                           |                                 |                                 |                                                   |                      |                                                                                   |                        |
| <b>Degree of protection:</b>                                               |              |                                 | IP64                                           |                                 |                                 |                                                   |                      |                                                                                   | <b>0</b>               |
|                                                                            |              |                                 | IP64                                           |                                 |                                 |                                                   |                      |                                                                                   | <b>3</b>               |

# SIMOTICS motors and geared motors

## SIMOTICS S-1FK7 servomotors for SINAMICS S110/SINAMICS S120

### SIMOTICS S-1FK7 Compact synchronous motors – Natural cooling > Preferred type

| Motor type<br>(repeated)              | Efficiency<br>1) | Stall<br>current                        | Calculated<br>power<br>$P_{calc}$ <sup>5)</sup>       | For SINAMICS S110/SINAMICS S120       |                                                                                                                                    | Power cable with complete shield                                             |                                                          |                    |
|---------------------------------------|------------------|-----------------------------------------|-------------------------------------------------------|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------------------------------------|--------------------|
|                                       |                  |                                         |                                                       | Rated output<br>current <sup>2)</sup> | PM240-2 Power Module<br>Internal air cooling<br><br>For further components,<br>see SINAMICS S110/<br>SINAMICS S120 drive<br>system | Motor connection (and brake connection)<br>via SPEED-CONNECT power connector |                                                          |                    |
|                                       | $\eta$<br>%      | $I_0$ at $M_0$<br>$\Delta T=100$ K<br>A | $P_{calc}$ at $M_0$<br>$\Delta T=100$ K<br>kW<br>(hp) | $I_{rated}$<br>A                      | Article No.                                                                                                                        | Power<br>connector                                                           | Cable cross-<br>section <sup>3)</sup><br>mm <sup>2</sup> | Article No.        |
| Line voltage 380 ... 480 V 3 AC       |                  |                                         |                                                       |                                       |                                                                                                                                    |                                                                              |                                                          |                    |
| 1FK7022-5AK71...                      | 86               | 1.8                                     | 0.5 (0.67)                                            | 3.1                                   | 6SL3210-1PE13-2 L1                                                                                                                 | 1                                                                            | 4 × 1.5                                                  | 6FX 002-5 G10-.... |
| 1FK7032-2AK71...                      | 88               | 1.7                                     | 0.7 (0.94)                                            | 2.2                                   | 6SL3210-1PE12-3 L1                                                                                                                 | 1                                                                            | 4 × 1.5                                                  | 6FX 002-5 G10-.... |
| 1FK7042-2AF71...                      | 89               | 2.2                                     | 0.9 (1.21)                                            | 3.1                                   | 6SL3210-1PE13-2 L1                                                                                                                 | 1                                                                            | 4 × 1.5                                                  | 6FX 002-5 G10-.... |
| 1FK7060-2AF71...                      | 90               | 4.45                                    | 1.9 (2.55)                                            | 7.7                                   | 6SL3210-1PE18-0 L1                                                                                                                 | 1                                                                            | 4 × 1.5                                                  | 6FX 002-5 G10-.... |
| 1FK7063-2AF71...                      | 91               | 8                                       | 3.5 (4.69)                                            | 13.2                                  | 6SL3210-1PE21-4 L0                                                                                                                 | 1                                                                            | 4 × 1.5                                                  | 6FX 002-5 G10-.... |
| 1FK7083-2AC71...                      | 93               | 7.5                                     | 3.4 (4.56)                                            | 10.2                                  | 6SL3210-1PE21-1 L0                                                                                                                 | 1                                                                            | 4 × 1.5                                                  | 6FX 002-5 G10-.... |
| 1FK7101-2AC71...                      | 93               | 12.3                                    | 5.7 (7.64)                                            | 18                                    | 6SL3210-1PE21-8 L0                                                                                                                 | 1.5                                                                          | 4 × 1.5                                                  | 6FX 002-5 G22-.... |
| Line filter:<br>Without<br>Integrated |                  |                                         |                                                       |                                       | U<br>A                                                                                                                             | Power cable:<br>MOTION-CONNECT 800PLUS<br>MOTION-CONNECT 500                 |                                                          |                    |
|                                       |                  |                                         |                                                       |                                       |                                                                                                                                    |                                                                              |                                                          | 8<br>5             |
|                                       |                  |                                         |                                                       |                                       |                                                                                                                                    | Without brake cores<br>With brake cores <sup>4)</sup>                        |                                                          |                    |
|                                       |                  |                                         |                                                       |                                       |                                                                                                                                    |                                                                              |                                                          | C<br>D             |
|                                       |                  |                                         |                                                       |                                       |                                                                                                                                    | Length code                                                                  |                                                          |                    |
|                                       |                  |                                         |                                                       |                                       |                                                                                                                                    |                                                                              |                                                          | ....               |

For further information about cables,  
see MOTION-CONNECT connection systems  
in Catalog D 21.4 or:  
[www.siemens.com/industrymall](http://www.siemens.com/industrymall)

1) Optimum efficiency in continuous duty.

2) With default setting of the pulse frequency.

3) The current carrying capacity of the power cables complies with EN 60204-1 for installation type C, for continuous duty at an ambient air temperature of 40 °C (104 °F).

4) Cable cross section for brake connection 2 × 1.5 mm<sup>2</sup>.

5)  $P_{calc} [kW] = \frac{M_0 [Nm] \times n_{rated}}{9550}$      $P_{calc} [hp] = \frac{M_0 [lb-ft] \times n_{rated}}{5250}$

## SIMOTICS motors and geared motors

### SIMOTICS S-1FK7 servomotors for SINAMICS S110/SINAMICS S120

#### SIMOTICS S-1FK7 Compact synchronous motors – Natural cooling

##### Selection and ordering data

| Rated speed                                                                                   | Shaft height | Rated power                                   | Static torque                              | Rated torque                                  | Rated current                                 | SIMOTICS S-1FK7 Compact synchronous motors                                                                                                                                                                                                                                                                                                              | Number of pole pairs | Moment of inertia of rotor (without brake)                                               | Weight (without brake) |   |
|-----------------------------------------------------------------------------------------------|--------------|-----------------------------------------------|--------------------------------------------|-----------------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------------------|------------------------|---|
| $n_{\text{rated}}$                                                                            | SH           | $P_{\text{rated}}$ at $\Delta T=100\text{ K}$ | $M_0$ at $\Delta T=100\text{ K}$           | $M_{\text{rated}}$ at $\Delta T=100\text{ K}$ | $I_{\text{rated}}$ at $\Delta T=100\text{ K}$ |                                                                                                                                                                                                                                                                                                                                                         | $p$                  | $J$                                                                                      | $m$                    |   |
| rpm                                                                                           |              | kW (hp)                                       | Nm (lb <sub>f</sub> -ft)                   | Nm (lb <sub>f</sub> -ft)                      | A                                             | Article No.                                                                                                                                                                                                                                                                                                                                             |                      | 10 <sup>-4</sup> kgm <sup>2</sup> (10 <sup>-3</sup> lb <sub>f</sub> -in-s <sup>2</sup> ) | kg (lb)                |   |
| 1FK7 Compact for DC link voltage 510 ... 720 V DC – Natural cooling                           |              |                                               |                                            |                                               |                                               |                                                                                                                                                                                                                                                                                                                                                         |                      |                                                                                          |                        |   |
| 6000                                                                                          | 20           | 0.05 (0.07)                                   | 0.18 (0.13)                                | 0.08 (0.06)                                   | 0.85                                          | 1FK7011-5AK7  -1    | 4                    | 0.064 (0.06)                                                                             | 0.9 (1.98)             |   |
|                                                                                               |              | 0.1 (0.13)                                    | 0.35 (0.26)                                | 0.16 (0.12)                                   | 0.85                                          | 1FK7015-5AK7  -1    | 4                    | 0.083 (0.07)                                                                             | 1.1 (2.43)             |   |
|                                                                                               | 28           | 0.38 (0.51)                                   | 0.85 (0.63)                                | 0.6 (0.44)                                    | 1.4                                           | 1FK7022-5AK7  -1    | 3                    | 0.28 (0.25)                                                                              | 1.8 (3.97)             |   |
| 1FK7 Compact for DC link voltage 270 ... 330 V DC – Natural cooling                           |              |                                               |                                            |                                               |                                               |                                                                                                                                                                                                                                                                                                                                                         |                      |                                                                                          |                        |   |
| 6000                                                                                          | 20           | 0.05 (0.07)                                   | 0.18 (0.13)                                | 0.08 (0.06)                                   | 0.5                                           | 1FK7011-5AK2  -1    | 4                    | 0.064 (0.06)                                                                             | 0.9 (1.98)             |   |
|                                                                                               |              | 0.1 (0.13)                                    | 0.35 (0.26)                                | 0.16 (0.12)                                   | 0.5                                           | 1FK7015-5AK2  -1    | 4                    | 0.083 (0.07)                                                                             | 1.1 (2.43)             |   |
|                                                                                               | 28           | 0.38 (0.51)                                   | 0.85 (0.63)                                | 0.6 (0.44)                                    | 1.4                                           | 1FK7022-5AK2  -1    | 3                    | 0.28 (0.25)                                                                              | 1.8 (3.97)             |   |
| Encoder systems for motors without DRIVE-CLiQ interface:                                      |              |                                               | IC2048S/R encoder                          |                                               |                                               | 4                                                                                                                                                                                                                                                                                                                                                       | A                    |                                                                                          |                        |   |
|                                                                                               |              |                                               | AM512S/R encoder ( <u>only</u> for 1FK702) |                                               |                                               | 4                                                                                                                                                                                                                                                                                                                                                       | H                    |                                                                                          |                        |   |
|                                                                                               |              |                                               | AM16S/R encoder                            |                                               |                                               | 4                                                                                                                                                                                                                                                                                                                                                       | J                    |                                                                                          |                        |   |
|                                                                                               |              |                                               | Multi-pole resolver                        |                                               |                                               | 4                                                                                                                                                                                                                                                                                                                                                       | S                    |                                                                                          |                        |   |
|                                                                                               |              |                                               | 2-pole resolver                            |                                               |                                               | 4                                                                                                                                                                                                                                                                                                                                                       | T                    |                                                                                          |                        |   |
| Encoder systems for motors with DRIVE-CLiQ interface: ( <u>Only</u> for 1FK702) <sup>1)</sup> |              |                                               | IC22DQ encoder                             |                                               |                                               | 1                                                                                                                                                                                                                                                                                                                                                       | D                    |                                                                                          |                        |   |
|                                                                                               |              |                                               | AM20DQ encoder                             |                                               |                                               | 1                                                                                                                                                                                                                                                                                                                                                       | L                    |                                                                                          |                        |   |
|                                                                                               |              |                                               | AM15DQ encoder                             |                                               |                                               | 1                                                                                                                                                                                                                                                                                                                                                       | V                    |                                                                                          |                        |   |
|                                                                                               |              |                                               | R15DQ resolver                             |                                               |                                               | 1                                                                                                                                                                                                                                                                                                                                                       | U                    |                                                                                          |                        |   |
|                                                                                               |              |                                               | R14DQ resolver                             |                                               |                                               | 1                                                                                                                                                                                                                                                                                                                                                       | P                    |                                                                                          |                        |   |
| Shaft extension:                                                                              |              |                                               | Shaft and flange accuracy:                 |                                               |                                               | Holding brake:                                                                                                                                                                                                                                                                                                                                          |                      |                                                                                          |                        |   |
| Feather key                                                                                   |              |                                               | Tolerance N                                |                                               |                                               | Without                                                                                                                                                                                                                                                                                                                                                 |                      |                                                                                          |                        |   |
| Feather key                                                                                   |              |                                               | Tolerance N                                |                                               |                                               | With                                                                                                                                                                                                                                                                                                                                                    |                      |                                                                                          |                        |   |
| Plain shaft                                                                                   |              |                                               | Tolerance N                                |                                               |                                               | Without                                                                                                                                                                                                                                                                                                                                                 |                      |                                                                                          |                        |   |
| Plain shaft                                                                                   |              |                                               | Tolerance N                                |                                               |                                               | With                                                                                                                                                                                                                                                                                                                                                    |                      |                                                                                          |                        |   |
| Degree of protection:                                                                         |              |                                               |                                            |                                               | Paint finish:                                 |                                                                                                                                                                                                                                                                                                                                                         |                      |                                                                                          |                        |   |
| IP64 ( <u>only</u> for 1FK702)                                                                |              |                                               |                                            |                                               | Without                                       |                                                                                                                                                                                                                                                                                                                                                         |                      |                                                                                          |                        | 0 |
| IP65 and DE flange IP67 ( <u>only</u> for 1FK702)                                             |              |                                               |                                            |                                               | Without                                       |                                                                                                                                                                                                                                                                                                                                                         |                      |                                                                                          |                        | 2 |
| IP54 ( <u>only</u> for 1FK701), IP64 ( <u>only</u> for 1FK702)                                |              |                                               |                                            |                                               | With                                          |                                                                                                                                                                                                                                                                                                                                                         |                      |                                                                                          |                        | 3 |
| IP65 and DE flange IP67 ( <u>only</u> for 1FK702)                                             |              |                                               |                                            |                                               | With                                          |                                                                                                                                                                                                                                                                                                                                                         |                      |                                                                                          |                        | 5 |

<sup>1)</sup> 1FK701 motors cannot be operated with a DRIVE-CLiQ interface.  
The encoder systems are connected via SMC.

# SIMOTICS motors and geared motors

## SIMOTICS S-1FK7 servomotors for SINAMICS S110/SINAMICS S120

### SIMOTICS S-1FK7 Compact synchronous motors – Natural cooling

| Motor type<br>(repeated) | Efficiency<br>1) | Stall<br>current                        | Calculated<br>power<br>$P_{calc}$ <sup>5)</sup> | <b>For SINAMICS S110/SINAMICS S120</b> |                                                                                                                                           | <b>Power cable with complete shield</b>                                      |                                       |                          |
|--------------------------|------------------|-----------------------------------------|-------------------------------------------------|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|---------------------------------------|--------------------------|
|                          | $\eta$           | $I_0$<br>at $M_0$<br>$\Delta T = 100$ K | $P_{calc}$<br>at $M_0$<br>$\Delta T = 100$ K    | Rated output<br>current <sup>2)</sup>  | <b>PM240-2 Power Module</b><br>Internal air cooling<br><br>For further components,<br>see SINAMICS S110/<br>SINAMICS S120<br>drive system | Motor connection (and brake connection)<br>via SPEED-CONNECT power connector |                                       |                          |
|                          | %                | A                                       | kW<br>(hp)                                      | A                                      | Article No.                                                                                                                               | Power<br>connector                                                           | Cable cross-<br>section <sup>3)</sup> | Pre-assembled<br>cable   |
|                          |                  |                                         |                                                 | Line voltage 380 ... 480 V 3 AC        |                                                                                                                                           |                                                                              |                                       |                          |
| 1FK7011-5AK7.-...        | 62               | 1.5                                     | 0.1 (0.13)                                      | 2.2                                    | <b>6SL3210-1PE12-3 L1</b>                                                                                                                 | 0.5                                                                          | 4 × 1.5                               | <b>6FX 002-5DN30-...</b> |
| 1FK7015-5AK7.-...        | 68               | 1.5                                     | 0.2 (0.27)                                      | 2.2                                    | <b>6SL3210-1PE12-3 L1</b>                                                                                                                 | 0.5                                                                          | 4 × 1.5                               | <b>6FX 002-5DN30-...</b> |
| 1FK7022-5AK7.-...        | 86               | 1.8                                     | 0.5 (0.67)                                      | 3.1                                    | <b>6SL3210-1PE13-2 L1</b>                                                                                                                 | 1                                                                            | 4 × 1.5                               | <b>6FX 002-5 G10-...</b> |
|                          |                  |                                         |                                                 | Line voltage 200 ... 240 V 1 AC        |                                                                                                                                           |                                                                              |                                       |                          |
| 1FK7011-5AK2.-...        | 62               | 0.85                                    | 0.1 (0.13)                                      | 3.2                                    | <b>6SL3210-1PB13-0 L0</b>                                                                                                                 | 0.5                                                                          | 4 × 1.5                               | <b>6FX 002-5DN30-...</b> |
| 1FK7015-5AK2.-...        | 68               | 0.85                                    | 0.2 (0.27)                                      | 3.2                                    | <b>6SL3210-1PB13-0 L0</b>                                                                                                                 | 0.5                                                                          | 4 × 1.5                               | <b>6FX 002-5DN30-...</b> |
| 1FK7022-5AK2.-...        | 88               | 1.8                                     | 0.5 (0.67)                                      | 3.2                                    | <b>6SL3210-1PB13-0 L0</b>                                                                                                                 | 1                                                                            | 4 × 1.5                               | <b>6FX 002-5 G10-...</b> |
|                          |                  |                                         |                                                 | <b>Line filter:</b>                    |                                                                                                                                           | <b>Power cable:</b>                                                          |                                       |                          |
|                          |                  |                                         |                                                 | Without                                |                                                                                                                                           | MOTION-CONNECT 800PLUS                                                       |                                       |                          |
|                          |                  |                                         |                                                 | Integrated                             |                                                                                                                                           | MOTION-CONNECT 500                                                           |                                       |                          |
|                          |                  |                                         |                                                 |                                        |                                                                                                                                           | Without brake cores                                                          |                                       |                          |
|                          |                  |                                         |                                                 |                                        |                                                                                                                                           | With brake cores <sup>4)</sup>                                               |                                       |                          |
|                          |                  |                                         |                                                 |                                        |                                                                                                                                           | Length code                                                                  |                                       |                          |

For further information about cables,  
see MOTION-CONNECT connection systems  
in Catalog D 21.4 or:  
[www.siemens.com/industrymall](http://www.siemens.com/industrymall)

1) Optimum efficiency in continuous duty.

2) With default setting of the pulse frequency.

3) The current carrying capacity of the power cables complies with EN 60204-1 for installation type C, for continuous duty at an ambient air temperature of 40 °C (104 °F).

4) Cable cross-section for brake connection 2 × 1.5 mm<sup>2</sup>.

5)  $P_{calc} [kW] = \frac{M_0 [Nm] \times n_{rated}}{9550}$   $P_{calc} [hp] = \frac{M_0 [lb-ft] \times n_{rated}}{5250}$

# SIMOTICS motors and geared motors

SIMOTICS S-1FK7 servomotors for SINAMICS S110/SINAMICS S120

## SIMOTICS S-1FK7 Compact synchronous motors – Natural cooling

### Selection and ordering data

| Rated speed                                                         | Shaft height | Rated power                                   | Static torque                    | Rated torque                                  | Rated current                                 | SIMOTICS S-1FK7 Compact synchronous motors | Number of pole pairs   | Moment of inertia of rotor (without brake)                                               | Weight (without brake) |
|---------------------------------------------------------------------|--------------|-----------------------------------------------|----------------------------------|-----------------------------------------------|-----------------------------------------------|--------------------------------------------|------------------------|------------------------------------------------------------------------------------------|------------------------|
| $n_{\text{rated}}$                                                  | SH           | $P_{\text{rated}}$ at $\Delta T=100\text{ K}$ | $M_0$ at $\Delta T=100\text{ K}$ | $M_{\text{rated}}$ at $\Delta T=100\text{ K}$ | $I_{\text{rated}}$ at $\Delta T=100\text{ K}$ |                                            | $p$                    | $J$                                                                                      | $m$                    |
| rpm                                                                 |              | kW (hp)                                       | Nm (lb <sub>r</sub> -ft)         | Nm (lb <sub>r</sub> -ft)                      | A                                             | Article No.                                |                        | 10 <sup>-4</sup> kgm <sup>2</sup> (10 <sup>-3</sup> lb <sub>r</sub> -in-s <sup>2</sup> ) | kg (lb)                |
| 1FK7 Compact for DC link voltage 510 ... 720 V DC – Natural cooling |              |                                               |                                  |                                               |                                               |                                            |                        |                                                                                          |                        |
| 2000                                                                | 48           | 0.6 (0.80)                                    | 3 (2.21)                         | 2.8 (2.07)                                    | 1.55                                          | 1FK7042-2AC7■-1■ ■ ■ ■                     | 4                      | 2.9 (2.57)                                                                               | 4.6 (10.1)             |
|                                                                     | 63           | 1.1 (1.48)                                    | 6 (4.43)                         | 5.3 (3.91)                                    | 2.95                                          | 1FK7060-2AC7■-1■ ■ ■ ■                     | 4                      | 7.7 (6.82)                                                                               | 7.1 (15.7)             |
|                                                                     |              | 1.5 (2.01)                                    | 8.5 (6.27)                       | 7 (5.16)                                      | 2.65                                          | 1FK7062-2AC7■-1■ ■ ■ ■                     | 4                      | 11.2 (9.91)                                                                              | 9.1 (20.1)             |
|                                                                     |              | 1.9 (2.55)                                    | 11 (8.11)                        | 8.9 (6.56)                                    | 4.4                                           | 1FK7063-2AC7■-1■ ■ ■ ■                     | 4                      | 14.7 (13.0)                                                                              | 11.1 (24.5)            |
|                                                                     | 80           | 2.1 (2.82)                                    | 12 (8.85)                        | 10 (7.38)                                     | 4.4                                           | 1FK7081-2AC7■-1■ ■ ■ ■                     | 4                      | 20 (17.7)                                                                                | 12.9 (28.4)            |
|                                                                     |              | 2.6 (3.49)                                    | 16 (11.8)                        | 12.5 (9.22)                                   | 6.3                                           | 1FK7083-2AC7■-1■ ■ ■ ■                     | 4                      | 26 (23.0)                                                                                | 15.6 (34.4)            |
|                                                                     |              | 3.1 (4.16)                                    | 20 (14.8)                        | 15 (11.1)                                     | 6.7                                           | 1FK7084-2AC7■-1■ ■ ■ ■                     | 4                      | 32.5 (28.8)                                                                              | 18.3 (40.3)            |
|                                                                     | 100          | 3 (4.02)                                      | 18 (13.3)                        | 14.5 (10.7)                                   | 7.1                                           | 1FK7100-2AC7■-1■ ■ ■ ■                     | 4                      | 54 (47.8)                                                                                | 17.6 (38.8)            |
|                                                                     |              | 4.3 (5.77)                                    | 27 (19.9)                        | 20.5 (15.1)                                   | 9.7                                           | 1FK7101-2AC7■-1■ ■ ■ ■                     | 4                      | 79 (69.9)                                                                                | 23 (50.7)              |
|                                                                     |              | 5.2 (6.97)                                    | 36 (26.6)                        | 25 (18.4)                                     | 11                                            | 1FK7103-2AC7■-1■ ■ ■ ■                     | 4                      | 104 (92.1)                                                                               | 28.5 (62.8)            |
|                                                                     |              | 7.7 (10.3)                                    | 48 (35.4)                        | 37 (27.3)                                     | 16                                            | 1FK7105-2AC7■-1■ ■ ■ ■                     | 4                      | 154 (136)                                                                                | 39 (86.0)              |
|                                                                     | 3000         | 48                                            | 0.8 (1.07)                       | 3 (2.21)                                      | 2.6 (1.92)                                    | 2                                          | 1FK7042-2AF7■-1■ ■ ■ ■ | 4                                                                                        | 2.9 (2.57)             |
| 63                                                                  |              | 1.5 (2.01)                                    | 6 (4.43)                         | 4.7 (3.47)                                    | 3.7                                           | 1FK7060-2AF7■-1■ ■ ■ ■                     | 4                      | 7.7 (6.82)                                                                               | 7.1 (15.7)             |
|                                                                     |              | 1.9 (2.55)                                    | 8.5 (6.27)                       | 6 (4.43)                                      | 4                                             | 1FK7062-2AF7■-1■ ■ ■ ■                     | 4                      | 11.2 (9.91)                                                                              | 9.1 (20.1)             |
|                                                                     |              | 2.3 (3.08)                                    | 11 (8.11)                        | 7.3 (5.38)                                    | 5.6                                           | 1FK7063-2AF7■-1■ ■ ■ ■                     | 4                      | 14.7 (13.0)                                                                              | 11.1 (24.5)            |
| 80                                                                  |              | 2.1 (2.82)                                    | 8 (5.90)                         | 6.8 (5.02)                                    | 4.4                                           | 1FK7080-2AF7■-1■ ■ ■ ■                     | 4                      | 14.2 (12.6)                                                                              | 10.3 (22.7)            |
|                                                                     |              | 2.7 (3.62)                                    | 12 (8.85)                        | 8.7 (6.42)                                    | 6.8                                           | 1FK7081-2AF7■-1■ ■ ■ ■                     | 4                      | 20 (17.7)                                                                                | 12.9 (28.4)            |
|                                                                     |              | 3.3 (4.43)                                    | 16 (11.8)                        | 10.5 (7.74)                                   | 7.2                                           | 1FK7083-2AF7■-1■ ■ ■ ■                     | 4                      | 26 (23.0)                                                                                | 15.6 (34.4)            |
|                                                                     |              | 3.1 (4.16)                                    | 20 (14.8)                        | 10 (7.38)                                     | 6.5                                           | 1FK7084-2AF7■-1■ ■ ■ ■                     | 4                      | 32.5 (28.8)                                                                              | 18.3 (40.3)            |
|                                                                     |              |                                               |                                  |                                               |                                               |                                            |                        |                                                                                          |                        |
| 100                                                                 |              | 3.8 (5.10)                                    | 18 (13.3)                        | 12 (8.85)                                     | 8                                             | 1FK7100-2AF7■-1■ ■ ■ ■                     | 4                      | 54 (47.8)                                                                                | 17.6 (38.8)            |
|                                                                     |              | 4.9 (6.57)                                    | 27 (19.9)                        | 15.5 (11.4)                                   | 11.6                                          | 1FK7101-2AF7■-1■ ■ ■ ■                     | 4                      | 79 (69.9)                                                                                | 23 (50.7)              |
|                                                                     |              | 4.4 (5.90)                                    | 36 (26.6)                        | 14 (10.3)                                     | 11.5                                          | 1FK7103-2AF7■-1■ ■ ■ ■                     | 4                      | 104 (92.1)                                                                               | 28.5 (62.8)            |
|                                                                     | 8.2 (11.0)   | 48 (35.4)                                     | 26 (19.2)                        | 18                                            | 1FK7105-2AF7■-1■ ■ ■ ■                        | 4                                          | 154 (136)              | 39 (86.0)                                                                                |                        |
| Encoder systems for motors without DRIVE-CLiQ interface:            |              |                                               | IC2048S/R encoder                | 4                                             | A                                             |                                            |                        |                                                                                          |                        |
|                                                                     |              |                                               | AM2048S/R encoder                | 4                                             | E                                             |                                            |                        |                                                                                          |                        |
|                                                                     |              |                                               | Multi-pole resolver              | 4                                             | S                                             |                                            |                        |                                                                                          |                        |
|                                                                     |              |                                               | 2-pole resolver                  | 4                                             | T                                             |                                            |                        |                                                                                          |                        |
| Encoder systems for motors with DRIVE-CLiQ interface:               |              |                                               | AS24DQI encoder                  | 1                                             | B                                             |                                            |                        |                                                                                          |                        |
|                                                                     |              |                                               | AM24DQI encoder                  | 1                                             | C                                             |                                            |                        |                                                                                          |                        |
|                                                                     |              |                                               | AS20DQI encoder                  | 1                                             | Q                                             |                                            |                        |                                                                                          |                        |
|                                                                     |              |                                               | AM20DQI encoder                  | 1                                             | R                                             |                                            |                        |                                                                                          |                        |
|                                                                     |              |                                               | R15DQ resolver                   | 1                                             | U                                             |                                            |                        |                                                                                          |                        |
|                                                                     |              |                                               | R14DQ resolver                   | 1                                             | P                                             |                                            |                        |                                                                                          |                        |
| Shaft extension:                                                    |              |                                               | Shaft and flange accuracy:       |                                               | Holding brake:                                |                                            | A<br>B<br>G<br>H       |                                                                                          |                        |
| Feather key                                                         |              | Tolerance N                                   |                                  | Without                                       |                                               |                                            |                        |                                                                                          |                        |
| Feather key                                                         |              | Tolerance N                                   |                                  | With                                          |                                               |                                            |                        |                                                                                          |                        |
| Plain shaft                                                         |              | Tolerance N                                   |                                  | Without                                       |                                               |                                            |                        |                                                                                          |                        |
| Plain shaft                                                         |              | Tolerance N                                   |                                  | With                                          |                                               |                                            |                        |                                                                                          |                        |
| Degree of protection:                                               |              |                                               | IP64                             |                                               |                                               | 0<br>1<br>2                                |                        |                                                                                          |                        |
|                                                                     |              |                                               | IP65                             |                                               |                                               |                                            |                        |                                                                                          |                        |
|                                                                     |              |                                               | IP65 and DE flange IP67          |                                               |                                               |                                            |                        |                                                                                          |                        |

# SIMOTICS motors and geared motors

## SIMOTICS S-1FK7 servomotors for SINAMICS S110/SINAMICS S120

### SIMOTICS S-1FK7 Compact synchronous motors – Natural cooling

| Motor type<br>(repeated)               | Efficiency<br>1) | Stall current                           | Calculated power<br>$P_{calc}$ <sup>5)</sup> | <b>For SINAMICS S110/SINAMICS S120</b> |                                                                                                                                           | <b>Power cable with complete shield</b>                                      |                                                              |                                           |
|----------------------------------------|------------------|-----------------------------------------|----------------------------------------------|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|--------------------------------------------------------------|-------------------------------------------|
|                                        | $\eta$           | $I_0$<br>at $M_0$<br>$\Delta T = 100$ K | $P_{calc}$<br>at $M_0$<br>$\Delta T = 100$ K | Rated output<br>current <sup>2)</sup>  | <b>PM240-2 Power Module</b><br>Internal air cooling<br><br>For further components,<br>see SINAMICS S110/<br>SINAMICS S120<br>drive system | Motor connection (and brake connection)<br>via SPEED-CONNECT power connector |                                                              |                                           |
|                                        | %                | A                                       | kW<br>(hp)                                   | $I_{rated}$<br><br>A                   | Article No.                                                                                                                               | Power<br>connector                                                           | Cable cross-<br>section <sup>3)</sup><br><br>mm <sup>2</sup> | Pre-assembled<br>cable<br><br>Article No. |
| <b>Line voltage 380 ... 480 V 3 AC</b> |                  |                                         |                                              |                                        |                                                                                                                                           |                                                                              |                                                              |                                           |
| 1FK7042-2AC7-...                       | 88               | 1.6                                     | 0.6 (0.80)                                   | 2.2                                    | <b>6SL3210-1PE12-3 L1</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7060-2AC7-...                       | 90               | 3.15                                    | 1.3 (1.74)                                   | 5.9                                    | <b>6SL3210-1PE16-1 L1</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7062-2AC7-...                       | 90               | 3                                       | 1.8 (2.41)                                   | 4.1                                    | <b>6SL3210-1PE14-3 L1</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7063-2AC7-...                       | 91               | 5.3                                     | 2.3 (3.08)                                   | 7.7                                    | <b>6SL3210-1PE18-0 L1</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7081-2AC7-...                       | 93               | 5                                       | 2.5 (3.35)                                   | 7.7                                    | <b>6SL3210-1PE18-0 L1</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7083-2AC7-...                       | 93               | 7.5                                     | 3.4 (4.56)                                   | 10.2                                   | <b>6SL3210-1PE21-1 L0</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7084-2AC7-...                       | 93               | 8.5                                     | 4.2 (5.63)                                   | 13.2                                   | <b>6SL3210-1PE21-4 L0</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7100-2AC7-...                       | 92               | 8.4                                     | 3.8 (5.10)                                   | 13.2                                   | <b>6SL3210-1PE21-4 L0</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7101-2AC7-...                       | 93               | 12.3                                    | 5.7 (7.64)                                   | 18                                     | <b>6SL3210-1PE21-8 L0</b>                                                                                                                 | 1.5                                                                          | 4 × 1.5                                                      | <b>6FX0002-5 G22-...</b>                  |
| 1FK7103-2AC7-...                       | 93               | 14.4                                    | 7.5 (10.1)                                   | 18                                     | <b>6SL3210-1PE21-8 L0</b>                                                                                                                 | 1.5                                                                          | 4 × 1.5                                                      | <b>6FX0002-5 G22-...</b>                  |
| 1FK7105-2AC7-...                       | 93               | 20                                      | 10.1 (13.5)                                  | 26                                     | <b>6SL3210-1PE22-7 L0</b>                                                                                                                 | 1.5                                                                          | 4 × 2.5                                                      | <b>6FX0002-5 G32-...</b>                  |
| 1FK7042-2AF7-...                       | 89               | 2.2                                     | 0.9 (1.21)                                   | 3.1                                    | <b>6SL3210-1PE13-2 L1</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7060-2AF7-...                       | 90               | 4.45                                    | 1.9 (2.55)                                   | 7.7                                    | <b>6SL3210-1PE18-0 L1</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7062-2AF7-...                       | 91               | 5.3                                     | 2.7 (3.62)                                   | 7.7                                    | <b>6SL3210-1PE18-0 L1</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7063-2AF7-...                       | 91               | 8                                       | 3.5 (4.69)                                   | 13.2                                   | <b>6SL3210-1PE21-4 L0</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7080-2AF7-...                       | 92               | 4.9                                     | 2.5 (3.35)                                   | 7.7                                    | <b>6SL3210-1PE18-0 L1</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7081-2AF7-...                       | 93               | 8.7                                     | 3.8 (5.10)                                   | 13.2                                   | <b>6SL3210-1PE21-4 L0</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7083-2AF7-...                       | 93               | 10.1                                    | 5 (6.71)                                     | 13.2                                   | <b>6SL3210-1PE21-4 L0</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7084-2AF7-...                       | 93               | 12.1                                    | 6.3 (8.45)                                   | 18                                     | <b>6SL3210-1PE21-8 L0</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7100-2AF7-...                       | 92               | 11.1                                    | 5.7 (7.64)                                   | 18                                     | <b>6SL3210-1PE21-8 L0</b>                                                                                                                 | 1                                                                            | 4 × 1.5                                                      | <b>6FX0002-5 G10-...</b>                  |
| 1FK7101-2AF7-...                       | 93               | 18.8                                    | 8.5 (11.4)                                   | 26                                     | <b>6SL3210-1PE22-7 L0</b>                                                                                                                 | 1.5                                                                          | 4 × 2.5                                                      | <b>6FX0002-5 G32-...</b>                  |
| 1FK7103-2AF7-...                       | 93               | 26                                      | 11.3 (15.2)                                  | 32                                     | <b>6SL3210-1PE23-3 L0</b>                                                                                                                 | 1.5                                                                          | 4 × 4                                                        | <b>6FX0002-5 G42-...</b>                  |
| 1FK7105-2AF7-...                       | 94               | 31                                      | 15.1 (20.2)                                  | 32                                     | <b>6SL3210-1PE23-3 L0</b>                                                                                                                 | 1.5                                                                          | 4 × 6                                                        | <b>6FX0002-5 G52-...</b>                  |
| <b>Line filter:</b>                    |                  |                                         |                                              |                                        |                                                                                                                                           | <b>Power cable:</b>                                                          |                                                              |                                           |
| Without                                |                  |                                         |                                              |                                        | <b>U</b>                                                                                                                                  | MOTION-CONNECT 800PLUS                                                       |                                                              |                                           |
| Integrated                             |                  |                                         |                                              |                                        | <b>A</b>                                                                                                                                  | MOTION-CONNECT 500                                                           |                                                              |                                           |
|                                        |                  |                                         |                                              |                                        |                                                                                                                                           | Without brake cores                                                          |                                                              |                                           |
|                                        |                  |                                         |                                              |                                        |                                                                                                                                           | With brake cores <sup>4)</sup>                                               |                                                              |                                           |
|                                        |                  |                                         |                                              |                                        |                                                                                                                                           | Length code                                                                  |                                                              |                                           |

For further information about cables,  
see MOTION-CONNECT connection systems  
in Catalog D 21.4 or:  
[www.siemens.com/industrymall](http://www.siemens.com/industrymall)

1) Optimum efficiency in continuous duty.

2) With default setting of the pulse frequency.

3) The current carrying capacity of the power cables complies with EN 60204-1 for installation type C, for continuous duty at an ambient air temperature of 40 °C (104 °F).

4) Cable cross-section for brake connection 2 × 1.5 mm<sup>2</sup>.

5)  $P_{calc} [kW] = \frac{M_0 [Nm] \times n_{rated}}{9550}$   $P_{calc} [hp] = \frac{M_0 [lb-ft] \times n_{rated}}{5250}$

# SIMOTICS motors and geared motors

SIMOTICS S-1FK7 servomotors for SINAMICS S110/SINAMICS S120

## SIMOTICS S-1FK7 Compact synchronous motors – Natural cooling

### Selection and ordering data

| Rated speed                                                         | Shaft height | Rated power                                   | Static torque                    | Rated torque                                  | Rated current                                 | SIMOTICS S-1FK7 Compact synchronous motors | Number of pole pairs | Moment of inertia of rotor (without brake)                                               | Weight (without brake) |  |
|---------------------------------------------------------------------|--------------|-----------------------------------------------|----------------------------------|-----------------------------------------------|-----------------------------------------------|--------------------------------------------|----------------------|------------------------------------------------------------------------------------------|------------------------|--|
| $n_{\text{rated}}$                                                  | SH           | $P_{\text{rated}}$ at $\Delta T=100\text{ K}$ | $M_0$ at $\Delta T=100\text{ K}$ | $M_{\text{rated}}$ at $\Delta T=100\text{ K}$ | $I_{\text{rated}}$ at $\Delta T=100\text{ K}$ |                                            | $p$                  | $J$                                                                                      | $m$                    |  |
| rpm                                                                 |              | kW (hp)                                       | Nm (lb <sub>r</sub> -ft)         | Nm (lb <sub>r</sub> -ft)                      | A                                             | Article No.                                |                      | 10 <sup>-4</sup> kgm <sup>2</sup> (10 <sup>-3</sup> lb <sub>r</sub> -in-s <sup>2</sup> ) | kg (lb)                |  |
| 1FK7 Compact for DC link voltage 510 ... 720 V DC – Natural cooling |              |                                               |                                  |                                               |                                               |                                            |                      |                                                                                          |                        |  |
| 4500                                                                | 63           | 1.7 (2.28)                                    | 6 (4.43)                         | 3.7 (2.73)                                    | 4.3                                           | 1FK7060-2AH7-1 ■ ■ ■ ■                     | 4                    | 7.7 (6.82)                                                                               | 7.1 (15.7)             |  |
|                                                                     |              | 1.4 (1.88)                                    | 8.5 (6.27)                       | 3 (2.21)                                      | 3.3                                           | 1FK7062-2AH7-1 ■ ■ ■ ■                     | 4                    | 11.2 (9.91)                                                                              | 9.1 (20.1)             |  |
|                                                                     |              | 1.4 (1.88)                                    | 11 (8.11)                        | 3 (2.21)                                      | 3.8                                           | 1FK7063-2AH7-1 ■ ■ ■ ■                     | 4                    | 14.7 (13.0)                                                                              | 11.1 (24.5)            |  |
|                                                                     | 80           | 2.1 (2.82)                                    | 8 (5.90)                         | 4.5 (3.32)                                    | 4.8                                           | 1FK7080-2AH7-1 ■ ■ ■ ■                     | 4                    | 14.2 (12.6)                                                                              | 10.3 (22.7)            |  |
|                                                                     |              | 1.8 (2.41)                                    | 12 (8.85)                        | 3.8 (2.80)                                    | 4.9                                           | 1FK7081-2AH7-1 ■ ■ ■ ■                     | 4                    | 20 (17.7)                                                                                | 12.9 (28.4)            |  |
|                                                                     |              | 1.4 (1.88)                                    | 16 (11.8)                        | 3 (2.21)                                      | 3.6                                           | 1FK7083-2AH7-1 ■ ■ ■ ■                     | 4                    | 26 (23.0)                                                                                | 15.6 (34.4)            |  |
| 6000                                                                | 36           | 0.5 (0.67)                                    | 1.15 (0.85)                      | 0.8 (0.59)                                    | 1.3                                           | 1FK7032-2AK7-1 ■ ■ ■ ■                     | 3                    | 0.65 (0.58)                                                                              | 2.7 (5.95)             |  |
|                                                                     |              | 0.6 (0.80)                                    | 1.6 (1.18)                       | 1 (0.74)                                      | 1.3                                           | 1FK7034-2AK7-1 ■ ■ ■ ■                     | 3                    | 0.9 (0.80)                                                                               | 3.5 (7.72)             |  |
|                                                                     | 48           | 0.7 (0.94)                                    | 1.6 (1.18)                       | 1.1 (0.81)                                    | 1.85                                          | 1FK7040-2AK7-1 ■ ■ ■ ■                     | 4                    | 1.6 (1.42)                                                                               | 3.2 (7.05)             |  |
|                                                                     |              | 0.9 (1.21)                                    | 3 (2.21)                         | 1.5 (1.11)                                    | 2.5                                           | 1FK7042-2AK7-1 ■ ■ ■ ■                     | 4                    | 2.9 (2.57)                                                                               | 4.6 (10.1)             |  |
| 1FK7 Compact for DC link voltage 270 ... 330 V DC – Natural cooling |              |                                               |                                  |                                               |                                               |                                            |                      |                                                                                          |                        |  |
| 3000                                                                | 36           | 0.3 (0.40)                                    | 1.15 (0.85)                      | 1 (0.74)                                      | 1.6                                           | 1FK7032-2AF2-1 ■ ■ ■ ■                     | 3                    | 0.65 (0.58)                                                                              | 2.7 (5.95)             |  |
|                                                                     |              | 0.5 (0.67)                                    | 1.6 (1.18)                       | 1.45 (1.07)                                   | 1.8                                           | 1FK7034-2AF2-1 ■ ■ ■ ■                     | 3                    | 0.9 (0.80)                                                                               | 3.5 (7.72)             |  |
|                                                                     | 48           | 0.8 (1.07)                                    | 3 (2.21)                         | 2.6 (1.92)                                    | 3.5                                           | 1FK7042-2AF2-1 ■ ■ ■ ■                     | 4                    | 2.9 (2.57)                                                                               | 4.6 (10.1)             |  |
| Encoder systems for motors without DRIVE-CLiQ interface:            |              |                                               | IC2048S/R encoder                |                                               |                                               | 4                                          | A                    |                                                                                          |                        |  |
|                                                                     |              |                                               | AM2048S/R encoder                |                                               |                                               | 4                                          | E                    |                                                                                          |                        |  |
|                                                                     |              |                                               | Multi-pole resolver              |                                               |                                               | 4                                          | S                    |                                                                                          |                        |  |
|                                                                     |              |                                               | 2-pole resolver                  |                                               |                                               | 4                                          | T                    |                                                                                          |                        |  |
| Encoder systems for motors with DRIVE-CLiQ interface:               |              |                                               | AS24DQI encoder                  |                                               |                                               | 1                                          | B                    |                                                                                          |                        |  |
|                                                                     |              |                                               | AM24DQI encoder                  |                                               |                                               | 1                                          | C                    |                                                                                          |                        |  |
|                                                                     |              |                                               | AS20DQI encoder                  |                                               |                                               | 1                                          | Q                    |                                                                                          |                        |  |
|                                                                     |              |                                               | AM20DQI encoder                  |                                               |                                               | 1                                          | R                    |                                                                                          |                        |  |
|                                                                     |              |                                               | R15DQ resolver                   |                                               |                                               | 1                                          | U                    |                                                                                          |                        |  |
|                                                                     |              |                                               | R14DQ resolver                   |                                               |                                               | 1                                          | P                    |                                                                                          |                        |  |
| Shaft extension:                                                    |              |                                               | Shaft and flange accuracy:       |                                               |                                               | Holding brake:                             |                      | A<br>B<br>G<br>H                                                                         |                        |  |
| Feather key                                                         |              |                                               | Tolerance N                      |                                               |                                               | Without                                    |                      |                                                                                          |                        |  |
| Feather key                                                         |              |                                               | Tolerance N                      |                                               |                                               | With                                       |                      |                                                                                          |                        |  |
| Plain shaft                                                         |              |                                               | Tolerance N                      |                                               |                                               | Without                                    |                      |                                                                                          |                        |  |
| Plain shaft                                                         |              |                                               | Tolerance N                      |                                               |                                               | With                                       |                      |                                                                                          |                        |  |
| Degree of protection:                                               |              |                                               | IP64                             |                                               |                                               |                                            | 0                    |                                                                                          |                        |  |
|                                                                     |              |                                               | IP65                             |                                               |                                               |                                            | 1                    |                                                                                          |                        |  |
|                                                                     |              |                                               | IP65 and DE flange IP67          |                                               |                                               |                                            | 2                    |                                                                                          |                        |  |

A  
B  
G  
H0  
1  
2

# SIMOTICS motors and geared motors

## SIMOTICS S-1FK7 servomotors for SINAMICS S110/SINAMICS S120

### SIMOTICS S-1FK7 Compact synchronous motors – Natural cooling

| Motor type<br>(repeated)               | Efficiency<br>1) | Stall<br>current                        | Calculated<br>power<br>$P_{calc}$ <sup>5)</sup> | <b>For SINAMICS S110/SINAMICS S120</b> |                                                                                                                                           | <b>Power cable with complete shield</b><br>Motor connection (and brake connection)<br>via SPEED-CONNECT power connector |                                       |                           |
|----------------------------------------|------------------|-----------------------------------------|-------------------------------------------------|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------|
|                                        | $\eta$           | $I_0$<br>at $M_0$<br>$\Delta T = 100$ K | $P_{calc}$<br>at $M_0$<br>$\Delta T = 100$ K    | Rated output<br>current <sup>2)</sup>  | <b>PM240-2 Power Module</b><br>Internal air cooling<br><br>For further components,<br>see SINAMICS S110/<br>SINAMICS S120<br>drive system | Power<br>connector                                                                                                      | Cable cross-<br>section <sup>3)</sup> | Pre-assembled<br>cable    |
|                                        | %                | A                                       | kW<br>(hp)                                      | A                                      | Article No.                                                                                                                               | Size                                                                                                                    | mm <sup>2</sup>                       | Article No.               |
| <b>Line voltage 380 ... 480 V 3 AC</b> |                  |                                         |                                                 |                                        |                                                                                                                                           |                                                                                                                         |                                       |                           |
| 1FK7060-2AH7.-...                      | 90               | 6.3                                     | 2.8 (3.75)                                      | 10.2                                   | <b>6SL3210-1PE21-1 L0</b>                                                                                                                 | 1                                                                                                                       | 4 × 1.5                               | <b>6FX0002-5 G10-....</b> |
| 1FK7062-2AH7.-...                      | 91               | 8                                       | 4 (5.36)                                        | 13.2                                   | <b>6SL3210-1PE21-4 L0</b>                                                                                                                 | 1                                                                                                                       | 4 × 1.5                               | <b>6FX0002-5 G10-....</b> |
| 1FK7063-2AH7.-...                      | 90               | 12                                      | 5.2 (6.97)                                      | 18                                     | <b>6SL3210-1PE21-8 L0</b>                                                                                                                 | 1                                                                                                                       | 4 × 1.5                               | <b>6FX0002-5 G10-....</b> |
| 1FK7080-2AH7.-...                      | 92               | 7.4                                     | 3.8 (5.10)                                      | 10.2                                   | <b>6SL3210-1PE21-1 L0</b>                                                                                                                 | 1                                                                                                                       | 4 × 1.5                               | <b>6FX0002-5 G10-....</b> |
| 1FK7081-2AH7.-...                      | 93               | 13.1                                    | 5.7 (7.64)                                      | 18                                     | <b>6SL3210-1PE21-8 L0</b>                                                                                                                 | 1                                                                                                                       | 4 × 1.5                               | <b>6FX0002-5 G10-....</b> |
| 1FK7083-2AH7.-...                      | 93               | 15                                      | 7.5 (10.1)                                      | 18                                     | <b>6SL3210-1PE21-8 L0</b>                                                                                                                 | 1                                                                                                                       | 4 × 1.5                               | <b>6FX0002-5 G10-....</b> |
| 1FK7032-2AK7.-...                      | 88               | 1.7                                     | 0.7 (0.94)                                      | 2.2                                    | <b>6SL3210-1PE12-3 L1</b>                                                                                                                 | 1                                                                                                                       | 4 × 1.5                               | <b>6FX0002-5 G10-....</b> |
| 1FK7034-2AK7.-...                      | 88               | 1.9                                     | 1 (1.34)                                        | 3.1                                    | <b>6SL3210-1PE13-1 L1</b>                                                                                                                 | 1                                                                                                                       | 4 × 1.5                               | <b>6FX0002-5 G10-....</b> |
| 1FK7040-2AK7.-...                      | 88               | 2.35                                    | 1 (1.34)                                        | 4.1                                    | <b>6SL3210-1PE14-1 L1</b>                                                                                                                 | 1                                                                                                                       | 4 × 1.5                               | <b>6FX0002-5 G10-....</b> |
| 1FK7042-2AK7.-...                      | 89               | 4.4                                     | 1.9 (2.55)                                      | 7.7                                    | <b>6SL3210-1PE18-0 L1</b>                                                                                                                 | 1                                                                                                                       | 4 × 1.5                               | <b>6FX0002-5 G10-....</b> |
| <b>Line voltage 200 ... 240 V 1 AC</b> |                  |                                         |                                                 |                                        |                                                                                                                                           |                                                                                                                         |                                       |                           |
| 1FK7032-2AF2.-...                      | 85               | 1.7                                     | 0.4 (0.54)                                      | 3.2                                    | <b>6SL3210-1PB13-0 L0</b>                                                                                                                 | 1                                                                                                                       | 4 × 1.5                               | <b>6FX0002-5 G10-....</b> |
| 1FK7034-2AF2.-...                      | 85               | 1.9                                     | 0.5 (0.67)                                      | 3.2                                    | <b>6SL3210-1PB13-0 L0</b>                                                                                                                 | 1                                                                                                                       | 4 × 1.5                               | <b>6FX0002-5 G10-....</b> |
| 1FK7042-2AF2.-...                      | 88               | 3.95                                    | 0.9 (1.21)                                      | 6                                      | <b>6SL3210-1PB15-5 L0</b>                                                                                                                 | 1                                                                                                                       | 4 × 1.5                               | <b>6FX0002-5 G10-....</b> |

**Line filter:**  
Without  
Integrated

**U**  
**A**

**Power cable:**  
MOTION-CONNECT 800PLUS  
MOTION-CONNECT 500

**8**  
**5**

Without brake cores  
With brake cores<sup>4)</sup>

**C**  
**D**

Length code

**....**

For further information about cables,  
see MOTION-CONNECT connection systems  
in Catalog D 21.4 or:  
[www.siemens.com/industry/mall](http://www.siemens.com/industry/mall)

<sup>1)</sup> Optimum efficiency in continuous duty.

<sup>2)</sup> With default setting of the pulse frequency.

<sup>3)</sup> The current carrying capacity of the power cables complies with EN 60204-1 for installation type C, for continuous duty at an ambient air temperature of 40 °C (104 °F).

<sup>4)</sup> Cable cross-section for brake connection 2 × 1.5 mm<sup>2</sup>.

<sup>5)</sup>  $P_{calc} [kW] = \frac{M_0 [Nm] \times n_{rated}}{9550}$   $P_{calc} [hp] = \frac{M_0 [lb-ft] \times n_{rated}}{5250}$

## SIMOTICS motors and geared motors

### SIMOTICS M-1PH8 main motors for SINAMICS S110/SINAMICS S120

#### SIMOTICS M-1PH8 asynchronous (induction) motors – Forced ventilation, IP55 degree of protection

##### Selection and ordering data

| Rated speed                                                    | Shaft height | Rated power                   | Rated torque                      | Rated current           | Rated voltage           | Rated frequency          | Operating speed during field weakening, max. <sup>1)</sup> | Speed, max. <sup>2)</sup> | SIMOTICS M-1PH8 asynchronous motors |
|----------------------------------------------------------------|--------------|-------------------------------|-----------------------------------|-------------------------|-------------------------|--------------------------|------------------------------------------------------------|---------------------------|-------------------------------------|
| $n_{\text{rated}}$<br>rpm                                      | SH           | $P_{\text{rated}}$<br>kW (hp) | $M_{\text{rated}}$<br>Nm (lbf-ft) | $I_{\text{rated}}$<br>A | $U_{\text{rated}}$<br>V | $f_{\text{rated}}$<br>Hz | $n_2$<br>rpm                                               | $n_{\text{max}}$<br>rpm   | Article No.                         |
| 1PH8 for line voltage 400 V 3 AC – Forced ventilation NDE → DE |              |                               |                                   |                         |                         |                          |                                                            |                           |                                     |
| 400                                                            | 160          | 9.5 (12.7)                    | 227 (167)                         | 30                      | 260                     | 14.3                     | 2150                                                       | 6500                      | 1PH8163-1 B 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 13 (17.4)                     | 310 (229)                         | 36                      | 300                     | 14.1                     | 1750                                                       | 6500                      | 1PH8165-1 B 1 ■ - ■ ■ ■ 2           |
| 1000                                                           | 100          | 3.7 (4.96)                    | 35 (25.8)                         | 10                      | 333                     | 35.8                     | 2550                                                       | 9000                      | 1PH8103-1 D 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 6.3 (8.45)                    | 60 (44.3)                         | 17.5                    | 307                     | 35.5                     | 4300                                                       | 9000                      | 1PH8107-1 D 1 ■ - ■ ■ ■ 2           |
|                                                                | 132          | 7.9 (10.6)                    | 75 (55.3)                         | 20                      | 316                     | 34.8                     | 3000                                                       | 8000                      | 1PH8131-1 D 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 12 (16.1)                     | 115 (84.8)                        | 30                      | 319                     | 35                       | 3000                                                       | 8000                      | 1PH8133-1 D 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 17 (22.8)                     | 162 (119)                         | 43                      | 307                     | 34.8                     | 4300                                                       | 8000                      | 1PH8137-1 D 1 ■ - ■ ■ ■ 2           |
|                                                                | 160          | 22 (29.5)                     | 210 (155)                         | 55                      | 300                     | 34.2                     | 2800                                                       | 6500                      | 1PH8163-1 D 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 28 (37.5)                     | 267 (197)                         | 71                      | 292                     | 34.2                     | 4600                                                       | 6500                      | 1PH8165-1 D 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 1500                          |                                   |                         |                         |                          |                                                            |                           |                                     |
| 80                                                             | 2.8 (3.75)   | 18 (13.3)                     | 7.5                               | 346                     | 53.3                    | 4700                     | 10000                                                      | 1PH8083-1 F 1 ■ - ■ ■ ■ 2 |                                     |
|                                                                | 3.7 (4.96)   | 24 (17.7)                     | 10                                | 336                     | 53.2                    | 5200                     | 10000                                                      | 1PH8087-1 F 1 ■ - ■ ■ ■ 2 |                                     |
| 100                                                            | 3.7 (4.96)   | 24 (17.7)                     | 12.5                              | 265                     | 52.4                    | 5000                     | 9000                                                       | 1PH8101-1 F 1 ■ - ■ ■ ■ 2 |                                     |
|                                                                |              | 5.5 (7.38)                    | 35 (25.8)                         | 13.5                    | 368                     | 52.4                     | 4200                                                       | 9000                      | 1PH8103-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                | 7 (9.39)     | 45 (33.2)                     | 17.5                              | 348                     | 51.9                    | 5250                     | 9000                                                       | 1PH8105-1 F 1 ■ - ■ ■ ■ 2 |                                     |
|                                                                | 9 (12.1)     | 57 (42.0)                     | 23.5                              | 330                     | 52.2                    | 4500                     | 9000                                                       | 1PH8107-1 F 1 ■ - ■ ■ ■ 2 |                                     |
|                                                                | 132          | 11 (14.8)                     | 70 (51.6)                         | 24                      | 360                     | 51.4                     | 4800                                                       | 8000                      | 1PH8131-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 15 (20.1)                     | 96 (70.8)                         | 34                      | 342                     | 51.3                     | 5500                                                       | 8000                      | 1PH8133-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 18.5 (24.8)                   | 118 (87.0)                        | 43                      | 330                     | 51.3                     | 6150                                                       | 8000                      | 1PH8135-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                | 22 (29.5)    | 140 (103)                     | 56                                | 308                     | 51.3                    | 4300                     | 8000                                                       | 1PH8137-1 F 1 ■ - ■ ■ ■ 2 |                                     |
| 160                                                            | 30 (40.2)    | 191 (141)                     | 71                                | 319                     | 50.8                    | 3500                     | 6500                                                       | 1PH8163-1 F 1 ■ - ■ ■ ■ 2 |                                     |
|                                                                | 37 (49.6)    | 236 (174)                     | 78                                | 350                     | 50.8                    | 2800                     | 6500                                                       | 1PH8165-1 F 1 ■ - ■ ■ ■ 2 |                                     |
| 1PH8 for line voltage 480 V 3 AC – Forced ventilation NDE → DE |              |                               |                                   |                         |                         |                          |                                                            |                           |                                     |
| 600                                                            | 160          | 14.5 (19.4)                   | 231 (170)                         | 30                      | 370                     | 21                       | 2150                                                       | 6500                      | 1PH8163-1 B 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 19 (25.5)                     | 302 (223)                         | 35                      | 420                     | 20.8                     | 1800                                                       | 6500                      | 1PH8165-1 B 1 ■ - ■ ■ ■ 2           |
| 1350                                                           | 100          | 4.7 (6.30)                    | 33 (24.3)                         | 9.7                     | 423                     | 47.3                     | 3500                                                       | 9000                      | 1PH8103-1 D 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 8 (10.7)                      | 57 (42.0)                         | 17                      | 400                     | 47.1                     | 5045                                                       | 9000                      | 1PH8107-1 D 1 ■ - ■ ■ ■ 2           |
|                                                                | 132          | 10.6 (14.2)                   | 75 (55.3)                         | 20                      | 416                     | 46.5                     | 3000                                                       | 8000                      | 1PH8131-1 D 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 15 (20.1)                     | 106 (78.2)                        | 28                      | 417                     | 46.5                     | 3500                                                       | 8000                      | 1PH8133-1 D 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 22 (29.5)                     | 156 (115)                         | 42                      | 404                     | 46.4                     | 4000                                                       | 8000                      | 1PH8137-1 D 1 ■ - ■ ■ ■ 2           |
|                                                                | 160          | 28 (37.5)                     | 198 (146)                         | 52                      | 400                     | 45.8                     | 4000                                                       | 6500                      | 1PH8163-1 D 1 ■ - ■ ■ ■ 2           |
| 34 (45.6)                                                      |              | 241 (178)                     | 66                                | 387                     | 45.8                    | 5600                     | 6500                                                       | 1PH8165-1 D 1 ■ - ■ ■ ■ 2 |                                     |
| 2000                                                           | 80           | 3.7 (4.96)                    | 18 (13.3)                         | 7.6                     | 447                     | 70                       | 5550                                                       | 10000                     | 1PH8083-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 4.9 (6.57)                    | 23 (17.0)                         | 10                      | 435                     | 69.9                     | 6100                                                       | 10000                     | 1PH8087-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                | 100          | 4.7 (6.30)                    | 22 (16.2)                         | 12.5                    | 343                     | 69                       | 7500                                                       | 9000                      | 1PH8101-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 7 (9.39)                      | 33 (24.3)                         | 12.7                    | 460                     | 69.1                     | 4100                                                       | 9000                      | 1PH8103-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 9 (12.1)                      | 43 (31.7)                         | 17                      | 453                     | 68.5                     | 6180                                                       | 9000                      | 1PH8105-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 11 (14.8)                     | 53 (39.1)                         | 21.5                    | 428                     | 68.6                     | 5500                                                       | 9000                      | 1PH8107-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 15 (20.1)                     | 72 (53.1)                         | 24                      | 460                     | 68.2                     | 5300                                                       | 8000                      | 1PH8131-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                | 132          | 20 (26.8)                     | 96 (70.8)                         | 34                      | 445                     | 68                       | 6200                                                       | 8000                      | 1PH8133-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 24 (32.2)                     | 115 (84.8)                        | 43                      | 434                     | 67.9                     | 7100                                                       | 8000                      | 1PH8135-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 28 (37.5)                     | 134 (98.8)                        | 55                      | 401                     | 67.9                     | 4000                                                       | 8000                      | 1PH8137-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                |              | 37 (49.6)                     | 177 (131)                         | 68                      | 416                     | 67.4                     | 3550                                                       | 6500                      | 1PH8163-1 F 1 ■ - ■ ■ ■ 2           |
|                                                                | 45 (60.3)    | 215 (159)                     | 75                                | 440                     | 67.5                    | 3300                     | 6500                                                       | 1PH8165-1 F 1 ■ - ■ ■ ■ 2 |                                     |

For versions, see  
Article No. supplements.

# SIMOTICS motors and geared motors

## SIMOTICS M-1PH8 main motors for SINAMICS S110/SINAMICS S120

### SIMOTICS M-1PH8 asynchronous (induction) motors – Forced ventilation, IP55 degree of protection

| Motor type<br>(repeated)                     | Power<br>factor | Magnetiz-<br>ing current | Efficiency  | Moment of<br>inertia without<br>holding brake                 | Weight with-<br>out holding<br>brake,<br>approx. | Terminal<br>box | <b>For SINAMICS S110/SINAMICS S120</b>                               |                                                                                                                                                              |
|----------------------------------------------|-----------------|--------------------------|-------------|---------------------------------------------------------------|--------------------------------------------------|-----------------|----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                              | $\cos \varphi$  | $I_{\mu}$<br>A           | $\eta$<br>% | $J$<br>kgm <sup>2</sup> (lb <sub>r</sub> -in-s <sup>2</sup> ) | kg (lb)                                          | Type            | Rated output<br>current <sup>3)</sup><br><br>$I_{\text{rated}}$<br>A | <b>PM240-2 Power Module</b><br><b>Internal air cooling</b><br>For further components,<br>see SINAMICS S110/<br>SINAMICS S120 drive system<br><br>Article No. |
| <b>Line voltage 380 ... 480 V 3 AC</b>       |                 |                          |             |                                                               |                                                  |                 |                                                                      |                                                                                                                                                              |
| 1PH8163-1. B...                              | 0.91            | 8.1                      | 82.3        | 0.216 (1.91)                                                  | 196 (432)                                        | gk863           | 32                                                                   | <b>6SL3210-1PE23-3■L0</b>                                                                                                                                    |
| 1PH8165-1. B...                              | 0.86            | 14.9                     | 82.6        | 0.232 (2.05)                                                  | 230 (507)                                        | gk863           | 38                                                                   | <b>6SL3210-1PE23-8■L0</b>                                                                                                                                    |
| 1PH8103-1. D...                              | 0.82            | 4.6                      | 81.4        | 0.0172 (0.15)                                                 | 51 (112)                                         | gk813           | 13.2                                                                 | <b>6SL3210-1PE21-4■L0</b>                                                                                                                                    |
| 1PH8107-1. D...                              | 0.82            | 8.2                      | 83.4        | 0.0289 (0.26)                                                 | 73 (161)                                         | gk813           | 18                                                                   | <b>6SL3210-1PE21-8■L0</b>                                                                                                                                    |
| 1PH8131-1. D...                              | 0.86            | 8                        | 87          | 0.059 (0.52)                                                  | 89 (196)                                         | gk833           | 32                                                                   | <b>6SL3210-1PE23-3■L0</b>                                                                                                                                    |
| 1PH8133-1. D...                              | 0.88            | 10.1                     | 87.1        | 0.076 (0.67)                                                  | 106 (234)                                        | gk833           | 32                                                                   | <b>6SL3210-1PE23-3■L0</b>                                                                                                                                    |
| 1PH8137-1. D...                              | 0.88            | 15.1                     | 88.1        | 0.109 (0.96)                                                  | 141 (311)                                        | gk833           | 45                                                                   | <b>6SL3210-1PE24-5■L0</b>                                                                                                                                    |
| 1PH8163-1. D...                              | 0.89            | 17.3                     | 90.9        | 0.216 (1.91)                                                  | 196 (432)                                        | gk863           | 60                                                                   | <b>6SL3210-1PE26-0■L0</b>                                                                                                                                    |
| 1PH8165-1. D...                              | 0.89            | 22.2                     | 91.4        | 0.232 (2.05)                                                  | 230 (507)                                        | gk863           | 75                                                                   | <b>6SL3210-1PE27-5■L0</b>                                                                                                                                    |
| 1PH8083-1. F...                              | 0.80            | 3.8                      | 80.9        | 0.0064 (0.06)                                                 | 32 (70.5)                                        | gk803           | 10.2                                                                 | <b>6SL3210-1PE21-1■L0</b>                                                                                                                                    |
| 1PH8087-1. F...                              | 0.81            | 4.9                      | 81.7        | 0.0089 (0.08)                                                 | 39 (86.0)                                        | gk803           | 13.2                                                                 | <b>6SL3210-1PE21-4■L0</b>                                                                                                                                    |
| 1PH8101-1. F...                              | 0.80            | 6                        | 83.5        | 0.0138 (0.12)                                                 | 42 (92.6)                                        | gk813           | 18                                                                   | <b>6SL3210-1PE21-8■L0</b>                                                                                                                                    |
| 1PH8103-1. F...                              | 0.80            | 6.5                      | 85.2        | 0.0172 (0.15)                                                 | 51 (112)                                         | gk813           | 18                                                                   | <b>6SL3210-1PE21-8■L0</b>                                                                                                                                    |
| 1PH8105-1. F...                              | 0.79            | 8.8                      | 86.7        | 0.0252 (0.22)                                                 | 65 (143)                                         | gk813           | 18                                                                   | <b>6SL3210-1PE21-8■L0</b>                                                                                                                                    |
| 1PH8107-1. F...                              | 0.81            | 10.8                     | 86.9        | 0.0289 (0.26)                                                 | 73 (161)                                         | gk813           | 26                                                                   | <b>6SL3210-1PE22-7■L0</b>                                                                                                                                    |
| 1PH8131-1. F...                              | 0.84            | 10.4                     | 89.9        | 0.059 (0.52)                                                  | 89 (196)                                         | gk833           | 26                                                                   | <b>6SL3210-1PE22-7■L0</b>                                                                                                                                    |
| 1PH8133-1. F...                              | 0.85            | 14.2                     | 89.9        | 0.076 (0.67)                                                  | 106 (234)                                        | gk833           | 38                                                                   | <b>6SL3210-1PE23-8■L0</b>                                                                                                                                    |
| 1PH8135-1. F...                              | 0.85            | 18.1                     | 89.8        | 0.094 (0.83)                                                  | 125 (276)                                        | gk833           | 45                                                                   | <b>6SL3210-1PE24-5■L0</b>                                                                                                                                    |
| 1PH8137-1. F...                              | 0.84            | 24.2                     | 90.4        | 0.109 (0.96)                                                  | 141 (311)                                        | gk833           | 60                                                                   | <b>6SL3210-1PE26-0■L0</b>                                                                                                                                    |
| 1PH8163-1. F...                              | 0.87            | 25.6                     | 92.3        | 0.216 (1.91)                                                  | 196 (432)                                        | gk863           | 75                                                                   | <b>6SL3210-1PE27-5■L0</b>                                                                                                                                    |
| 1PH8165-1. F...                              | 0.88            | 27                       | 92.6        | 0.232 (2.05)                                                  | 230 (507)                                        | gk863           | 90                                                                   | <b>6SL3210-1PE28-8■L0</b>                                                                                                                                    |
| <b>Line voltage 380 ... 480 V 3 AC</b>       |                 |                          |             |                                                               |                                                  |                 |                                                                      |                                                                                                                                                              |
| 1PH8163-1. B...                              | 0.90            | 8.1                      | 85.1        | 0.216 (1.91)                                                  | 196 (432)                                        | gk863           | 32                                                                   | <b>6SL3210-1PE23-3■L0</b>                                                                                                                                    |
| 1PH8165-1. B...                              | 0.88            | 12                       | 85          | 0.232 (2.05)                                                  | 230 (507)                                        | gk863           | 38                                                                   | <b>6SL3210-1PE23-8■L0</b>                                                                                                                                    |
| 1PH8103-1. D...                              | 0.82            | 4.4                      | 84.8        | 0.0172 (0.15)                                                 | 51 (112)                                         | gk813           | 13.2                                                                 | <b>6SL3210-1PE21-4■L0</b>                                                                                                                                    |
| 1PH8107-1. D...                              | 0.80            | 8.2                      | 86.7        | 0.0289 (0.26)                                                 | 73 (161)                                         | gk813           | 18                                                                   | <b>6SL3210-1PE21-8■L0</b>                                                                                                                                    |
| 1PH8131-1. D...                              | 0.86            | 7.9                      | 90          | 0.059 (0.52)                                                  | 89 (196)                                         | gk833           | 32                                                                   | <b>6SL3210-1PE23-3■L0</b>                                                                                                                                    |
| 1PH8133-1. D...                              | 0.86            | 10.7                     | 90.4        | 0.076 (0.67)                                                  | 106 (234)                                        | gk833           | 32                                                                   | <b>6SL3210-1PE23-3■L0</b>                                                                                                                                    |
| 1PH8137-1. D...                              | 0.86            | 15.9                     | 90.2        | 0.109 (0.96)                                                  | 141 (311)                                        | gk833           | 45                                                                   | <b>6SL3210-1PE24-5■L0</b>                                                                                                                                    |
| 1PH8163-1. D...                              | 0.88            | 17.7                     | 92.4        | 0.216 (1.91)                                                  | 196 (432)                                        | gk863           | 60                                                                   | <b>6SL3210-1PE26-0■L0</b>                                                                                                                                    |
| 1PH8165-1. D...                              | 0.86            | 22.5                     | 92.8        | 0.232 (2.05)                                                  | 230 (507)                                        | gk863           | 75                                                                   | <b>6SL3210-1PE27-5■L0</b>                                                                                                                                    |
| 1PH8083-1. F...                              | 0.79            | 3.7                      | 85          | 0.0064 (0.06)                                                 | 32 (70.5)                                        | gk803           | 10.2                                                                 | <b>6SL3210-1PE17-1■L0</b>                                                                                                                                    |
| 1PH8087-1. F...                              | 0.80            | 4.9                      | 86.4        | 0.0089 (0.08)                                                 | 39 (86.0)                                        | gk803           | 13.2                                                                 | <b>6SL3210-1PE21-4■L0</b>                                                                                                                                    |
| 1PH8101-1. F...                              | 0.79            | 6                        | 87.1        | 0.0138 (0.12)                                                 | 42 (92.6)                                        | gk813           | 18                                                                   | <b>6SL3210-1PE21-8■L0</b>                                                                                                                                    |
| 1PH8103-1. F...                              | 0.81            | 5.8                      | 89.4        | 0.0172 (0.15)                                                 | 51 (112)                                         | gk813           | 18                                                                   | <b>6SL3210-1PE21-8■L0</b>                                                                                                                                    |
| 1PH8105-1. F...                              | 0.78            | 8.7                      | 91.1        | 0.0252 (0.22)                                                 | 65 (143)                                         | gk813           | 18                                                                   | <b>6SL3210-1PE21-8■L0</b>                                                                                                                                    |
| 1PH8107-1. F...                              | 0.79            | 10.8                     | 90.1        | 0.0289 (0.26)                                                 | 73 (161)                                         | gk813           | 26                                                                   | <b>6SL3210-1PE22-7■L0</b>                                                                                                                                    |
| 1PH8131-1. F...                              | 0.86            | 9.2                      | 93.1        | 0.059 (0.52)                                                  | 89 (196)                                         | gk833           | 26                                                                   | <b>6SL3210-1PE22-7■L0</b>                                                                                                                                    |
| 1PH8133-1. F...                              | 0.85            | 13.5                     | 93.3        | 0.076 (0.67)                                                  | 106 (234)                                        | gk833           | 38                                                                   | <b>6SL3210-1PE23-8■L0</b>                                                                                                                                    |
| 1PH8135-1. F...                              | 0.84            | 18.1                     | 92.9        | 0.094 (0.83)                                                  | 125 (276)                                        | gk833           | 45                                                                   | <b>6SL3210-1PE24-5■L0</b>                                                                                                                                    |
| 1PH8137-1. F...                              | 0.84            | 23.1                     | 93.1        | 0.109 (0.96)                                                  | 141 (311)                                        | gk833           | 60                                                                   | <b>6SL3210-1PE26-0■L0</b>                                                                                                                                    |
| 1PH8163-1. F...                              | 0.86            | 24.6                     | 93.2        | 0.216 (1.91)                                                  | 196 (432)                                        | gk863           | 75                                                                   | <b>6SL3210-1PE27-5■L0</b>                                                                                                                                    |
| 1PH8165-1. F...                              | 0.89            | 23.6                     | 93.6        | 0.232 (2.05)                                                  | 230 (507)                                        | gk863           | 90                                                                   | <b>6SL3210-1PE28-8■L0</b>                                                                                                                                    |
| <b>Line filter:</b><br>Without<br>Integrated |                 |                          |             |                                                               |                                                  |                 |                                                                      | <b>U</b><br><b>A</b>                                                                                                                                         |

<sup>1)</sup>  $n_2$ : Maximum permissible thermal speed at constant power or speed, which is at the voltage limit when  $P = P_{\text{rated}}$ .

<sup>2)</sup>  $n_{\text{max}}$ : Maximum speed that must not be exceeded (applicable to Standard: 14th data position B to C).

<sup>3)</sup> The rated pulse frequencies must be taken into account. The rated motor data is valid for 4 kHz.

## SIMOTICS motors and geared motors

SIMOTICS M-1PH8 main motors for SINAMICS S110/SINAMICS S120

SIMOTICS M-1PH8 asynchronous (induction) motors – Water cooling, IP65 degree of protection

### Selection and ordering data

| Rated speed                                      | Shaft height | Rated power                                      | Rated torque                            | Rated current    | Rated voltage    | Rated frequency   | Operating speed during field weakening, max. <sup>1)</sup> | Speed max. <sup>2)</sup> | SIMOTICS M-1PH8 asynchronous motors |
|--------------------------------------------------|--------------|--------------------------------------------------|-----------------------------------------|------------------|------------------|-------------------|------------------------------------------------------------|--------------------------|-------------------------------------|
| $n_{rated}$<br>rpm                               | SH           | $P_{rated}$<br>kW (hp)                           | $M_{rated}$<br>Nm (lb <sub>r</sub> -ft) | $I_{rated}$<br>A | $U_{rated}$<br>V | $f_{rated}$<br>Hz | $n_2$<br>rpm                                               | $n_{max}$<br>rpm         | Article No.                         |
| 1PH8 for line voltage 400 V 3 AC – Water cooling |              |                                                  |                                         |                  |                  |                   |                                                            |                          |                                     |
| 1500                                             | 80           | 3.5 (4.69)                                       | 22 (16.2)                               | 8.9              | 357              | 54.5              | 3550                                                       | 10000                    | 1PH8083-1 F2 ■■■■1                  |
|                                                  |              | 4.6 (6.17)                                       | 29 (21.4)                               | 13.7             | 316              | 53.3              | 6000                                                       | 10000                    | 1PH8087-1 F2 ■■■■1                  |
|                                                  | 100          | 5 (6.71)                                         | 32 (23.6)                               | 12.8             | 357              | 53.1              | 2500                                                       | 9000                     | 1PH8101-1 F2 ■■■■1                  |
|                                                  |              | 7.1 (9.52)                                       | 45 (33.2)                               | 19.7             | 317              | 53                | 4000                                                       | 9000                     | 1PH8103-1 F2 ■■■■1                  |
|                                                  |              | 11 (14.8)                                        | 70 (51.6)                               | 28.5             | 340              | 52.8              | 3500                                                       | 9000                     | 1PH8105-1 F2 ■■■■1                  |
|                                                  |              | 14 (18.8)                                        | 89 (65.6)                               | 43.7             | 277              | 53.3              | 5600                                                       | 9000                     | 1PH8107-1 F2 ■■■■1                  |
|                                                  |              | 15 (20.1)                                        | 96 (70.8)                               | 30               | 380              | 52.3              | 2500                                                       | 8000                     | 1PH8131-1 F2 ■■■■1                  |
|                                                  | 132          | 17 (22.8)                                        | 108 (79.7)                              | 38               | 345              | 51.5              | 3500                                                       | 8000                     | 1PH8133-1 F2 ■■■■1                  |
|                                                  |              | 22 (29.5)                                        | 140 (103)                               | 51               | 342              | 51.5              | 4000                                                       | 8000                     | 1PH8135-1 F2 ■■■■1                  |
|                                                  |              | 27 (36.2)                                        | 172 (127)                               | 67               | 315              | 51.6              | 4000                                                       | 8000                     | 1PH8137-1 F2 ■■■■1                  |
|                                                  |              | 30 (40.2)                                        | 191 (141)                               | 80               | 289              | 51.9              | 5000                                                       | 8000                     | 1PH8138-1 F2 ■■■■1                  |
|                                                  | 160          | 37 (49.6)                                        | 236 (174)                               | 84               | 328              | 51.1              | 3000                                                       | 6500                     | 1PH8163-1 F2 ■■■■1                  |
|                                                  |              | 46 (61.7)                                        | 293 (216)                               | 104              | 330              | 50.9              | 3050                                                       | 6500                     | 1PH8165-1 F2 ■■■■1                  |
|                                                  |              | 52 (69.7)                                        | 331 (244)                               | 116              | 332              | 51.2              | 3050                                                       | 6500                     | 1PH8166-1 F2 ■■■■1                  |
|                                                  |              | 1PH8 for line voltage 480 V 3 AC – Water cooling |                                         |                  |                  |                   |                                                            |                          |                                     |
| 2000                                             | 80           | 4.6 (6.17)                                       | 22 (16.2)                               | 8.7              | 457              | 71                | 4250                                                       | 10000                    | 1PH8083-1 F2 ■■■■1                  |
|                                                  |              | 6.1 (8.18)                                       | 29 (21.4)                               | 13.7             | 402              | 70                | 6950                                                       | 10000                    | 1PH8087-1 F2 ■■■■1                  |
|                                                  | 100          | 6.6 (8.85)                                       | 32 (23.6)                               | 12.5             | 450              | 69.9              | 2500                                                       | 9000                     | 1PH8101-1 F2 ■■■■1                  |
|                                                  |              | 9.4 (12.6)                                       | 45 (33.2)                               | 19.7             | 411              | 69.7              | 5000                                                       | 9000                     | 1PH8103-1 F2 ■■■■1                  |
|                                                  |              | 14 (18.8)                                        | 67 (49.4)                               | 27.5             | 426              | 69.5              | 3000                                                       | 9000                     | 1PH8105-1 F2 ■■■■1                  |
|                                                  |              | 18 (24.1)                                        | 86 (63.4)                               | 42.6             | 363              | 69.7              | 3000                                                       | 9000                     | 1PH8107-1 F2 ■■■■1                  |
|                                                  |              | 18.5 (24.8)                                      | 88 (64.9)                               | 30               | 460              | 68.7              | 2500                                                       | 8000                     | 1PH8131-1 F2 ■■■■1                  |
|                                                  | 132          | 22.5 (30.2)                                      | 107 (78.9)                              | 38               | 452              | 68.2              | 4000                                                       | 8000                     | 1PH8133-1 F2 ■■■■1                  |
|                                                  |              | 29 (38.9)                                        | 138 (102)                               | 52               | 448              | 68.2              | 4500                                                       | 8000                     | 1PH8135-1 F2 ■■■■1                  |
|                                                  |              | 36 (48.3)                                        | 172 (127)                               | 67               | 415              | 68.3              | 4000                                                       | 8000                     | 1PH8137-1 F2 ■■■■1                  |
|                                                  |              | 37 (49.6)                                        | 177 (131)                               | 76               | 380              | 68.4              | 6000                                                       | 8000                     | 1PH8138-1 F2 ■■■■1                  |
|                                                  | 160          | 49 (65.7)                                        | 234 (173)                               | 84               | 430              | 67.7              | 3500                                                       | 6500                     | 1PH8163-1 F2 ■■■■1                  |
|                                                  |              | 60 (80.5)                                        | 287 (212)                               | 103              | 426              | 67.6              | 3050                                                       | 6500                     | 1PH8165-1 F2 ■■■■1                  |
|                                                  |              | 68 (91.2)                                        | 325 (240)                               | 116              | 426              | 67.9              | 3050                                                       | 6500                     | 1PH8166-1 F2 ■■■■1                  |

For versions, see  
Article No. supplements

# SIMOTICS motors and geared motors

## SIMOTICS M-1PH8 main motors for SINAMICS S110/SINAMICS S120

### SIMOTICS M-1PH8 asynchronous (induction) motors – Water cooling, IP65 degree of protection

| Motor type<br>(repeated)              | Power<br>factor | Magnetiz-<br>ing current | Efficiency  | Moment of<br>inertia                                          | Weight,<br>approx. | Terminal<br>box | For SINAMICS S110/SINAMICS S120       |                                                                                                                             |
|---------------------------------------|-----------------|--------------------------|-------------|---------------------------------------------------------------|--------------------|-----------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
|                                       |                 |                          |             |                                                               |                    |                 | Rated output<br>current <sup>3)</sup> | PM240-2 Power Module<br>Internal air cooling<br>For further components,<br>see SINAMICS S110/<br>SINAMICS S120 drive system |
|                                       | $\cos \varphi$  | $I_{\mu}$<br>A           | $\eta$<br>% | $J$<br>kgm <sup>2</sup> (lb <sub>F</sub> -in-s <sup>2</sup> ) | kg (lb)            | Type            | $I_{\text{rated}}$<br>A               | Article No.                                                                                                                 |
| Line voltage 380 ... 480 V 3 AC       |                 |                          |             |                                                               |                    |                 |                                       |                                                                                                                             |
| 1PH8083-1.F....                       | 0.84            | 3.6                      | 78.4        | 0.0064 (0.06)                                                 | 36 (79.4)          | gk803           | 13.2                                  | 6SL3210-1PE21-4■L0                                                                                                          |
| 1PH8087-1.F....                       | 0.78            | 7.2                      | 81.4        | 0.0089 (0.08)                                                 | 44 (97.0)          | gk803           | 18                                    | 6SL3210-1PE21-8■L0                                                                                                          |
| 1PH8101-1.F....                       | 0.81            | 6                        | 81.3        | 0.0138 (0.12)                                                 | 51 (112)           | gk823           | 18                                    | 6SL3210-1PE21-8■L0                                                                                                          |
| 1PH8103-1.F....                       | 0.82            | 8.6                      | 82.7        | 0.0172 (0.15)                                                 | 60 (132)           | gk823           | 26                                    | 6SL3210-1PE22-7■L0                                                                                                          |
| 1PH8105-1.F....                       | 0.81            | 13.3                     | 84.3        | 0.0252 (0.22)                                                 | 74 (163)           | gk823           | 32                                    | 6SL3210-1PE23-3■L0                                                                                                          |
| 1PH8107-1.F....                       | 0.83            | 17.8                     | 82.9        | 0.0289 (0.26)                                                 | 83 (183)           | gk823           | 45                                    | 6SL3210-1PE24-5■L0                                                                                                          |
| 1PH8131-1.F....                       | 0.89            | 9.2                      | 88.3        | 0.059 (0.52)                                                  | 105 (231)          | gk843           | 32                                    | 6SL3210-1PE23-3■L0                                                                                                          |
| 1PH8133-1.F....                       | 0.86            | 14.2                     | 89.7        | 0.076 (0.67)                                                  | 123 (271)          | gk843           | 38                                    | 6SL3210-1PE23-8■L0                                                                                                          |
| 1PH8135-1.F....                       | 0.85            | 20.3                     | 90.1        | 0.094 (0.83)                                                  | 141 (311)          | gk843           | 60                                    | 6SL3210-1PE26-0■L0                                                                                                          |
| 1PH8137-1.F....                       | 0.86            | 25.3                     | 90          | 0.109 (0.96)                                                  | 157 (346)          | gk843           | 75                                    | 6SL3210-1PE27-5■L0                                                                                                          |
| 1PH8138-1.F....                       | 0.88            | 27.1                     | 88.2        | 0.109 (0.96)                                                  | 157 (346)          | gk843           | 75                                    | 6SL3210-1PE27-5■L0                                                                                                          |
| 1PH8163-1.F....                       | 0.88            | 27.4                     | 91.6        | 0.216 (1.91)                                                  | 229 (505)          | gk873           | 90                                    | 6SL3210-1PE28-8■L0                                                                                                          |
| 1PH8165-1.F....                       | 0.87            | 37.2                     | 93          | 0.232 (2.05)                                                  | 264 (582)          | gk873           | 110                                   | 6SL3210-1PE31-1■L0                                                                                                          |
| 1PH8166-1.F....                       | 0.88            | 36.7                     | 93.6        | 0.232 (2.05)                                                  | 269 (593)          | gk873           | 145                                   | 6SL3210-1PE31-5■L0                                                                                                          |
| Line voltage 380 ... 480 V 3 AC       |                 |                          |             |                                                               |                    |                 |                                       |                                                                                                                             |
| 1PH8083-1.F....                       | 0.83            | 3.8                      | 83.9        | 0.0064 (0.06)                                                 | 36 (79.4)          | gk803           | 13.2                                  | 6SL3210-1PE21-4■L0                                                                                                          |
| 1PH8087-1.F....                       | 0.79            | 6.8                      | 86.8        | 0.0089 (0.08)                                                 | 44 (97.0)          | gk803           | 18                                    | 6SL3210-1PE21-8■L0                                                                                                          |
| 1PH8101-1.F....                       | 0.82            | 4.4                      | 85.8        | 0.0138 (0.12)                                                 | 51 (112)           | gk823           | 18                                    | 6SL3210-1PE21-8■L0                                                                                                          |
| 1PH8103-1.F....                       | 0.82            | 8.5                      | 86.9        | 0.0172 (0.15)                                                 | 60 (132)           | gk823           | 26                                    | 6SL3210-1PE22-7■L0                                                                                                          |
| 1PH8105-1.F....                       | 0.82            | 11.7                     | 89.4        | 0.0252 (0.22)                                                 | 74 (163)           | gk823           | 32                                    | 6SL3210-1PE23-3■L0                                                                                                          |
| 1PH8107-1.F....                       | 0.81            | 19.1                     | 87.3        | 0.0289 (0.26)                                                 | 83 (183)           | gk823           | 45                                    | 6SL3210-1PE24-5■L0                                                                                                          |
| 1PH8131-1.F....                       | 0.90            | 7.2                      | 91.2        | 0.059 (0.52)                                                  | 105 (231)          | gk843           | 32                                    | 6SL3210-1PE23-3■L0                                                                                                          |
| 1PH8133-1.F....                       | 0.86            | 14.4                     | 93.8        | 0.076 (0.67)                                                  | 123 (271)          | gk843           | 38                                    | 6SL3210-1PE23-8■L0                                                                                                          |
| 1PH8135-1.F....                       | 0.85            | 19.9                     | 93.1        | 0.094 (0.83)                                                  | 141 (311)          | gk843           | 60                                    | 6SL3210-1PE26-0■L0                                                                                                          |
| 1PH8137-1.F....                       | 0.86            | 25.4                     | 92.8        | 0.109 (0.96)                                                  | 157 (346)          | gk843           | 75                                    | 6SL3210-1PE27-5■L0                                                                                                          |
| 1PH8138-1.F....                       | 0.86            | 28.4                     | 92          | 0.109 (0.96)                                                  | 157 (346)          | gk843           | 75                                    | 6SL3210-1PE27-5■L0                                                                                                          |
| 1PH8163-1.F....                       | 0.88            | 26.9                     | 92.5        | 0.216 (1.91)                                                  | 229 (505)          | gk873           | 90                                    | 6SL3210-1PE28-8■L0                                                                                                          |
| 1PH8165-1.F....                       | 0.88            | 34                       | 94          | 0.232 (2.05)                                                  | 264 (582)          | gk873           | 110                                   | 6SL3210-1PE31-1■L0                                                                                                          |
| 1PH8166-1.F....                       | 0.89            | 32.8                     | 94.1        | 0.232 (2.05)                                                  | 269 (593)          | gk873           | 145                                   | 6SL3210-1PE31-5■L0                                                                                                          |
| Line filter:<br>Without<br>Integrated |                 |                          |             |                                                               |                    |                 |                                       | U<br>A                                                                                                                      |

<sup>1)</sup>  $n_2$ : Maximum permissible thermal speed at constant power.

<sup>2)</sup>  $n_{\text{max}}$ : Maximum speed that must not be exceeded (applicable to Standard: 14th data position B to C).

<sup>3)</sup> The rated pulse frequencies must be taken into account. The rated motor data is valid for 4 kHz.

# SIMOTICS motors and geared motors

SIMOTICS M-1PH8 main motors for SINAMICS S110/SINAMICS S120

Article No. supplements for SIMOTICS M-1PH8 without holding brake > SH 80 to SH 160

## Selection and ordering data

| Data position in Article No.                                                                                           | 1 | 2                    | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |   |   |   |   |  |   |
|------------------------------------------------------------------------------------------------------------------------|---|----------------------|---|---|---|---|---|---|---|----|----|----|----|----|----|----|---|---|---|---|--|---|
| Shaft height 80                                                                                                        | 1 | P                    | H | 8 | 0 | 8 | . | - | ■ | ■  | ■  | ■  | ■  | -  | ■  | ■  | ■ | . | - | Z |  |   |
| Shaft height 100                                                                                                       | 1 | P                    | H | 8 | 1 | 0 | . | - | ■ | ■  | ■  | ■  | ■  | -  | ■  | ■  | ■ | . | - | Z |  |   |
| Shaft height 132                                                                                                       | 1 | P                    | H | 8 | 1 | 3 | . | - | ■ | ■  | ■  | ■  | ■  | -  | ■  | ■  | ■ | . | - | Z |  |   |
| Shaft height 160                                                                                                       | 1 | P                    | H | 8 | 1 | 6 | . | - | ■ | ■  | ■  | ■  | ■  | -  | ■  | ■  | ■ | . | - | Z |  |   |
| Overall length (cannot be selected, determined by the choice of rated power)                                           |   |                      |   |   |   |   | . |   |   |    |    |    |    |    |    |    |   |   |   |   |  |   |
| Asynchronous version                                                                                                   |   |                      |   |   |   |   |   | 1 |   |    |    |    |    |    |    |    |   |   |   |   |  |   |
| Encoder systems for motors <u>without</u> DRIVE-CLiQ interface                                                         |   |                      |   |   |   |   |   |   |   |    |    |    |    |    |    |    |   |   |   |   |  |   |
| Without encoder <sup>1)</sup>                                                                                          |   |                      |   |   |   |   |   |   | A |    |    |    |    |    |    |    |   | 2 |   |   |  |   |
| Absolute encoder EnDat 2048 S/R (encoder AM2048S/R) <sup>2)</sup>                                                      |   |                      |   |   |   |   |   |   | E |    |    |    |    |    |    |    |   | 2 |   |   |  |   |
| Incremental encoder HTL 1024 S/R (encoder HTL1024S/R) <sup>1) 3)</sup>                                                 |   |                      |   |   |   |   |   |   | H |    |    |    |    |    |    |    |   | 2 |   |   |  |   |
| Incremental encoder HTL 2048 S/R (encoder HTL2048S/R) <sup>1) 4)</sup>                                                 |   |                      |   |   |   |   |   |   | J |    |    |    |    |    |    |    |   | 2 |   |   |  |   |
| Incremental encoder HTL 1024 S/R (encoder HTL1024S/R) with connection via additional terminal box <sup>1) 3) 10)</sup> |   |                      |   |   |   |   |   |   | W |    |    |    |    |    |    |    |   | 2 |   |   |  |   |
| Incremental encoder HTL 2048 S/R (encoder HTL2048S/R) with connection via additional terminal box <sup>1) 4) 10)</sup> |   |                      |   |   |   |   |   |   | Y |    |    |    |    |    |    |    |   | 2 |   |   |  |   |
| Incremental encoder sin/cos 1 V <sub>pp</sub> 2048 S/R with C and D tracks (encoder IC2048S/R) <sup>2)</sup>           |   |                      |   |   |   |   |   |   | M |    |    |    |    |    |    |    |   | 2 |   |   |  |   |
| Incremental encoder sin/cos 1 V <sub>pp</sub> 512 S/R without C and D tracks (encoder IN512S/R) <sup>1) 5)</sup>       |   |                      |   |   |   |   |   |   | T |    |    |    |    |    |    |    |   | 2 |   |   |  |   |
| Encoder systems for motors <u>with</u> DRIVE-CLiQ interface                                                            |   |                      |   |   |   |   |   |   |   |    |    |    |    |    |    |    |   |   |   |   |  |   |
| Absolute encoder 22-bit single-turn + 12-bit multi-turn (encoder AM22DQ) <sup>2)</sup>                                 |   |                      |   |   |   |   |   |   | F |    |    |    |    |    |    |    |   | 1 |   |   |  |   |
| Incremental encoder 22-bit with commutation position (encoder IC22DQ) <sup>2)</sup>                                    |   |                      |   |   |   |   |   |   | D |    |    |    |    |    |    |    |   |   | 1 |   |  |   |
| Incremental encoder 20-bit without commutation position (encoder IN20DQ) <sup>1) 5)</sup>                              |   |                      |   |   |   |   |   |   | U |    |    |    |    |    |    |    |   |   | 1 |   |  |   |
| Rated speeds (380 V to 480 V 3 AC) (winding design)                                                                    |   |                      |   |   |   |   |   |   |   |    |    |    |    |    |    |    |   |   |   |   |  |   |
| 400 rpm, 500 rpm, 600 rpm, 700 rpm                                                                                     |   |                      |   |   |   |   |   |   | B |    |    |    |    |    |    |    |   |   |   |   |  |   |
| 1000 rpm, 1150 rpm, 1350 rpm, 1500 rpm                                                                                 |   |                      |   |   |   |   |   |   | D |    |    |    |    |    |    |    |   |   |   |   |  |   |
| 1500 rpm, 1750 rpm, 2000 rpm, 2200 rpm                                                                                 |   |                      |   |   |   |   |   |   | F |    |    |    |    |    |    |    |   |   |   |   |  |   |
| 2000 rpm, 2300 rpm, 2650 rpm, 2800 rpm                                                                                 |   |                      |   |   |   |   |   |   | G |    |    |    |    |    |    |    |   |   |   |   |  |   |
| 2500 rpm, 2800 rpm, 3000 rpm                                                                                           |   |                      |   |   |   |   |   |   | L |    |    |    |    |    |    |    |   |   |   |   |  |   |
| 3000 rpm, 3300 rpm, 3600 rpm, 3900 rpm                                                                                 |   |                      |   |   |   |   |   |   | M |    |    |    |    |    |    |    |   |   |   |   |  |   |
| Cooling                                                                                                                |   | Degree of protection |   |   |   |   |   |   |   |    |    |    |    |    |    |    |   |   |   |   |  |   |
| Forced ventilation DE → NDE                                                                                            |   | IP55                 |   |   |   |   |   |   |   |    |    | 0  |    |    |    |    |   |   |   |   |  |   |
| Forced ventilation NDE → DE                                                                                            |   | IP55                 |   |   |   |   |   |   |   |    |    | 1  |    |    |    |    |   |   |   |   |  |   |
| Water cooling                                                                                                          |   | IP65                 |   |   |   |   |   |   |   |    |    | 2  |    |    |    |    |   |   |   |   |  |   |
| Type of construction                                                                                                   |   |                      |   |   |   |   |   |   |   |    |    |    |    |    |    |    |   |   |   |   |  |   |
| IM B3 (IM V5, IM V6, IM B6, IM B7, IM B8)                                                                              |   |                      |   |   |   |   |   |   |   |    |    |    | 0  |    |    |    |   |   |   |   |  |   |
| IM B5 (IM V1, IM V3) <sup>12)</sup>                                                                                    |   |                      |   |   |   |   |   |   |   |    |    |    | 2  |    |    |    |   |   |   |   |  |   |
| IM B35 (IM V15, IM V35) <sup>6)</sup>                                                                                  |   |                      |   |   |   |   |   |   |   |    |    |    | 3  |    |    |    |   |   |   |   |  |   |
| Version status <sup>11)</sup>                                                                                          |   |                      |   |   |   |   |   |   |   |    |    |    |    |    |    |    |   |   |   |   |  |   |
| Special version (order codes required for options)                                                                     |   |                      |   |   |   |   |   |   |   |    |    |    |    |    |    |    |   |   |   |   |  | Z |

See next page for the  
13th to 16th digit  
of the Article No.

## Ordering example

| Selection criteria    | Version                                                                             | Structure of the Article No.       |
|-----------------------|-------------------------------------------------------------------------------------|------------------------------------|
| <b>1PH8 motor</b>     | Asynchronous version, water cooling<br>Shaft height 132<br>Version status 1         | <b>1PH8131-1 . . . 2 . . . . 1</b> |
| Encoder system        | Incremental encoder HTL 1024 S/R (encoder HTL1024S/R)                               | <b>1PH8131-1H . 2 . . . . 1</b>    |
| Rated operating point | 1500 rpm, 15 kW (20.1 hp), 96 Nm (70.8 lb <sub>f</sub> -ft)                         | <b>1PH8131-1HF2 . . . . 1</b>      |
| Type of construction  | IM B3 (IM V5, IM V6)                                                                | <b>1PH8131-1HF20 . . . . 1</b>     |
| Shaft extension DE    | Plain shaft                                                                         | <b>1PH8131-1HF20-0 . . . 1</b>     |
| Bearing version       | Standard<br>Vibration severity R/A<br>Shaft and flange accuracy R                   | <b>1PH8131-1HF20-0B . 1</b>        |
| Connection            | Cable connection terminal box top<br>Cable entry on the right, signal connection DE | <b>1PH8131-1HF20-0BA 1</b>         |

# SIMOTICS motors and geared motors

## SIMOTICS M-1PH8 main motors for SINAMICS S110/SINAMICS S120

Article No. supplements for SIMOTICS M-1PH8 without holding brake > SH 80 to SH 160**Selection and ordering data** (continued)

| Data position in Article No.                       |  | 1                                              | 2 | 3 | 4 | 5                  | 6 | 7 | 8 | 9 | 10 | 11                       | 12 | 13                        | 14 | 15 | 16 |   |   |   |   |  |  |  |  |
|----------------------------------------------------|--|------------------------------------------------|---|---|---|--------------------|---|---|---|---|----|--------------------------|----|---------------------------|----|----|----|---|---|---|---|--|--|--|--|
|                                                    |  | 1                                              | P | H | 8 | .                  | . | . | - | ■ | ■  | ■                        | ■  | ■                         | -  | ■  | ■  | ■ | . | - | Z |  |  |  |  |
| Shaft extension (DE)                               |  | Balancing                                      |   |   |   |                    |   |   |   |   |    |                          |    |                           |    |    |    |   |   |   |   |  |  |  |  |
| Plain shaft                                        |  | —                                              |   |   |   |                    |   |   |   |   |    |                          |    |                           |    |    |    |   | 0 |   |   |  |  |  |  |
| Feather key                                        |  | Full-key                                       |   |   |   |                    |   |   |   |   |    |                          |    |                           |    |    |    |   | 1 |   |   |  |  |  |  |
| Feather key                                        |  | Half-key                                       |   |   |   |                    |   |   |   |   |    |                          |    |                           |    |    |    |   | 2 |   |   |  |  |  |  |
| Bearing                                            |  | Vibration severity acc. to Siemens/EN 60034-14 |   |   |   |                    |   |   |   |   |    |                          |    | Shaft and flange accuracy |    |    |    |   |   |   |   |  |  |  |  |
| Standard with location bearing <sup>13)</sup>      |  | R/A                                            |   |   |   |                    |   |   |   |   |    |                          |    | R                         |    |    |    |   | B |   |   |  |  |  |  |
| Standard with location bearing <sup>13)</sup>      |  | S/A                                            |   |   |   |                    |   |   |   |   |    |                          |    | R                         |    |    |    |   | C |   |   |  |  |  |  |
| Standard with location bearing <sup>1) 13)</sup>   |  | SR/A                                           |   |   |   |                    |   |   |   |   |    |                          |    | R                         |    |    |    |   | D |   |   |  |  |  |  |
| Standard <sup>13)</sup>                            |  | R/A                                            |   |   |   |                    |   |   |   |   |    |                          |    | R                         |    |    |    |   | G |   |   |  |  |  |  |
| Standard <sup>13)</sup>                            |  | S/A                                            |   |   |   |                    |   |   |   |   |    |                          |    | R                         |    |    |    |   | H |   |   |  |  |  |  |
| Increased radial forces <sup>13) 15)</sup>         |  | R/A                                            |   |   |   |                    |   |   |   |   |    |                          |    | R                         |    |    |    |   | F |   |   |  |  |  |  |
| Performance <sup>7)</sup>                          |  | SPECIAL/B                                      |   |   |   |                    |   |   |   |   |    |                          |    | SPECIAL                   |    |    |    |   | L |   |   |  |  |  |  |
| Advanced Lifetime <sup>8) 13)</sup>                |  | S/A                                            |   |   |   |                    |   |   |   |   |    |                          |    | R                         |    |    |    |   | Q |   |   |  |  |  |  |
| Power connection (looking at DE)                   |  |                                                |   |   |   |                    |   |   |   |   |    |                          |    |                           |    |    |    |   |   |   |   |  |  |  |  |
| <u>Terminal box</u>                                |  |                                                |   |   |   | <u>Cable entry</u> |   |   |   |   |    | <u>Signal connection</u> |    |                           |    |    |    |   |   |   |   |  |  |  |  |
| Top                                                |  |                                                |   |   |   | Right              |   |   |   |   |    | DE                       |    |                           |    |    |    |   |   |   | A |  |  |  |  |
| Top                                                |  |                                                |   |   |   | Left               |   |   |   |   |    | DE                       |    |                           |    |    |    |   |   |   | B |  |  |  |  |
| Top                                                |  |                                                |   |   |   | NDE                |   |   |   |   |    | Left                     |    |                           |    |    |    |   |   |   | C |  |  |  |  |
| Top <sup>14)</sup>                                 |  |                                                |   |   |   | DE                 |   |   |   |   |    | Left                     |    |                           |    |    |    |   |   |   | D |  |  |  |  |
| <u>Power connector</u>                             |  |                                                |   |   |   |                    |   |   |   |   |    |                          |    |                           |    |    |    |   |   |   |   |  |  |  |  |
| Top <sup>9)</sup>                                  |  |                                                |   |   |   | Right              |   |   |   |   |    | DE                       |    |                           |    |    |    |   |   |   | E |  |  |  |  |
| Top <sup>9)</sup>                                  |  |                                                |   |   |   | Left               |   |   |   |   |    | DE                       |    |                           |    |    |    |   |   |   | F |  |  |  |  |
| Top <sup>9)</sup>                                  |  |                                                |   |   |   | NDE                |   |   |   |   |    | Left                     |    |                           |    |    |    |   |   |   | G |  |  |  |  |
| Top <sup>9)</sup>                                  |  |                                                |   |   |   | DE                 |   |   |   |   |    | Left                     |    |                           |    |    |    |   |   |   | H |  |  |  |  |
| Version status <sup>11)</sup>                      |  |                                                |   |   |   |                    |   |   |   |   |    |                          |    |                           |    |    |    |   |   |   |   |  |  |  |  |
| Special version (order codes required for options) |  |                                                |   |   |   |                    |   |   |   |   |    |                          |    |                           |    |    |    |   |   |   |   |  |  |  |  |
| Z                                                  |  |                                                |   |   |   |                    |   |   |   |   |    |                          |    |                           |    |    |    |   |   |   |   |  |  |  |  |

<sup>1)</sup> Only possible when 8th data position is: 1 (asynchronous version).

<sup>2)</sup> Limited to  $n_{\max} = 12000$  rpm.

<sup>3)</sup> Limited to  $n_{\max} = 9000$  rpm.

<sup>4)</sup> Limited to  $n_{\max} = 4600$  rpm.

<sup>5)</sup> Limited to  $n_{\max} = 15000$  rpm.

<sup>6)</sup> Only possible for shaft height 100, 132, and 160.

<sup>7)</sup> Only possible when 8th data position is: 1 (asynchronous version).

Shaft height 80: limited to  $n_{\max} = 15000$  rpm,

Shaft height 100: limited to  $n_{\max} = 12000$  rpm,

Shaft height 132: limited to  $n_{\max} = 10000$  rpm,

Shaft height 160: limited to  $n_{\max} = 9000$  rpm; not possible when 12th data position is: 2 (IM B5).

<sup>8)</sup> Limited to  $n_{\max} = 5000$  rpm, shaft height 132:  $n_{\max} = 4500$  rpm, shaft height 160:  $n_{\max} = 4000$  rpm.

<sup>9)</sup> At a shaft height of 100, a power connector is only possible up to a maximum stall current of  $I_0 = 36$  A, At a shaft height of 132, a power connector is only possible up to a maximum stall current of  $I_0 = 85$  A, A power connector is not possible for shaft height 160.

<sup>10)</sup> Only possible when 14th data position is: B, C, D, G, H, Q, F, and 15th data position is: A and B.

<sup>11)</sup> Directly coupled to 9th data position.

<sup>12)</sup> Not possible with shaft height 160 and 14th data position: L.

<sup>13)</sup> Not possible when 9th data position is: T, U.

<sup>14)</sup> Not possible with shaft height 160 and 8th data position is: 2 or 4 (synchronous version).

<sup>15)</sup> Limited to shaft height 100:  $n_{\max} = 7000$  rpm, shaft height 132:  $n_{\max} = 6500$  rpm, shaft height 160:  $n_{\max} = 5300$  rpm.

# SIMOTICS motors and geared motors

## Mechatronic components

### Electric cylinders

#### Overview



Axial mounting of a SIMOTICS S-1FK7 motor on the linear unit with mounting kit and accessories



Parallel mounting of a SIMOTICS S-1FK7 motor on the linear unit with mounting kit and accessories

The electric cylinder comprises a CASM linear unit supplied by SKF and a SIMOTICS S-1FK7 motor. The CASM linear unit converts the rotary motion of the SIMOTICS S-1FK7 motor into a highly dynamic linear movement and is a perfect substitute for pneumatic or hydraulic cylinders in many applications. By contrast with pneumatic and hydraulic cylinders, electric cylinders allow the driven machine to approach any position with extreme precision solely on the basis of setpoints transferred to an inverter from the SINAMICS S110 or SINAMICS S120 range.

#### Benefits

- Modular system with wide variety of options.
- Substitute for hydraulic and pneumatic cylinders in most applications.
- No compressed air/hydraulic fluid required – helps to cut costs (no need to supply compressed air or hydraulic fluid), reduces noise emissions significantly and lowers energy consumption in operation.
- Highly dynamic, precise positioning with high repeat accuracy.
- Mechanical conversion is simple because electric cylinders are essentially the same size as pneumatic cylinders. Furthermore, the relevant pneumatic cylinder accessories can also be used for electric cylinders.
- The SIMOTICS S-1FK7 motors are attached to the linear unit supplied by SKF by means of adapters also supplied by SKF, making it very easy for the customer to install the motor.

#### Application

The electric cylinders (CASM linear unit supplied by SKF in conjunction with SIMOTICS S-1FK7 motors and SINAMICS S110/SINAMICS S120 converters) can be used for any application which requires a linear motion and/or a defined force. Their areas of application are the same as those for pneumatic and hydraulic cylinders.

The electric cylinders are used, for example, in production machines such as:

- Machines used in the wood, glass, and ceramics industries
- Metalworking and coating machines
- Printing machines
- Plastics processing machines
- Packaging machines

Function examples:

- Positioning of cutters
- Edge guidance/edge cutting
- Retainers
- Buffers/sorters/slide gates
- Nozzle holders

Notes:

- Technical advice must be sought for applications involving continuous short-stroke movements (less than three times screw pitch).
- The electric cylinder must be assembled (depending on the stroke length) in such a way as to minimize lateral forces.
- The electric cylinder is not self-locking – it might be necessary to provide a motor holding brake.

#### Design

Electric cylinders essentially comprise the CASM linear unit (with a lead screw or ball screw) housed in an extruded casing and a SIMOTICS S-1FK7 servomotor attached to the linear unit by means of an adapter kit.

The motor can be mounted on the linear unit in two different ways:

- Axial mounting – see first picture:  
Motor is attached using an axial adapter kit (containing all the necessary parts including the coupling)
- Parallel mounting – see second picture:  
Motor is attached using a parallel adapter kit (containing all the necessary parts including timing pulley and toothed belt).

Depending on the linear unit and SIMOTICS S-1FK7 motor used, higher forces can be obtained with the axial arrangement option than with the parallel arrangement driven by a toothed belt.

**Design** (continued)

The SIMOTICS S-1FK7 motor is normally attached to the linear unit by the user by means of the appropriate adapter. The adapter kit is included in the scope of supply of the linear unit.

**Technical specifications**

The technical specifications given below are intended to provide an initial overview only and refer to operation of the linear units with SIMOTICS S-1FK7 motors (see equipment combinations in the tables).

**CASM-32 linear unit**

|                                                                                             | Suitable motor type | CASM-32-LS                       | BS                               | BN                               |
|---------------------------------------------------------------------------------------------|---------------------|----------------------------------|----------------------------------|----------------------------------|
| <b>Spindle type</b>                                                                         | –                   | Lead screw                       | Ball screw                       | Ball screw                       |
| <b>Screw pitch</b>                                                                          | –                   | 1.5 mm/rev<br>(0.06 in/rev)      | 3 mm/rev<br>(0.12 in/rev)        | 10 mm/rev<br>(0.39 in/rev)       |
| <b>Max. force <math>F_{\max}</math></b>                                                     |                     |                                  |                                  |                                  |
| Parallel arrangement                                                                        | 1FK7015             | 300 N<br>(67.4 lb <sub>f</sub> ) | 700 N<br>(157 lb <sub>f</sub> )  | 450 N<br>(101 lb <sub>f</sub> )  |
| Axial arrangement                                                                           | 1FK7015             | 300 N<br>(67.4 lb <sub>f</sub> ) | 700 N<br>(157 lb <sub>f</sub> )  | 450 N<br>(101 lb <sub>f</sub> )  |
|                                                                                             | 1FK7022             | 300 N<br>(67.4 lb <sub>f</sub> ) | 700 N<br>(157 lb <sub>f</sub> )  | 630 N<br>(142 lb <sub>f</sub> )  |
| <b>Max. average force <math>F_m</math></b><br>(average force over a completed motion cycle) |                     |                                  |                                  |                                  |
| Parallel arrangement                                                                        | 1FK7015             | 203 N<br>(45.6 lb <sub>f</sub> ) | 293 N<br>(65.9 lb <sub>f</sub> ) | 151 N<br>(33.9 lb <sub>f</sub> ) |
| Axial arrangement                                                                           | 1FK7015             | 203 N<br>(45.6 lb <sub>f</sub> ) | 293 N<br>(65.9 lb <sub>f</sub> ) | 151 N<br>(33.9 lb <sub>f</sub> ) |
|                                                                                             | 1FK7022             | 300 N<br>(67.4 lb <sub>f</sub> ) | 672 N<br>(151 lb <sub>f</sub> )  | 357 N<br>(80.3 lb <sub>f</sub> ) |
| <b>Max. velocity</b>                                                                        |                     | 60 mm/s<br>(2.36 in/s)           | 150 mm/s<br>(5.91 in/s)          | 500 mm/s<br>(19.7 in/s)          |
| <b>Stroke</b>                                                                               |                     | 50 ... 400 mm (1.97 ... 15.7 in) |                                  |                                  |

**CASM-40 linear unit**

|                                                                                             | Suitable motor type | CASM-40-LS                        | BS                               | BN                               |
|---------------------------------------------------------------------------------------------|---------------------|-----------------------------------|----------------------------------|----------------------------------|
| <b>Spindle type</b>                                                                         | –                   | Lead screw                        | Ball screw                       | Ball screw                       |
| <b>Screw pitch</b>                                                                          | –                   | 2.5 mm/rev<br>(0.1 in/rev)        | 5 mm/rev<br>(0.2 in/rev)         | 12.7 mm/rev<br>(0.5 in/rev)      |
| <b>Max. force <math>F_{\max}</math></b>                                                     |                     |                                   |                                  |                                  |
| Parallel arrangement                                                                        | 1FK7022             | 600 N<br>(135 lb <sub>f</sub> )   | 2375 N<br>(534 lb <sub>f</sub> ) | 1163 N<br>(261 lb <sub>f</sub> ) |
| Axial arrangement                                                                           | 1FK7022             | 600 N<br>(135 lb <sub>f</sub> )   | 2375 N<br>(534 lb <sub>f</sub> ) | 1318 N<br>(296 lb <sub>f</sub> ) |
|                                                                                             | 1FK7034             | 600 N<br>(135 lb <sub>f</sub> )   | 2375 N<br>(534 lb <sub>f</sub> ) | 1550 N<br>(348 lb <sub>f</sub> ) |
| <b>Max. average force <math>F_m</math></b><br>(average force over a completed motion cycle) |                     |                                   |                                  |                                  |
| Parallel arrangement                                                                        | 1FK7022             | 408 N<br>(91.7 lb <sub>f</sub> )  | 640 N<br>(144 lb <sub>f</sub> )  | 301 N<br>(67.7 lb <sub>f</sub> ) |
| Axial arrangement                                                                           | 1FK7022             | 408 N<br>(91.7 lb <sub>f</sub> )  | 640 N<br>(144 lb <sub>f</sub> )  | 301 N<br>(67.7 lb <sub>f</sub> ) |
|                                                                                             | 1FK7034             | 600 N<br>(135 lb <sub>f</sub> )   | 1219 N<br>(274 lb <sub>f</sub> ) | 572 N<br>(129 lb <sub>f</sub> )  |
| <b>Max. velocity</b>                                                                        | –                   | 70 mm/s<br>(2.76 in/s)            | 300 mm/s<br>(11.8 in/s)          | 825 mm/s<br>(32.5 in/s)          |
| <b>Stroke</b>                                                                               | –                   | 100 ... 600 mm (3.94 ... 23.6 in) |                                  |                                  |

**Technical specifications** (continued)**CASM-63 linear unit**

|                                                                                             | Suitable motor type | CASM-63-LS                        | BS                                | BN                               |
|---------------------------------------------------------------------------------------------|---------------------|-----------------------------------|-----------------------------------|----------------------------------|
| <b>Spindle type</b>                                                                         | –                   | Lead screw                        | Ball screw                        | Ball screw                       |
| <b>Screw pitch</b>                                                                          | –                   | 4 mm/rev<br>(0.16 in/rev)         | 10 mm/rev<br>(0.39 in/rev)        | 20 mm/rev<br>(0.79 in/rev)       |
| <b>Max. force <math>F_{\max}</math></b>                                                     |                     |                                   |                                   |                                  |
| Parallel arrangement                                                                        | 1FK7034             | 1000 N<br>(225 lb <sub>f</sub> )  | 2583 N<br>(581 lb <sub>f</sub> )  | 1339 N<br>(301 lb <sub>f</sub> ) |
| Axial arrangement                                                                           | 1FK7034             | 1000 N<br>(225 lb <sub>f</sub> )  | 3052 N<br>(686 lb <sub>f</sub> )  | 1583 N<br>(356 lb <sub>f</sub> ) |
|                                                                                             | 1FK7044             | 1000 N<br>(225 lb <sub>f</sub> )  | 5400 N<br>(1214 lb <sub>f</sub> ) | 2800 N<br>(629 lb <sub>f</sub> ) |
| <b>Max. average force <math>F_m</math></b><br>(average force over a completed motion cycle) |                     |                                   |                                   |                                  |
| Parallel arrangement                                                                        | 1FK7034             | 527 N<br>(118 lb <sub>f</sub> )   | 708 N<br>(159 lb <sub>f</sub> )   | 367 N<br>(82.5 lb <sub>f</sub> ) |
| Axial arrangement                                                                           | 1FK7034             | 527 N<br>(118 lb <sub>f</sub> )   | 708 N<br>(159 lb <sub>f</sub> )   | 367 N<br>(82.5 lb <sub>f</sub> ) |
|                                                                                             | 1FK7044             | 1000 N<br>(225 lb <sub>f</sub> )  | 1745 N<br>(392 lb <sub>f</sub> )  | 905 N<br>(203 lb <sub>f</sub> )  |
| <b>Max. velocity</b>                                                                        | –                   | 70 mm/s<br>(2.76 in/s)            | 530 mm/s<br>(20.9 in/s)           | 1060 mm/s<br>(41.7 in/s)         |
| <b>Stroke</b>                                                                               | –                   | 100 ... 800 mm (3.94 ... 31.5 in) |                                   |                                  |

**More information**

Further information on CASM linear units and adapters, such as technical specifications and selection and ordering data, can be found on the Internet at:

<https://support.industry.siemens.com/cs/document/109744083>

## SIMOTICS motors and geared motors

### Mechatronic components

#### LTS and LTSE complete linear motor axes

##### Overview



LTS linear motor complete axes without bellows cover

The LTS/LTSE linear motor complete axes supplied by SKF are units comprising a slide top and a base which are supplied ready for installation and operation. A profile rail guide, the primary and secondary motor parts, a linear encoder including limit switches, limit position dampers and cable trailing device connection are fully integrated into the linear complete axis.

A variant of the SIMOTICS L-1FN3 linear motor series based on convection cooling is used. These axes are thus suitable for use in precise, highly dynamic short-stroke applications which require a high degree of repeat accuracy as well as for the implementation of dynamic linear motions for positioning workpieces and tools.

The linear motors are deployed in combination with SINAMICS S120 inverters.

##### Benefits

- Excellent dynamic response, positioning accuracy and control stability
- Outstanding synchronization characteristics coupled with high static and dynamic stability
- Incremental and absolute position measuring systems are available
- Modular system offering numerous options, lengths and widths
- Multiple slide tops (of different sizes if required) on a single base

##### Application

The LTS/LTSE linear motor complete axes are used whenever alternative options such as toothed belts and screws are too inaccurate, too slow or too inflexible in order to raise the throughput, the cycle time, the accuracy or the product variance of a machine or a testing facility. The low-wear design (guides require only minimal lubrication following assembly) also reduces maintenance requirements.

Typical applications for the LTS/LTSE include:

- Workpiece transfer within assembly processes
- Laser machining – to achieve linear accuracies within a range of a few  $\mu\text{m}$
- Measuring instruments – positioning/traversal of sensors, vision systems, probes
- Medical engineering – reliable, low-noise positioning in confined installation spaces
- Clamping systems (holding a part between two jaws (primary parts))
- Pick and place applications in (or at beginning or end of) production lines

##### Design

The LTS/LTSE linear motor complete axes consist of a stable aluminum base which supports a guide comprised of two profile rails, the secondary parts arranged between the rails, the linear measurement system and the inductive limit position sensors.

The 4 roller units (ball screw) belonging to the profile rail guide, the measuring probe of the linear encoder and the relevant primary part are all integrated into the slide top. The power and temperature sensor connectors are fitted to the casing of the slide top.

The scope of supply includes an adapter cable for the temperature sensor integrated in the primary part and (if required) for the measuring system to the encoder evaluation system (SME 120/125).

Convection-cooled linear motors from the tried-and-tested SIMOTICS L-1FN3 linear motor range developed by Siemens are used in the design. Each of the two series is available in three frame sizes and different lengths.

The LTS series is capable of higher operational accuracy ( $<20 \mu\text{m}$ ). The LTSE series is more flexible in its basic design which means that it can be adapted more easily to meet individual customer requirements and also allows the use of other SIMOTICS L-1FN3 motor types.

Linear motor complete axes are supplied as standard with bellows cover.

### Technical specifications

The technical specifications of the LTS and LTSE linear motor complete axes given below are intended to provide an initial overview only.

#### LTS linear motor complete axis

| Type                                                                   | Linear motor complete axis                |                                      |                                      |
|------------------------------------------------------------------------|-------------------------------------------|--------------------------------------|--------------------------------------|
|                                                                        | LTS 154                                   | LTS 182                              | LTS 212                              |
| <b>Widths</b>                                                          | 154 mm<br>(6.06 in)                       | 182 mm<br>(7.17 in)                  | 212 mm<br>(8.35 in)                  |
| Stroke range<br>(without bellows)                                      | 77 ... 1778 mm<br>(3.03 ... 70.0 in)      | 77 ... 1778 mm<br>(3.03 ... 70.0 in) | 77 ... 1778 mm<br>(3.03 ... 70.0 in) |
| <b>Rated force <math>F_{rated}</math></b>                              | 135 ... 265 N<br>(30.3 ... 59.6 lbf)      | 240 ... 725 N<br>(54.0 ... 163 lbf)  | 330 ... 995 N<br>(74.2 ... 224 lbf)  |
| <b>Rated current <math>I_{rated}</math></b>                            | 2.1 ... 3.4 A                             | 2.9 ... 8.8 A                        | 4.2 ... 12.8 A                       |
| <b>Max. velocity at<br/>rated force<br/><math>v_{maxFrated}</math></b> | 300 m/min<br>(984 ft/min)                 | 300 m/min<br>(984 ft/min)            | 300 m/min<br>(984 ft/min)            |
| <b>Maximum force<br/><math>F_{max}</math></b>                          | 320 ... 640 N<br>(71.9 ... 144 lbf)       | 680 ... 2030 N<br>(153 ... 456 lbf)  | 1030 ... 3100 N<br>(232 ... 697 lbf) |
| <b>Maximum current<br/><math>I_{max}</math></b>                        | 7.7 ... 12.6 A                            | 12.5 ... 37.6 A                      | 20.2 ... 60.6 A                      |
| <b>Max. velocity at<br/>maximum force<br/><math>v_{maxFmax}</math></b> | 144 ... 186 m/min<br>(472 ... 610 ft/min) | 150 m/min<br>(492 ft/min)            | 162 m/min<br>(531 ft/min)            |

Comments on LTS linear motor complete axes:

- Incremental, optical measuring system
- Bellows cover
- Up to three primary parts on a single secondary part
- For further options, see SKF
- Special versions available on request

#### LTSE linear motor complete axis

| Type                                                                   | Linear motor complete axis           |                                      |                                      |
|------------------------------------------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
|                                                                        | LTSE 165                             | LTSE 210                             | LTSE 250                             |
| <b>Widths</b>                                                          | 165 mm<br>(6.50 in)                  | 210 mm<br>(8.27 in)                  | 250 mm<br>(9.84 in)                  |
| Stroke range<br>(without bellows)                                      | 80 ... 1640 mm<br>(3.15 ... 64.6 in) | 80 ... 3560 mm<br>(3.15 ... 140 in)  | 60 ... 3540 mm<br>(2.36 ... 139 in)  |
| <b>Rated force <math>F_{rated}</math></b>                              | 265 N<br>(59.6 lbf)                  | 485 ... 725 N<br>(109 ... 163 lbf)   | 665 ... 995 N<br>(149 ... 224 lbf)   |
| <b>Rated current <math>I_{rated}</math></b>                            | 3.4 A                                | 5.9 ... 8.8 A                        | 8.5 ... 12.8 A                       |
| <b>Max. velocity at<br/>rated force<br/><math>v_{maxFrated}</math></b> | 300 m/min<br>(984 ft/min)            | 300 m/min<br>(984 ft/min)            | 300 m/min<br>(984 ft/min)            |
| <b>Maximum force<br/><math>F_{max}</math></b>                          | 640 N<br>(144 lbf)                   | 1350 ... 2030 N<br>(303 ... 456 lbf) | 2060 ... 3100 N<br>(463 ... 697 lbf) |
| <b>Maximum current<br/><math>I_{max}</math></b>                        | 12.6 A                               | 25.1 ... 37.6 A                      | 40.4 ... 60.6 A                      |
| <b>Max. velocity at<br/>maximum force<br/><math>v_{maxFmax}</math></b> | 144 m/min<br>(472 ft/min)            | 150 m/min<br>(492 ft/min)            | 162 m/min<br>(531 ft/min)            |

Comments on LTSE linear motor complete axes:

- Incremental/optical measuring system, inductive/absolute and inductive/incremental measuring systems are available
- Clamping elements can be integrated on request
- Limit position damping by shock absorbers or buffers
- Additional fans on request
- Multiple primary parts on a single secondary part
- Further options/special versions available on request

### More information

For more information on LTS/LTSE linear motor complete axes from SKF, such as technical specifications, selection and ordering data, see [www.skf.com/lts](http://www.skf.com/lts)

## SIMOTICS motors and geared motors

### Notes

## Engineering tools


**SINAMICS SELECTOR app**  
**Mobile selection guide for**  
**frequency inverters**


Siemens has developed the SINAMICS SELECTOR app as a practical tool for finding article numbers for your SINAMICS drives in the power range from 0.12 kW to 630 kW quickly and easily. Whether for SINAMICS V20, SINAMICS G120C, SINAMICS G120P or SINAMICS G120: The app will provide you with the correct article numbers conveniently.

How does it work? Simply select your application, the frequency inverter you require, the rated power and device options as well as the necessary accessories.

Then you can save your selection and send it by email. The preselection serves as the basis for an order specification with the dealer/Siemens.

You will find the free downloads for Android and for iOS at the following link:

[www.siemens.com/sinamics-selector](http://www.siemens.com/sinamics-selector)

**SINAMICS ASSISTANT app**

The error code function of the SINAMICS ASSISTANT app helps you to identify and rectify errors. Just enter the error code of your frequency inverter and the app shows you what sort of error it is and how you can rectify it.

This app also recalculates for you the frequency (Hz) of a frequency inverter into the speed to be set on the motor (rpm) or vice versa.

In addition this app offers you a support page on which you can get in touch straight away with the right contact person in your region if you have any questions. Furthermore, video information is available to you free of charge, e.g. on installation and commissioning of the SINAMICS G120 frequency inverter.

You will find the free downloads for Android and for iOS at the following link:

[www.siemens.com/sinamics-assistant](http://www.siemens.com/sinamics-assistant)

12/2 **SinaSave energy efficiency tool**

12/3 **Drive Technology Configurator**

12/4 **SIZER for Siemens Drives engineering tool**

12/5 **CAD CREATOR**

12/6 **STARTER commissioning tool**

12/8 **SINAMICS Startdrive commissioning tool**

12/11 **Drive ES engineering software**

**Security information**

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial security measures that may be implemented, please visit

<https://www.siemens.com/industrialsecurity>

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Security RSS Feed under

<https://www.siemens.com/industrialsecurity>

## Engineering tools

### SinaSave energy efficiency tool

#### Overview


The SinaSave energy efficiency tool calculates potential energy savings and amortization times based on your individual conditions of use and therefore offers practical assistance in making decisions about investments in energy-efficient technologies.

From SinaSave Version 6.0 and higher, the drive systems to be compared and the relevant drive component parameters are displayed graphically. An additional expansion are the numerous comparison possibilities for different control types and comprehensive product combinations for drive solutions for pump and fan applications. In addition to SIMOTICS motors and SINAMICS drives, the product portfolio comprises SIRIUS switching devices, offering a comprehensive range of comparison possibilities – according to your individual requirements.




SinaSave offers numerous comparison scenarios:

- Comparison of drive systems for pump and fan applications in the output range from 0.55 kW (low voltage) to 5.5 MW (medium voltage) for
  - Reactor control (fixed speed; motor and switching device)
  - Bypass control (fixed speed; motor and switching device)
  - Speed control (variable speed; motor and frequency converter)
- Comparison and evaluation of standard motors (incl. ignition protection motors) in different energy efficiency classes

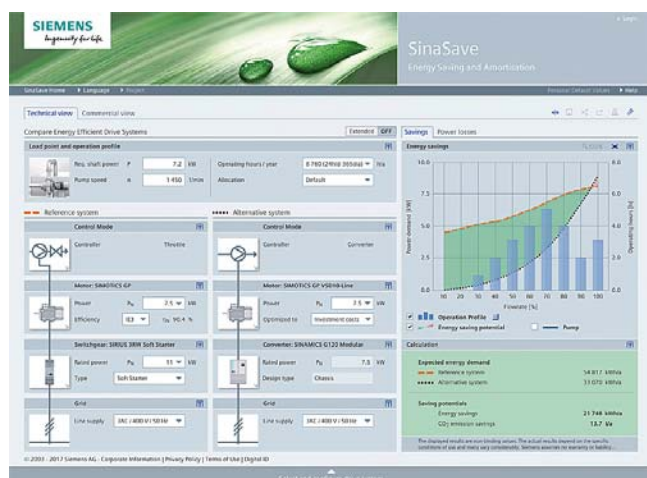

SinaSave supports the evaluation of the various comparisons of product and system by

- Displaying the potential savings for energy and energy costs, as well as CO<sub>2</sub> emissions
- Estimation of the amortization time
- Estimation of the individual total lifecycle costs
- Representation of the system power losses according to EN 50598-2 for full load and partial load
- Direct comparison of Siemens drives with the reference Power Drive System (PDS) described in EN 50598-2

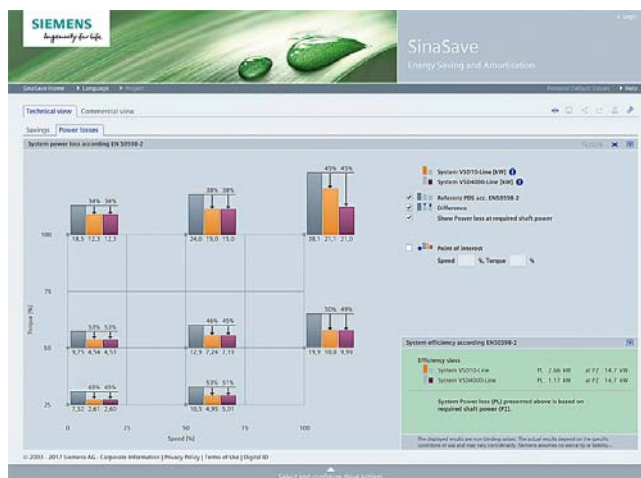

#### Access to the SinaSave energy efficiency tool

SinaSave can be accessed without the need for registration or logging in:

[www.automation.siemens.com/sinasave](http://www.automation.siemens.com/sinasave)

#### More information

For more information about the amortization calculator for energy-efficient drive systems, visit

[www.siemens.com/sinasave](http://www.siemens.com/sinasave)


More information about services for energy saving is available on the Internet at

[www.siemens.com/energysaving](http://www.siemens.com/energysaving)

## Overview

The Drive Technology Configurator (DT Configurator) helps you to configure the optimum drive technology products for your application – starting with gear units, motors, inverters as well as the associated options and components and ending with controllers, software licenses and connection systems. Whether with little or detailed knowledge of products: preselected product groups, deliberate navigation through selection menus and direct product selection through entry of the article number support quick, efficient and convenient configuration.

In addition, comprehensive documentation comprising technical data sheets, 2D dimensional drawings/3D CAD models, operating instructions, certificates, etc. can be selected in the DT Configurator. Immediate ordering is possible by simply transferring a parts list to the shopping cart of the Industry Mall.

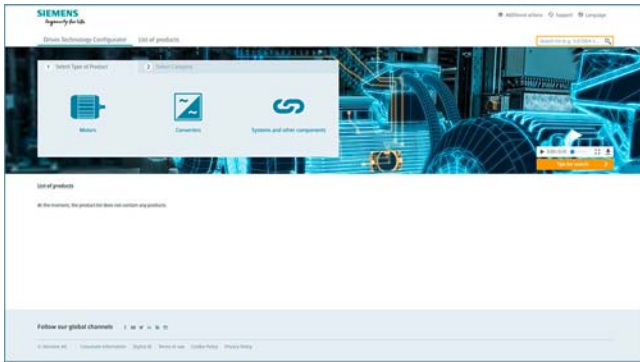

### *Drive Technology Configurator for efficient drive configuration with the following functions*

- Quick and easy configuration of drive products and associated components – gear units, motors, inverters, controllers, connection systems
- Configuration of drive systems for pumps, fans and compressor applications from 1 kW to 2.6 MW
- Retrievable documentation for configured products and components, such as
  - Data sheets in up to 9 languages in PDF or RTF format
  - 2D dimensional drawings/3D CAD models in various formats
  - Terminal box drawing and terminal connection diagram
  - Operating instructions
  - Certificates
  - Start-up calculation for SIMOTICS motors
  - EPLAN macros
- Support with retrofitting in conjunction with Spares On Web ([www.siemens.com/sow](http://www.siemens.com/sow))
- Ability to order products directly through the Siemens Industry Mall

### Access to the Drive Technology Configurator

The Drive Technology Configurator can be called up without registration and without a login:  
[www.siemens.com/dt-configurator](http://www.siemens.com/dt-configurator)

## Selection and ordering data

| Description                                                                 | Article No.                      |
|-----------------------------------------------------------------------------|----------------------------------|
| <b>Interactive catalog CA 01</b><br>including Drive Technology Configurator |                                  |
| • German (DVD-ROM – Edition Germany)                                        | <b>E86060-D4001-A500-D8</b>      |
| • German, English, French, Spanish<br>(Download – without prices)           | <b>E86060-D4001-A510-D8-7500</b> |

## More information

### Online access to the Drive Technology Configurator

More information about the Drive Technology Configurator is available on the Internet at  
[www.siemens.com/dtconfigurator](http://www.siemens.com/dtconfigurator)

### Offline access to the Drive Technology Configurator in the Interactive Catalog CA 01


In addition, the Drive Technology Configurator is also included in the Interactive Catalog CA 01 – the offline version of the Siemens Industry Mall.

The Interactive Catalog CA 01 can be ordered from the relevant Siemens sales office or via the Internet:  
[www.siemens.com/automation/CA01](http://www.siemens.com/automation/CA01)

## Engineering tools

### SIZER for Siemens Drives engineering tool

#### Overview

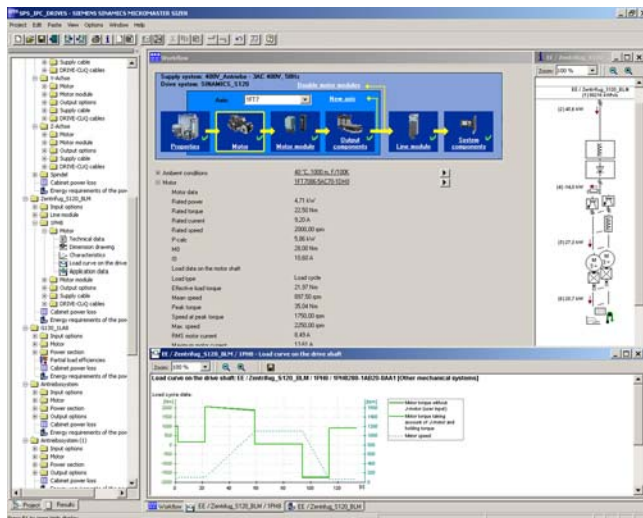

The following drives and controls can be engineered in a user-friendly way using the SIZER for Siemens Drives engineering tool:

- SIMOTICS low-voltage motors, including servo geared motors
- SINAMICS low-voltage drive systems
- Motor starters
- SINUMERIK CNC
- SIMOTION Motion Control controller
- SIMATIC controller

It provides support when selecting the technologies involved in the hardware and firmware components required for a drive task. SIZER for Siemens Drives covers the full range of operations required to configure a complete drive system, from basic single drives to demanding multi-axis applications.

SIZER for Siemens Drives supports all of the engineering steps in one workflow:

- Configuring the power supply
- Designing the motor and gearbox, including calculation of mechanical transmission elements
- Configuring the drive components
- Compiling the required accessories
- Selecting the line-side and motor-side power options, e.g. cables, filters, and reactors

When SIZER for Siemens Drives was being designed, particular importance was placed on a high degree of usability and a universal, function-based approach to the drive application. The extensive user guidance makes it easy to use the tool. Status information keeps you continually informed about the progress of the configuration process.

The drive configuration is saved in a project. In the project, the components and functions used are displayed in a hierarchical tree structure.

The project view permits the configuration of drive systems and the copying/inserting/modifying of drives already configured.

The configuration process produces the following results:

- A parts list of the required components (export to Excel, use of the Excel data sheet for import to SAP)
- Technical specifications of the system
- Characteristic curves
- Comments on system reactions
- Mounting arrangement of drive and control components and dimensional drawings of motors
- Energy requirements of the configured application

These results are displayed in a results tree and can be reused for documentation purposes.

Support is provided by the technological online help menu:

- Detailed technical specifications
- Information about the drive systems and their components
- Decision-making criteria for the selection of components
- Online help in English, French, German, Italian, Chinese and Japanese

#### System requirements

- PG or PC with Pentium III min. 800 MHz (recommended > 1 GHz)
- 512 MB RAM (1 GB RAM recommended)
- At least 4.1 GB of free hard disk space
- An additional 100 MB of free hard disk space on Windows system drive
- Screen resolution 1024 × 768 pixels (1280 × 1024 pixels recommended)
- Operating system:
  - Windows 7 Professional (32/64-bit)
  - Windows 7 Enterprise (32/64-bit)
  - Windows 7 Ultimate (32/64-bit)
  - Windows 7 Home (32/64-bit)
  - Windows 8.1 Professional (32/64-bit)
  - Windows 8.1 Enterprise (32/64-bit)
- Microsoft Internet Explorer V5.5 SP2

#### Selection and ordering data

| Description                                                    | Article No.               |
|----------------------------------------------------------------|---------------------------|
| <b>SIZER for Siemens Drives engineering tool</b><br>on DVD-ROM | <b>6SL3070-0AA00-0AG0</b> |
| English, French, German, Italian                               |                           |


#### More information

The SIZER for Siemens Drives engineering tool is available free on the Internet at

[www.siemens.com/sizer](http://www.siemens.com/sizer)

## Overview

### **CAD CREATOR – Dimensional drawing and 2D/3D CAD generator**

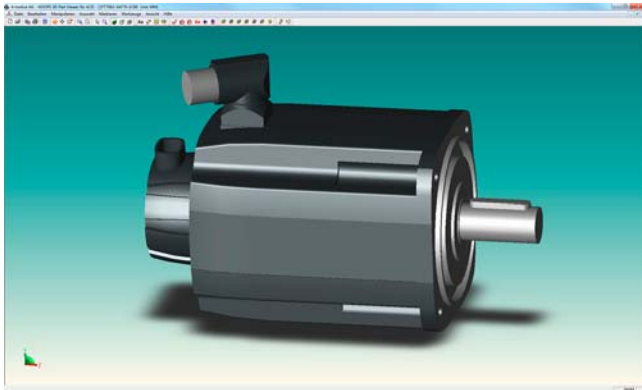

Thanks to its intuitive user interface, CAD CREATOR allows you to quickly create product-specific dimensional drawings and 2D/3D CAD models. The CAD CREATOR assists the machine manufacturer's designers, drafting engineers and project engineers when creating plant documentation.

The data for motors, drives and CNC controls is currently available in the online version:

- SIMOTICS motors for Motion Control
- SINAMICS S110, SINAMICS S120
- SINUMERIK
- SIMOTION
- MOTION-CONNECT connection systems
- Measuring systems

#### **Performance features**

- Provision of dimensional drawings as 2D/3D CAD models
- Display of 2D/3D CAD models and dimensional drawings on integrated viewers
- With the online version, 3D models and dimensional drawings can also be displayed in the form of a downloadable PDF
- Support for all general geometry interfaces STEP, IGES, Parasolid, SAT, VDA, and for special interfaces such as Ideas, NX, Solid Edge, Pro/Engineer, Autocad, Inventor, Mechanical Desktop, Catia and Solidworks

The CAD CREATOR offers a variety of options for configuring, and different methods for searching for a product:

- The entry point is the **Product selection**
- Selection according to **Technical description**

After successful configuration of the product, the dimensional drawings and models are displayed with the integrated viewers and made available for export.

## Selection and ordering data

| Description                                            | Article No.               |
|--------------------------------------------------------|---------------------------|
| <b>CAD CREATOR</b>                                     | <b>6SL3075-0AA00-0AG0</b> |
| Dimensional drawing and 2D/3D CAD generator on DVD-ROM |                           |
| English, French, German, Italian, Spanish              |                           |


## More information

The CAD CREATOR is available on DVD-ROM and as an Internet application.

More information is available on the Internet at [www.siemens.com/cadcreator](http://www.siemens.com/cadcreator)

## STARTER commissioning tool

## Overview

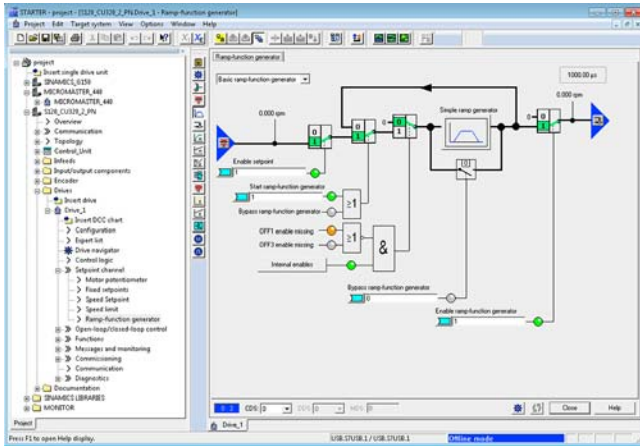

The user-friendly STARTER commissioning tool can be used for:

- Commissioning
- Optimization
- Diagnostics

This software can be operated as a standalone PC application, or integrated as a TIA-compatible program in SIMATIC STEP 7, or highly integrated into the SCOUT Engineering System (for SIMOTION). The basic functions and handling are the same in both cases.

In addition to the SINAMICS drives, STARTER also supports MICROMASTER 4 devices.

The project wizards can be used to create the drives within the structure of the project tree.

Beginners are supported by solution-based dialog guidance, whereby a standard graphics-based display maximizes clarity when setting the drive parameters.

First commissioning is guided by a wizard which makes all the basic settings in the drive. Therefore, getting a motor up and running is merely a question of setting a few of the drive parameters as part of the drive configuration process.

The individual settings required are made using graphics-based parameterization screens, which also precisely visualize the principle of operation of the drive.

Examples of individual settings that can be made include:

- How terminals are used
- Bus interface
- Setpoint channel (e.g., fixed setpoints)
- Closed-loop speed control (e.g., ramp-function generator, limits)
- BICO interconnections
- Diagnostics

For experts, the expert list can be used to specifically and quickly access individual parameters at any time. An individual compilation of frequently used parameters can be saved in dedicated user lists and watch tables.

In addition, the following functions are available for optimization purposes:

- Self-optimization of the controller settings (depending on drive unit)
- Setup and evaluation of trace recordings <sup>1)</sup>  
Tool function for recording  $2 \times 8$  signals with
  - Measuring cursor function
  - Extensive trigger functions
  - Several Y scales
  - Sampling times in the current controller cycle clock

Diagnostics functions provide information about:

- Control/status words
- Parameter status
- Operating conditions
- Communication states

### Performance features

- User-friendly: Only a small number of settings need to be made for successful first commissioning: The motor starts to rotate
- Solution-oriented dialog-based user guidance simplifies commissioning
- Self-optimization functions reduce manual effort for optimization.

## System requirements

The following minimum requirements must be complied with:

- Hardware
  - PG or PC with Pentium III min. 1 GHz (recommended >1 GHz)
  - Work memory 2 GB (4 GB recommended)
  - Screen resolution 1024 × 768 pixels, 16-bit color depth
  - Free hard disk memory: min. 5 GB
- Software
  - Microsoft Internet Explorer V6.0 or higher
  - 64-bit operating systems:
    - Microsoft Windows 7 Professional SP1
    - Microsoft Windows 7 Ultimate SP1
    - Microsoft Windows 7 Enterprise SP1 (standard installation)
    - Microsoft Windows Server 2008 R2 SP1
    - Microsoft Windows Server 2016
    - Microsoft Windows 10 Pro
    - Microsoft Windows 10 Enterprise

### Supported virtualization platforms

STARTER (V5.1 SP1 and higher) can be installed on a virtual machine. For this purpose, one of the following virtualization platforms in the specified version or a newer version can be used:

- VMware vSphere Hypervisor (ESXi) 6.0
- VMware Workstation 11 V12.5.2
- VMware Player Pro 7.0 V12.5.2
- Microsoft Windows Server 2012 Hyper-V

You can use the following guest operating systems to install STARTER within the selected virtualization platform:

- Windows 7 Professional/Ultimate/ Enterprise (64-bit)
- Windows 10 Professional/Enterprise (64-bit)

1) Depending on drive unit.  
Not supported for MICROMASTER 4, SINAMICS G110,  
SINAMICS G120 <firmware V4.4, SINAMICS G110D and  
SINAMICS G120D <firmware V4.5.

### Integration

Data can be exchanged (depending on the version) via PROFIBUS or PROFINET/Ethernet or via a serial interface.

For commissioning and service, a PG/PC can be connected to the CU320-2 Control Unit via PROFIBUS. A PROFIBUS connection must be available with a connecting cable at the PG/PC.

Further, communication between a CU320-2 Control Unit and PG/PC can also be established via Ethernet, either via an (optional) CBE20 Communication Board or the Ethernet interface -X127 on the CU320-2 Control Unit.

#### Note:

The terminal strip -X127 is suitable as a communication link to the PG/PC only for the purposes of servicing and commissioning.

### Selection and ordering data

| Description                                                                                                    | Article No.               |
|----------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>STARTER commissioning tool</b><br>for SINAMICS and MICROMASTER<br>English, French, German, Italian, Spanish | <b>6SL3072-0AA00-0AG0</b> |

### Accessories

Depending on the version of the Control Unit (CU), the Control Unit of the drive unit can communicate with the programming device (PG) or PC via PROFIBUS or PROFINET/Ethernet or via a serial interface. The following accessories are available for the particular drive system as listed in the following table.

|                         |                                                                                                                                                                |                           |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Description             | <b>Recommended accessories</b><br>For communication between the drive unit and the programming device or PC<br>Article No.                                     |                           |
| <b>SINAMICS G120C</b>   |                                                                                                                                                                |                           |
| • USB                   | <b>PC inverter connection kit 2</b><br>Mini USB interface cable for communication with a PC, 3 m (9.84 ft)                                                     | <b>6SL3255-0AA00-2CA0</b> |
| <b>SINAMICS G120</b>    |                                                                                                                                                                |                           |
| • USB                   | <b>PC inverter connection kit 2</b><br>Mini USB interface cable for communication with a PC, 3 m (9.84 ft)                                                     | <b>6SL3255-0AA00-2CA0</b> |
| • PROFIBUS              | <b>SIMATIC DP plug-in cable</b><br>12 MBaud, for PG connection, pre-assembled with 2 × 9-pin SUB D connector, 3 m (9.84 ft)                                    | <b>6ES7901-4BD00-0XA0</b> |
| • PROFINET/<br>Ethernet | Standard CAT5 Ethernet cable or PROFINET cable                                                                                                                 | —                         |
| <b>SINAMICS S110</b>    |                                                                                                                                                                |                           |
| • RS232                 | <b>SIMATIC S7 connecting cable</b><br>Null modem cable, 6 m (19.69 ft)                                                                                         | <b>6ES7901-1BF00-0XA0</b> |
| • PROFIBUS              | <b>CP 5711 communication module</b><br>USB adapter for connecting a PG or notebook to PROFIBUS or MPI<br>USB cable (2 m (6.56 ft)) included in scope of supply | <b>6GK1571-1AA00</b>      |
|                         | <b>SIMATIC DP plug-in cable</b><br>12 MBaud, for PG connection, pre-assembled with 2 × 9-pin SUB D connector, 3 m (9.84 ft)                                    | <b>6ES7901-4BD00-0XA0</b> |
| • PROFINET/<br>Ethernet | Standard CAT5 Ethernet cable or PROFINET cable                                                                                                                 | —                         |


### More information

The STARTER commissioning tool is also available on the Internet at  
[www.siemens.com/starter](http://www.siemens.com/starter)

## Engineering tools

### SINAMICS Startdrive commissioning tool

#### Overview

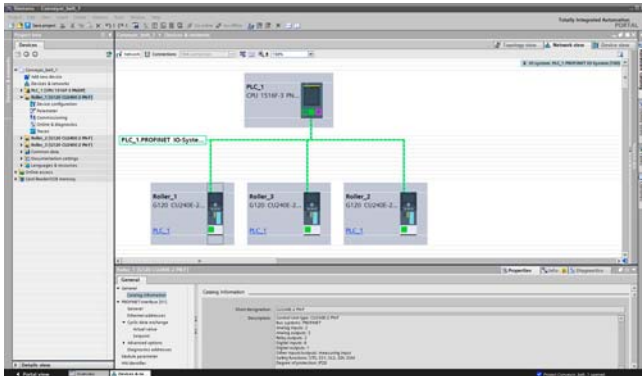

SINAMICS Startdrive is a tool for configuring, commissioning, and diagnosing the SINAMICS family of drives and is integrated into the TIA Portal.

The SINAMICS Startdrive commissioning tool has been optimized with regard to user friendliness and consistent use of the TIA Portal benefits of a common working environment for PLC, HMI and drives.

#### Performance features

Efficient commissioning with easy configuration and powerful tools:

- High degree of usability thanks to task-based navigation through the engineering workflow
  - Hardware configuration
  - Parameterization
  - Commissioning
  - Diagnostics
- Time-saving and guided step-by-step commissioning
- User-friendly graphic function view for all drive functions
- List of drive parameters structured according to functions
- Easy integration of SIMOTICS motors
- Integrated control panel for direct operation of the drive from the TIA Portal
- Powerful realtime trace for commissioning and drive diagnostics
- Intuitive and efficient drive diagnostics through automatic display of messages
- Context-sensitive online help, e.g. for drive messages
- Integrated detailed drive diagnostic functions
  - Control/status words
  - Parameter status
  - Operating conditions
  - Communication states
- Simple configuration for drive-end Safety Integrated and the drive-internal basic positioning function (EPos)

#### Integration

##### Integration of SINAMICS drives with SIMATIC in the TIA Portal

The software packages based on the TIA Portal are harmonized with each other and offer important benefits. The TIA Portal enables simple integration of SINAMICS drives in your automation solution:

- Reduction in training costs thanks to cross-tool uniformity of the operator inputs
- Device configuration and network connection of the drives in the TIA Portal-wide configuration/network editor
- Device access to the drives via the PLC across network boundaries (dataset routing)
- Automatic frame comparison between converters/inverters and SIMATIC S7 PLC
- Reduction of standstill times through the integration of converter/inverter messages in the SIMATIC S7 system diagnostics:
  - The drive messages are part of the SIMATIC S7 system diagnostics without previous configuration effort
  - The drive messages are therefore automatically available as plain text in the TIA Portal, the web server of the SIMATIC S7 PLC and the HMI
- Time savings thanks to simple and guided configuration of the drives for operation with SIMATIC S7 Motion Control
- Short familiarization time for SIMATIC STEP 7 users due to common use of editors. Real-time trace and the drive control panel are identical to the editors in STEP 7
- Reuse of the drive configuration and parameterization is possible with the assistance of the TIA Portal library
- Standard TIA Portal functions for converters/inverters, e.g. Undo, Redo
- Block library supplied for easy integration of SINAMICS drives into the user programs of the SIMATIC S7-300, S7-400, S7-1200, S7-1500
- Shared project storage for all devices in the project

##### Supported drives

The following drives can be configured with SINAMICS Startdrive

- SINAMICS G120
- SINAMICS G120C
- SINAMICS G120D
- SINAMICS G120P
- SINAMICS G110M
- SINAMICS G130
- SINAMICS G150
- SINAMICS S120
- SINAMICS S150
- SINAMICS medium voltage converters

All of the available Control Units with SINAMICS firmware V4.4 and later are supported for the SINAMICS G120, G120C, G120D, G120P and G110M devices (including PROFINET, PROFIBUS, Safety Integrated). All combinable Power Modules up to 400 kW can be configured.

Control Unit CU320-2 PN with SINAMICS firmware V4.8 and later is supported for the SINAMICS S120, G130, G150, S150 devices and for the SINAMICS medium voltage converters

**Integration** (continued)**SINAMICS Startdrive Advanced**

- Advanced functions for SINAMICS Startdrive V15: Safety acceptance test for the SINAMICS G120 family
  - Prompted acceptance test wizard for all drive-based Safety Integrated functions (Basic and Extended Safety)
  - Automatic and safety function-specific generation of traces to analyze the machine behavior
  - Generation of an acceptance report as Excel file (xlsx format, can also be used with OpenOffice)
  - Available for SINAMICS G110M, G120, G120C, G120D and G120P
- Also contains all Startdrive Basic functions
- Only a license key is required, no additional installation
- A trial license is available free-of-charge without a license key (21 days)

**Installation versions**

SINAMICS Startdrive can be installed as an optional package to SIMATIC STEP 7 or as a stand-alone application (without SIMATIC STEP 7).

**System requirements**

The following table shows the recommended hardware and system equipment for the operation of SINAMICS Startdrive.

| Hardware                 | Recommendation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Computer</b>          | As of SIMATIC FIELD PG M5 Advanced (or comparable PC)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Processor</b>         | Intel Core i5-6440EQ (up to 3.4 GHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>RAM</b>               | 16 GB or more (32 GB for large projects)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hard disk</b>         | SSD with at least 50 GB available memory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Screen resolution</b> | 15.6" Full HD display (1920 × 1080 or larger)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Operating systems</b> | <ul style="list-style-type: none"> <li>• Windows 7 (64 bit)               <ul style="list-style-type: none"> <li>- Professional SP1</li> <li>- Enterprise SP1</li> <li>- Ultimate SP1</li> </ul> </li> <li>• Windows 10 (64 bit)               <ul style="list-style-type: none"> <li>- Professional Version 1703</li> <li>- Enterprise Version 1703</li> <li>- Enterprise 2016 LTSC</li> <li>- IoT Enterprise 2015 LTSC</li> <li>- IoT Enterprise 2016 LTSC</li> </ul> </li> <li>• Windows Server (64 bit)               <ul style="list-style-type: none"> <li>- 2012 R2 StdE (full installation)</li> <li>- 2016 Standard (full installation)</li> </ul> </li> </ul> |

**Compatibility with other products**

- Startdrive V15 operates with STEP 7, WinCC and Scout TIA V15 in a framework
- Startdrive V15 can be installed on the same computer as other versions of Startdrive V12 to V14 SP1
- Startdrive can be installed on the same computer as SINAMICS MICROMASTER STARTER

**Supported virtualization platforms**

SINAMICS Startdrive can be installed in a virtual machine. For this purpose, one of the following virtualization platforms in the specified version or a newer version can be used:

- VMware vSphere Hypervisor (ESXi) 6.0
- VMware Workstation 12
- VMware Player 12
- Microsoft Hyper-V with Microsoft Server 2016 Standard

**Supported security programs**

The following security programs have been tested with SINAMICS Startdrive V15:

- Virus scanners:
  - Symantec Endpoint Protection 14
  - Trend Micro OfficeScan Corporate Edition 12.0
  - McAfee VirusScan Enterprise 8.8
  - Kaspersky Anti-Virus 2017 V17.0
  - Windows Defender
  - Qihoo 360 "Safe Guard 1.0" + "Virus Scanner 5.0"
- Encryption software:
  - Microsoft BitLocker
  - Host-based Intrusion Detection System
  - McAfee Application Control 8.0

## Engineering tools

### SINAMICS Startdrive commissioning tool

#### Selection and ordering data

| Description                                                                                                                                                           | Article No.                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| <b>SINAMICS Startdrive Basic V15 commissioning tool</b><br>Single license and certificate of license<br>English, French, German, Italian, Spanish, Chinese Simplified |                               |
| • On DVD-ROM                                                                                                                                                          | <b>NEW</b> 6SL3072-4FA02-0XA0 |
| • On the Internet as a download                                                                                                                                       | <b>NEW</b> 6SL3072-4FA02-0XG0 |
| <b>SINAMICS Startdrive Advanced V15 commissioning tool</b><br>License key (floating license)<br>English, French, German, Italian, Spanish, Chinese Simplified         |                               |
| • On DVD ROM with license key on USB flash drive                                                                                                                      | <b>NEW</b> 6SL3072-4FA02-0XA5 |
| • On the Internet as a download                                                                                                                                       | <b>NEW</b> 6SL3072-4FA02-0XG5 |

#### Accessories


Depending on the version of the Control Unit (CU), the Control Unit of the drive unit can communicate with the programming device (PG) or PC via PROFIBUS or PROFINET/Ethernet or via a serial interface. The following accessories are available for the particular drive system as listed in the following table.

| Description             |                                                                                                                             | Recommended accessories<br>For communication between the drive unit and the programming device or PC<br><br>Article No. |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| SINAMICS G120C          |                                                                                                                             |                                                                                                                         |
| • USB                   | <b>PC inverter connection kit 2</b><br>Mini USB interface cable for communication with a PC, 3 m (9.84 ft)                  | <b>6SL3255-0AA00-2CA0</b>                                                                                               |
| SINAMICS G120           |                                                                                                                             |                                                                                                                         |
| • USB                   | <b>PC inverter connection kit 2</b><br>Mini USB interface cable for communication with a PC, 3 m (9.84 ft)                  | <b>6SL3255-0AA00-2CA0</b>                                                                                               |
| • PROFIBUS              | <b>SIMATIC DP plug-in cable</b><br>12 MBaud, for PG connection, pre-assembled with 2 × 9-pin SUB D connector, 3 m (9.84 ft) | <b>6ES7901-4BD00-0XA0</b>                                                                                               |
| • PROFINET/<br>Ethernet | Standard CAT5 Ethernet cable or PROFINET cable                                                                              | —                                                                                                                       |

#### More information

The SINAMICS Startdrive Basic commissioning tool is available free on the Internet at [www.siemens.com/startdrive](http://www.siemens.com/startdrive)

## Overview

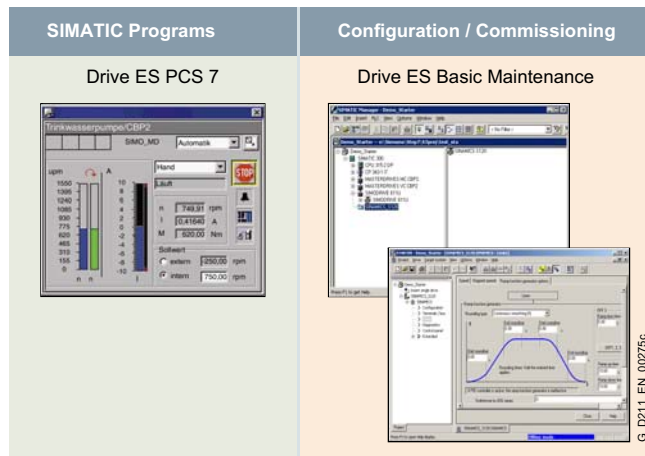

Drive ES is the engineering system used to integrate the communication, configuration and data management functions of Siemens drive technology into the SIMATIC automation world easily, efficiently and cost-effectively.

The following software packages are available for selection:

- Drive ES Basic Maintenance
- Drive ES PCS 7

Drive ES (**D**rive **E**ngineering **S**oftware) fully integrates drives from Siemens into the world of Totally Integrated Automation.

## Design

The following software packages are available for selection:

- **Drive ES Basic Maintenance**
- **Drive ES PCS 7** (APL Style or Classic Style)

### Drive ES Basic Maintenance

This software product will ensure TIA functionality for the previous drive systems not supported by STARTER.

Drive ES Basic Maintenance is for first-time users of the world of Totally Integrated Automation and the basic software for setting the parameters of all drives online and offline in this environment. Drive ES Basic Maintenance enables both the automation system and the drives to be handled using the SIMATIC Manager software. Drive ES Basic Maintenance is the starting point for common data archiving for complete projects and for extending the use of the SIMATIC teleservice to drives. Drive ES Basic Maintenance provides the configuration tools for the new Motion Control functions – slave-to-slave communication, equidistance and isochronous operation with PROFIBUS DP and ensures that drives with PROFINET IO are simply integrated into the SIMATIC environment.

### Note:

For SINAMICS and MICROMASTER 4 drives, this TIA functionality is provided with the STARTER commissioning tool (V4.3.2 and higher).

### Drive ES PCS 7 (APL Style or Classic Style)

Drive ES PCS 7 links the drives with a PROFIBUS DP interface into the SIMATIC PCS 7 process control system, and it requires that SIMATIC PCS 7, V6.1 and higher has first been installed. Drive ES PCS 7 provides a block library with blocks for the drives and the corresponding faceplates for the operator station, which enables the drives to be operated from the PCS 7 process control system. From V6.1 and higher, drives will also be able to be represented in the PCS 7 Maintenance Station.

From Drive ES PCS 7 V8.0 and higher, two versions of the library are available: The APL (Advanced Process Library) variant and the previous version in the so-called Classic Style.

### Detailed contents of the Drive ES PCS 7 (APL Style or Classic Style)

- **Block library for SIMATIC PCS 7** Faceplates and control blocks for SIMOVERT MASTERDRIVES VC and MC, as well as MICROMASTER/MIDIMASTER of the third and fourth generation and SIMOREG DC MASTER and SINAMICS
- **STEP 7 slave object manager** for convenient configuration of drives and non-cyclic PROFIBUS DP communication with the drives
- **STEP 7 device object manager** for easy configuration of drives with PROFINET-IO interfaces (V8.0 SP1 and higher)
- **SETUP program** for installing the software in the PCS 7 environment

## Engineering tools

### Drive ES engineering software

#### Selection and ordering data

| Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Article No.                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>Drive ES Basic Maintenance V5.6 SPx <sup>*)</sup></b><br>Configuration software for the integration of drives into TIA (Totally Integrated Automation)<br>Requirement: STEP 7 V5.4 SP4 or higher<br>Type of delivery: on DVD-ROM<br>Languages: de, en, fr, it, es<br>with electronic documentation<br>• Floating license, 1 user                                                                                                                                                                                                                                       | <b>6SW1700-5JA00-6AA0</b>                                                                                        |
| <b>Drive ES PCS 7 V8.0 SPx <sup>*)</sup></b><br>Block library for PCS 7 for the integration of drives in Classic Style (as predecessor)<br>Requirement: PCS 7 V8.0 and higher<br>Type of delivery: CD-ROM<br>Languages: de, en, fr, it, es<br>with electronic documentation<br>• Single-user license incl. 1 runtime license<br>• Runtime license (without data carrier)<br>• Update service for single-user license<br>• Upgrade from V6.x to V8.0 SPx <sup>*)</sup>                                                                                                     | <b>6SW1700-8JD00-0AA0</b><br><b>6SW1700-5JD00-1AC0</b><br><b>6SW1700-0JD00-0AB2</b><br><b>6SW1700-8JD00-0AA4</b> |
| <b>Drive ES PCS 7 APL V8.0 SPx <sup>*)</sup></b><br>Block library for PCS 7 for the integration of drives in APL Style (Advanced Process Library)<br>Requirement: PCS 7 V8.0 and higher<br>Type of delivery: CD-ROM<br>Languages: de, en, fr, it, es<br>with electronic documentation<br>• Single-user license incl. 1 runtime license<br>• Runtime license (without data carrier)<br>• Update service for single-user license<br>• Upgrade of APL V8.0 to V8.0 SP1 or Drive ES PCS7 V6.x, V7.x, V8.x classic to Drive ES PCS7 APL V8.0 SPx <sup>*)</sup>                 | <b>6SW1700-8JD01-0AA0</b><br><b>6SW1700-5JD00-1AC0</b><br><b>6SW1700-0JD01-0AB2</b><br><b>6SW1700-8JD01-0AA4</b> |
| <b>Drive ES PCS 7 V8.1 SPx <sup>*)</sup></b><br>Block library for PCS 7 for the integration of drives in Classic Style (as predecessor)<br>Requirement: PCS 7 V8.1 and higher<br>Type of delivery: CD-ROM<br>Languages: de, en, fr, it, es<br>with electronic documentation<br>• Single-user license incl. 1 runtime license<br>• Runtime license (without data carrier)<br>• Update service for single-user license<br>• Upgrade from V6.x/V7.x/V8.x to V8.1 SPx <sup>*)</sup>                                                                                           | <b>6SW1700-8JD00-1AA0</b><br><b>6SW1700-5JD00-1AC0</b><br><b>6SW1700-0JD00-0AB2</b><br><b>6SW1700-8JD00-1AA4</b> |
| <b>Drive ES PCS 7 APL V8.1 SPx <sup>*)</sup></b><br>Block library for PCS 7 for the integration of drives in APL Style (Advanced Process Library)<br>Requirement: PCS 7 V8.1 and higher<br>Type of delivery: CD-ROM<br>Languages: de, en, fr, it, es<br>with electronic documentation<br>• Single-user license incl. 1 runtime license<br>• Runtime license (without data carrier)<br>• Update service for single-user license<br>• Upgrade of APL V8.x to V8.1 SPx <sup>*)</sup> or Drive ES PCS 7 V6.x, V7.x, V8.x classic to Drive ES PCS 7 APL V8.1 SPx <sup>*)</sup> | <b>6SW1700-8JD01-1AA0</b><br><b>6SW1700-5JD00-1AC0</b><br><b>6SW1700-0JD01-0AB2</b><br><b>6SW1700-8JD01-1AA4</b> |
| <b>Drive ES PCS 7 V8.2 SPx <sup>*)</sup></b><br>Block library for PCS 7 for the integration of drives in Classic Style (as predecessor)<br>Requirement: PCS 7 V8.2 and higher<br>Type of delivery: CD-ROM<br>Languages: de, en, fr, it, es<br>with electronic documentation<br>• Single-user license incl. 1 runtime license<br>• Runtime license (without data carrier)<br>• Update service for single-user license<br>• Upgrade from V6.x/V7.x/V8.x to V8.2 SPx <sup>*)</sup>                                                                                           | <b>6SW1700-8JD00-2AA0</b><br><b>6SW1700-5JD00-1AC0</b><br><b>6SW1700-0JD00-0AB2</b><br><b>6SW1700-8JD00-2AA4</b> |

| Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Article No.                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>Drive ES PCS 7 APL V8.2 SPx <sup>*)</sup></b><br>Block library for PCS 7 for the integration of drives in APL Style (Advanced Process Library)<br>Requirement: PCS 7 V8.2 and higher<br>Type of delivery: CD-ROM<br>Languages: de, en, fr, it, es<br>with electronic documentation<br>• Single-user license incl. 1 runtime license<br>• Runtime license (without data carrier)<br>• Update service for single-user license<br>• Upgrade of APL V8.x to V8.2 SPx <sup>*)</sup> or Drive ES PCS 7 V6.x, V7.x, V8.x classic to Drive ES PCS 7 APL V8.2 SPx <sup>*)</sup>            | <b>6SW1700-8JD01-2AA0</b><br><b>6SW1700-5JD00-1AC0</b><br><b>6SW1700-0JD01-0AB2</b><br><b>6SW1700-8JD01-2AA4</b> |
| <b>Drive ES PCS 7 V9.0 SPx <sup>*)</sup></b><br>Block library for PCS 7 for the integration of drives in Classic Style (as predecessor)<br>Requirement: PCS 7 V9.0 or higher<br>Type of delivery: CD-ROM<br>Languages: de, en, fr, it, es<br>with electronic documentation<br>• Single-user license incl. 1 runtime license<br>• Runtime license (without data carrier)<br>• Update service for single-user license<br>• Upgrade from V6.x/V7.x/V8.x/V9.x to V9.0 SPx <sup>*)</sup>                                                                                                  | <b>6SW1700-1JD00-0AA0</b><br><b>6SW1700-5JD00-1AC0</b><br><b>6SW1700-0JD00-0AB2</b><br><b>6SW1700-1JD00-0AA4</b> |
| <b>Drive ES PCS 7 APL V9.0 SPx <sup>*)</sup></b><br>Block library for PCS 7 for the integration of drives in APL Style (Advanced Process Library)<br>Requirement: PCS 7 V9.0 or higher<br>Type of delivery: CD-ROM<br>Languages: de, en, fr, it, es<br>with electronic documentation<br>• Single-user license incl. 1 runtime license<br>• Runtime license (without data carrier)<br>• Update service for single-user license<br>• Upgrade of APL V8.x, V9.x to V9.0 SPx <sup>*)</sup> or Drive ES PCS 7 V6.x, V7.x, V8.x, V9.x classic to Drive ES PCS 7 APL V9.0 SPx <sup>*)</sup> | <b>6SW1700-1JD01-0AA0</b><br><b>6SW1700-5JD00-1AC0</b><br><b>6SW1700-0JD01-0AB2</b><br><b>6SW1700-1JD01-0AA4</b> |

#### Options

##### Drive ES software update service

A software update service can also be purchased for the Drive ES software. The user will automatically receive the latest software, service packs and full versions for one year after ordering.

The update service can only be ordered in addition to an existing (i.e. previously ordered) full version.

- Period of update service: 1 year

The update service is automatically extended by 1 further year unless canceled up to 6 weeks prior to expiration.


| Description                                                           | Article No.               |
|-----------------------------------------------------------------------|---------------------------|
| <b>Drive ES PCS 7</b><br>• Update service for single-user license     | <b>6SW1700-0JD00-0AB2</b> |
| <b>Drive ES PCS 7 APL</b><br>• Update service for single-user license | <b>6SW1700-0JD01-0AB2</b> |

#### More information

More information is available on the Internet at [www.siemens.com/drive-es](http://www.siemens.com/drive-es)

<sup>\*)</sup> Orders are automatically supplied with the latest Service Pack (SP).

## Drive applications

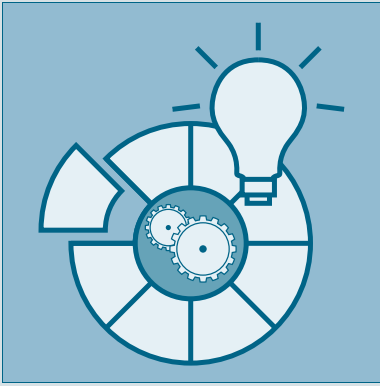

13/2  
13/4

**Drive applications**  
**Hydraulic systems**

You can find additional information on the Internet at  
[www.siemens.com/sinamics-applications](http://www.siemens.com/sinamics-applications)  
<https://support.industry.siemens.com>

# Drive applications

## Drive applications

### Overview

*Overview of drive applications for SINAMICS drives, including SIMATIC ET 200pro FC-2 frequency converters*

| Drive application                    | SINAMICS V<br>V20 | SINAMICS G |       |       |       |                              |       |                              | SINAMICS S |      | SIMATIC        |
|--------------------------------------|-------------------|------------|-------|-------|-------|------------------------------|-------|------------------------------|------------|------|----------------|
|                                      |                   | G110       | G110D | G120C | G120P | G120                         | G110M | G120D                        | S110       | S120 | ET 200pro FC-2 |
| Standard technology functions        |                   |            |       |       |       |                              |       |                              |            |      |                |
| BICO technology                      | ✓                 | –          | ✓     | ✓     | ✓     | ✓                            | ✓     | ✓                            | ✓          | ✓    | ✓              |
| Free Function Blocks (FFB)           | ✓                 | –          | ✓     | ✓     | ✓     | ✓                            | ✓     | ✓                            | ✓          | ✓    | –              |
| Basic positioner (EPos)              | –                 | –          | –     | –     | –     | ✓ with CU250S-2 Control Unit | –     | ✓ with CU250D-2 Control Unit | ✓          | ✓    | –              |
| Technology controller (PID)          | ✓                 | –          | ✓     | ✓     | ✓     | ✓                            | ✓     | ✓                            | ✓          | ✓    | –              |
| Advanced technology functions        |                   |            |       |       |       |                              |       |                              |            |      |                |
| SINAMICS Drive Control Chart (DCC)   | –                 | –          | –     | –     | –     | –                            | –     | –                            | –          | ✓    | –              |
| SINAMICS Technology Extensions (TEC) | –                 | –          | –     | –     | –     | –                            | –     | –                            | –          | ✓    | –              |
| Applications & Branch know-how       |                   |            |       |       |       |                              |       |                              |            |      |                |


Siemens has applied these technology functions (standard and/or advanced) to generate numerous application solutions. These applications can be downloaded from the Siemens application support website at [www.siemens.com/sinamics-applications](http://www.siemens.com/sinamics-applications)

### Standard applications: Understanding and profiting from know-how

The development of standard applications is a major area of activity within the Siemens automation and drive environment. The scope of these standard applications ranges from clearly organized documentation that focuses on one or several technologies (e.g. Safety Integrated) to complete, comprehensive, standardized solutions for complex tasks (e.g. cross cutters).


#### Standard application requirements

One feature that all application examples have in common is that they are designed to help users help themselves. They have been created by developers with extensive tool, commissioning and application know-how to make them as user-friendly as possible. Standard applications generally provide the user with reusable components.

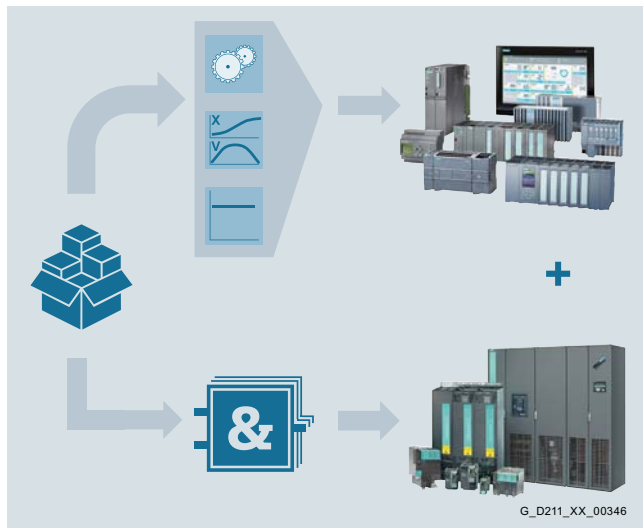

Technology functions in the higher-level control system

- Tested SIMATIC PLC blocks
- Reusable HMIs and faceplates

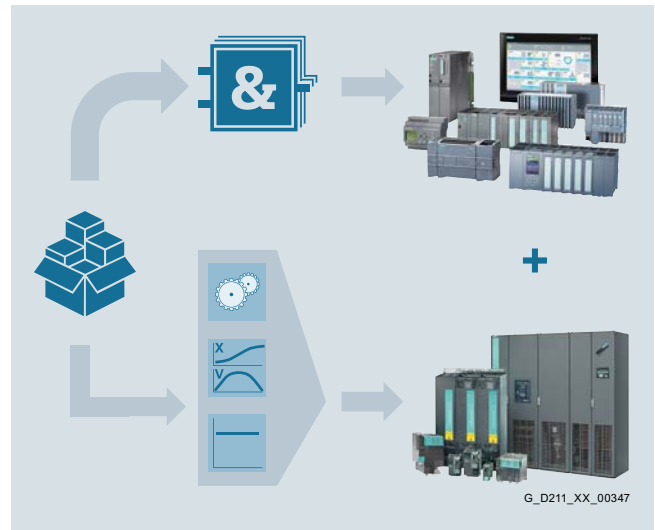


Technology functions in the drive


- Tested SIMATIC PLC blocks
- Reusable HMIs and faceplates
- Application-specific Drive Control Charts (DCC)

## Overview (continued)

## Expandable drive technologies

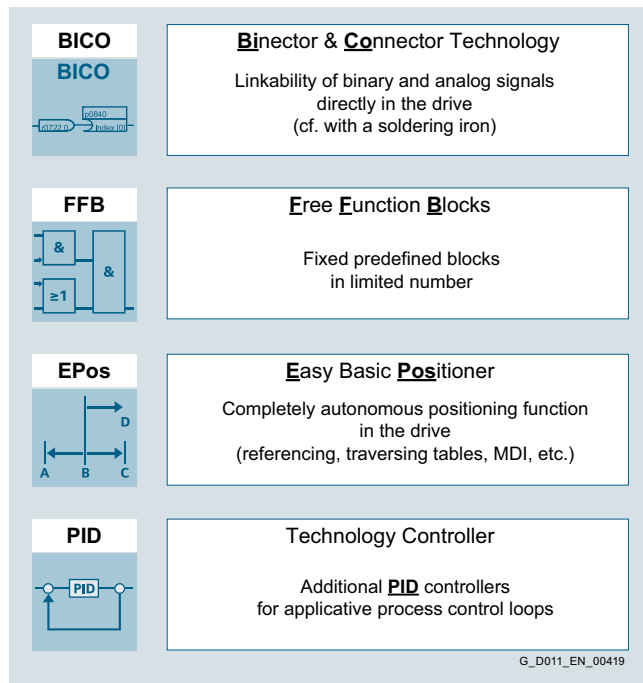

Standard technology functions

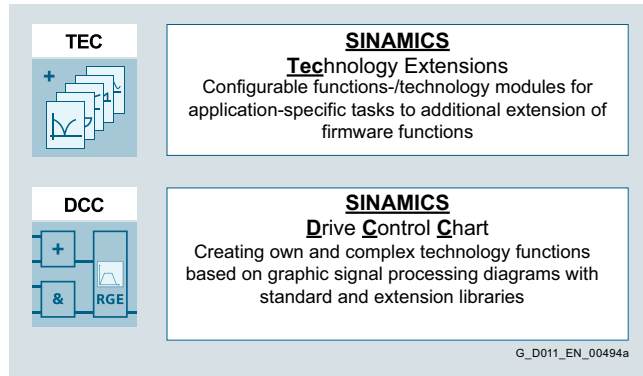

Advanced technology functions

The development of standard technological applications is a dedicated area of activity within the Siemens automation and drive environment. Owing to the generally large size of the applications, they are supplied with detailed documentation and example codes.

These applications focus on the use of product features such as SINAMICS Drive Control Chart (DCC) with its Drive Control Block (DCB) libraries of DCB Standard and DCB Extension, SINAMICS Technology Extensions (TEC) and Free Function Blocks (FFB).

This enables extensive, complete and standardized solutions to be developed for complex drive tasks.

These solutions can be flexibly adapted while at the same time allowing the user to expand them with additional elements or special functions as required.

## Application examples

Freely available application examples offer:

- Explanation of the necessary configuring steps with Siemens engineering tools
- Reusable standardized blocks for SIMATIC PLC
- Functionally coordinated programs and blocks
- Significantly shorter commissioning times

Various application examples also explain how to use Free Function Blocks (FFB), logic processing integrated in the drive with Drive Control Chart (DCC) and Safety Integrated.

The following application examples are just a selection of some of the many applications that are available on the Internet at:

- SINAMICS G: Controlling the speed of a G110M/G120 (Startdrive) with S7-1500 (TO) via PROFINET or PROFIBUS with Safety Integrated (via terminal) and HMI  
<https://support.industry.siemens.com/cs/document/78788716>
- SINAMICS G: Positioning a G110M/G120 (Startdrive) with S7-1500 (TO) via PROFINET/PROFIBUS with Safety Integrated and HMI  
<https://support.industry.siemens.com/cs/document/81666970>
- SINAMICS S: Controlling the speed of a SINAMICS S120 with SIMATIC S7-300/400F (STEP 7 V5) via PROFINET/PROFIBUS with Safety Integrated (via PROFIsafe) and HMI  
<https://support.industry.siemens.com/cs/document/68624711>
- SINAMICS S: SINAMICS S120 web server – user-defined sample pages  
<https://support.industry.siemens.com/cs/document/78388880>
- SIMATIC – Fail-safe LDrvSafe library for controlling Safety Integrated functions for the SINAMICS drive family  
<https://support.industry.siemens.com/cs/document/109485794>

You can find additional information on the Internet at:

[www.siemens.com/sinamics-applications](http://www.siemens.com/sinamics-applications)

<https://support.industry.siemens.com>

## Drive applications

### Hydraulic systems

#### Overview



**Drive components for hydraulic systems – the energy-saving solution for hydraulic machines**

#### *Outstanding efficiency all along the line*

Efficiency is becoming an increasingly important factor in the optimization of hydraulic machines and plants. This basically applies to all types of hydraulically driven axes, but particularly to the axes of presses, injection molding machines and blow molding machines, for example. In addition to the trend in favor of hydraulic machines which are partially or fully electrical in design, it is also beneficial to optimize the hydraulic units themselves.


#### *Energy saving made easy*

With energy savings of up to 70 %, your investment in the future will pay off within a very short time. Suitable combinations comprising one hydraulic pump, a SIMOTICS motor and a SINAMICS frequency converter – a development which is state of the art with respect to energy efficiency – will guarantee that you achieve maximum energy savings.

#### Application

##### *Process-optimized use of energy*

Energy-efficient, modernized systems generally consume only as much energy as the hydraulic machines need in the relevant phases. The energy saving effect is greatest during "idle times": The pump is then virtually at a standstill and consumes only a minimal amount of energy, by contrast with the pump in conventional solutions which needed to continue running at a reduced output (15 to 20 %).

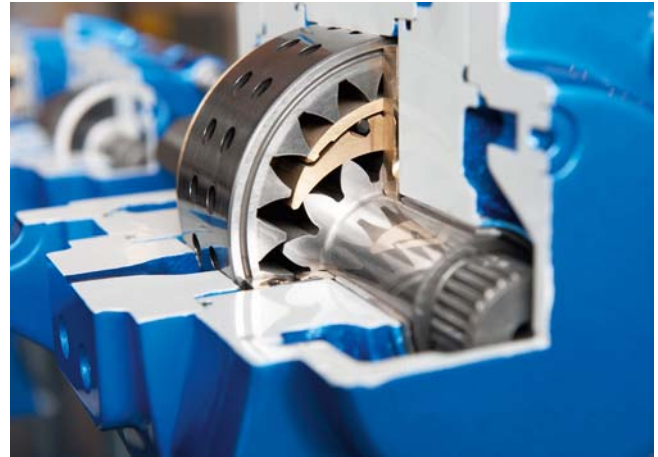

#### Benefits


##### *The advantages at a glance*

- High energy efficiency: Savings of up to 70 %
- Active control in SINAMICS S120 on the basis of Drive Control Chart (DCC)
- Enormous reduction in noise emissions
- High efficiency
- Simple drive system with broad scope of functions
- Reduced complexity
- Easy system integration
- Simple preventive maintenance
- Reduction in quantity of valves
- Optimum adaptation of force and velocity to the pressing process
- Precise reproducibility of velocity, force and cycle rates
- Small oil tank
- Highly developed diagnostics capability
- Modular design


## Design

## Standard components for drive applications


|                                       | Variable-speed pumps for simple applications | Variable-speed pumps for efficient applications | Servo pumps for high-performance applications                             |
|---------------------------------------|----------------------------------------------|-------------------------------------------------|---------------------------------------------------------------------------|
| <b>Converters/inverters</b>           | SINAMICS V20                                 | SINAMICS G120                                   | SINAMICS S120                                                             |
| <b>Motors</b>                         | SIMOTICS GP 1LE1                             | SIMOTICS GP 1LE1<br>SIMOTICS GP 1FP1            | SIMOTICS S-1FK7<br>SIMOTICS S-1FT7<br>SIMOTICS M-1PH8<br>SIMOTICS GP 1FP1 |
| <b>Torque and speed control</b>       | V/f control                                  | Vector control<br>(with and without encoder)    | Servo and vector control                                                  |
| <b>Pressure and flow rate control</b> | Technology controller                        | Technology controller                           | Drive Control Chart<br>(DCC on SD card)                                   |

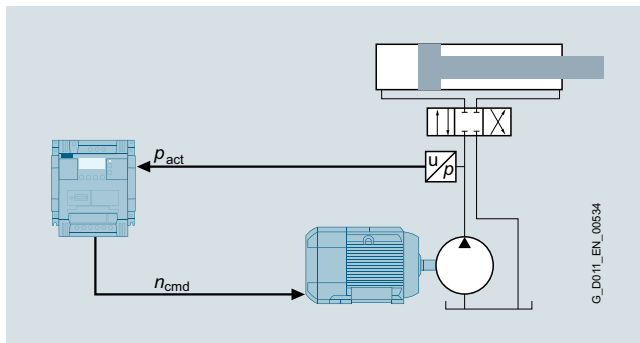

Example of block diagram for a variable-speed pump with SINAMICS V20

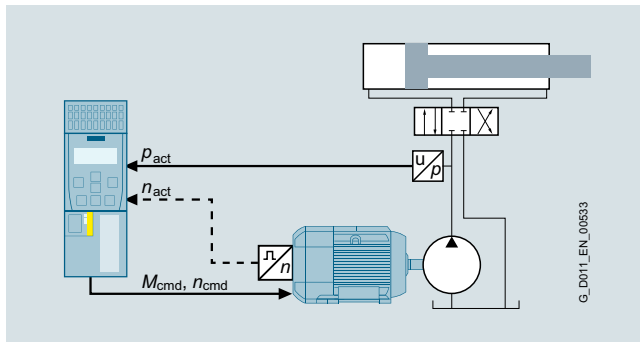

Example of block diagram for a variable-speed pump with SINAMICS G120

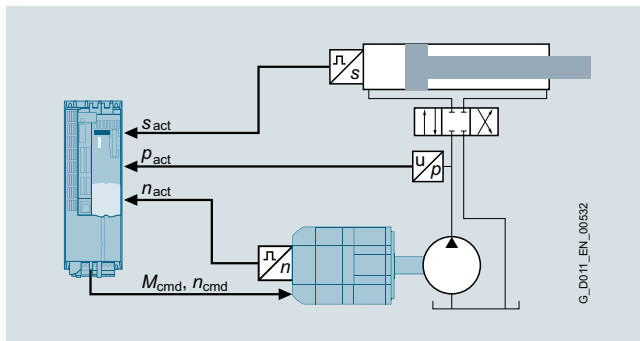

Example of block diagram for a servo pump with SINAMICS S120


## More information

You can find additional information on the Internet at [www.siemens.com/hydraulic-systems](http://www.siemens.com/hydraulic-systems)

## Drive applications

### Notes

## Services and documentation

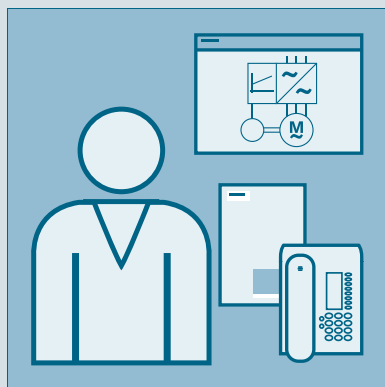


|              |                                                                        |
|--------------|------------------------------------------------------------------------|
| <b>14/2</b>  | <b>Partner · Industry Mall and Interactive Catalog CA 01</b>           |
| <b>14/4</b>  | <b>Industry Services</b>                                               |
| 14/5         | Industry Services – Portfolio overview                                 |
| 14/6         | Online Support                                                         |
| <b>14/7</b>  | <b>Training</b>                                                        |
| 14/7         | SITRAIN – Training for Industry                                        |
| 14/8         | Training courses for                                                   |
|              | SINAMICS low-voltage converters                                        |
| 14/9         | SINAMICS V20 training case                                             |
| 14/9         | SINAMICS G120C training case                                           |
| 14/10        | Training case, single-axis drive, modular                              |
| 14/12        | SINAMICS S110 training case                                            |
| <b>14/13</b> | <b>Siemens Automation Cooperates with Education (SCE)</b>              |
| 14/13        | Teaching made easy – Comprehensive support on the way to Industrie 4.0 |
| <b>14/16</b> | <b>Control cabinets</b>                                                |
| <b>14/18</b> | <b>Repair service contract RSC</b>                                     |
| 14/20        | Types of contract for production machines                              |
| <b>14/21</b> | <b>Mechatronic Support</b>                                             |
| <b>14/22</b> | <b>Applications</b>                                                    |
| <b>14/23</b> | <b>Spare parts services</b>                                            |
| 14/23        | Spare parts services during the lifecycle                              |
| 14/23        | Delivery of spare parts                                                |
| 14/24        | Delivery as exchange product                                           |
| 14/24        | Repair                                                                 |
| 14/25        | Product upgrade service                                                |
| 14/25        | General overhaul                                                       |
| 14/26        | Function check                                                         |
| 14/26        | Return of diagnostic parts                                             |
| 14/27        | Stock reduction in spare parts store                                   |
| 14/27        | Extended spare part availability                                       |
| <b>14/28</b> | <b>Spares on Web</b>                                                   |
| <b>14/29</b> | <b>Product Partner – Drives Options</b>                                |
| <b>14/30</b> | <b>mySupport documentation</b>                                         |
| <b>14/31</b> | <b>Documentation</b>                                                   |
| 14/31        | General documentation                                                  |

## Services and documentation

### Partner · Industry Mall and Interactive Catalog CA 01

#### Partner at Siemens

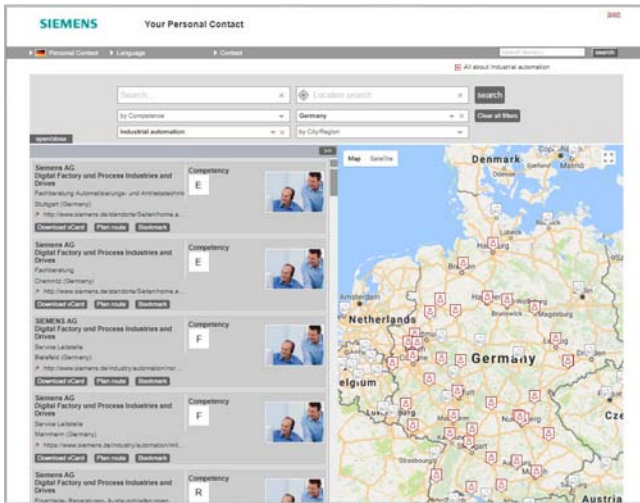


At your service locally, around the globe for consulting, sales, training, service, support, spare parts on the entire portfolio of Digital Factory and Process Industries and Drives.

Your partner can be found in our Personal Contacts Database at: [www.siemens.com/automation-contact](http://www.siemens.com/automation-contact)

You start by selecting

- the required competence,
  - products and branches,
  - a country and a city
- or by a
- location search or free text search.

#### Easy product selection and ordering in the Industry Mall and with the Interactive Catalog CA 01

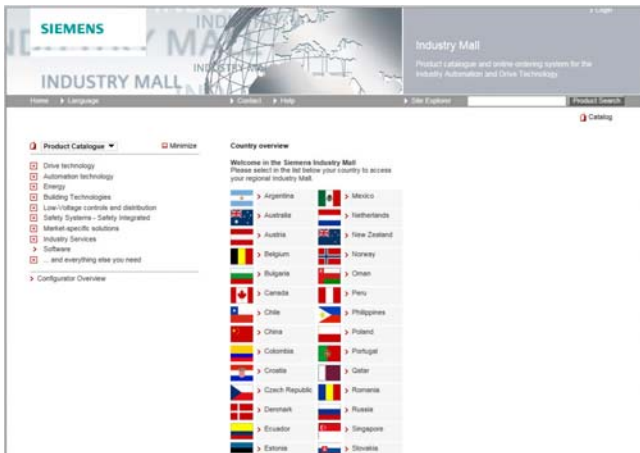


##### Industry Mall

The Industry Mall is a Siemens Internet ordering platform. Here you have a clear and informative online access to a huge range of products.

Powerful search functions make it easy to select the required products. Configurators enable you to configure complex product and system components quickly and easily. CAx data types are also provided here.

Data transfer allows the whole procedure, from selection through ordering to tracking and tracing, to be carried out online. Availability checks, customer-specific discounts and bid creation are also possible.

[www.siemens.com/industrymall](http://www.siemens.com/industrymall)

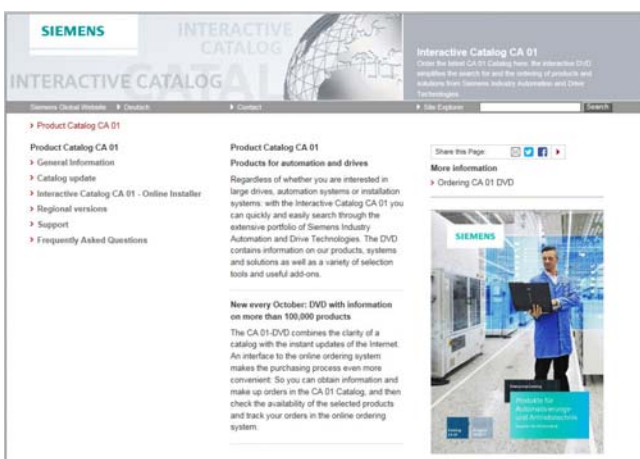


##### Interactive Catalog CA 01 - Products for Automation and Drives

The Interactive Catalog CA 01 combined with the Siemens Industry Mall unites the benefits of offline and online media in one application – the performance of an offline catalog with the availability of manifold and up-to-date information on the Internet.

Select products and assemble orders with the CA 01, determine the availability of the selected products and track & trace via the Industry Mall.

More information and download: [www.siemens.com/automation/ca01](http://www.siemens.com/automation/ca01)

### Downloading catalogs

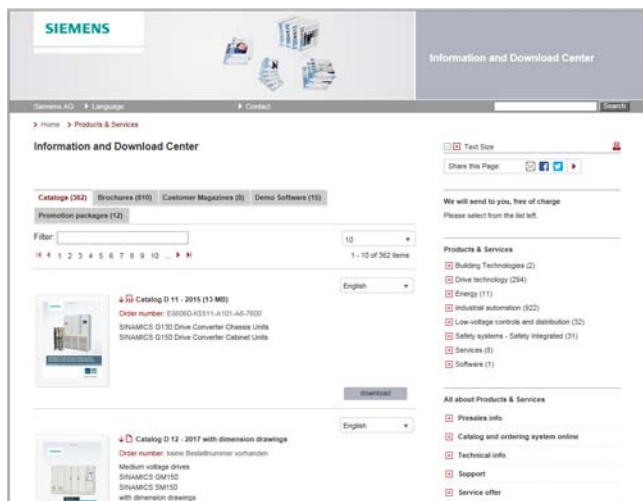


In the Information and Download Center you can download catalogs and brochures in PDF format without having to register. The filter dialog makes it possible to carry out targeted searches.

[www.siemens.com/industry/infocenter](http://www.siemens.com/industry/infocenter)

## Services and documentation

### Industry Services

#### Overview

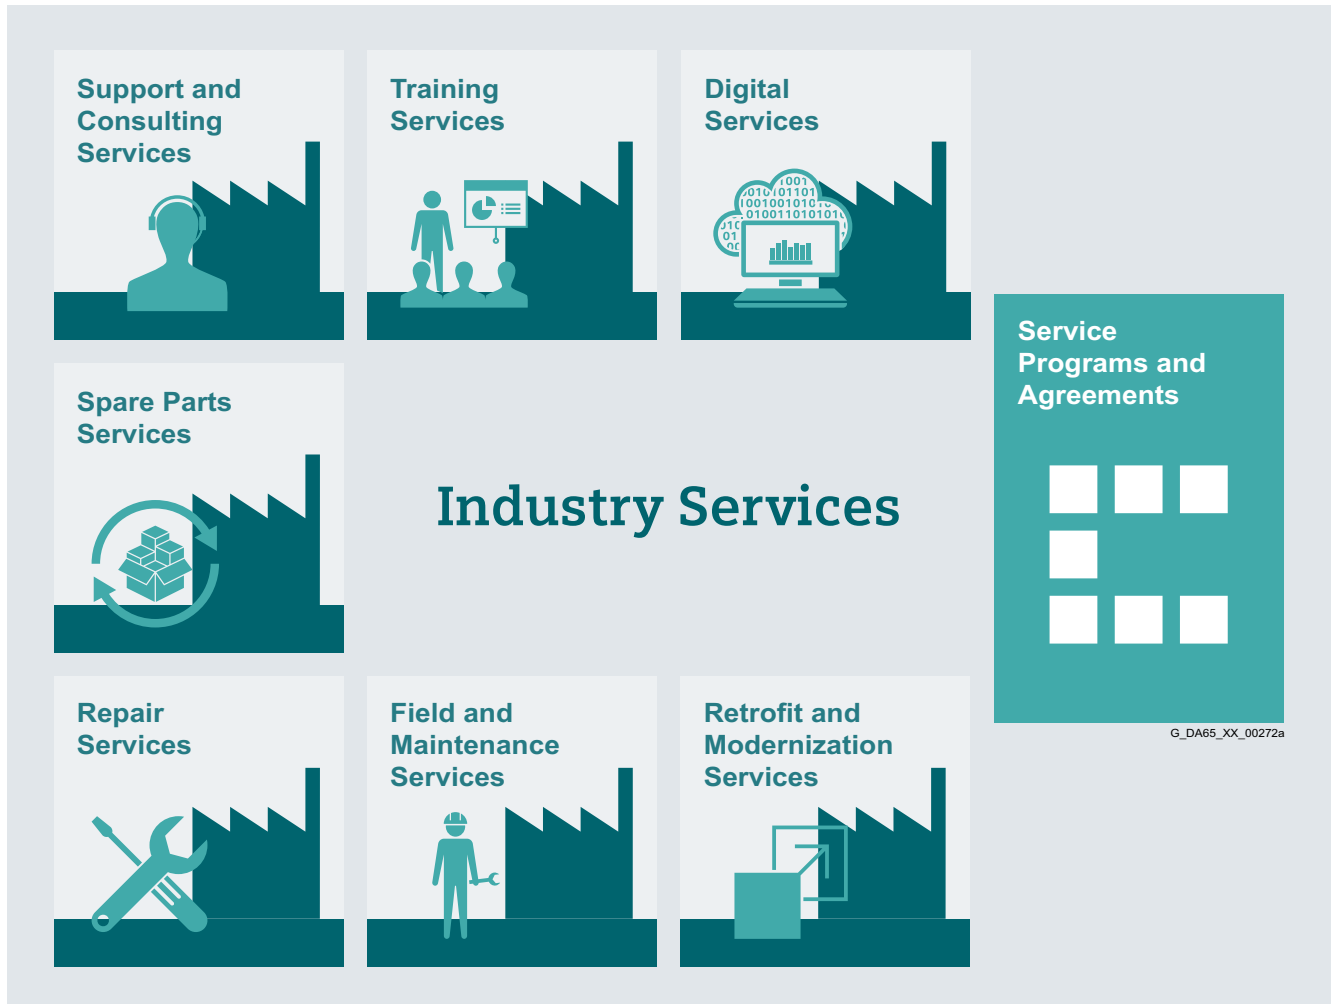

#### Keep your business running and shaping your digital future – with Industry Services

Optimizing the productivity of your equipment and operations can be a challenge, especially with constantly changing market conditions. Working with our service experts makes it easier. We understand your industry's unique processes and provide the services needed so that you can better achieve your business goals.

You can count on us to maximize your uptime and minimize your downtime, increasing your operations' productivity and reliability. When your operations have to be changed quickly to meet a new demand or business opportunity, our services give you the flexibility to adapt. Of course, we take care that your production is protected against cyber threats. We assist in keeping your operations as energy and resource efficient as possible and reducing your total cost of ownership. As a trendsetter, we ensure that you can capitalize on the opportunities of digitalization and by applying data analytics to enhance decision making: You can be sure that your plant reaches its full potential and retains this over the longer lifespan.

You can rely on our highly dedicated team of engineers, technicians and specialists to deliver the services you need – safely, professionally and in compliance with all regulations. We are there for you, where you need us, when you need us.

<https://www.siemens.com/global/en/home/products/services/industry.html>

### Overview




#### Digital Services

Digital Services make your industrial processes transparent to gain improvements in productivity, asset availability, and energy efficiency.

Production data is generated, filtered and translated with intelligent analytics to enhance decision-making.

This is done whilst taking data security into consideration and with continuous protection against cyber-attack threats.

<https://www.siemens.com/global/en/home/products/services/industry/digital-services.html>



#### Training Services

From the basics and advanced to specialist skills, SITRAIN courses provide expertise right from the manufacturer – and encompass the entire spectrum of Siemens products and systems for the industry.

Worldwide, SITRAIN courses are available wherever you need a training course in more than 170 locations in over 60 countries.

<https://support.industry.siemens.com/cs/ww/en/sc/2226>



#### Support and Consulting Services

**Industry Online Support** site for comprehensive information, application examples, FAQs and support requests.

**Technical and Engineering Support** for advice and answers for all inquiries about functionality, handling, and fault clearance. The Service Card as prepaid support for value added services such as Priority Call Back or Extended Support offers the clear advantage of quick and easy purchasing.

**Information & Consulting Services**, e.g. SIMATIC System Audit; clarity about the state and service capability of your automation system or Lifecycle Information Services; transparency on the lifecycle of the products in your plants.

<https://support.industry.siemens.com/cs/ww/en/sc/2235>



#### Spare Parts

Spare Parts Services are available worldwide for smooth and fast supply of spare parts – and thus optimal plant availability. Genuine spare parts are available for up to ten years. Logistic experts take care of procurement, transport, custom clearance, storage and order management.

Reliable logistics processes ensure that components reach their destination as needed.

Since not all spare parts can be kept in stock at all times, Siemens offers a preventive measure for spare parts provisioning on the customer's premises with optimized **Spare Parts Packages** for individual products, custom-assembled drive components and entire integrated drive trains – including risk consulting.

**Asset Optimization Services** help you design a strategy for parts supply where your investment and carrying costs are reduced and the risk of obsolescence is avoided.

<https://support.industry.siemens.com/cs/ww/en/sc/2110>



#### Repair Services

Repair Services are offered on-site and in regional repair centers for fast restoration of faulty devices' functionality.

Also available are extended repair services, which include additional diagnostic and repair measures, as well as emergency services.

<https://support.industry.siemens.com/cs/ww/en/sc/2154>



#### Field and Maintenance Services

Siemens specialists are available globally to provide expert field and maintenance services, including commissioning, functional testing, preventive maintenance and fault clearance.

All services can be included in customized service agreements with defined reaction times or fixed maintenance intervals.

<https://support.industry.siemens.com/cs/ww/en/sc/2265>



#### Retrofit and Modernization Services

Provide a cost-effective solution for the expansion of entire plants, optimization of systems or upgrading existing products to the latest technology and software, e.g. migration services for automation systems.

Service experts support projects from planning through commissioning and, if desired over the entire extended lifespan, e.g. Retrofit for Integrated Drive Systems for an extended lifetime of your machines and plants.

<https://support.industry.siemens.com/cs/ww/en/sc/2286>



#### Service Programs and Agreements

A technical Service Program or Agreement enables you to easily bundle a wide range of services into a single annual or multi-year agreement.

You pick the services you need to match your unique requirements or fill gaps in your organization's maintenance capabilities.

Programs and agreements can be customized as KPI-based and/or performance-based contracts.

<https://support.industry.siemens.com/cs/ww/en/sc/2275>

## Services and documentation

### Industry Services

#### Online Support

#### Overview

Online Support – fast, intuitive, whenever you want, wherever you need



**Web**  
support.industry.siemens.com

**App**

GET IT ON Google Play | GET IT ON App Store | Microsoft

Scan the QR code for information on our Online Support app.

 **FAQ / Application examples**  
Information about industrial products, programming and configuration as well as application examples

 **Technical Information**  
Videos, documentation, manuals, updates, product notes, compatibility tool, certificates, planning data such as dimensional drawings, product data, 3D models

 **Forum**  
Exchange information and experience with other users and experts

## Online Support for Siemens Products for Industry

Siemens Industry and Online Support with some 1.7 million visitors per month is one of the most popular web services provided by Siemens. It is the central access point for comprehensive technical know-how about products, systems and services for automation and drives applications as well as for process industries.

In connection with the challenges and opportunities related to digitalization you can look forward to continued support with innovative offerings.

**Overview**

***Your benefit from practical training directly from the manufacturer***

SITRAIN – Training for Industry – provides you with comprehensive support in solving your tasks.

Training directly from the manufacturer enables you to make correct decisions with confidence.

***Increased profits and lower costs:***

- Shorter times for commissioning, maintenance and servicing
- Optimized production operations
- Reliable configuration and commissioning
- Shortened startup times, reduced downtimes, and faster troubleshooting
- Exclude expensive faulty planning right from the start.
- Flexible plant adaptation to market requirements
- Compliance with quality standards in production
- Increased employee satisfaction and motivation
- Shorter familiarization times following changes in technology and staff

***Contact***

Visit our site on the Internet at:  
[www.siemens.com/sitrain](http://www.siemens.com/sitrain)

or let us advise you personally.

***SITRAIN – Training for Industry***  
***SITRAIN Customer Support Germany:***

Tel.: +49 911 895-7575

Fax: +49 911 895-7576

Email: [info@sitrain.com](mailto:info@sitrain.com)

***Your benefits with SITRAIN – Training for Industry***
Certified top trainers

Our trainers are skilled specialists with practical experience. Course developers have close contact with product development, and pass on their knowledge to the trainers and then to you.

Practical application with practice

Practice, practice, practice! We have designed the trainings with an emphasis on practical exercises. They take up to half of the course time in our trainings. You can therefore implement your new knowledge in practice even faster.

300 courses in more than 60 countries

We offer a total of about 300 classroom-based courses. You can find us at more than 50 locations in Germany, and in 62 countries worldwide. You can find which course is offered at which location at:

[www.siemens.com/sitrain](http://www.siemens.com/sitrain)

Skills development

Do you want to develop skills and fill in gaps in your knowledge? Our solution: We will provide a program tailored exactly to your personal requirements. After an individual requirements analysis, we will train you in our training centers near you or directly at your offices. You will practice on the most modern training equipment with special exercise units. The individual training courses are optimally matched to each other and help with the continuous development of knowledge and skills. After finishing a training module, the follow-up measures make success certain, as well as the refreshment and deepening of the knowledge gained.

## Services and documentation

### Training

#### Training courses for SINAMICS low-voltage converters

##### Overview

##### Training courses for SINAMICS drive system



This provides an overview of the training courses available for the SINAMICS drive system.

The courses are modular in design and are directed at a variety of target groups as well as individual customer requirements.

The system overview will acquaint decision-makers and sales personnel with the system very quickly.

The engineering course provides all the information you need to configure the drive system.

The courses dedicated to diagnostics and servicing, parameterization and commissioning, communication as well as extended functions such as Safety Integrated are sure to provide all the technical knowledge service engineers will need.

All courses contain as many practical exercises as possible to enable intensive and direct training on the drive system and with the tools in small groups.

Please also take note of the training options available for SIMOTICS motors. You will find more information about course contents and dates in Catalog ITC and on the Internet.

| Title<br>(all courses are available in English and German) | Target group                                     |                                                         |                                                  | Duration | Order code |
|------------------------------------------------------------|--------------------------------------------------|---------------------------------------------------------|--------------------------------------------------|----------|------------|
|                                                            | Planners,<br>decision-makers,<br>sales personnel | Commissioning<br>engineers,<br>configuring<br>engineers | Service personnel,<br>maintenance<br>technicians |          |            |
| Courses Fundamentals and overview                          |                                                  |                                                         |                                                  |          |            |
| SINAMICS and SIMOTICS – Basics of drive technology         | ✓                                                | ✓                                                       | ✓                                                | 5 days   | DR-GAT     |
| SINAMICS and SIMOTICS – System overview                    | ✓                                                | –                                                       | –                                                | 3 days   | DR-SYS     |
| SINAMICS System Overview                                   | ✓                                                | –                                                       | –                                                | 2 days   | DR-SN-UEB  |
| Courses SINAMICS S120                                      |                                                  |                                                         |                                                  |          |            |
| Planning and engineering                                   | ✓                                                | –                                                       | –                                                | 5 days   | DR-S12-PL  |
| Parameterizing and commissioning                           | –                                                | ✓                                                       | –                                                | 5 days   | DR-S12-PM  |
| Parameterization Advanced Course                           | –                                                | ✓                                                       | –                                                | 5 days   | DR-S12-PA  |
| Parameterizing and optimizing                              | –                                                | ✓                                                       | –                                                | 3 days   | DR-S12-OPT |
| Parameterizing Safety Integrated                           | –                                                | ✓                                                       | –                                                | 4 days   | DR-S12-SAF |
| Diagnostics and service                                    | –                                                | –                                                       | ✓                                                | 5 days   | DR-S12-DG  |
| Diagnostics at chassis and cabinet units                   | –                                                | ✓                                                       | ✓                                                | 3 days   | DR-S12-CHA |
| Diagnostics PROFINET and PROFIBUS                          | –                                                | ✓                                                       | ✓                                                | 3 days   | DR-S12-NET |
| Courses SINAMICS G120                                      |                                                  |                                                         |                                                  |          |            |
| Planning and engineering                                   | ✓                                                | –                                                       | –                                                | 2 days   | DR-G12-PL  |
| Parameterizing and commissioning                           | –                                                | ✓                                                       | –                                                | 2 days   | DR-G12-PM  |
| Parameterization Advanced Course                           | –                                                | ✓                                                       | –                                                | 3 days   | DR-G12-PA  |
| Parameterizing Safety Integrated                           | –                                                | ✓                                                       | –                                                | 2 days   | DR-G12-SAF |
| Courses SINAMICS G130/G150/G180/S150                       |                                                  |                                                         |                                                  |          |            |
| DYNAVERT – commissioning and diagnostics                   | –                                                | ✓                                                       | ✓                                                | 2 days   | DR-DYNA    |
| SINAMICS G150/G130/S150 – diagnostics and service          | –                                                | ✓                                                       | ✓                                                | 5 days   | DR-G15-DG  |
| SINAMICS G180 – diagnostics and service                    | –                                                | –                                                       | ✓                                                | 2.5 days | DR-G18-DG  |

**SINAMICS V20 training case**
**Overview**


SINAMICS V20 training case

The SINAMICS V20 training case is a convincing demonstration system thanks to its compact design. It is suitable for direct customer presentations as well as for tests in technical departments. It enables the functions of SINAMICS V20 to be demonstrated and tested quickly and easily.

It contains the following components:

- SINAMICS V20 converter, 0.12 kW (0.16 hp)
- SINAMICS V20 Smart Access
- SINAMICS V20 Parameter Loader
- SIMOTICS GP asynchronous (induction) motor

The SINAMICS V20 training case is supplied in the form of a stackable Tanos Systainer case of size 4.

**Technical specifications**

|                        | <b>SINAMICS V20 training case</b><br>6AG1067-2AA00-0AC6 |
|------------------------|---------------------------------------------------------|
| <b>Supply voltage</b>  | 230 V 1 AC                                              |
| <b>Dimensions</b>      |                                                         |
| • Width                | 180 mm (7.09 in)                                        |
| • Height               | 450 mm (17.72 in)                                       |
| • Depth                | 400 mm (15.75 in)                                       |
| <b>Weight, approx.</b> | 9 kg (19.8 lb)                                          |

**Selection and ordering data**

| Description                       | Article No.               |
|-----------------------------------|---------------------------|
| <b>SINAMICS V20 training case</b> | <b>6AG1067-2AA00-0AC6</b> |

**SINAMICS G120C training case**
**Overview**


SINAMICS G120C training case with operator panel IOP-2

The SINAMICS G120C training case is a convincing demonstration system thanks to its compact design. It is suitable for direct customer presentations as well as for tests in technical departments. It enables the functions of SINAMICS G120C to be demonstrated and tested quickly and easily.

It contains the following components:

- SINAMICS G120C frequency inverter, PROFINET / EtherNet/IP or PROFIBUS variants, 0.55 kW (0.75 hp)
- IOP-2 and BOP-2 operator panels and SINAMICS G120 Smart Access
- SIMOTICS GP asynchronous (induction) motor

The SINAMICS G120C training case is supplied in the form of a stackable Tanos Systainer case of size 4.

**Technical specifications**

|                        | <b>SINAMICS G120C training case</b><br>6AG1067-2AA00-0AA0<br>6AG1067-1AA25-0AA0 |
|------------------------|---------------------------------------------------------------------------------|
| <b>Supply voltage</b>  | 230 V 1 AC                                                                      |
| <b>Dimensions</b>      |                                                                                 |
| • Width                | 315 mm (12.40 in)                                                               |
| • Height               | 400 mm (15.75 in)                                                               |
| • Depth                | 300 mm (11.81 in)                                                               |
| <b>Weight, approx.</b> | 9 kg (19.8 lb)                                                                  |

**Selection and ordering data**

| Description                         | Article No.               |
|-------------------------------------|---------------------------|
| <b>SINAMICS G120C training case</b> |                           |
| • PROFINET / EtherNet/IP variant    | <b>6AG1067-2AA00-0AA0</b> |
| • PROFIBUS variant                  | <b>6AG1067-1AA25-0AA0</b> |

## Services and documentation

### Training

#### Training case, single-axis drive, modular

##### Overview



Training case, single-axis drive, modular

The basic version of the training case contains the following components:

- SINAMICS PM240-2 Power Module, 0.12 kW (0.16 hp)
- SINAMICS CU240E-2 PN-F Control Unit
- IOP-2 operator panel
- SIMOTICS GP asynchronous (induction) motor with HTL encoder
- Simulator panel

The following expansions are possible:

- Second Power Module
- Various Control Units
- Servo module with load equipment and encoder system
- SIMATIC module

The single-axis drive modular training case is supplied in the form of a trolley case. It is available in the basic and compact basic variants. The compact basic variant cannot be expanded with the SIMATIC module.

##### Technical specifications

|                        | Training case, single-axis drive, modular |                                     |
|------------------------|-------------------------------------------|-------------------------------------|
|                        | Basic<br>6AG1067-2AA00-0AA3               | Compact basic<br>6AG1067-2AA00-0AB8 |
| <b>Supply voltage</b>  | 230 V 1 AC                                | 230 V 1 AC                          |
| <b>Dimensions</b>      |                                           |                                     |
| • Width                | 560 mm (22.05 in)                         | 420 mm (16.54 in)                   |
| • Height               | 695 mm (27.36 in)                         | 695 mm (27.36 in)                   |
| • Depth                | 325 mm (12.80 in)                         | 325 mm (12.80 in)                   |
| <b>Weight, approx.</b> | 28 kg (61.7 lb)                           | 25 kg (55.1 lb)                     |

##### Selection and ordering data

| Description                                      | Article No.               |
|--------------------------------------------------|---------------------------|
| <b>Training case, single-axis drive, modular</b> |                           |
| • Basic                                          | <b>6AG1067-2AA00-0AA3</b> |
| • Compact basic                                  | <b>6AG1067-2AA00-0AB8</b> |
| <b>Accessories</b>                               |                           |
| <b>Power Module</b>                              | <b>6AG1067-2AA00-0AA5</b> |
| <b>SINAMICS G Control Units</b>                  |                           |
| • CU250S-2 PN                                    | <b>6AG1067-2AA00-0AB7</b> |
| • CU240E-2 DP-F                                  | <b>6AG1067-2AA00-0AA7</b> |
| • CU240E-2 PN-F                                  | <b>6AG1067-2AA00-0AA8</b> |
| • CU230P-2 DP-F                                  | <b>6AG1067-2AA00-0AB1</b> |
| <b>SINAMICS S Control Units</b>                  |                           |
| • CU310-2 DP                                     | <b>6AG1067-2AA00-0AB3</b> |
| • CU310-2 PN                                     | <b>6AG1067-2AA00-0AB4</b> |
| <b>SIMOTION D Control Unit</b>                   |                           |
| • D410-2                                         | <b>6AG1067-2AA00-0AB5</b> |
| <b>Servo module</b>                              | <b>6AG1067-2AA00-0AA4</b> |
| <b>SIMATIC module</b>                            | <b>6AG1067-2AA00-0AA6</b> |

## Accessories

### Power Module and Control Units



The Power Module expands the single-axis drive modular training case with the functionality of a second inverter. The PM240-2 Power Module is already pre-wired on the supply side.

The additional Control Units transform the single-axis drive modular training case into a universal training case for SINAMICS and SIMOTION drive technology. The I/O signals are wired to SUB-D connectors.

#### SINAMICS G120 Control Units

CU250S-2 PN

CU240E-2 DP-F

CU240E-2 PN-F

CU230P-2 DP-F

#### SINAMICS S120 Control Units


CU310-2 DP

CU310-2 PN

#### SIMOTION D Control Unit

D410-2

### Servo module

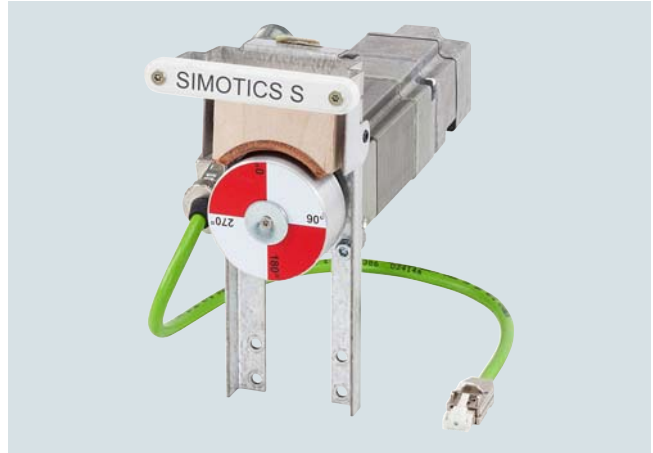

The servo module expands the single-axis drive modular training case with servo functionality. The servo module comprises a SIMOTICS S-1FK7 servomotor with load equipment and a mounted mechanical system. The encoder cable is integrated into the servo module. The power cable is already included in the scope of supply of the SINAMICS modular training case.

### SIMATIC module



The SIMATIC module expands the single-axis drive modular training case in the basic variant. The SIMATIC module supports integration of the single-axis drive modular training case into the SIMATIC and TIA world. The SIMATIC S7-300/-1200/-1500 automation systems can be integrated.

## Services and documentation

### Training

#### SINAMICS S110 training case

##### Overview



SINAMICS S110 training case

The SINAMICS S110 training case is a convincing demonstration system for all situations thanks to its compact design. It vividly demonstrates easy and accurate positioning of an axis by means of the integrated basic positioner (EPos). The integrated touch panel allows for the specification of setpoint values via the PROFIBUS interface. The travel adapter plug and replaceable side panels (German/English) included in the scope of supply enable the unit to be used worldwide.

It contains the following components:

- SINAMICS S110 servo drive
  - PM240-2 Power Module, 0.37 kW (0.5 hp)
  - CU305 DP Control Unit
- SIMATIC S7-300 controller
- SIMATIC Touch Panel TP177B, 4.3" TFT Widescreen Color
- SIMOTICS S-1FK7 synchronous motor

The SINAMICS S110 training case is supplied preprogrammed in the form of a stackable Tanos Systainer case of size 4.

##### Technical specifications

|                        | <b>SINAMICS S110 training case</b><br>6AG1067-1AA18-0AA0 |
|------------------------|----------------------------------------------------------|
| <b>Supply voltage</b>  | 230 V 1 AC                                               |
| <b>Dimensions</b>      |                                                          |
| • Width                | 360 mm (14.17 in)                                        |
| • Height               | 280 mm (11.02 in)                                        |
| • Depth                | 270 mm (10.63 in)                                        |
| <b>Weight, approx.</b> | 13 kg (28.7 lb)                                          |

##### Selection and ordering data

| Description                                      | Article No.               |
|--------------------------------------------------|---------------------------|
| <b>SINAMICS S110 training case with PROFIBUS</b> | <b>6AG1067-1AA18-0AA0</b> |

**Knowledge & technology – the keystones to success in digitalization*****Digitalization is quickly and radically changing our world. What does this mean for education?***

In the world of Industrie 4.0, companies can expect a host of new opportunities and challenges. New systems are verified on the spot through simulations. Automated mass production processes can make every product on the conveyor belt a unique product.



New products are now market-ready much faster. Siemens is shaping this transformation as a technology leader in the field of automation and process lifecycle management (PLM).


These new digitalization processes are changing the know-how requirements for employees. Many educational institutions are facing the challenge of conveying Industrie 4.0 know-how as part of their teaching and training. The Siemens Automation Cooperates with Education (SCE) program is supporting educators on the way to Industrie 4.0.

**The SCE digitalization concept for educators**

*The SCE digitalization concept presented here shows how digitalization can be implemented in educational institutions – from vocational schools to universities.*

Digitalization (or Industrie 4.0) know-how is now introduced through CAx and cloud technologies. It is founded on the basics of automation, such as digital technologies, PLC and information technologies, and on advanced automation and industrial communication technologies.

The level of digitalization knowledge can be weighted, depending on the vocational field or branch of study – e.g. mechanical engineering, automation engineering or computer science.

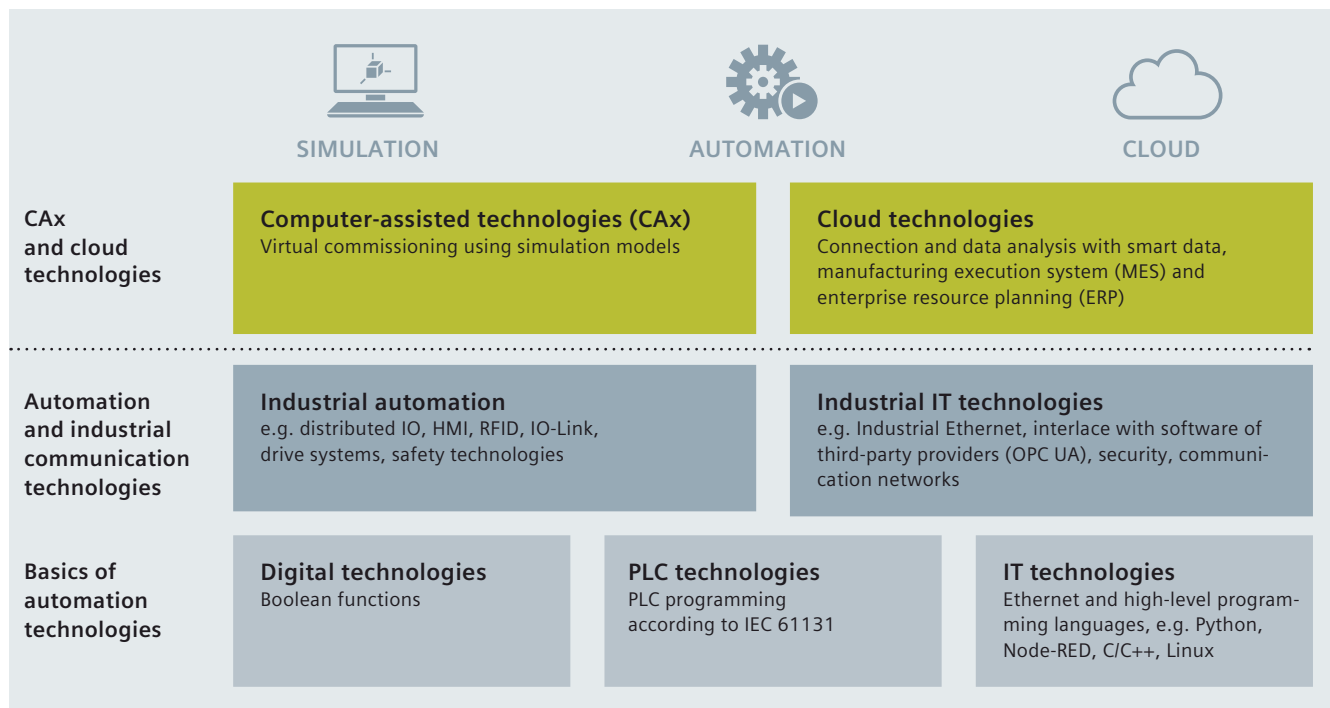

## Services and documentation

### Siemens Automation Cooperates with Education (SCE)

#### Teaching made easy – Comprehensive support on the way to Industrie 4.0

#### The SCE digitalization concept for educators (continued)



As part of their project work, students at Vocational School 2 in Wolfsburg, Germany, have implemented the three levels of the SCE Industrie 4.0 concept. A virtual twin created with the Siemens NX Mechatronics Designer (MCD) CAD software was used for the design and virtual commissioning. This enables fast and efficient assembly of the real automation system, e.g. with SIMATIC S7-1500/ET 200SP/RFID, for use in classes. Production data, such as the number of bottles filled, production date and system parameters, are uploaded to a cloud using SIMATIC IOT2000.

[www.siemens.com/iot2020](http://www.siemens.com/iot2020)

[www.siemens.com/nx](http://www.siemens.com/nx)

#### The SCE offers



#### Learning and training documents

More than 100 didactically prepared learning and training documents are available through SCE and incorporate the digitalization concept. They are designed for use in classes, but can also be customized or used for individual study. These documents are available for free download, most of them in 7 languages.

[www.siemens.com/sce/documents](http://www.siemens.com/sce/documents)

#### Educator courses

Excellent teaching content is needed to introduce students to digitalization. For this purpose, SCE holds educator courses in certain regions. Based on our learning and training documents and through practical exercises, educators acquire the latest Industrie 4.0 know-how.

[www.siemens.com/sce/courses](http://www.siemens.com/sce/courses)



#### Trainer packages

The 90 SCE trainer packages help educators teaching and implementing the SCE digitalization concept. Trainer packages comprise specially compiled, genuine Siemens hardware and software products. The trainer packages are based on the learning and training documents and are offered to schools, colleges and universities at special terms.

[www.siemens.com/sce/tp](http://www.siemens.com/sce/tp)

#### Support for your projects / textbooks

We support you on selected projects with advice and assistance from SCE contact partners.

As a special service, we support textbook authors. We maintain a list of textbooks on the SCE website.

[www.siemens.com/sce/contact](http://www.siemens.com/sce/contact)

[www.siemens.com/sce/books](http://www.siemens.com/sce/books)

## Services and documentation

### Siemens Automation Cooperates with Education (SCE)

Teaching made easy – Comprehensive support on the way to Industrie 4.0

#### Partnerships for proliferation of Industrie 4.0 in education



##### Partnership with WorldSkills

As a technology powerhouse, we support vocational training of students around the world. Since 2010, we have partnered with WorldSkills as a Global Industry Partner in order to amplify this cause.

WorldSkills is an international organization whose mission is to raise the profile and recognition of skilled people, and show how important vocational skills are in achieving economic growth and personal success. Every two years, WorldSkills hosts the world championships of skills.

Siemens provides the competitors with automation products, such as SIMATIC S7-1500 and LOGO!, for the disciplines: industrial control, electrical installations, Polymechanics/Automation and manufacturing technology.

The next international skill competitions are scheduled for Kazan/Russia, in 2019 and Shanghai/China, in 2021. Additionally, we support selected continental and regional competitions.

[www.siemens.com/worldskills](http://www.siemens.com/worldskills)

##### Partnerships with educators

We provide support to educators and educational organizations in the form of one-on-one advice through SCE contact partners and Siemens experts as well as long-term cooperation.

[www.siemens.com/sce/contact](http://www.siemens.com/sce/contact)

##### Partnerships with producers of learning systems

For practical training in classrooms and labs, numerous producers of learning systems offer a wide range of complete didactic solutions based on SCE trainer packages.

[www.siemens.com/sce/partner](http://www.siemens.com/sce/partner)

#### Information portal



To facilitate your teaching assignment and/or for selfstudy, we offer educators and students a comprehensive SCE information portal. At this portal you have quick access to all SCE offers, e.g. learning and training documents including projects, Getting Started information, videos, manuals, trial software and newsletters.

[www.siemens.com/sce](http://www.siemens.com/sce)

**SIEMENS**

Global Industry  
Partner of  
WorldSkills  
International



## Services and documentation

### Control cabinets

#### Overview

##### *Complete equipment for machine tools and production systems*

Our supplied range of products and services also includes complete equipment for machine tools and production systems with all services in the process chain from consulting through to after-sales service.

We support you in the areas of engineering, production and logistics.

##### *Engineering support*

Siemens supports you with advice on design in accordance with standards and concepts for drive systems, control, operation and safety.

Our engineers configure for you in EPLAN P8 and other commonly used CAD systems, execute projects designed to cost and adapt your documents where necessary to UL or new systems.


Our Technical Competence Center Cabinets in Chemnitz supports you with selecting and optimizing the suitable control cabinet air-conditioning system. Apart from calculation and simulation, we also use instrumentation testing in our heat laboratory with load simulation.

We also offer the following services:

- Vibration measurements and control cabinet certification in the field
- Measurement of conducted interference voltages in our laboratory



Cabinet engineering

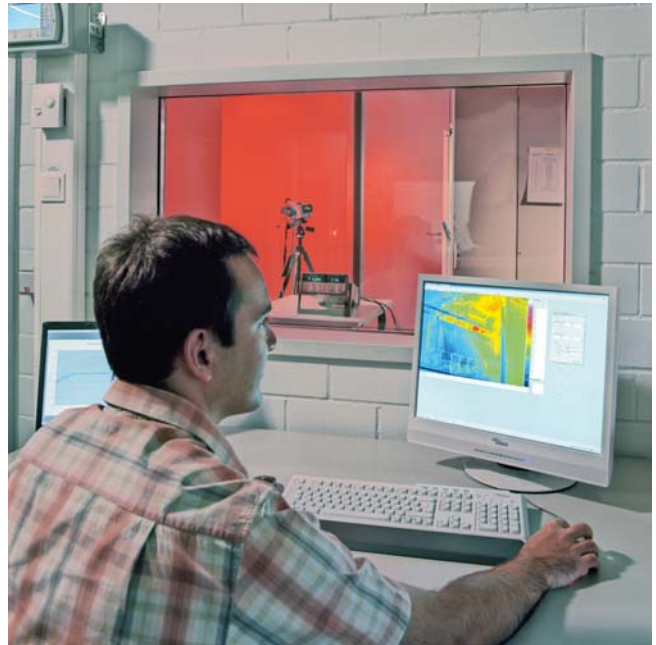

Testing in the heat laboratory

##### *Production at a high level of quality*

Complete equipment is manufactured at a high industrial level. This means:

- Examining consistency of the order documentation
- Checking for adherence to current regulations
- Collision check in 3D layout, taking into account the free space required thermally and electrically
- Automatic preparation of enclosures, cables and cable bundles
- Automated inspection and shipment free of faults
- Documentation and traceability
- Declaration of conformity regarding the Low-Voltage Directive and manufacturer's declaration on machinery directive
- UL label on request

##### *Superior logistics*

Everything from a single source offers you the following advantages:

- Cost savings for procurement, stockkeeping, financing
- Reduction in throughput times
- Just-in-time delivery

##### *Individual support and maximum flexibility*

Our technical consultants for complete equipment support customers and sales departments in the various regions. Our control cabinet customers are supported in the Systems Engineering Plant Chemnitz (WKC) by ordering centers and production teams that are permanently assigned to customers.

Distance does not present a problem; we also use web cams for consulting our customers.

### Overview (continued)



Worldwide repair service

Customer-specific logistics models, flexible production capacity and production areas as well as change management in all process phases ensure maximum flexibility.

#### *Customized supplementary products*

As part of its complete equipment program, Siemens also offers the development and construction of customized supplementary products, e.g. special operator panels and power supply systems.

#### *Liability for defects*

Of course we accept the same liability for defects for our complete equipment as for our SINUMERIK and SINAMICS products.

Furthermore, you can use our worldwide repair service anywhere and at any time.

#### *Your benefits*

One partner, one quotation, one order, one delivery, one invoice, and one contact partner for liability of defects.

For series production or individual items, Siemens is your competent partner for complete equipment.



Control cabinet with SINAMICS S120 in booksize format

## Services and documentation

### Repair service contract RSC

#### Overview

##### *RSC description of performance*

Siemens provides for the machine manufacturer and dealer (in the following referred to as the "Customer") at the installation site of the machine the services specified below under Scope of services for components from Siemens DF & PD contained in the parts list of the RSC Certificate.

The RSC is ordered by the Customer who states the required article numbers that can be obtained from the Siemens sales partners or found in catalogs and the Industry Mall. The Customer receives from Siemens a certificate of delivery, which thus signifies the conclusion of the RSC.

After the Customer has provided the final destination notification, Siemens sends the Customer an RSC Certificate detailing the place of performance and the service period.

The services to be provided by Siemens are requested via a service order from the Customer. The service order must be submitted within the service period of the RSC.

##### *Place of performance*

The specified service is provided at the installation site of the machine (hereinafter referred to as "on-site"). This corresponds to the country of the end customer and the latter's full address, as specified in the final destination notification. Services covered by this RSC shall only be provided in those countries named in the RSC country list.

##### *Scope of services*

The following services shall be provided:

- **Provision of service personnel**  
Siemens provides qualified personnel for the purpose of fault diagnostics and/or fault correction. The services are provided during the normal regional working hours in the country of installation.
- **On-site fault diagnostics**  
Fault diagnostics applies to components from Siemens DF & PD as stated in the parts list in the RSC Certificate.
- **Fault correction on-site**  
Fault correction is carried out by repairing and/or replacing defective components from Siemens DF & PD.
- **Documentation of the fault correction**  
A service report is prepared on-site in the language of the end customer and shall be signed by the end customer. A copy of the report remains with the end customer.

##### *Contract periods/service period*

The RSC is offered for the period of liability (warranty period) of the Siemens customers to their end customers. Different RSC periods permit various market requirements to be addressed.

The service period of the RSC begins on the date notified to Siemens in the final destination notification when commissioning has been completed at the end customer's site and ends on expiry of the selected RSC term. The beginning and end of the performance period are stated in the RSC Certificate <sup>1)</sup>.

##### *RSC Certificate*

The Customer is provided with an RSC Certificate once the final destination notification has been handed over. This certificate shall contain the contract number and essential contract data such as machine number, machine type, parts list, beginning and end of the service period and the place of performance (address for the provision of services).

##### *Service exclusions*

The following is not included in the services:

- Complete motor spindles
- Services cannot be provided for wearing parts after the first 12 months of the contract period.
- Machine commissioning or optimization
- Masonry work, metalwork, breaking work and other non-electrical work
- Fault diagnostics and fault correction relating to faults that have occurred as a result of:
  - Non-compliance with the Siemens engineering and user guidelines, e.g. incorrect installation or grounding and incorrect operation or other improper treatment
  - Function-critical contamination, e.g. oil, conductive materials, rust
  - Mechanical damage
  - External electrical influences, for example, effects of overvoltage, non-reactor-protected power factor correction systems and/or line harmonics
  - Wanton destruction
  - Force majeure

<sup>1)</sup> For example, in the case of an RSC with 12 months contract period, maximum of 24 months from the transfer of risk (delivery of the components).

### Overview (continued)

#### Country list

A repair service is offered for the following countries:

| Continent              | Country/region                                                                                                                                                                                                                                  |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Country group 1</b> |                                                                                                                                                                                                                                                 |
| Americas               | Mexico, USA                                                                                                                                                                                                                                     |
| Asia                   | China, India, Japan, South Korea, Taiwan, Thailand                                                                                                                                                                                              |
| Australia              | Australia                                                                                                                                                                                                                                       |
| Europe                 | Andorra, Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Great Britain, Hungary, Italy, Liechtenstein, Luxembourg, Monaco, the Netherlands, Poland, Portugal, Rumania, Slovak Republic, Spain, Sweden, Switzerland, Turkey |
| <b>Country group 2</b> |                                                                                                                                                                                                                                                 |
| Africa                 | South Africa                                                                                                                                                                                                                                    |
| Americas               | Brazil, Canada                                                                                                                                                                                                                                  |
| Asia                   | Indonesia, Israel, Malaysia, Singapore                                                                                                                                                                                                          |
| Australia              | New Zealand                                                                                                                                                                                                                                     |
| Europe                 | Bosnia-Herzegovina, Bulgaria, Croatia, Estonia, Ireland, Latvia, Lithuania, Norway, Slovenia                                                                                                                                                    |
| <b>Country group 3</b> |                                                                                                                                                                                                                                                 |
| Africa                 | Egypt                                                                                                                                                                                                                                           |
| Americas               | Argentina, Chile, Columbia, Ecuador, Peru, Venezuela                                                                                                                                                                                            |
| Asia                   | Bahrain, Hong Kong, Kuwait, Oman, Qatar, Saudi Arabia, United Arab Emirates (Dubai), Vietnam                                                                                                                                                    |
| Europe                 | Belarus, Greece, Malta, Russia, Serbia and Montenegro, Ukraine                                                                                                                                                                                  |

**Countries not listed, for customers with framework contracts only.**

#### Response time

The following response times apply in general whenever services are provided under the RSC in the event of a machine standstill:

| Country groups       |                                                                                                                                 |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------|
| CG 1                 | Next working day                                                                                                                |
| CG 2                 | Within two working days                                                                                                         |
| CG 3                 | Depending on country-specific conditions                                                                                        |
| Countries not listed | Depending on country-specific conditions, only for customers with framework contracts for the price of the individual contract. |

The response time is defined as the time between Siemens receiving the service order, technically clarified in advance by the Customer, and the Siemens service personnel commencing his travel to the place of performance or until troubleshooting commences using teleservice. The response times given apply to technically clarified service orders within the normal working hours of the region (e.g. Monday to Friday 8:00 to 17:00) excluding public holidays.

#### Spare parts

Spare parts are provided from our central spare parts warehouse or from regional spare parts warehouses using our worldwide spare parts logistics infrastructure. All of the essential spare parts are stocked in our central spare parts stores. Regional spare parts warehouses are adapted to include the components specified in the final destination certificate<sup>1)</sup>.

The following components are not defined as spare parts:

- Motors: They are repaired at an authorized repair workshop. For selected motors, Siemens in Germany stocks components for express delivery. These motors can be manufactured and delivered within a few working days. You can obtain the current list from your Siemens sales partner.
- Cables: The delivery times known to you usually apply.
- Special or customer-specific modules and components not available from Siemens as spare parts.

The RSC shall only be processed in accordance with the terms and conditions applying to repair service contracts (RSC).

[www.siemens.com/automation/rscagb](http://www.siemens.com/automation/rscagb)

#### Benefits

- Protection against unknown costs for a fixed price
- RSC can be synchronized with the machine warranty period
- Planning certainty and calculable costs
- Easier processing in service cases
- High machine availability thanks to a fast response to machine faults (contract priority)
- Reduced downtimes thanks to stored product, final destination and contract information
- RSC can be ordered for machine deliveries to numerous countries
- Worldwide service infrastructure with experienced service staff

<sup>1)</sup> Since the export of standard versions (components/system) is subject to a time-consuming official approval procedure, which applies in equal measure to the supply of such components for the purpose of servicing and spare parts supply, we offer **an export version** for individual components. This has usually less options than the standard version of the component and is not subject to an export authorization. Please note the **information about export**.

## Services and documentation

### Repair service contract RSC

#### Types of contract for production machines

##### Overview



##### Data handling

To improve the service availability, Siemens DF & PD offers users the opportunity to register machines online and to save what is known as a identSNAPSHOT file. In addition to the component list and the software requirements of machines, this also includes information on machine manufacturers, and where relevant, dealers and end customers.

To simplify data handling, information about the final destination certificate can be saved using the XML function of identSNAPSHOT and transferred to Siemens using an online registration. This data can also be kept with the machine as data backup.

[www.siemens.com/identsnapshot](http://www.siemens.com/identsnapshot)

##### Selection and ordering data

| Description                                                                                  | Article No.               |
|----------------------------------------------------------------------------------------------|---------------------------|
| <b>Repair service contract RSC</b>                                                           |                           |
| For Siemens DF & PD components on production machines for countries in country groups 1 to 3 |                           |
| • 12 month contract period <sup>1)</sup>                                                     | <b>6FC8507-0RX12-0000</b> |
| • 24 month contract period <sup>2)</sup>                                                     | <b>6FC8507-0RX24-0000</b> |
| Equipment value in €                                                                         | ↑                         |
| 0.–                                                                                          | 0                         |
| 100000.–                                                                                     | 1                         |
| 200000.–                                                                                     | 2                         |
| 300000.–                                                                                     | 3                         |
| 400000.–                                                                                     | 4                         |
| 500000.–                                                                                     | 5                         |
| 600000.–                                                                                     | 6                         |
| 700000.–                                                                                     | 7                         |
| 800000.–                                                                                     | 8                         |
| 900000.–                                                                                     | 9                         |
|                                                                                              | ↑                         |
| 0.–                                                                                          | A                         |
| 10000.–                                                                                      | B                         |
| 20000.–                                                                                      | C                         |
| 30000.–                                                                                      | D                         |
| 40000.–                                                                                      | E                         |
| 50000.–                                                                                      | F                         |
| 60000.–                                                                                      | G                         |
| 70000.–                                                                                      | H                         |
| 80000.–                                                                                      | J                         |
| 90000.–                                                                                      | K                         |
|                                                                                              | ↑                         |
| 0.–                                                                                          | A                         |
| 1000.–                                                                                       | B                         |
| 2000.–                                                                                       | C                         |
| 3000.–                                                                                       | D                         |
| 4000.–                                                                                       | E                         |
| 5000.–                                                                                       | F                         |
| 6000.–                                                                                       | G                         |
| 7000.–                                                                                       | H                         |
| 8000.–                                                                                       | J                         |
| 9000.–                                                                                       | K                         |


Ordering example:

Contract period of 12 months and equipment value €96000  
6FC8507-0RX12-0KG0

<sup>1)</sup> Max. 24 months from the transfer of risk (delivery of components).

<sup>2)</sup> Max. 36 months from the transfer of risk (delivery of components).

## Overview

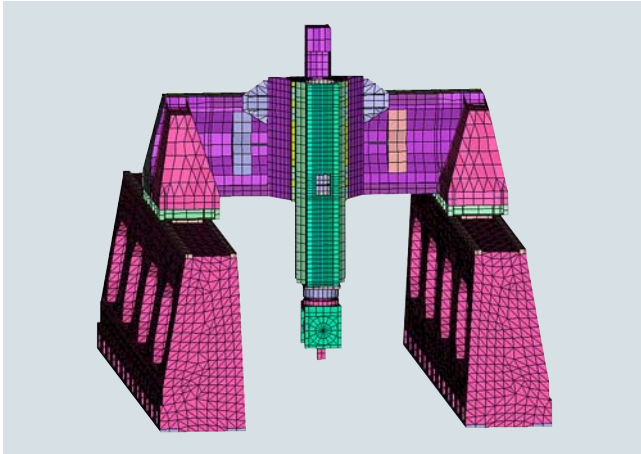

### *Achieve the optimum machine quicker and more efficiently with Mechatronic Support*

The Mechatronic Support service ensures that already at the design stage of new machines, all the systems involved in mechanics, electronics, and IT are tested and optimized in a simulation environment in terms of their functionality and interaction, before they are actually built.

Mechatronic Support is thus the intelligent alternative to trial and error. Innovative machine concepts are mutually compared, modified and optimized at the outset – a process which of course also takes account of your ideas for new mechatronic components.

#### **Virtual simulation - real construction**

With the help of the Mechatronic Support service, machinery ideas and new developments can be mechatronically tested and modified in a short time at low expense. The first real prototype can be built immediately afterwards as a functioning machine.

As the machine manufacturer, you have the benefit of shorter development phases and faster time-to-market; or as the end customer, you benefit from an optimized high-performance machine solution.

## Benefits

- Shorter development times – shorter time to market
- Reliable achievement of development objectives
- Risk-free testing of innovative machine concepts
- Higher quality and productivity from the outset
- Get to the finished machine more quickly with specialist support

## Selection and ordering data

| Description                                                                                                                                                                                    | Type                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| <b>Consultation</b><br>Technical consultation with customer                                                                                                                                    | <b>6FC5088-1....</b> |
| <b>Machine analysis and optimization</b><br><ul style="list-style-type: none"> <li>• Analysis of the existing machine and its limits.</li> <li>• Recommendations for manufacturer</li> </ul>   | <b>6FC5088-3....</b> |
| <b>Machine simulation</b><br><ul style="list-style-type: none"> <li>• Simulation of individual axes and complete machines</li> <li>• Analysis of dynamic behavior in the simulation</li> </ul> | <b>6FC5088-4....</b> |

## More information

Please contact your local Siemens sales office or representative for more information.

Contact information is available on the Internet at:

[www.siemens.com/automation-contact](http://www.siemens.com/automation-contact)

## Services and documentation

### Applications

#### Overview



Our understanding of an application is the customer-specific solution of an automation task based on standard hardware and software components. In this respect, industry knowledge and technological expertise are just as important as expert knowledge about how our products and systems work. We are setting ourselves this challenge with more than 280 application engineers in 20 countries.

#### Application centers

We currently have application centers in:

- Germany: Head Office in Erlangen and in other German regions, e.g. in Munich, Nuremberg, Stuttgart, Mannheim, Frankfurt, Chemnitz, Cologne, Bielefeld, Bremen, Hanover, Hamburg
- Belgium: Brussels
- Brazil: Sao Paulo
- China: Beijing and 12 regions
- Denmark: Ballerup
- France: Paris
- Great Britain: Manchester
- India: Mumbai
- Italy: Bologna, Milan
- Japan: Tokyo, Osaka
- The Netherlands: The Hague
- Austria: Vienna
- Poland: Warsaw
- Sweden: Göteborg
- Switzerland: Zurich, Lausanne
- Spain: Madrid
- South Korea: Seoul
- Taiwan: Taipei
- Turkey: Istanbul
- USA: Atlanta

These application centers specialize in the use of SIMATIC/SIMOTION/SINAMICS. You therefore can rely on automation and drive specialists for implementing successful applications. By involving your personnel at an early stage in the process, we can provide a solid basis for rapid knowledge transfer, maintenance and further development of your automation solution.

#### Advice on applications and implementation

We offer a variety of consultation services to help you find the optimum solution for the SIMATIC/SIMOTION/SINAMICS application you want to implement:

The quotation phase includes

- clarification of technical questions,
- discussion of machine concepts and customer-specific solutions,
- selection of suitable technology and
- suggestions for implementation.

A technical feasibility study is also performed at the outset. In this way, difficult points of the application can be identified and solved early on. We can also configure and implement your application as a complete solution from a single source.

A large number of proven standard applications are available for use during the implementation phase. This saves engineering costs.

The system can be commissioned by experienced, competent personnel, if required. This saves time and trouble.

If servicing is required, we can support you on site or remotely. For further information about servicing, please see the section "Industry Services".


#### On-site application training

Training for the implemented applications can also be organized and carried out on site. This training for machine manufacturers and their customers does not deal with individual products, but the entire hardware and software system (for example, automation, drives and visualization).

From an initial concept to successful installation and commissioning: We provide complete support for SIMATIC/SIMOTION/SINAMICS! Contact your Siemens representative.

You can find further information at [www.siemens.com/machinebuilding](http://www.siemens.com/machinebuilding)

### Overview

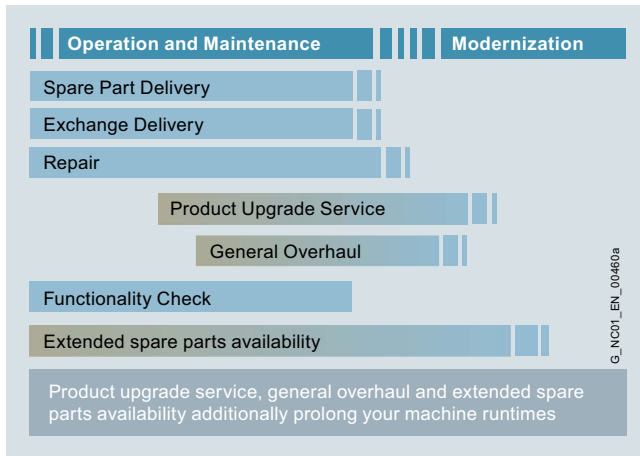

Spare parts services during the lifecycle

Siemens also provides constant support to customers after delivery of the machines or plant. This includes spare parts, repairs, as well as other supplementary services, and has a positive effect on machine operating times, inventories and costs.

When customers purchase a high-quality machine or plant, they intend to use it as intensively as possible, preferably for three shifts a day over many years. Under such circumstances, it is normal for parts to fail eventually. It is essential to replace the part as quickly as possible, because every hour of a plant stoppage costs money. To satisfy the multi-faceted requirements in the different areas, we have created comprehensive spare parts services.

### Overview (continued)

You can sign up for the spare parts service that suits your requirements perfectly:

- Delivery of spare parts
- Delivery as exchange product
- Repair
- Product upgrade service
- General overhaul
- Function check
- Return of diagnostic parts
- Stock reduction of your spare parts store
- Extended spare parts availability

### Benefits

- Optimum price/performance ratio and top quality
- Lifecycle management over the complete lifecycle
- Outstanding quality and availability of your machines and plant using Siemens original spare parts
- Global network and optimized logistics chains – 24 hours a day, 365 days a year
- Additional services from Siemens

### More information

More information is available on the Internet at:

[www.siemens.com/motioncontrol/spareparts](http://www.siemens.com/motioncontrol/spareparts)

For further information, please approach your contact at your local Siemens office.

Contact information is available on the Internet at:

[www.siemens.com/automation-contact](http://www.siemens.com/automation-contact)

## Delivery of spare parts

### Overview

In every industry worldwide, plants and systems are required to operate with constantly increasing reliability. Lack of a specific spare part can result in considerable costs. We will provide you with the support you need to prevent a standstill from occurring in the first place: with a worldwide network and optimum logistics chains.

| Ordering mode     | Logistics service                               | Note                                                                                                                                                                                                                           |
|-------------------|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard          | Cost-optimized:<br>Contracted shipping company  | Delivery within the normal national delivery times through the contracted shipping company                                                                                                                                     |
| Plant stoppage    | Time-optimized:<br>Express, courier, collection | You choose the shortest possible delivery time for your own benefit: <ul style="list-style-type: none"> <li>• Delivery by means of collection or courier service</li> <li>• Delivery by express service</li> </ul>             |
| Emergency service | Special logistics:<br>Courier                   | You can also order the spare parts from us outside normal working hours, as well as on weekends or national holidays round-the-clock. <ul style="list-style-type: none"> <li>• Your delivery will arrive by courier</li> </ul> |

### Benefits

- New liability for defects for the spare part
- Long-term spare parts availability
- Optimum system compatibility

## Services and documentation

### Spare parts services

#### Delivery as exchange product

##### Overview

In addition to the simple delivery of spare parts, with many products, we also offer you the option of an exchange. This has the advantage that you not only receive the spare part quickly, but are able to return the defective device to us for a credit. You therefore receive our spare part at the lower exchange price.

A credit will be awarded on condition that the repair code indicates that repurchasing is admissible, a replacement is obtained from the spare parts store, and that the returned product is repairable.

The ordering mode and logistics service determine the delivery of spare parts:

| Ordering mode     | Logistics service                               | Note                                                                                                                                                                                                                           |
|-------------------|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard          | Cost-optimized:<br>Contracted shipping company  | Delivery within the normal national delivery times through the contracted shipping company                                                                                                                                     |
| Plant stoppage    | Time-optimized:<br>Express, courier, collection | You choose the shortest possible delivery time for your own benefit: <ul style="list-style-type: none"> <li>• Delivery by means of collection or courier service</li> <li>• Delivery by express service</li> </ul>             |
| Emergency service | Special logistics:<br>Courier                   | You can also order the spare parts from us outside normal working hours, as well as on weekends or national holidays round-the-clock. <ul style="list-style-type: none"> <li>• Your delivery will arrive by courier</li> </ul> |

##### Overview (continued)

###### Return

For returns, we require the following information:

- Reason for return
- If defective: detailed description of the fault
- Machine number
- Machine/system manufacturer
- End customer

We will then be able to provide you with additional information in the repair report/inspection report regarding the diagnosis/inspection as well as information about the completed repair.

##### Benefits

- Savings thanks to the option of returning defective parts
- A spare part is available immediately in the event of failure
- New liability for defects for the spare part
- Long-term spare parts availability
- Optimum system compatibility

## Repair

##### Overview

Downtimes cause problems in the plant as well as unnecessary costs. We can help you to reduce both to a minimum – with our worldwide repair facilities. The advantage for you: Defects can be rectified before they cause further harm.

Repair is a favorable option when you have specific reasons for not replacing the defective device or part with a new one (delivery as exchange product).

We maintain a global network of Siemens repair shops and certified partners to ensure that we will always be able to process your repairs quickly.

We can offer you different types of repair depending on your requirements:

###### Normal repair

Normal repair at standard conditions normally takes 10 working days following receipt of the defective item at our repair shop.

###### Fast repair

In particularly urgent cases, we offer you the option of a fast repair within 1 or 2 working days for many products at additional cost.

###### Turnaround repair

With a turnaround repair, we organize on your behalf collection of the device/component to be repaired.

###### Mobile repair service

We come to you and perform the required repairs on site, for example, when the device/component cannot be removed due to its weight.

##### Overview (continued)

###### Function repair


A function repair is the same as a normal repair but excludes the repair of cosmetic defects, e.g. scratches, labels, discoloration. The conditions applicable to function repairs should be observed in this case. The function repair service is only available for machine manufacturers or machine operators. Please ask your regional Siemens contact.

For repairs, we require the following information:

- Reason for return
- If defective: detailed fault report
- Machine number
- Machine/system manufacturer
- End customer

##### Benefits

- Short downtimes for machines and plants
- Only certified original parts are used
- Additional services from Siemens:
  - Longer availability of your machine/plant through the preventive replacement of wear parts and aging parts
  - Highest standards of quality
  - Use of the comprehensive test concept of series production, including software, firmware, ASICs, complex function blocks, etc.
  - Implementation of all the hardware and software/firmware enhancements known by development, production, service and quality management departments, as well as suppliers
- Information supplied by repair report/inspection report

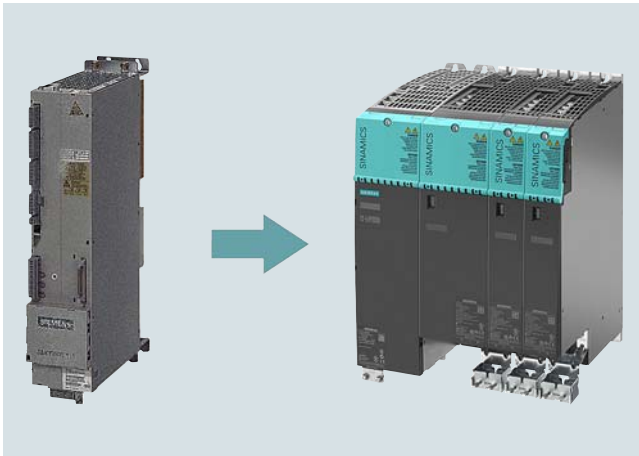**Overview**

Product upgrade service: From OLD to NEW

A long service life is expected from machines and plants. The service life of the electronic components is, however, limited and normally shorter than the planned machine/plant operating times. To ensure that the required extended availability of the machine/plant is achieved, we offer you the product upgrade service at an attractive price.

In the course of their lifecycle, electronic components are normally redesigned/upgraded several times. With the product upgrade service, you will always receive the latest technology.

**Overview (continued)**


A planned product upgrade from OLD to NEW helps to prevent unplanned machine stoppages and supports a safer and longer machine/plant availability. The upgrade service is mainly offered for older components that will soon be discontinued.

For information about potential upgrades from the latest upgrade list, please ask your regional Siemens contact. The product upgrade service is only available for machine manufacturers or machine operators.

**Benefits**

- Price benefit through upgrade service
- New liability for defects for the new component
- Extended availability of your machine/plant
- Prevention of component failures due to wear and aging
- Prevention of machine stoppages due to unavailability of spare parts
- Reduced spare parts inventories
- Latest technology
- Easier servicing due to fewer variants
- Industry Services through Siemens are assured for the future

## General overhaul

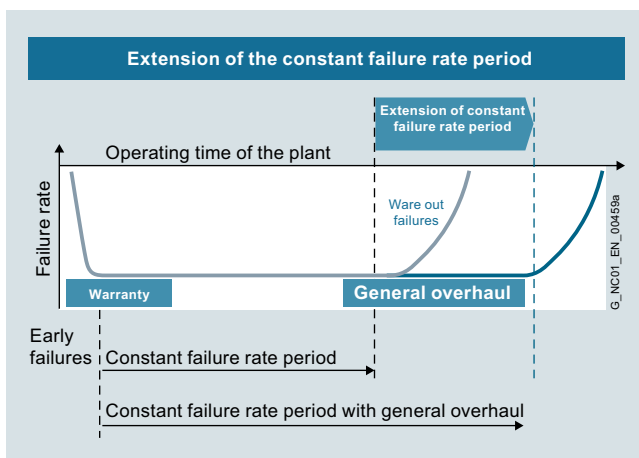**Overview**

Extension of the period with a constant failure rate

A long service life is expected from machines and plants. The service life of electronic components and mechanical parts is, however, limited and normally shorter than the planned machine/plant operating times. For higher availability of the machines or plants, we offer a general overhaul (preventive maintenance) for electronic components and motors at favorable conditions.

**Overview (continued)**

During the planned general overhaul, wear parts and aging parts are replaced in accordance with their stated service life so as to reduce unplanned downtimes. In the case of motors, in addition to a general overhaul, replacement of bearings and encoders is also offered.

If a fault is detected during a general overhaul, troubleshooting and repair will be performed at the repair price without requesting confirmation or interrupting the process. In the case of extensive wear or damage, a general overhaul/repair will not be performed. A fixed lump sum for expenses will be charged in this case.

**Benefits**

- Preventive replacement of wear parts and aging parts in accordance with their stated service life
- Reduction in unplanned plant stoppages
- Enhanced production reliability
- Extended availability of your machine/plant
- New liability for defects for 12 months for the components subjected to a general overhaul
- Low price

## Services and documentation

### Spare parts services

#### Function check

##### Overview

It is checked that the components function reliably.

The first step involves cleaning the component. Then all the hardware and software/firmware enhancements are implemented that are known by development, production, service and quality management departments, as well as suppliers. Using the comprehensive test concept of series production, all the functions of the software, firmware, ASICs, complex and less complex function blocks are checked.

If a fault is detected during the function check, troubleshooting and repair will be performed at the repair price without requesting confirmation or interrupting the process. In the case of extensive wear or damage, no repairs will be performed. A fixed lump sum for expenses will be charged.

##### Benefits

- The component is checked and can be deployed again
- The component contains all the known improvements
- The customer's own spare parts stock is up-to-date
- Low price

#### Return of diagnostic parts

##### Overview



Spare parts used for diagnostic purposes from the spare parts store can be returned within 3 months and a credit note for up to 85 % is issued.

For unused spare parts in their original packaging, you will receive a credit of 100 % in which case you will be charged a fixed price for handling.

##### Benefits

- Can be used for diagnostics
- Reduced spare parts inventories
- Low costs

**Overview**


Thanks to fast delivery of spare parts from Siemens, manufacturers and plant operators are able to reduce their spare parts inventories. Siemens offers an analysis for this purpose to indicate exactly which parts must be available in the customer's stores for a specific combination of machines and which should be obtained directly from Siemens.

**Benefits**

- Reduced costs
- Stock optimization
- Minimization of fault downtimes

**Extended spare part availability**
**Overview**

We normally retain spare parts for all products and systems for a period of 10 years after discontinuation of product marketing.

In individual cases, when we do not carry spare parts, we will offer a repair.

For a wide range of products and systems, we extend the availability of spare parts. We can provide you with the current spare parts availability for your machine/plant as a service once you have registered online with identSNAPSHOT.

[www.siemens.com/identsnapshot](http://www.siemens.com/identsnapshot)

If you require longer availability of spare parts, please contact your regional sales representative.

**Benefits**

- Higher plant availability
- Investment protection
- Reduction of lifecycle costs




## Services and documentation

### Spares on Web

#### Overview

#### *Spares on Web – online identification of spare parts*

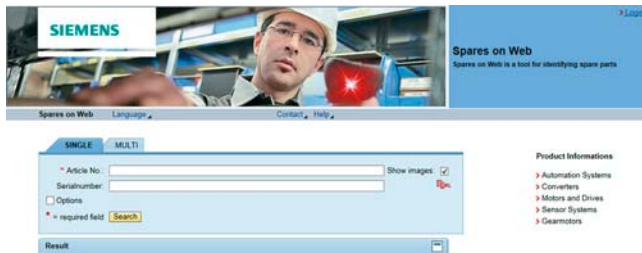

© Siemens AG 2014 | About Us | Privacy Policy | Term of Use | Digital ID | COP

Spares on Web is a web-based tool for identifying spare parts. After you have entered the Article No. and serial number, the spare parts available for the relevant unit are displayed.

[www.siemens.com/sow](http://www.siemens.com/sow)

### Overview

#### Siemens Product Partners for Drives Options

##### Individual options for our drives


In order to meet as many customer requirements as possible in the field of drive technology, in addition to its own products, Siemens also relies on the individual and complementary services of selected partners.

We are increasingly focusing on the standard drive options, and our Siemens Product Partners for Drives Options supplement our drives with individual drive options.

This gives Siemens a unique flexibility to meet all application requirements. Naturally, we support our Siemens Product Partners for Drives Options in tailoring their options perfectly to our drives.

For you as our customer, there are multiple benefits:

- The Siemens Product Partners for Drives Options meet the same high standards of quality and performance that we place on our own products
- Drive options can be adapted to individual requirements/ designs
- The Siemens Product Partners for Drives Options know our Siemens inverter portfolio and can advise you individually and quickly

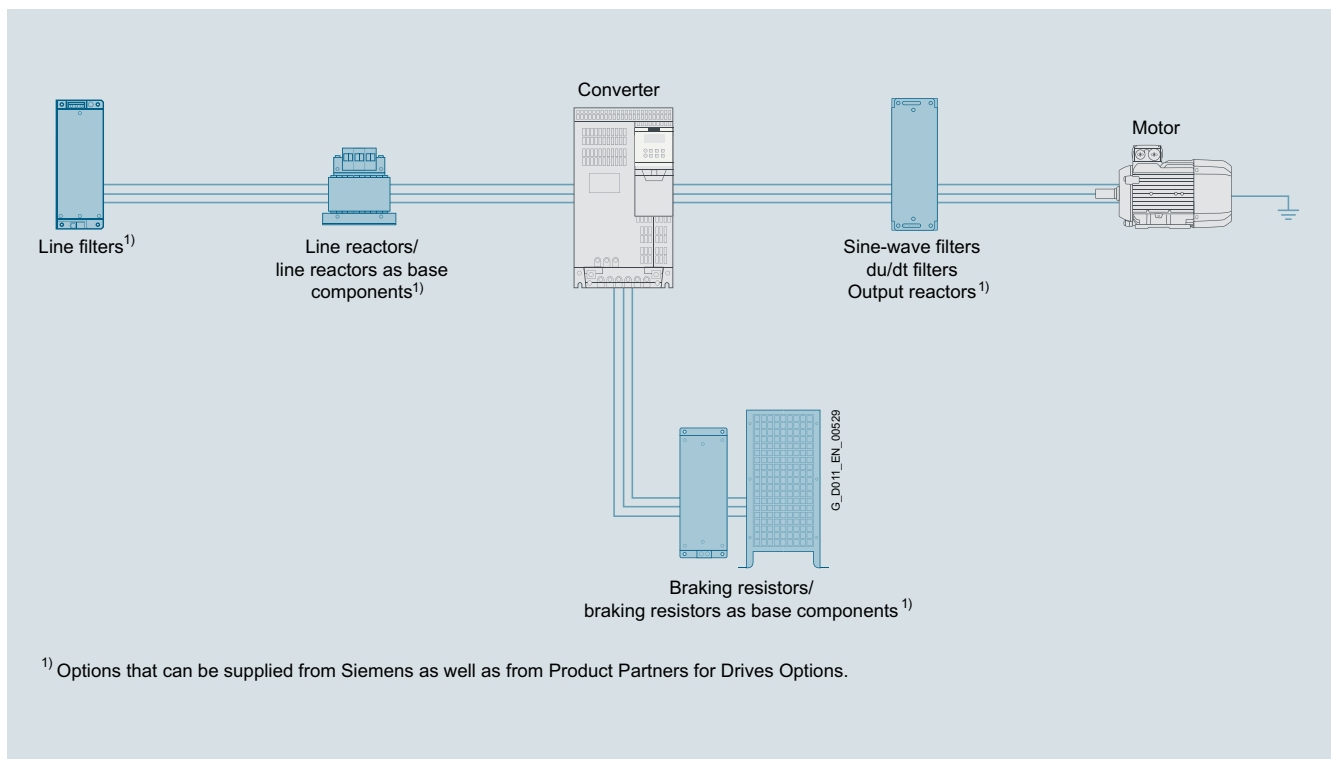

### More information


You can find more information on the Internet at [www.siemens.com/drives-options-partner](http://www.siemens.com/drives-options-partner)

## Services and documentation

### mySupport documentation

#### Overview

#### mySupport documentation – Compiling personal documents

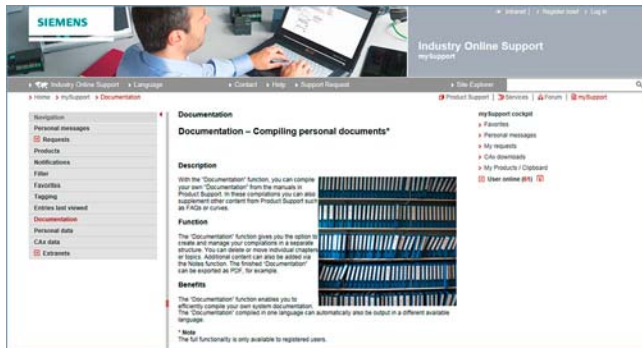

mySupport documentation is a web-based system for generating personalized documentation based on standard documents and is part of the Siemens Industry Online Support portal.

In mySupport, a personal document library can be created in the "Documentation" category. This library can be accessed online in mySupport or also be generated in various formats for offline use.

Previously, this functionality was available in the My Documentation Manager for configurable manuals. Due to the integration in mySupport, all entries of the Industry Online Support can now be imported into the personal document library, including FAQs or product notifications.

If you have already worked with the My Documentation Manager, all of the previously created libraries will continue to be available without restrictions in mySupport.

In addition, the personal library in mySupport can be shared with other mySupport users. In this way, a collection of relevant documents can be created very effectively and used together with other mySupport users all over the world.

You must register/log in for configuring and generating/managing.

#### Benefits

- **Display**  
View, print or download standard documents or personalized documents
- **Configure**  
Transfer standard documents or parts of them to personalized documents
- **Generate/Manage**  
Generate and manage personalized documents in the formats PDF, RTF or XML in all available languages

#### Function

##### Opening mySupport documentation in the Industry Online Support portal

- Via the product support, entry type "Manual":  
<https://support.industry.siemens.com/cs/ww/en/ps/man>  
By clicking on the required version of the manual and then "Show and configure", the manual opens in a modular view, where you can navigate from topic to topic. Here the direct link to a topic can be used and made available to other users. The selected document can be added to the personal library via "mySupport Cockpit" > "Add to mySupport documentation".
- Via the direct link  
<https://support.industry.siemens.com/my/ww/en/documentation/advanced>  
After logon/registration, the online help is displayed as the current document.

#### More information

You can find additional information on the Internet at

- <https://support.industry.siemens.com/my/ww/en/documentation>
- [https://support.industry.siemens.com/cs/helpcenter/en/index.htm?#persoenliche\\_bibliothek\\_aufbauen.htm](https://support.industry.siemens.com/cs/helpcenter/en/index.htm?#persoenliche_bibliothek_aufbauen.htm)

## Overview

A high-quality programmable control or drive system can be used to maximum effect only if the user is aware of the performance of the products used as a result of intensive training and good technical documentation.

This is becoming more important due to the shorter innovation cycles of modern automation products and the convergence of electronics and mechanical engineering.

A comprehensive range of documentation is available which includes a Getting Started guide, operating instructions, installation manuals and a list manual.

The documents are available in hardcopy form or as a PDF file for downloading from the Internet.

Information and documentation relating to SINUMERIK, SINAMICS, SIMOTION and SIMOTICS are available on the Internet at <https://support.industry.siemens.com/cs/document/109476679>

In addition to many other useful documents, the Information and Download Center also contains catalogs about the following systems:

- SINUMERIK: NC 62, NC 81.1, NC 82
- SINAMICS: D 11, D 12, D 21.3, D 21.4, D 23.1, D 23.2, D 31.1, D 31.2, D 32, D 33, D 35
- SIMOTION: PM 21
- SIMOTICS: D 21.4, D 41, D 81.1, D 81.8, D 83.1

You can download these catalogs in PDF format – you don't need to log on. You can perform a targeted search using the filter box above the first displayed catalog. By entering the search term "NC 8", for example, you can locate Catalog NC 81.1 and Catalog NC 82, and by entering "ST 70" you will find Catalog ST 70 as well as the relevant news and add-ons (if available). [www.siemens.com/industry/infocenter](http://www.siemens.com/industry/infocenter)

## Application

### Explanations of the manuals:

- **Operating Instructions**  
contain all the information needed to install the device and make electrical connections, information about commissioning and a description of the inverter functions.  
Phases of use: Control cabinet construction, commissioning, operation, maintenance and servicing.
- **Hardware Installation Manual**  
contains all relevant information about the intended use of the components of a system (technical specifications, interfaces, dimensional drawings, characteristics, or possible applications), information about installation and electrical connections and information about maintenance and servicing.  
Phases of use: Control cabinet configuration/construction, maintenance and servicing.
- **Operating and Installation Instructions** (for inverter and accessories)  
contain all relevant information about the intended use of the components, such as technical specifications, interfaces, dimensional drawings, characteristics, or possible applications.  
Phases of use: Control cabinet configuration/construction.
- **Manual/Configuration Manual**  
contains all necessary information about the intended use of the components of a system, e.g. technical specifications, interfaces, dimensional drawings, characteristics, or possible applications.  
Phases of use: Cabinet configuration/setup, circuit diagram configuration/drawing.
- **Commissioning Manual**  
contains all information relevant to commissioning after installation and wiring. It also contains all safety and warning notices relevant to commissioning in addition to overview drawings.  
Phases of use: Commissioning of components that have already been connected, configuration of system functions.
- **List Manual**  
contains all parameters, function diagrams, and faults/alarms for the product/system as well as their meanings and setting options. It contains parameter data and fault/alarm descriptions with functional correlations.  
Phases of use: Commissioning of components that have already been connected, configuration of system functions, fault cause/diagnosis.
- **Getting Started**  
provides information about getting started for the first-time user as well as references to additional information. It contains information about the basic steps to be taken during commissioning. The information in the other documentation should be carefully observed for all of the other work required.  
Phases of use: Commissioning of components that have already been connected.
- **Function Manual Drive Functions**  
contains all the relevant information about individual drive functions: Description, commissioning and integration in the drive system.  
Phases of use: Commissioning of components that have already been connected, configuration of system functions.

## Services and documentation

### Documentation

#### General documentation

#### Selection and ordering data

| Description                                                                                                           | Article No.                   |
|-----------------------------------------------------------------------------------------------------------------------|-------------------------------|
| <b>Decentralization with PROFIBUS DP/DPV1</b>                                                                         | Via bookstore                 |
| • German                                                                                                              | <b>ISBN 978-3-89578-189-6</b> |
| • English                                                                                                             | <b>ISBN 978-3-89578-218-3</b> |
| <b>Automating with PROFINET:<br/>Industrial Communication Based<br/>on Industrial Ethernet</b>                        | Via bookstore                 |
| • German                                                                                                              | <b>ISBN 978-3-89578-293-0</b> |
| • English                                                                                                             | <b>ISBN 978-3-89578-294-7</b> |
| <b>Configuration Manual<br/>EMC Installation Guideline<br/>SIMOCRANE, SIMOTICS, SIMOTION,<br/>SINAMICS, SINUMERIK</b> |                               |
| • German                                                                                                              | <b>6FC5297-0AD30-0AP3</b>     |
| • English                                                                                                             | <b>6FC5297-0AD30-0BP3</b>     |
| • Italian                                                                                                             | <b>6FC5297-0AD30-0CP3</b>     |
| • French                                                                                                              | <b>6FC5297-0AD30-0DP3</b>     |
| • Spanish                                                                                                             | <b>6FC5297-0AD30-0EP3</b>     |
| • Chinese Simplified                                                                                                  | <b>6FC5297-0AD30-0RP3</b>     |

Appendix



|       |                                                        |
|-------|--------------------------------------------------------|
| 15/2  | Certificates of suitability (approvals)                |
| 15/4  | Software licenses                                      |
| 15/6  | Subject index                                          |
| 15/10 | Conversion tables                                      |
| 15/12 | Metal surcharges                                       |
| 15/15 | Conditions of sale and delivery/<br>Export regulations |

## Appendix

### Certificates of suitability (approvals)

#### Overview

Many of the products in this Catalog fulfill requirements, e.g. for UL, CSA or FM and are labeled with the corresponding approval designation.

All of the certificates of suitability, approvals, certificates, declarations of conformity, test certificates, e.g. CE, UL, Safety Integrated etc. have been performed with the associated system components as they are described in the Catalogs and Configuration Manuals.

The certificates are only valid if the products are used with the described system components, are installed according to the Installation Guidelines and used for their intended purpose.

In other cases, the vendor of these products is responsible for arranging for the issue of new certificates.

| Test code                                                                                                                                                                                                                                                                                                                  | Tested by                                | Device series/<br>Component                       | Test standard                                                                         | Product category/<br>File-No.                                                                                                                                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|---------------------------------------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UL: Underwriters Laboratories</b><br><i>Independent public testing body in North America</i>                                                                                                                                                                                                                            |                                          |                                                   |                                                                                       |                                                                                                                                                                         |
|                                                                                                                                                                                                                                           | UL according to UL standard              | SINUMERIK                                         | Standard UL 508, CSA C22.2 No. 142                                                    | NRAQ/7.E164110<br>NRAQ/7.E217227                                                                                                                                        |
|                                                                                                                                                                                                                                                                                                                            |                                          | SIMOTION                                          | Standard UL 508, CSA C22.2 No. 142                                                    | NRAQ/7.E164110                                                                                                                                                          |
|                                                                                                                                                                                                                                           | UL according to CSA standard             | SINAMICS                                          | Standard UL 508, 508C, 61800-5-1<br>CSA C22.2 No. 142, 274                            | NRAQ/7.E164110,<br>NMMS/2/7/8.E192450,<br>NMMS/2/7/8.E203250,<br>NMMS/7.E214113,<br>NMMS/7.E253831                                                                      |
|                                                                                                                                                                                                                                           | UL according to UL and CSA standards     |                                                   |                                                                                       | NMMS/2/7/8.E121068<br>NMMS/7.E355661<br>NMMS/7.E323473                                                                                                                  |
|                                                                                                                                                                                                                                           | UL according to UL standard              | SIMODRIVE                                         | Standard UL 508C, CSA C22.2 No. 274                                                   | NMMS/2/7/8.E192450<br>NMMS/7.E214113                                                                                                                                    |
|                                                                                                                                                                                                                                          | UL according to CSA standard             | SIMOTICS                                          | Standard UL 1004-1, 1004-6, 1004-8,<br>CSA C22.2 No. 100                              | PRGY2/8.E227215<br>PRHZ2/8.E93429<br>PRHJ2/8.E342747<br>PRGY2/8.E253922<br>PRHZ2/8.E342746                                                                              |
|                                                                                                                                                                                                                                         | UL according to UL and CSA standards     |                                                   |                                                                                       |                                                                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                            |                                          | Line/motor reactors                               | Standard UL 508, 506, 5085-1, 5085-2, 1561,<br>CSA C22.2 No. 14, 47, 66.1-06, 66.2-06 | XQNX2/8.E257859<br>NMTR2/8.E219022<br>NMMS2/8.E333628<br>XPTQ2/8.E257852<br>XPTQ2/8.E103521<br>NMMS2/8.E224872<br>XPTQ2/8.E354316<br>XPTQ2/8.E198309<br>XQNX2/8.E475972 |
|                                                                                                                                                                                                                                                                                                                            |                                          | Line filters, dv/dt filters,<br>sine-wave filters | UL 1283, CSA C22.2 No. 8                                                              | FOKY2/8.E70122                                                                                                                                                          |
|                                                                                                                                                                                                                                                                                                                            |                                          | Resistors                                         | UL 508, 508C, CSA C22.2 No. 14, 274                                                   | NMTR2/8.E224314<br>NMMS2/8.E192450<br>NMTR2/8.E221095<br>NMTR2/8.E226619                                                                                                |
| <b>TUV: TÜV Rheinland of North America Inc.</b><br><i>Independent public testing body in North America, Nationally Recognized Testing Laboratory (NRTL)</i><br><b>TÜV: TÜV SÜD Product Service</b><br><i>Independent public testing body in Germany, Nationally Recognized Testing Laboratory (NRTL) for North America</i> |                                          |                                                   |                                                                                       |                                                                                                                                                                         |
|                                                                                                                                                                                                                                         | TUV according to<br>UL and CSA standards | SINAMICS                                          | NRTL listing according to standard UL 508C                                            | U7V 12 06 20078 013<br>U7 11 04 20078 009<br>U7 11 04 20078 010<br>U7 11 04 20078 011                                                                                   |
|                                                                                                                                                                                                                                                                                                                            |                                          | SIMOTION                                          | NRTL listing according to standard UL 508                                             | U7V 13 03 20078 01                                                                                                                                                      |
|                                                                                                                                                                                                                                                                                                                            |                                          | SIMODRIVE                                         | NRTL listing according to standard UL 508C,<br>CSA C22.2. No. 14                      | CU 72090702                                                                                                                                                             |
|                                                                                                                                                                                                                                                                                                                            |                                          | Motion Control Encoder                            | NRTL listing according to UL 61010-1<br>CSA C22.2 No. 61010-1                         | U8V 10 06 20196 024                                                                                                                                                     |
|                                                                                                                                                                                                                                                                                                                            |                                          |                                                   |                                                                                       |                                                                                                                                                                         |

## Certificates of suitability (approvals)

## Overview (continued)

| Test code                                                                                                        | Tested by                                | Device series/<br>Component       | Test standard                                               | Product category/<br>File-No. |
|------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------|-------------------------------------------------------------|-------------------------------|
| <b>CSA: Canadian Standards Association</b><br><i>Independent public testing body in Canada</i>                   |                                          |                                   |                                                             |                               |
|                                 | CSA according to CSA standard            | SINUMERIK                         | Standard CSA C22.2 No. 142                                  | 2252-01 : LR 102527           |
| <b>FMRC: Factory Mutual Research Corporation</b><br><i>Independent public testing body in North America</i>      |                                          |                                   |                                                             |                               |
|                                 | FM according to FM standard              | SINUMERIK                         | Standard FMRC 3600, FMRC 3611, FMRC 3810, ANSI/ISA S82.02.1 | –                             |
| <b>EAC: Ivanovo-Certificate</b><br><i>Independent public testing body in the Russian Federation</i>              |                                          |                                   |                                                             |                               |
|                                 | EAC in accordance with the EAC Directive | SINAMICS<br>SINUMERIK<br>SIMOTION | Standard IEC 61800-5-1/-2, IEC 61800-3                      | –                             |
| <b>RCM: Australian Communications and Media Authority</b><br><i>Independent public testing body in Australia</i> |                                          |                                   |                                                             |                               |
|                                 | RCM according to EMC standard            | SINAMICS<br>SINUMERIK<br>SIMOTION | Standard IEC AS 61800-3, EN 61800-3                         | –                             |
| <b>KC: National Radio Research Agency</b><br><i>Independent public testing body in South Korea</i>               |                                          |                                   |                                                             |                               |
|                                | KC according to EMC standard             | SINAMICS<br>SINUMERIK<br>SIMOTION | Standard KN 11                                              | –                             |
| <b>BIA</b><br><i>Federal Institute for Occupational Safety</i>                                                   |                                          |                                   |                                                             |                               |
| –                                                                                                                | Functional safety                        | SINAMICS<br>SINUMERIK<br>SIMOTION | Standard EN 61800-5-2                                       | –                             |
| <b>TÜV SÜD Rail</b>                                                                                              |                                          |                                   |                                                             |                               |
| –                                                                                                                | Functional safety                        | SINAMICS<br>SINUMERIK<br>SIMOTION | Standard EN 61800-5-2                                       | –                             |

More information about certificates can be found online at:  
<https://support.industry.siemens.com/cs/ww/en/ps/cert>

## Appendix

### Software licenses

#### Overview

##### Software types

Software requiring a license is categorized into types. The following software types have been defined:

- Engineering software
- Runtime software

##### Engineering software

This includes all software products for creating (engineering) user software, e.g. for configuring, programming, parameterizing, testing, commissioning or servicing.

Data generated with engineering software and executable programs can be duplicated for your own use or for use by third-parties free-of-charge.

##### Runtime software

This includes all software products required for plant/machine operation, e.g. operating system, basic system, system expansions, drivers, etc.

The duplication of the runtime software and executable programs created with the runtime software for your own use or for use by third-parties is subject to a charge.

You can find information about license fees according to use in the ordering data (e.g. in the catalog). Examples of categories of use include per CPU, per installation, per channel, per instance, per axis, per control loop, per variable, etc.

Information about extended rights of use for parameterization/configuration tools supplied as integral components of the scope of delivery can be found in the readme file supplied with the relevant product(s).

##### License types

Siemens Industry Automation & Drive Technologies offers various types of software license:

- Floating license
- Single license
- Rental license
- Rental floating license
- Trial license
- Demo license
- Demo floating license

##### Floating license

The software may be installed for internal use on any number of devices by the licensee. Only the concurrent user is licensed. The concurrent user is the person using the program. Use begins when the software is started. A license is required for each concurrent user.

##### Single license

Unlike the floating license, a single license permits only one installation of the software per license.

The type of use licensed is specified in the ordering data and in the Certificate of License (CoL). Types of use include for example per instance, per axis, per channel, etc.

One single license is required for each type of use defined.

##### Rental license

A rental license supports the "sporadic use" of engineering software. Once the license key has been installed, the software can be used for a specific period of time (the operating hours do not have to be consecutive).

One license is required for each installation of the software.

##### Rental floating license

The rental floating license corresponds to the rental license, except that a license is not required for each installation of the software. Rather, one license is required per object (for example, user or device).

##### Trial license

A trial license supports "short-term use" of the software in a non-productive context, e.g. for testing and evaluation purposes. It can be transferred to another license.

##### Demo license

The demo license support the "sporadic use" of engineering software in a non-productive context, for example, use for testing and evaluation purposes. It can be transferred to another license. After the installation of the license key, the software can be operated for a specific period of time, whereby usage can be interrupted as often as required.

One license is required per installation of the software.

##### Demo floating license

The demo floating license corresponds to the demo license, except that a license is not required for each installation of the software. Rather, one license is required per object (for example, user or device).

##### Certificate of License (CoL)

The CoL is the licensee's proof that the use of the software has been licensed by Siemens. A CoL is required for every type of use and must be kept in a safe place.

##### Downgrading

The licensee is permitted to use the software or an earlier version/release of the software, provided that the licensee owns such a version/release and its use is technically feasible.

##### Delivery versions

Software is constantly being updated.

The following delivery versions

- PowerPack
- Upgrade

can be used to access updates.

Existing bug fixes are supplied with the ServicePack version.

##### PowerPack

PowerPacks can be used to upgrade to more powerful software. The licensee receives a new license agreement and CoL (Certificate of License) with the PowerPack. This CoL, together with the CoL for the original product, proves that the new software is licensed.

A separate PowerPack must be purchased for each original license of the software to be replaced.

**Overview** (continued)**Upgrade**

An upgrade permits the use of a new version of the software on the condition that a license for a previous version of the product is already held.

The licensee receives a new license agreement and CoL with the upgrade. This CoL, together with the CoL for the previous product, proves that the new version is licensed.

A separate upgrade must be purchased for each original license of the software to be upgraded.

**ServicePack**

ServicePacks are used to debug existing products. ServicePacks may be duplicated for use as prescribed according to the number of existing original licenses.

**License key**

Siemens Industry Automation & Drive Technologies supplies software products with and without license keys.

The license key serves as an electronic license stamp and is also the "switch" for activating the software (floating license, rental license, etc.).

The complete installation of software products requiring license keys includes the program to be licensed (the software) and the license key (which represents the license).

**Software Update Service (SUS)**

As part of the SUS contract, all software updates for the respective product are made available to you free of charge for a period of one year from the invoice date. The contract will automatically be extended for one year if it is not canceled three months before it expires.

The possession of the current version of the respective software is a basic condition for entering into an SUS contract.

You can download explanations concerning license conditions from [www.siemens.com/automation/salesmaterial-as/catalog/en/terms\\_of\\_trade\\_en.pdf](http://www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf)

# Appendix

## Subject index

|                                                                              | Page  |                                                  | Page       |
|------------------------------------------------------------------------------|-------|--------------------------------------------------|------------|
| <b>A</b>                                                                     |       | <b>C</b>                                         |            |
| Absolute encoders.....                                                       | 1/11  | CA 01.....                                       | 12/3, 14/2 |
| Activation of the integrated safety functions.....                           | 3/8   | CAD CREATOR.....                                 | 12/5       |
| Advanced Functions.....                                                      | 3/8   | CANopen.....                                     | 5/10       |
| Advanced Technology Functions.....                                           | 2/5   | Catalog CA 01.....                               | 12/3, 14/2 |
| Air-cooled Power Modules for SINAMICS S110.....                              | 10/9  | Certificates of suitability (approvals).....     | 15/2       |
| Appendix.....                                                                | 15/1  | CM240NE chemical industry module.....            | 9/112      |
| Applications & Branch know-how.....                                          | 2/6   | Commissioning tool SINAMICS Startdrive.....      | 12/8       |
| Applications.....                                                            | 14/22 | Commissioning tool STARTER.....                  | 12/6       |
| Approvals (certificates of suitability).....                                 | 15/2  | Common Engineering.....                          | 2/6        |
| Asynchronous (induction) motors SIMOTICS M-1PH8 –<br>Forced ventilation..... | 11/16 | Communication.....                               | 5/1        |
| Asynchronous (induction) motors SIMOTICS M-1PH8 –<br>Water cooling.....      | 11/18 | Communication overview.....                      | 5/2        |
| <b>B</b>                                                                     |       | Compact inverters SINAMICS G120C.....            | 8/1        |
| Basic converters SINAMICS V20.....                                           | 7/1   | Complete linear motor axes LTS and LTSE.....     | 11/24      |
| Basic Drive Functions.....                                                   | 2/2   | Conditions of sale and delivery.....             | 15/15      |
| Basic Functions.....                                                         | 3/8   | Connection systems MOTION-CONNECT, overview..... | 1/12       |
| Basic Operator Panel BOP-2                                                   |       | Control cabinets.....                            | 14/16      |
| • for SINAMICS G120.....                                                     | 9/102 | Control Units                                    |            |
| • for SINAMICS G120C.....                                                    | 8/33  | • for SINAMICS G120.....                         | 9/17       |
| Basic Operator Panel BOP20 for SINAMICS S110.....                            | 10/41 | • for SINAMICS S110.....                         | 10/6       |
| Basic positioner EPos.....                                                   | 6/3   | Conversion tables.....                           | 15/10      |
| BOP Interface SINAMICS V20.....                                              | 7/29  | Converter selection.....                         | 1/6        |
| BOP SINAMICS V20.....                                                        | 7/29  | Converters                                       |            |
| BOP-2                                                                        |       | • SINAMICS G120.....                             | 9/1        |
| • for SINAMICS G120.....                                                     | 9/106 | • SINAMICS G120C.....                            | 8/1        |
| • for SINAMICS G120C.....                                                    | 8/37  | • SINAMICS S110.....                             | 10/1       |
| BOP20 for SINAMICS S110.....                                                 | 10/41 | • SINAMICS V20.....                              | 7/1        |
| Brake Relay.....                                                             | 9/110 | <b>D</b>                                         |            |
| Braking Modules for SINAMICS V20.....                                        | 7/25  | DC link components                               |            |
| Braking resistors                                                            |       | • for SINAMICS G120.....                         | 9/82       |
| • for SINAMICS G120.....                                                     | 9/82  | • for SINAMICS G120C.....                        | 8/28       |
| • for SINAMICS G120C.....                                                    | 8/28  | • for SINAMICS S110.....                         | 10/32      |
| • for SINAMICS S110.....                                                     | 10/32 | • for SINAMICS V20.....                          | 7/23       |
| • for SINAMICS V20.....                                                      | 7/23  | Dimensional drawing and 2D/3D CAD generator..... | 12/5       |
|                                                                              |       | Documentation.....                               | 14/31      |
|                                                                              |       | Download Center.....                             | 14/3       |
|                                                                              |       | Drive applications.....                          | 13/1       |
|                                                                              |       | Drive ES.....                                    | 12/11      |
|                                                                              |       | Drive selection.....                             | 1/6        |
|                                                                              |       | Drive Technology Configurator.....               | 12/3       |
|                                                                              |       | Drives family SINAMICS.....                      | 1/2        |
|                                                                              |       | Drives Options Partner.....                      | 14/29      |
|                                                                              |       | Drives                                           |            |
|                                                                              |       | • SINAMICS G120.....                             | 9/1        |
|                                                                              |       | • SINAMICS G120C.....                            | 8/1        |
|                                                                              |       | • SINAMICS S110.....                             | 10/1       |
|                                                                              |       | • SINAMICS V20.....                              | 7/1        |
|                                                                              |       | Dual-encoder system.....                         | 3/9        |
|                                                                              |       | dv/dt filter plus VPL for SINAMICS G120.....     | 9/98       |

|                                                             | Page  |                                                                    | Page       |
|-------------------------------------------------------------|-------|--------------------------------------------------------------------|------------|
| <b>E</b>                                                    |       | <b>I</b>                                                           |            |
| Electric cylinders .....                                    | 11/22 | I/O Extension Module SINAMICS V20 .....                            | 7/31       |
| Encoder system connection .....                             | 10/43 | IDS – Integration at its very best .....                           | 4, 1/5     |
| Encoders, system overview .....                             | 1/11  | Incremental encoders .....                                         | 1/11       |
| Energy efficiency .....                                     | 4/1   | Industrial Ethernet .....                                          | 5/9        |
| Energy efficiency classes in accordance with EN 50598 ..... | 4/6   | Industry Mall .....                                                | 14/2       |
| Energy efficiency tool SinaSave .....                       | 12/2  | Industry Services .....                                            | 14/4       |
| Energy-efficient drives with intelligent functions .....    | 4/4   | Information and Download Center .....                              | 14/3       |
| Energy management process .....                             | 1/3   | Integrated energy management – SIMATIC Energy Suite .....          | 4/3        |
| Energy-saving functions for SINAMICS drives, overview ..... | 4/5   | Integrated safety functions in SINAMICS drives .....               | 3/3        |
| Engineering software Drive ES .....                         | 12/11 | Integration in automation .....                                    | 1/2        |
| Engineering tool SIZER for Siemens Drives .....             | 12/4  | Intelligent functions for energy-efficient drives .....            | 4/4        |
| Engineering tools .....                                     | 12/1  | Intelligent Operator Panel IOP-2 Handheld                          |            |
| EPos .....                                                  | 6/3   | • for SINAMICS G120 .....                                          | 9/103      |
| Establishing efficiency classes .....                       | 4/7   | • for SINAMICS G120C .....                                         | 8/33       |
| EtherNet/IP .....                                           | 5/10  | Intelligent Operator Panel IOP-2                                   |            |
| Extended Functions .....                                    | 3/8   | • for SINAMICS G120 .....                                          | 9/103      |
| Extension Module SINAMICS V20 .....                         | 7/31  | • for SINAMICS G120C .....                                         | 8/33       |
| <b>F</b>                                                    |       | Interactive Catalog CA 01 .....                                    | 12/3, 14/2 |
| Fans (spare parts)                                          |       | Inverter selection .....                                           | 1/6        |
| • for SINAMICS G120 .....                                   | 9/118 | Inverters                                                          |            |
| • for SINAMICS G120C .....                                  | 8/42  | • SINAMICS G120 .....                                              | 9/1        |
| • for SINAMICS V20 .....                                    | 7/32  | • SINAMICS G120C .....                                             | 8/1        |
| Firmware functionality .....                                | 2/1   | • SINAMICS S110 .....                                              | 10/1       |
| Free function blocks (FFB) .....                            | 6/2   | • SINAMICS V20 .....                                               | 7/1        |
| Function module basic positioner EPos .....                 | 6/3   | IOP-2                                                              |            |
| Functionality of the EPos basic positioner .....            | 6/4   | • for SINAMICS G120 .....                                          | 9/103      |
| Functions for                                               |       | • for SINAMICS G120C .....                                         | 8/33       |
| • safe brake management .....                               | 3/3   | <b>L</b>                                                           |            |
| • safely monitoring the motion of a drive .....             | 3/3   | Line filters                                                       |            |
| • safely monitoring the position of a drive .....           | 3/3   | • for SINAMICS G120 .....                                          | 9/72       |
| • safely stopping a drive .....                             | 3/3   | • for SINAMICS G120C .....                                         | 8/25       |
| <b>G</b>                                                    |       | • for SINAMICS S110 .....                                          | 10/26      |
| Geared motors SIMOGEAR, system overview .....               | 1/7   | • for SINAMICS V20 .....                                           | 7/17       |
| <b>H</b>                                                    |       | Line reactors                                                      |            |
| Handheld Intelligent Operator Panel IOP-2                   |       | • for SINAMICS G120 .....                                          | 9/75       |
| • for SINAMICS G120 .....                                   | 9/103 | • for SINAMICS G120C .....                                         | 8/26       |
| • for SINAMICS G120C .....                                  | 8/33  | • for SINAMICS S110 .....                                          | 10/28      |
| Hydraulic systems, drive application .....                  | 13/4  | • for SINAMICS V20 .....                                           | 7/20       |
|                                                             |       | Line-side components                                               |            |
|                                                             |       | • for SINAMICS G120 .....                                          | 9/72       |
|                                                             |       | • for SINAMICS G120C .....                                         | 8/25       |
|                                                             |       | • for SINAMICS S110 .....                                          | 10/26      |
|                                                             |       | • for SINAMICS V20 .....                                           | 7/17       |
|                                                             |       | Load-side power components                                         |            |
|                                                             |       | • for SINAMICS G120 .....                                          | 9/88       |
|                                                             |       | • for SINAMICS G120C .....                                         | 8/30       |
|                                                             |       | • for SINAMICS S110 .....                                          | 10/36      |
|                                                             |       | • for SINAMICS V20 .....                                           | 7/26       |
|                                                             |       | Low-voltage motors SIMOTICS for line and converter operation ..... | 1/10       |

# Appendix

## Subject index

|                                                                      | Page  |                                                                       | Page         |
|----------------------------------------------------------------------|-------|-----------------------------------------------------------------------|--------------|
| <b>M</b>                                                             |       | <b>Q</b>                                                              |              |
| Main motors SIMOTICS M-1PH8 for SINAMICS S110/<br>SINAMICS S120..... | 11/16 | Quality management according to EN ISO 9001 .....                     | 1/5          |
| Measuring systems Motion Control Encoder, system overview.....       | 1/11  | <b>R</b>                                                              |              |
| Mechatronic components .....                                         | 11/22 | Recommended line-side overcurrent protection devices                  |              |
| Mechatronic Support .....                                            | 14/21 | • for SINAMICS G120 .....                                             | 9/78         |
| Memory cards                                                         |       | • for SINAMICS G120C .....                                            | 8/27         |
| • for SINAMICS G120.....                                             | 9/108 | • for SINAMICS S110 .....                                             | 10/30        |
| • for SINAMICS G120C .....                                           | 8/38  | • for SINAMICS V20 .....                                              | 7/22         |
| • for SINAMICS V20 .....                                             | 7/28  | Repair service contract RSC .....                                     | 14/18        |
| Metal surcharges .....                                               | 15/12 | Replacement connectors                                                |              |
| Modbus RTU .....                                                     | 5/10  | • for SINAMICS G120 .....                                             | 9/117        |
| Motion Control Encoder measuring systems, system overview .....      | 1/11  | • for SINAMICS G120C .....                                            | 8/42         |
| MOTION-CONNECT connection systems, overview .....                    | 1/12  | Replacement fans                                                      |              |
| Motors SIMOTICS for motion control applications.....                 | 1/8   | • for SINAMICS G120 .....                                             | 9/118        |
| Motors SIMOTICS, overview .....                                      | 11/2  | • for SINAMICS G120C .....                                            | 8/42         |
| Motors SIMOTICS, system overview.....                                | 1/7   | • for SINAMICS V20 .....                                              | 7/32         |
| Mounting sets for SINAMICS G120 .....                                | 9/116 | <b>S</b>                                                              |              |
| mySupport documentation .....                                        | 14/30 | Safe Brake Control (SBC).....                                         | 3/6          |
| <b>O</b>                                                             |       | Safe Brake Relay                                                      |              |
| Online Support.....                                                  | 14/6  | • for SINAMICS G120 .....                                             | 9/111        |
| Operating principle of Safety Integrated .....                       | 3/8   | • for SINAMICS S110 .....                                             | 10/42        |
| Operator Panel BOP-2                                                 |       | Safe Direction (SDI).....                                             | 3/7          |
| • for SINAMICS G120.....                                             | 9/106 | Safe Operating Stop (SOS) .....                                       | 3/5          |
| • for SINAMICS G120C .....                                           | 8/37  | Safe Speed Monitor (SSM) .....                                        | 3/7          |
| Operator Panel BOP20 for SINAMICS S110.....                          | 10/41 | Safe speed/position sensing without/with encoder .....                | 3/9          |
| Operator Panel IOP-2                                                 |       | Safe Stop 1 (SS1) .....                                               | 3/4          |
| • for SINAMICS G120.....                                             | 9/103 | Safe Stop 2 (SS2) .....                                               | 3/5          |
| • for SINAMICS G120C .....                                           | 8/33  | Safe Torque Off (STO) .....                                           | 3/4          |
| Operator panels                                                      |       | Safely-Limited Speed (SLS) .....                                      | 3/6          |
| • for SINAMICS G120.....                                             | 9/102 | Safety functions integral to the SINAMICS drives .....                | 3/3          |
| • for SINAMICS G120C .....                                           | 8/33  | Safety Integrated .....                                               | 3/1          |
| Output reactors                                                      |       | • for SINAMICS G120 .....                                             | 3/12         |
| • for SINAMICS G120.....                                             | 9/88  | • for SINAMICS G120C .....                                            | 3/11         |
| • for SINAMICS G120C .....                                           | 8/30  | • for SINAMICS S110 .....                                             | 3/16         |
| • for SINAMICS S110 .....                                            | 10/36 | Safety Integrated, operating principle.....                           | 3/8          |
| • for SINAMICS V20 .....                                             | 7/26  | Safety-related standards .....                                        | 3/2          |
| <b>P</b>                                                             |       | SBC (Safe Brake Control).....                                         | 3/6          |
| Parameter Loader SINAMICS V20.....                                   | 7/28  | SD card                                                               |              |
| Partner at Siemens.....                                              | 14/2  | • for SINAMICS G120 .....                                             | 9/108        |
| PC inverter connection kit 2                                         |       | • for SINAMICS G120C .....                                            | 8/38         |
| • for SINAMICS G120.....                                             | 9/114 | • for SINAMICS V20 .....                                              | 7/28         |
| • for SINAMICS G120C .....                                           | 8/41  | SDI (Safe Direction).....                                             | 3/7          |
| Platform concept.....                                                | 1/5   | Security information.....                                             | 12/1         |
| Position sensing without/with encoder .....                          | 3/9   | Selection guide SINAMICS – typical applications.....                  | 1/6          |
| Power Modules                                                        |       | Sensor Module Cabinet-Mounted                                         |              |
| • for SINAMICS G120.....                                             | 9/35  | • SMC10 .....                                                         | 10/44        |
| • for SINAMICS S110 .....                                            | 10/9  | • SMC20 .....                                                         | 10/45        |
| PROFIBUS .....                                                       | 5/8   | • SMC30 .....                                                         | 10/46        |
| PROFIdrive.....                                                      | 5/7   | Services and documentation.....                                       | 14/1         |
| PROFINET .....                                                       | 5/3   | Servo drives SINAMICS S110 .....                                      | 10/1         |
| Push-through mounting frame                                          |       | Servomotors SIMOTICS S-1FK7 for SINAMICS S110/<br>SINAMICS S120 ..... | 11/8         |
| • for SINAMICS G120.....                                             | 9/108 | Shield connection kits                                                |              |
| • for SINAMICS S110 .....                                            | 10/40 | • for SINAMICS G120 .....                                             | 9/115, 9/116 |
|                                                                      |       | • for SINAMICS G120C .....                                            | 8/41         |
|                                                                      |       | • for SINAMICS S110 .....                                             | 10/40        |
|                                                                      |       | • for SINAMICS V20 .....                                              | 7/32         |

|                                                                               | Page        |                                                                    | Page  |
|-------------------------------------------------------------------------------|-------------|--------------------------------------------------------------------|-------|
| <b>S</b>                                                                      |             | <b>S</b>                                                           |       |
| Siemens Automation Cooperates with Education.....                             | 14/13       | Spare parts kit                                                    |       |
| SIMATIC Energy Suite – integrated energy management .....                     | 4/3         | • for SINAMICS G120 .....                                          | 9/116 |
| SIMOGEAR geared motors, system overview .....                                 | 1/7         | • for SINAMICS G120C .....                                         | 8/42  |
| SIMOTICS low-voltage motors for line and converter operation .....            | 1/10        | Spare parts services .....                                         | 14/23 |
| SIMOTICS M-1PH8 asynchronous (induction) motors –<br>Forced ventilation ..... | 11/16       | Spare parts                                                        |       |
| SIMOTICS M-1PH8 asynchronous (induction) motors –<br>Water cooling .....      | 11/18       | • for SINAMICS G120 .....                                          | 9/116 |
| SIMOTICS M-1PH8 main motors for SINAMICS S110/<br>SINAMICS S120 .....         | 11/16       | • for SINAMICS G120C .....                                         | 8/42  |
| SIMOTICS motors, system overview .....                                        | 1/7         | • for SINAMICS V20 .....                                           | 7/32  |
| SIMOTICS motors and geared motors .....                                       | 11/1        | Spares on Web .....                                                | 14/28 |
| SIMOTICS motors for motion control applications .....                         | 1/8         | Speed/position sensing without/with encoder .....                  | 3/9   |
| SIMOTICS S-1FK7 Compact synchronous motors – Natural cooling .....            | 11/8        | SS1 (Safe Stop 1) .....                                            | 3/4   |
| SIMOTICS S-1FK7 servomotors for SINAMICS S110/<br>SINAMICS S120 .....         | 11/8        | SS2 (Safe Stop 2) .....                                            | 3/5   |
| SINAMICS as part of the Siemens modular automation system .....               | 1/3         | SSM (Safe Speed Monitor) .....                                     | 3/7   |
| SINAMICS drives family .....                                                  | 1/2         | Standard inverters SINAMICS G120 .....                             | 9/1   |
| SINAMICS G120 Smart Access .....                                              | 8/39, 9/109 | Standard Technology Functions .....                                | 2/4   |
| SINAMICS G120 standard inverters .....                                        | 9/1         | Starter Kit for SINAMICS V20 .....                                 | 7/16  |
| SINAMICS G120C compact inverters .....                                        | 8/1         | STARTER .....                                                      | 12/6  |
| SINAMICS S110 servo drives .....                                              | 10/1        | STO (Safe Torque Off) .....                                        | 3/4   |
| SINAMICS SD card                                                              |             | Supplementary system components                                    |       |
| • for SINAMICS G120 .....                                                     | 9/108       | • for SINAMICS G120 .....                                          | 9/102 |
| • for SINAMICS G120C .....                                                    | 8/38        | • for SINAMICS G120C .....                                         | 8/33  |
| • for SINAMICS V20 .....                                                      | 7/28        | • for SINAMICS S110 .....                                          | 10/40 |
| SINAMICS selection guide – typical applications .....                         | 1/6         | • for SINAMICS V20 .....                                           | 7/28  |
| SINAMICS Startdrive .....                                                     | 12/8        | Synchronous motors SIMOTICS S-1FK7 Compact – Natural cooling ..... | 11/8  |
| SINAMICS V20 basic converters .....                                           | 7/1         | System overview .....                                              | 1/1   |
| SINAMICS V20 BOP Interface .....                                              | 7/29        |                                                                    |       |
| SINAMICS V20 BOP .....                                                        | 7/29        | <b>T</b>                                                           |       |
| SINAMICS V20 Braking Module .....                                             | 7/25        | Technology functions .....                                         | 6/1   |
| SINAMICS V20 I/O Extension Module .....                                       | 7/31        | Terminal cover kits                                                |       |
| SINAMICS V20 Parameter Loader .....                                           | 7/28        | • for SINAMICS G120 .....                                          | 9/117 |
| SINAMICS V20 replacement fan .....                                            | 7/32        | • for SINAMICS G120C .....                                         | 8/42  |
| SINAMICS V20 shield connection kits .....                                     | 7/32        | Totally Integrated Automation .....                                | 1/2   |
| SINAMICS V20 Smart Access .....                                               | 7/30        | Training .....                                                     | 14/7  |
| SINAMICS V20 Starter Kit .....                                                | 7/16        | Training cases                                                     |       |
| Sine-wave filter                                                              |             | • SINAMICS G120C .....                                             | 14/9  |
| • for SINAMICS G120 .....                                                     | 9/95        | • SINAMICS S110 .....                                              | 14/12 |
| • for SINAMICS G120C .....                                                    | 8/32        | • SINAMICS V20 .....                                               | 14/9  |
| Single-encoder system .....                                                   | 3/9         | • Single-axis drive, modular .....                                 | 14/10 |
| SITRAIN – Training for Industry .....                                         | 14/7        | Training courses for SINAMICS low-voltage converters .....         | 14/8  |
| SIZER for Siemens Drives .....                                                | 12/4        | Typical applications – SINAMICS selection guide .....              | 1/6   |
| SLS (Safely-Limited Speed) .....                                              | 3/6         |                                                                    |       |
| Smart Access SINAMICS G120 .....                                              | 8/39, 9/109 | <b>U</b>                                                           |       |
| Smart Access SINAMICS V20 .....                                               | 7/30        | USS .....                                                          | 5/10  |
| SMC10 .....                                                                   | 10/44       |                                                                    |       |
| SMC20 .....                                                                   | 10/45       | <b>V</b>                                                           |       |
| SMC30 .....                                                                   | 10/46       | Variants of the SINAMICS family .....                              | 1/4   |
| Software licenses .....                                                       | 15/4        |                                                                    |       |
| SOS (Safe Operating Stop) .....                                               | 3/5         |                                                                    |       |

## Appendix

### Conversion tables

#### Rotary inertia (to convert from A to B, multiply by entry in table)

| A \ B                                        | lb-in <sup>2</sup>     | lb-ft <sup>2</sup>    | lb-in-s <sup>2</sup>  | lb-ft-s <sup>2</sup><br>slug-ft <sup>2</sup> | kg-cm <sup>2</sup>  | kg-cm-s <sup>2</sup>   | gm-cm <sup>2</sup>  | gm-cm-s <sup>2</sup>  | oz-in <sup>2</sup>    | oz-in-s <sup>2</sup>  |
|----------------------------------------------|------------------------|-----------------------|-----------------------|----------------------------------------------|---------------------|------------------------|---------------------|-----------------------|-----------------------|-----------------------|
| lb-in <sup>2</sup>                           | 1                      | $6.94 \times 10^{-3}$ | $2.59 \times 10^{-3}$ | $2.15 \times 10^{-4}$                        | 2.926               | $2.98 \times 10^{-3}$  | $2.92 \times 10^3$  | 2.984                 | 16                    | $4.14 \times 10^{-2}$ |
| lb-ft <sup>2</sup>                           | 144                    | 1                     | 0.3729                | $3.10 \times 10^{-2}$                        | 421.40              | 0.4297                 | $4.21 \times 10^5$  | 429.71                | 2304                  | 5.967                 |
| lb-in-s <sup>2</sup>                         | 386.08                 | 2.681                 | 1                     | $8.33 \times 10^{-2}$                        | $1.129 \times 10^3$ | 1.152                  | $1.129 \times 10^6$ | $1.152 \times 10^3$   | $6.177 \times 10^3$   | 16                    |
| lb-ft-s <sup>2</sup><br>slug-ft <sup>2</sup> | $4.63 \times 10^3$     | 32.17                 | 12                    | 1                                            | $1.35 \times 10^4$  | 13.825                 | $1.355 \times 10^7$ | $1.38 \times 10^4$    | $7.41 \times 10^4$    | 192                   |
| kg-cm <sup>2</sup>                           | 0.3417                 | $2.37 \times 10^{-3}$ | $8.85 \times 10^{-4}$ | $7.37 \times 10^{-5}$                        | 1                   | $1.019 \times 10^{-3}$ | 1000                | 1.019                 | 5.46                  | $1.41 \times 10^{-2}$ |
| kg-cm-s <sup>2</sup>                         | 335.1                  | 2.327                 | 0.8679                | $7.23 \times 10^{-2}$                        | 980.66              | 1                      | $9.8 \times 10^5$   | 1000                  | $5.36 \times 10^3$    | 13.887                |
| gm-cm <sup>2</sup>                           | $3.417 \times 10^{-4}$ | $2.37 \times 10^{-6}$ | $8.85 \times 10^{-7}$ | $7.37 \times 10^{-8}$                        | $1 \times 10^{-3}$  | $1.01 \times 10^{-6}$  | 1                   | $1.01 \times 10^{-3}$ | $5.46 \times 10^{-3}$ | $1.41 \times 10^{-5}$ |
| gm-cm-s <sup>2</sup>                         | 0.335                  | $2.32 \times 10^{-3}$ | $8.67 \times 10^{-4}$ | $7.23 \times 10^{-5}$                        | 0.9806              | $1 \times 10^{-3}$     | 980.6               | 1                     | 5.36                  | $1.38 \times 10^{-2}$ |
| oz-in <sup>2</sup>                           | 0.0625                 | $4.34 \times 10^{-4}$ | $1.61 \times 10^{-4}$ | $1.34 \times 10^{-5}$                        | 0.182               | $1.86 \times 10^{-4}$  | 182.9               | 0.186                 | 1                     | $2.59 \times 10^{-3}$ |
| oz-in-s <sup>2</sup>                         | 24.13                  | 0.1675                | $6.25 \times 10^{-2}$ | $5.20 \times 10^{-3}$                        | 70.615              | $7.20 \times 10^{-2}$  | $7.09 \times 10^4$  | 72.0                  | 386.08                | 1                     |

#### Torque (to convert from A to B, multiply by entry in table)

| A \ B   | lb-in                  | lb-ft                  | oz-in                  | N-m                    | kg-cm                   | kg-m                   | gm-cm                  | dyne-cm             |
|---------|------------------------|------------------------|------------------------|------------------------|-------------------------|------------------------|------------------------|---------------------|
| lb-in   | 1                      | $8.333 \times 10^{-2}$ | 16                     | 0.113                  | 1.152                   | $1.152 \times 10^{-2}$ | $1.152 \times 10^3$    | $1.129 \times 10^6$ |
| lb-ft   | 12                     | 1                      | 192                    | 1.355                  | 13.825                  | 0.138                  | $1.382 \times 10^4$    | $1.355 \times 10^7$ |
| oz-in   | $6.25 \times 10^{-2}$  | $5.208 \times 10^{-3}$ | 1                      | $7.061 \times 10^{-3}$ | $7.200 \times 10^{-2}$  | $7.200 \times 10^{-4}$ | 72.007                 | $7.061 \times 10^4$ |
| N-m     | 8.850                  | 0.737                  | 141.612                | 1                      | 10.197                  | 0.102                  | $1.019 \times 10^4$    | $1 \times 10^7$     |
| kg-cm   | 0.8679                 | $7.233 \times 10^{-2}$ | 13.877                 | $9.806 \times 10^{-2}$ | 1                       | $10^{-2}$              | 1000                   | $9.806 \times 10^5$ |
| kg-m    | 86.796                 | 7.233                  | $1.388 \times 10^3$    | 9.806                  | 100                     | 1                      | $1 \times 10^5$        | $9.806 \times 10^7$ |
| gm-cm   | $8.679 \times 10^{-4}$ | $7.233 \times 10^{-5}$ | $1.388 \times 10^{-2}$ | $9.806 \times 10^{-5}$ | $1 \times 10^{-3}$      | $1 \times 10^{-5}$     | 1                      | 980.665             |
| dyne-cm | $8.850 \times 10^{-7}$ | $7.375 \times 10^{-8}$ | $1.416 \times 10^{-5}$ | $10^{-7}$              | $1.0197 \times 10^{-6}$ | $1.019 \times 10^{-8}$ | $1.019 \times 10^{-3}$ | 1                   |

#### Length (to convert from A to B, multiply by entry in table)

| A \ B  | inches  | feet    | cm    | yd                    | mm    | m      |
|--------|---------|---------|-------|-----------------------|-------|--------|
| inches | 1       | 0.0833  | 2.54  | 0.028                 | 25.4  | 0.0254 |
| feet   | 12      | 1       | 30.48 | 0.333                 | 304.8 | 0.3048 |
| cm     | 0.3937  | 0.03281 | 1     | $1.09 \times 10^{-2}$ | 10    | 0.01   |
| yd     | 36      | 3       | 91.44 | 1                     | 914.4 | 0.914  |
| mm     | 0.03937 | 0.00328 | 0.1   | $1.09 \times 10^{-3}$ | 1     | 0.001  |
| m      | 39.37   | 3.281   | 100   | 1.09                  | 1000  | 1      |

#### Power (to convert from A to B, multiply by entry in table)

| A \ B            | hp                     | Watts                  |
|------------------|------------------------|------------------------|
| hp (English)     | 1                      | 745.7                  |
| (lb-in) (deg./s) | $2.645 \times 10^{-6}$ | $1.972 \times 10^{-3}$ |
| (lb-in) (rpm)    | $1.587 \times 10^{-5}$ | $1.183 \times 10^{-2}$ |
| (lb-ft) (deg./s) | $3.173 \times 10^{-5}$ | $2.366 \times 10^{-2}$ |
| (lb-ft) (rpm)    | $1.904 \times 10^{-4}$ | 0.1420                 |
| Watts            | $1.341 \times 10^{-3}$ | 1                      |

#### Force (to convert from A to B, multiply by entry in table)

| A \ B | lb                     | oz                    | gm    | dyne                  | N       |
|-------|------------------------|-----------------------|-------|-----------------------|---------|
| lb    | 1                      | 16                    | 453.6 | $4.448 \times 10^5$   | 4.4482  |
| oz    | 0.0625                 | 1                     | 28.35 | $2.780 \times 10^4$   | 0.27801 |
| gm    | $2.205 \times 10^{-3}$ | 0.03527               | 1     | $1.02 \times 10^{-3}$ | N.A.    |
| dyne  | $2.248 \times 10^{-6}$ | $3.59 \times 10^{-5}$ | 980.7 | 1                     | 0.00001 |
| N     | 0.22481                | 3.5967                | N.A.  | 100000                | 1       |

#### Mass (to convert from A to B, multiply by entry in table)

| A \ B | lb                     | oz                     | gm                  | kg        | slug                   |
|-------|------------------------|------------------------|---------------------|-----------|------------------------|
| lb    | 1                      | 16                     | 453.6               | 0.4536    | 0.0311                 |
| oz    | $6.25 \times 10^{-2}$  | 1                      | 28.35               | 0.02835   | $1.93 \times 10^{-3}$  |
| gm    | $2.205 \times 10^{-3}$ | $3.527 \times 10^{-2}$ | 1                   | $10^{-3}$ | $6.852 \times 10^{-5}$ |
| kg    | 2.205                  | 35.27                  | $10^3$              | 1         | $6.852 \times 10^{-2}$ |
| slug  | 32.17                  | 514.8                  | $1.459 \times 10^4$ | 14.59     | 1                      |

#### Rotation (to convert from A to B, multiply by entry in table)

| A \ B     | rpm   | rad/s                  | degrees/s |
|-----------|-------|------------------------|-----------|
| rpm       | 1     | 0.105                  | 6.0       |
| rad/s     | 9.55  | 1                      | 57.30     |
| degrees/s | 0.167 | $1.745 \times 10^{-2}$ | 1         |

## Conversion tables

## Temperature Conversion

| °F                                        | °C    | °C                                   | °F   |
|-------------------------------------------|-------|--------------------------------------|------|
| 0                                         | -17.8 | -10                                  | 14   |
| 32                                        | 0     | 0                                    | 32   |
| 50                                        | 10    | 10                                   | 50   |
| 70                                        | 21.1  | 20                                   | 68   |
| 90                                        | 32.2  | 30                                   | 86   |
| 98.4                                      | 37    | 37                                   | 98.4 |
| 212                                       | 100   | 100                                  | 212  |
| subtract 32 and multiply by $\frac{5}{9}$ |       | multiply by $\frac{9}{5}$ and add 32 |      |

## Mechanism Efficiencies

|                             |            |
|-----------------------------|------------|
| Acme-screw with brass nut   | ~0.35–0.65 |
| Acme-screw with plastic nut | ~0.50–0.85 |
| Ball-screw                  | ~0.85–0.95 |
| Chain and sprocket          | ~0.95–0.98 |
| Preloaded ball-screw        | ~0.75–0.85 |
| Spur or bevel-gears         | ~0.90      |
| Timing belts                | ~0.96–0.98 |
| Worm gears                  | ~0.45–0.85 |
| Helical gear (1 reduction)  | ~0.92      |

## Friction Coefficients

| Materials                | $\mu$      |
|--------------------------|------------|
| Steel on steel (greased) | ~0.15      |
| Plastic on steel         | ~0.15–0.25 |
| Copper on steel          | ~0.30      |
| Brass on steel           | ~0.35      |
| Aluminum on steel        | ~0.45      |
| Steel on steel           | ~0.58      |
| Mechanism                | $\mu$      |
| Ball bushings            | <0.001     |
| Linear bearings          | <0.001     |
| Dove-tail slides         | ~0.2++     |
| Gibb ways                | ~0.5++     |

## Material Densities

| Material                        | lb-in <sup>3</sup> | gm-cm <sup>3</sup> |
|---------------------------------|--------------------|--------------------|
| Aluminum                        | 0.096              | 2.66               |
| Brass                           | 0.299              | 8.30               |
| Bronze                          | 0.295              | 8.17               |
| Copper                          | 0.322              | 8.91               |
| Hard wood                       | 0.029              | 0.80               |
| Soft wood                       | 0.018              | 0.48               |
| Plastic                         | 0.040              | 1.11               |
| Glass                           | 0.079–0.090        | 2.2–2.5            |
| Titanium                        | 0.163              | 4.51               |
| Paper                           | 0.025–0.043        | 0.7–1.2            |
| Polyvinyl chloride              | 0.047–0.050        | 1.3–1.4            |
| Rubber                          | 0.033–0.036        | 0.92–0.99          |
| Silicone rubber, without filler | 0.043              | 1.2                |
| Cast iron, gray                 | 0.274              | 7.6                |
| Steel                           | 0.280              | 7.75               |

Wire Gauges<sup>1)</sup>

| Cross-section<br>mm <sup>2</sup> | Standard Wire<br>Gauge (SWG) | American Wire<br>Gauge (AWG) |
|----------------------------------|------------------------------|------------------------------|
| 0.2                              | 25                           | 24                           |
| 0.3                              | 23                           | 22                           |
| 0.5                              | 21                           | 20                           |
| 0.75                             | 20                           | 19                           |
| 1.0                              | 19                           | 18                           |
| 1.5                              | 17                           | 16                           |
| 2.5                              | 15                           | 13                           |
| 4                                | 13                           | 11                           |
| 6                                | 12                           | 9                            |
| 10                               | 9                            | 7                            |
| 16                               | 7                            | 6                            |
| 25                               | 5                            | 3                            |
| 35                               | 3                            | 2                            |
| 50                               | 0                            | 1/0                          |
| 70                               | 000                          | 2/0                          |
| 95                               | 00000                        | 3/0                          |
| 120                              | 0000000                      | 4/0                          |
| 150                              | –                            | 6/0                          |
| 185                              | –                            | 7/0                          |

<sup>1)</sup> The table shows approximate SWG/AWG sizes nearest to standard metric sizes; the cross-sections do not match exactly.

## Appendix

### Metal surcharges

#### Explanation of the raw material/metal surcharges <sup>1)</sup>

##### Surcharge calculation

To compensate for variations in the price of the raw materials silver, copper, aluminum, lead, gold, dysprosium <sup>2)</sup> and/or neodym <sup>2)</sup>, surcharges are calculated on a daily basis using the so-called metal factor for products containing these raw materials. A surcharge for the respective raw material is calculated as a supplement to the price of a product if the basic official price of the raw material in question is exceeded.

The surcharges are calculated in accordance with the following criteria:

- Basic official price of the raw material  
Basic official price from the day prior to receipt of the order or prior to release order (daily price) for <sup>3)</sup>  
- Silver (sales price, processed)  
- Gold (sales price, processed)  
and for <sup>4)</sup>  
- Copper (lower DEL notation + 1 %)  
- Aluminum (aluminum in cables)  
- Lead (lead in cables)
- Metal factor of the products  
Certain products are displayed with a metal factor. The metal factor determines the official price (for those raw materials concerned) as of which the metal surcharges are applied and the calculation method used (weight or percentage method). An exact explanation is given below.

##### Structure of the metal factor

The metal factor consists of several digits; the first digit indicates whether the percentage method of calculation refers to the list price or a possible discounted price (customer net price) (L = list price / N = customer net price).

The remaining digits indicate the method of calculation used for the respective raw material. If no surcharge is added for a raw material, a "-" is used.

|           |                                                        |
|-----------|--------------------------------------------------------|
| 1st digit | List or customer net price using the percentage method |
| 2nd digit | for silver (AG)                                        |
| 3rd digit | for copper (CU)                                        |
| 4th digit | for aluminum (AL)                                      |
| 5th digit | for lead (PB)                                          |
| 6th digit | for gold (AU)                                          |
| 7th digit | for dysprosium (Dy) <sup>2)</sup>                      |
| 8th digit | for neodym (Nd) <sup>2)</sup>                          |

##### Weight method

The weight method uses the basic official price, the daily price and the raw material weight. In order to calculate the surcharge, the basic official price must be subtracted from the daily price. The difference is then multiplied by the raw material weight.

The basic official price can be found in the table below using the number (1 to 9) of the respective digit of the metal factor. The raw material weight can be found in the respective product descriptions.

##### Percentage method

Use of the percentage method is indicated by the letters A-Z at the respective digit of the metal factor.

The surcharge is increased - dependent on the deviation of the daily price compared with the basic official price - using the percentage method in "steps" and consequently offers surcharges that remain constant within the framework of this "step range". A higher percentage rate is charged for each new step. The respective percentage level can be found in the table below.

##### Metal factor examples

|                        |                                                                                                                                                                                                                                                                               |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>L E A - - - -</b>   | Basis for % surcharge: List price<br>Silver Basis 150 €, Step 50 €, 0.5 %<br>Copper Basis 150 €, Step 50 €, 0.1 %<br>No surcharge for aluminum<br>No surcharge for lead<br>No surcharge for gold<br>No surcharge for dysprosium<br>No surcharge for neodym                    |
| <b>N - A 6 - - - -</b> | Basis for % surcharge: Customer net price<br>No surcharge for silver<br>Copper Basis 150 €, Step 50 €, 0.1 %<br>Aluminum acc. to weight, basic offic. price 225 €<br>No surcharge for lead<br>No surcharge for gold<br>No surcharge for dysprosium<br>No surcharge for neodym |
| <b>- - 3 - - - -</b>   | No basis necessary<br>No surcharge for silver<br>Copper acc. to weight, basic official price 150 €<br>No surcharge for aluminum<br>No surcharge for lead<br>No surcharge for gold<br>No surcharge for dysprosium<br>No surcharge for neodym                                   |

<sup>1)</sup> Refer to the separate explanation on the next page regarding the raw materials dysprosium and neodym (= rare earths).

<sup>2)</sup> For a different method of calculation, refer to the separate explanation for these raw materials on the next page.

<sup>3)</sup> Source: Umicore, Hanau ([www.metalsmanagement.umicore.com](http://www.metalsmanagement.umicore.com)).

<sup>4)</sup> Source: Schutzvereinigung DEL-Notiz e.V. ([www.del-notiz.org](http://www.del-notiz.org)).

## Explanation of the raw material/metal surcharges for dysprosium and neodym (rare earths)

### Surcharge calculation

To compensate for variations in the price of the raw materials silver <sup>1)</sup>, copper <sup>1)</sup>, aluminum <sup>1)</sup>, lead <sup>1)</sup>, gold <sup>1)</sup>, dysprosium and/or neodym, surcharges are calculated on a daily basis using the so-called metal factor for products containing these raw materials. The surcharge for dysprosium and neodym is calculated as a supplement to the price of a product if the basic official price of the raw material in question is exceeded.

The surcharge is calculated in accordance with the following criteria:

- Basic official price of the raw material <sup>2)</sup>  
Three-month basic average price (see below) in the period before the quarter in which the order was received or the release order took place (= average official price) for  
- dysprosium (Dy metal, 99 % min. FOB China; USD/kg)  
- neodym (Nd metal, 99 % min. FOB China; USD/kg)
- Metal factor of the products  
Certain products are displayed with a metal factor. The metal factor indicates (for those raw materials concerned) the basic official price as of which the surcharges for dysprosium and neodym are calculated using the weight method. An exact explanation of the metal factor is given below.

### Three-month average price

The prices of rare earths vary according to the foreign currency, and there is no freely accessible stock exchange listing. This makes it more difficult for all parties involved to monitor changes in price. In order to avoid continuous adjustment of the surcharges, but to still ensure fair, transparent pricing, an average price is calculated over a three-month period using the average monthly foreign exchange rate from USD to EUR (source: European Central Bank). Since not all facts are immediately available at the start of each month, a one-month buffer is allowed before the new average price applies.

Examples of calculation of the average official price:

| Period for calculation of the average price: | Period during which the order/release order is effected and the average price applies: |
|----------------------------------------------|----------------------------------------------------------------------------------------|
| Sep 2012 - Nov 2012                          | Q1 in 2013 (Jan - Mar)                                                                 |
| Dec 2012 - Feb 2013                          | Q2 in 2013 (Apr - Jun)                                                                 |
| Mar 2013 - May 2013                          | Q3 in 2013 (Jul - Sep)                                                                 |
| Jun 2013 - Aug 2013                          | Q4 in 2013 (Oct - Dec)                                                                 |

### Structure of the metal factor

The metal factor consists of several digits; the first digit is not relevant to the calculation of dysprosium and neodym.

The remaining digits indicate the method of calculation used for the respective raw material. If no surcharge is added for a raw material, a "-" is used.

|           |                                                        |
|-----------|--------------------------------------------------------|
| 1st digit | List or customer net price using the percentage method |
| 2nd digit | for silver (AG) <sup>1)</sup>                          |
| 3rd digit | for copper (CU) <sup>1)</sup>                          |
| 4th digit | for aluminum (AL) <sup>1)</sup>                        |
| 5th digit | for lead (PB) <sup>1)</sup>                            |
| 6th digit | for gold (AU) <sup>1)</sup>                            |
| 7th digit | for dysprosium (Dy)                                    |
| 8th digit | for neodym (Nd)                                        |

### Weight method

The weight method uses the basic official price, the average price and the raw material weight. In order to calculate the surcharge, the basic official price must be subtracted from the average price. The difference is then multiplied by the raw material weight.

The basic official price can be found in the table below using the number (1 to 9) of the respective digit of the metal factor. Your Sales contact can inform you of the raw material weight.

### Metal factor examples

|         |                                                       |
|---------|-------------------------------------------------------|
| -----71 |                                                       |
| ↑       | No basis necessary                                    |
| ↑       | No surcharge for silver                               |
| ↑       | No surcharge for copper                               |
| ↑       | No surcharge for aluminum                             |
| ↑       | No surcharge for lead                                 |
| ↑       | No surcharge for gold                                 |
| ↑       | Dysprosium acc. to weight, basic official price 300 € |
| ↑       | Neodym acc. to weight, basic official price 50 €      |

<sup>1)</sup> For a different method of calculation, refer to the separate explanation for these raw materials on the previous page.

<sup>2)</sup> Source: Asian Metal Ltd ([www.asianmetal.com](http://www.asianmetal.com))

## Appendix

### Metal surcharges

#### Values of the metal factor

| Percentage<br>method    | Basic official<br>price<br>in €                                     | Step range<br>in €                       | % surcharge<br>1st step | % surcharge<br>2nd step | % surcharge<br>3rd step | % surcharge<br>4th step | % sur-<br>charge<br>per addi-<br>tional step |
|-------------------------|---------------------------------------------------------------------|------------------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|----------------------------------------------|
|                         |                                                                     |                                          | Price in €              | Price in €              | Price in €              | Price in €              |                                              |
|                         |                                                                     |                                          | 150.01 - 200.00         | 200.01 - 250.00         | 250.01 - 300.00         | 300.01 - 350.00         |                                              |
| A                       | 150                                                                 | 50                                       | 0.1                     | 0.2                     | 0.3                     | 0.4                     | 0.1                                          |
| B                       | 150                                                                 | 50                                       | 0.2                     | 0.4                     | 0.6                     | 0.8                     | 0.2                                          |
| C                       | 150                                                                 | 50                                       | 0.3                     | 0.6                     | 0.9                     | 1.2                     | 0.3                                          |
| D                       | 150                                                                 | 50                                       | 0.4                     | 0.8                     | 1.2                     | 1.6                     | 0.4                                          |
| E                       | 150                                                                 | 50                                       | 0.5                     | 1.0                     | 1.5                     | 2.0                     | 0.5                                          |
| F                       | 150                                                                 | 50                                       | 0.6                     | 1.2                     | 1.8                     | 2.4                     | 0.6                                          |
| G                       | 150                                                                 | 50                                       | 1.0                     | 2.0                     | 3.0                     | 4.0                     | 1.0                                          |
| H                       | 150                                                                 | 50                                       | 1.2                     | 2.4                     | 3.6                     | 4.8                     | 1.2                                          |
| I                       | 150                                                                 | 50                                       | 1.6                     | 3.2                     | 4.8                     | 6.4                     | 1.6                                          |
| J                       | 150                                                                 | 50                                       | 1.8                     | 3.6                     | 5.4                     | 7.2                     | 1.8                                          |
|                         |                                                                     |                                          | 175.01 - 225.00         | 225.01 - 275.00         | 275.01 - 325.00         | 325.01 - 375.00         |                                              |
| O                       | 175                                                                 | 50                                       | 0.1                     | 0.2                     | 0.3                     | 0.4                     | 0.1                                          |
| P                       | 175                                                                 | 50                                       | 0.2                     | 0.4                     | 0.6                     | 0.8                     | 0.2                                          |
| R                       | 175                                                                 | 50                                       | 0.5                     | 1.0                     | 1.5                     | 2.0                     | 0.5                                          |
|                         |                                                                     |                                          | 225.01 - 275.00         | 275.01 - 325.00         | 325.01 - 375.00         | 375.01 - 425.00         |                                              |
| S                       | 225                                                                 | 50                                       | 0.2                     | 0.4                     | 0.6                     | 0.8                     | 0.2                                          |
| U                       | 225                                                                 | 50                                       | 1.0                     | 2.0                     | 3.0                     | 4.0                     | 1.0                                          |
| V                       | 225                                                                 | 50                                       | 1.0                     | 1.5                     | 2.0                     | 3.0                     | 1.0                                          |
| W                       | 225                                                                 | 50                                       | 1.2                     | 2.5                     | 3.5                     | 4.5                     | 1.0                                          |
|                         |                                                                     |                                          | 150.01 - 175.00         | 175.01 - 200.00         | 200.01 - 225.00         | 225.01 - 250.00         |                                              |
| Y                       | 150                                                                 | 25                                       | 0.3                     | 0.6                     | 0.9                     | 1.2                     | 0.3                                          |
|                         |                                                                     |                                          | 400.01 - 425.00         | 425.01 - 450.00         | 450.01 - 475.00         | 475.01 - 500.00         |                                              |
| Z                       | 400                                                                 | 25                                       | 0.1                     | 0.2                     | 0.3                     | 0.4                     | 0.1                                          |
| Price basis (1st digit) |                                                                     |                                          |                         |                         |                         |                         |                                              |
| L                       | Calculation based on the list price                                 |                                          |                         |                         |                         |                         |                                              |
| N                       | Calculation based on the customer net price (discounted list price) |                                          |                         |                         |                         |                         |                                              |
| Weight<br>method        | Basic official price in €                                           |                                          |                         |                         |                         |                         |                                              |
| 1                       | 50                                                                  | Calculation based on raw material weight |                         |                         |                         |                         |                                              |
| 2                       | 100                                                                 |                                          |                         |                         |                         |                         |                                              |
| 3                       | 150                                                                 |                                          |                         |                         |                         |                         |                                              |
| 4                       | 175                                                                 |                                          |                         |                         |                         |                         |                                              |
| 5                       | 200                                                                 |                                          |                         |                         |                         |                         |                                              |
| 6                       | 225                                                                 |                                          |                         |                         |                         |                         |                                              |
| 7                       | 300                                                                 |                                          |                         |                         |                         |                         |                                              |
| 8                       | 400                                                                 |                                          |                         |                         |                         |                         |                                              |
| 9                       | 555                                                                 |                                          |                         |                         |                         |                         |                                              |
| Miscella-<br>neous      |                                                                     |                                          |                         |                         |                         |                         |                                              |
| -                       | No metal surcharge                                                  |                                          |                         |                         |                         |                         |                                              |

## Conditions of sale and delivery/Export regulations

**1. General Provisions**

By using this catalog you can acquire hardware and software products described therein from Siemens AG subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as "T&C"). Please note that the scope, the quality and the conditions for supplies and services, including software products, by any Siemens entity having a registered office outside Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

**1.1 For customers with a seat or registered office in Germany**

For customers with a seat or registered office in Germany, the following applies subordinate to the T&C:

- for installation work the "General Conditions for Erection Works – Germany"<sup>1)</sup> ("Allgemeine Montagebedingungen – Deutschland" (only available in German at the moment)) and/or
- for Plant Analytics Services the "Standard Terms and Conditions for Plant Analytics Services – for Customer in Germany"<sup>1)</sup> ("Allgemeine Geschäftsbedingungen für das Plant Analytics Services – für Kunden in Deutschland" (only available in German at the moment)) and/or
- for stand-alone software products and software products forming a part of a product or project, the "General License Conditions for Software Products for Automation and Drives for Customers with a Seat or registered Office in Germany"<sup>1)</sup> and/or
- for other supplies and/or services the "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"<sup>1)</sup>.  
In case such supplies and/or services should contain Open Source Software, the conditions of which shall prevail over the "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"<sup>1)</sup>. A notice will be contained in the scope of delivery in which the applicable conditions for Open Source Software are specified. This shall apply mutatis mutandis for notices referring to other third party software components.

**1.2 For customers with a seat or registered office outside Germany**

For customers with a seat or registered office outside Germany, the following applies subordinate to the T&C:

- for Plant Analytics Services the "Standard Terms and Conditions for Plant Analytics Services"<sup>1)</sup> and/or
- for services the "International Terms & Conditions for Services"<sup>1)</sup> supplemented by "Software Licensing Conditions"<sup>1)</sup> and/or
- for other supplies of hard- and/or software the "International Terms & Conditions for Products"<sup>1)</sup> supplemented by "Software Licensing Conditions"<sup>1)</sup>

**1.3 For customers with master or framework agreement**

To the extent our supplies and/or services offered are covered by an existing master or framework agreement, the terms and conditions of that agreement shall apply instead of T&C.

**2. Prices**

The prices are in € (Euro) ex point of delivery, exclusive of packaging.

The sales tax (value added tax) is not included in the prices. It shall be charged separately at the respective rate according to the applicable statutory legal regulations.

Prices are subject to change without prior notice. We will charge the prices valid at the time of delivery.

To compensate for variations in the price of raw materials (e.g. silver, copper, aluminum, lead, gold, dysprosium and neodym), surcharges are calculated on a daily basis using the so-called metal factor for products containing these raw materials. A surcharge for the respective raw material is calculated as a supplement to the price of a product if the basic official price of the raw material in question is exceeded.

The metal factor of a product indicates the basic official price (for those raw materials concerned) as of which the surcharges on the price of the product are applied, and with what method of calculation.

You will find a detailed explanation of the metal factor on the page headed "Metal surcharges".

To calculate the surcharge (except in the cases of dysprosium and neodym), the official price from the day prior to that on which the order was received or the release order was effected is used.

To calculate the surcharge applicable to dysprosium and neodym ("rare earths"), the corresponding three-month basic average price in the quarter prior to that in which the order was received or the release order was effected is used with a one-month buffer (details on the calculation can be found in the explanation of the metal factor).

**3. Additional Terms and Conditions**

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog - especially with regard to data, dimensions and weights given - these are subject to change without prior notice.

<sup>1)</sup> The text of the Terms and Conditions of Siemens AG can be downloaded at [www.siemens.com/automation/salesmaterial-as/catalog/en/terms\\_of\\_trade\\_en.pdf](http://www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf)

## Appendix

### Conditions of sale and delivery/Export regulations

#### 4. Export regulations

We shall not be obligated to fulfill any agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes and/or other sanctions.

Export may be subject to license. We shall indicate in the delivery details whether licenses are required under German, European and US export lists.

Our products are controlled by the U.S. Government (when labeled with "ECCN" unequal "N") and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. Government or as otherwise authorized by U.S. law and regulations.

The export indications can be viewed in advance in the description of the respective goods on the Industry Mall, our online catalog system. Only the export labels "AL" and "ECCN" indicated on order confirmations, delivery notes and invoices are authoritative.

Products labeled with "AL" unequal "N" are subject to European / national export authorization. Products without label, with label "AL:N" / "ECCN:N", or label "AL:9X9999" / "ECCN: 9X9999" may require authorization from responsible authorities depending on the final end-use, or the destination.

If you transfer goods (hardware and/or software and/or technology as well as corresponding documentation, regardless of the mode of provision) delivered by us or works and services (including all kinds of technical support) performed by us to a third party worldwide, you must comply with all applicable national and international (re-)export control regulations.

If required for the purpose of conducting export control checks, you (upon request by us) shall promptly provide us with all information pertaining to the particular end customer, final disposition and intended use of goods delivered by us respectively works and services provided by us, as well as to any export control restrictions existing in this relation.

The products listed in this catalog may be subject to European/German and/or US export regulations. Any export requiring approval is therefore subject to authorization by the relevant authorities.

Errors excepted and subject to change without prior notice.

Further information can be obtained from our branch offices listed at [www.siemens.com/automation-contact](http://www.siemens.com/automation-contact)

|                                                                                                                                     |              |                |
|-------------------------------------------------------------------------------------------------------------------------------------|--------------|----------------|
| <b>Interactive Catalog on DVD</b>                                                                                                   |              | <i>Catalog</i> |
| Products for Automation and Drives                                                                                                  | <b>CA 01</b> |                |
| <b>Building Control</b>                                                                                                             |              |                |
| GAMMA Building Control                                                                                                              | ET G1        |                |
| <b>Drive Systems</b>                                                                                                                |              |                |
| SINAMICS G130 Drive Converter Chassis Units                                                                                         | D 11         |                |
| SINAMICS G150 Drive Converter Cabinet Units                                                                                         |              |                |
| SINAMICS GM150, SINAMICS SM150 Medium-Voltage Converters                                                                            | D 12         |                |
| <i>Digital: SINAMICS PERFECT HARMONY GH180 Medium-Voltage Air-Cooled Drives (Germany Edition)</i>                                   | D 15.1       |                |
| SINAMICS G180 Converters – Compact Units, Cabinet Systems, Cabinet Units Air-Cooled and Liquid-Cooled                               | D 18.1       |                |
| SINAMICS S120 Chassis Format Converter Units                                                                                        | D 21.3       |                |
| SINAMICS S120 Cabinet Modules                                                                                                       |              |                |
| SINAMICS S150 Converter Cabinet Units                                                                                               |              |                |
| SINAMICS S120 and SIMOTICS                                                                                                          | D 21.4       |                |
| SINAMICS DCM DC Converter, Control Module                                                                                           | D 23.1       |                |
| SINAMICS Inverters for Single-Axis Drives · Built-In Units                                                                          | D 31.1       |                |
| SINAMICS Inverters for Single-Axis Drives · Distributed Inverters                                                                   | D 31.2       |                |
| <i>Digital: SINAMICS S210 Servo Drive System</i>                                                                                    | D 32         |                |
| <i>Digital: SINAMICS V90 Basic Servo Drive System</i>                                                                               | D 33         |                |
| <i>Digital: SINAMICS G120P and SINAMICS G120P Cabinet pump, fan, compressor converters</i>                                          | D 35         |                |
| LOHER VARIO High Voltage Motors Flameproof, Type Series 1PS4, 1PS5, 1MV4 and 1MV5 Frame Size 355 to 1000, Power Range 80 to 7100 kW | D 83.2       |                |
| <i>Digital: Three-Phase Induction Motors SIMOTICS HV, SIMOTICS TN</i>                                                               | D 84.1       |                |
| <i>Digital: Three-Phase Induction Motors SIMOTICS HV</i>                                                                            | D 84.3       |                |
| High Voltage Three-phase Induction Motors SIMOTICS HV Series A-compact PLUS                                                         | D 84.9       |                |
| <i>Digital: Modular Industrial Generators SIGENTICS M</i>                                                                           | D 85.1       |                |
| Three-Phase Induction Motors SIMOTICS HV, Series H-compact                                                                          | D 86.1       |                |
| Synchronous Motors with Permanent-Magnet Technology, HT-direct                                                                      | D 86.2       |                |
| DC Motors                                                                                                                           | DA 12        |                |
| SIMOVERT PM Modular Converter Systems                                                                                               | DA 45        |                |
| MICROMASTER 420/430/440 Inverters                                                                                                   | DA 51.2      |                |
| MICROMASTER 411/COMBIMASTER 411                                                                                                     | DA 51.3      |                |
| <u>Low-Voltage Three-Phase-Motors</u>                                                                                               |              |                |
| SIMOTICS S-1FG1 Servo geared motors                                                                                                 | D 41         |                |
| SIMOTICS Low-Voltage Motors                                                                                                         | D 81.1       |                |
| SIMOTICS FD Low-Voltage Motors                                                                                                      | D 81.8       |                |
| LOHER Low-Voltage Motors                                                                                                            | D 83.1       |                |
| <i>Digital: MOTOX Geared Motors</i>                                                                                                 | D 87.1       |                |
| SIMOGEAR Geared Motors                                                                                                              | MD 50.1      |                |
| SIMOGEAR Electric-monorail geared motors Light-load and heavy-load applications                                                     | MD 50.8      |                |
| SIMOGEAR Gearboxes with adapter                                                                                                     | MD 50.11     |                |
| <u>Mechanical Driving Machines</u>                                                                                                  |              |                |
| FLENDER Standard Couplings                                                                                                          | MD 10.1      |                |
| FLENDER High Performance Couplings                                                                                                  | MD 10.2      |                |
| FLENDER Backlash-free Couplings                                                                                                     | MD 10.3      |                |
| FLENDER SIP Standard industrial planetary gear units                                                                                | MD 31.1      |                |
| <b>Motion Control</b>                                                                                                               |              |                |
| SINUMERIK 840 Equipment for Machine Tools                                                                                           | NC 62        |                |
| SINUMERIK 808 Equipment for Machine Tools                                                                                           | NC 81.1      |                |
| SINUMERIK 828 Equipment for Machine Tools                                                                                           | NC 82        |                |
| SIMOTION Equipment for Production Machines                                                                                          | PM 21        |                |
| <i>Digital: Drive and Control Components for Cranes</i>                                                                             | CR 1         |                |
| <b>Process Instrumentation and Analytics</b>                                                                                        |              | <i>Catalog</i> |
| <i>Digital: Field Instruments for Process Automation</i>                                                                            | FI 01        |                |
| <i>Digital: Display Recorders SIREC D</i>                                                                                           | MP 20        |                |
| <i>Digital: SIPART Controllers and Software</i>                                                                                     | MP 31        |                |
| Products for Weighing Technology                                                                                                    | WT 10        |                |
| <i>Digital: Process Analytical Instruments</i>                                                                                      | AP 01        |                |
| <i>Digital: Process Analytics, Components for Continuous Emission Monitoring</i>                                                    | AP 11        |                |
| <b>Low-Voltage Power Distribution and Electrical Installation Technology</b>                                                        |              |                |
| SENTRON · SIVACON · ALPHA Protection, Switching, Measuring and Monitoring Devices, Switchboards and Distribution Systems            | LV 10        |                |
| Standards-Compliant Components for Photovoltaic Plants                                                                              | LV 11        |                |
| Electrical Components for the Railway Industry                                                                                      | LV 12        |                |
| Power Monitoring Made Simple                                                                                                        | LV 14        |                |
| Components for Industrial Control Panels according to UL Standards                                                                  | LV 16        |                |
| <i>Digital: Air circuit breakers and molded case circuit breakers with UL certification</i>                                         | LV 18        |                |
| 3WT Air Circuit Breakers up to 4000 A                                                                                               | LV 35        |                |
| 3VT Molded Case Circuit Breakers up to 1600 A                                                                                       | LV 36        |                |
| <i>Digital: SIVACON System Cubicles, System Lighting and System Air-Conditioning</i>                                                | LV 50        |                |
| <i>Digital: ALPHA Distribution Systems</i>                                                                                          | LV 51        |                |
| ALPHA FIX Terminal Blocks                                                                                                           | LV 52        |                |
| SIVACON S4 Power Distribution Boards                                                                                                | LV 56        |                |
| SIVACON 8PS Busbar Trunking Systems                                                                                                 | LV 70        |                |
| <i>Digital: DELTA Switches and Socket Outlets</i>                                                                                   | ET D1        |                |
| Vacuum Switching Technology and Components for Medium Voltage                                                                       | HG 11.01     |                |
| <b>Power Supply</b>                                                                                                                 |              |                |
| SITOP Power supply                                                                                                                  | KT 10.1      |                |
| <b>Safety Integrated</b>                                                                                                            |              |                |
| Safety Technology for Factory Automation                                                                                            | SI 10        |                |
| <b>SIMATIC HMI / PC-based Automation</b>                                                                                            |              |                |
| Human Machine Interface Systems/ PC-based Automation                                                                                | ST 80/ ST PC |                |
| <b>SIMATIC Ident</b>                                                                                                                |              |                |
| Industrial Identification Systems                                                                                                   | ID 10        |                |
| <b>SIMATIC Industrial Automation Systems</b>                                                                                        |              |                |
| Products for Totally Integrated Automation                                                                                          | ST 70        |                |
| SIMATIC PCS 7 Process Control System System components                                                                              | ST PCS 7     |                |
| SIMATIC PCS 7 Process Control System Technology components                                                                          | ST PCS 7 T   |                |
| Add-ons for the SIMATIC PCS 7 Process Control System                                                                                | ST PCS 7 AO  |                |
| SIMATIC S7-400 advanced controller                                                                                                  | ST 400       |                |
| <b>SIMATIC NET</b>                                                                                                                  |              |                |
| Industrial Communication                                                                                                            | IK PI        |                |
| <b>SIRIUS Industrial Controls</b>                                                                                                   |              |                |
| <i>Digital: SIRIUS Industrial Controls</i>                                                                                          | IC 10        |                |

*Digital: These catalogs are only available as a PDF.***Information and Download Center**

Digital versions of the catalogs are available on the Internet at:

[www.siemens.com/industry/infocenter](http://www.siemens.com/industry/infocenter)

There you'll find additional catalogs in other languages.

Please note the section "Downloading catalogs" on page "Online services" in the appendix of this catalog.

## Get more information

The SINAMICS drives family:  
**[www.siemens.com/sinamics](http://www.siemens.com/sinamics)**

SIMOTICS electric motors:  
**[www.siemens.com/simotics](http://www.siemens.com/simotics)**

Motion Control Systems and Solutions for production machine and machine tool equipment:  
**[www.siemens.com/motioncontrol](http://www.siemens.com/motioncontrol)**

Local partners worldwide:  
**[www.siemens.com/automation-contact](http://www.siemens.com/automation-contact)**

Siemens AG  
Digital Factory Division  
Motion Control  
Postfach 31 80  
91050 ERLANGEN  
GERMANY

© Siemens AG 2018  
Subject to change without prior notice  
PDF Update 06/2018  
(Article No. E86060-K5531-A111-A1-7600)  
V6.MKKATA.GMC.101 / Dispo 18404  
KG 0818 HOF 394 En  
Produced in Germany

The information provided in this catalog contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice.

All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.

## Security information

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial security measures that may be implemented, please visit  
**<https://www.siemens.com/industrialsecurity>**

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Security RSS Feed under  
**<https://www.siemens.com/industrialsecurity>**

Discover the  
advantages of  
Integrated Drive  
Systems at a glance

