


NOTE: Thread bosses use #10 x 3/8 Trilobular thread forming screw

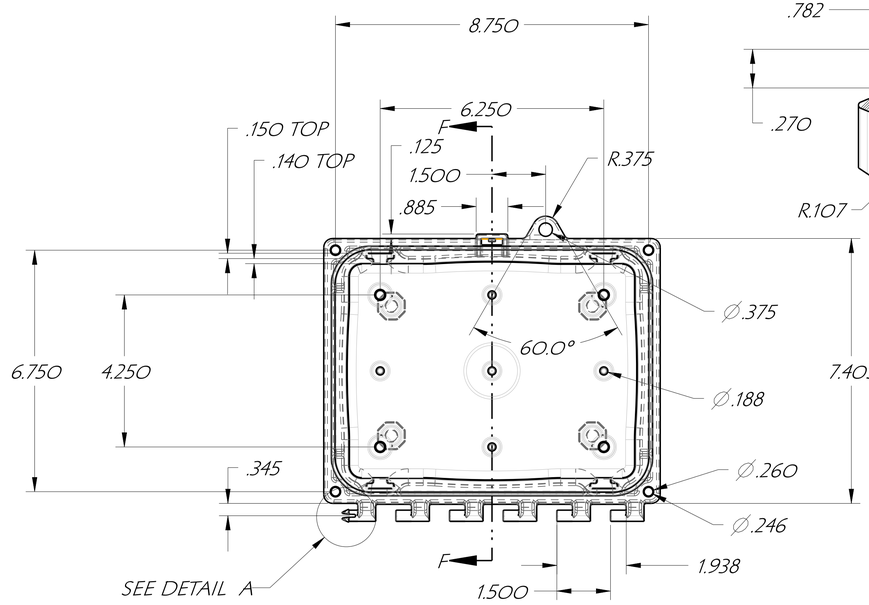


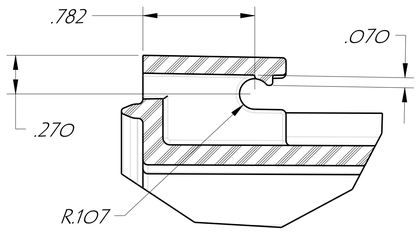


DETAIL C
SCALE 2.000

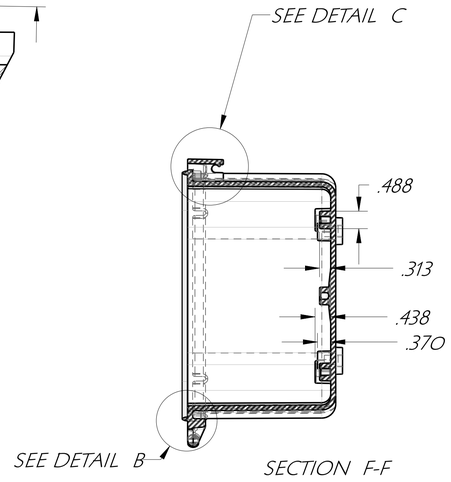


SECTION F-F

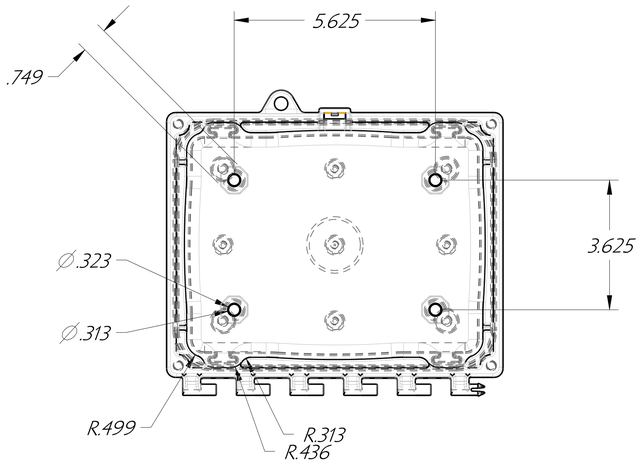


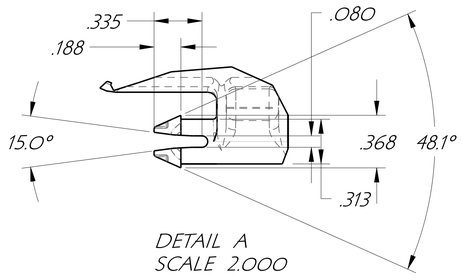


DETAIL A
SCALE 2.000




DETAIL B
SCALE 2.000

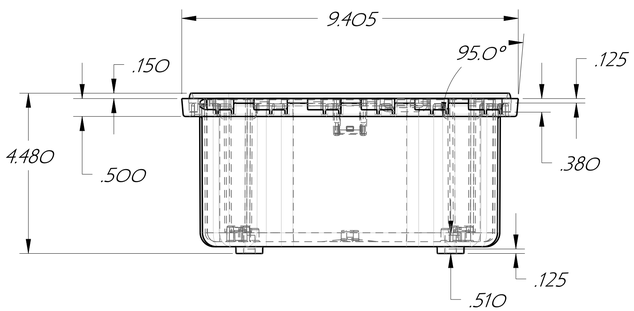


8 X 6 ENCLOSURE

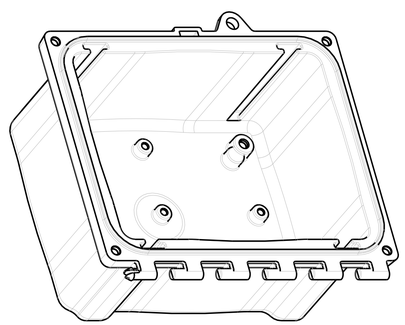


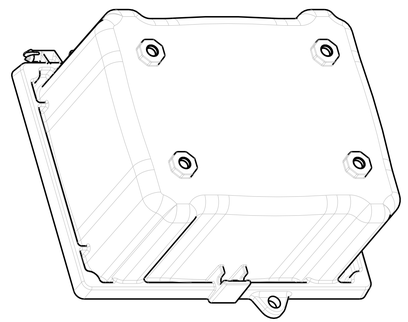


DES. C.R.W.	DRN. C.R.W.	CHKD.		ATTABOX	CUSTOMER
APP.	DATE 10/16/07	SCALE			
TOLERANCES:	2 PLACE DEC. ±.010	FRAC.	PART NAME ENCLOSURE & LID	PART NO.	PART MAT'L POLYCARBONATE
	3 PLACE DEC. ±.005	± 1/64			
UNLESS OTHERWISE SHOWN	4 PLACE DEC. ±.0005		TOOL DESC. SINGLE CAVITY INJECTION MOLD	SHRINK .006/IN.	SHEET OF

ПРОМЭЛЕКТРОНИКА/ sales@prom-elec.com

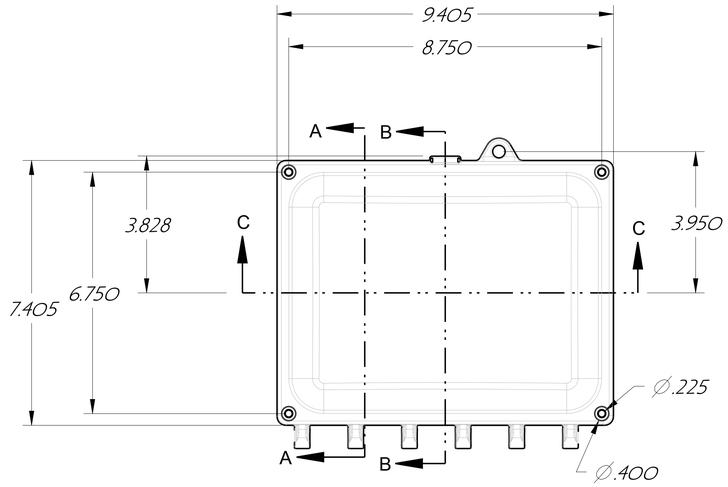


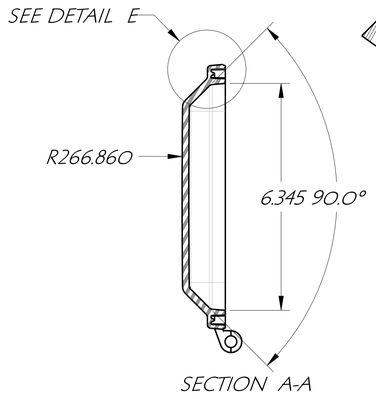


SECTION A-A




DETAIL E
SCALE 1.500




SECTION B-B

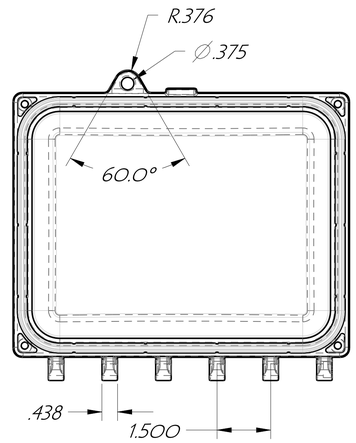





DETAIL F
SCALE 1.500


8 X 6 LID

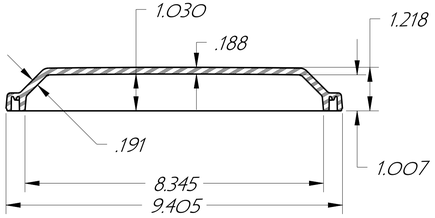


SECTION C-C

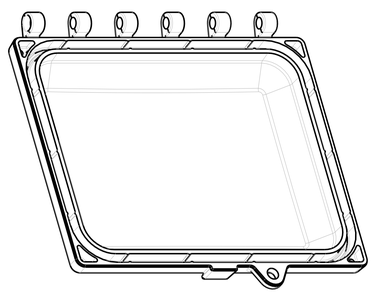

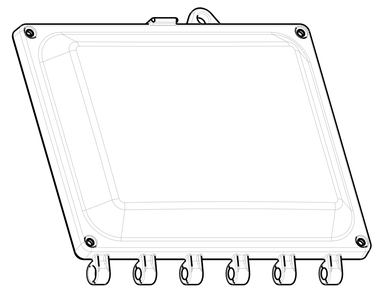

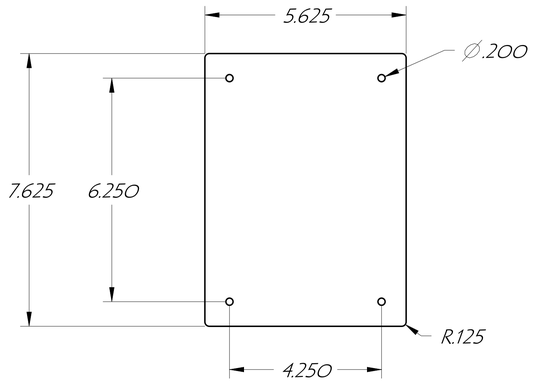




SUB PANEL OR SWING PANEL

DES. C.R.W.	DRN. C.R.W.	CHKD.			
APP.	DATE 10/16/07	SCALE			
TOLERANCES:	2 PLACE DEC. ±.010	FRAC. ±1/64			
UNLESS OTHERWISE SHOWN	3 PLACE DEC. ±.005				
	4 PLACE DEC. ±.0005				


ATTABOX		CUSTOMER	
PART NAME ENCLOSURE & LID	PART NO.	PART MAT'L POLYCARBONATE	
TOOL DESC. SINGLE CAVITY INJECTION MOLD		SHRINK .006/IN.	SHEET OF

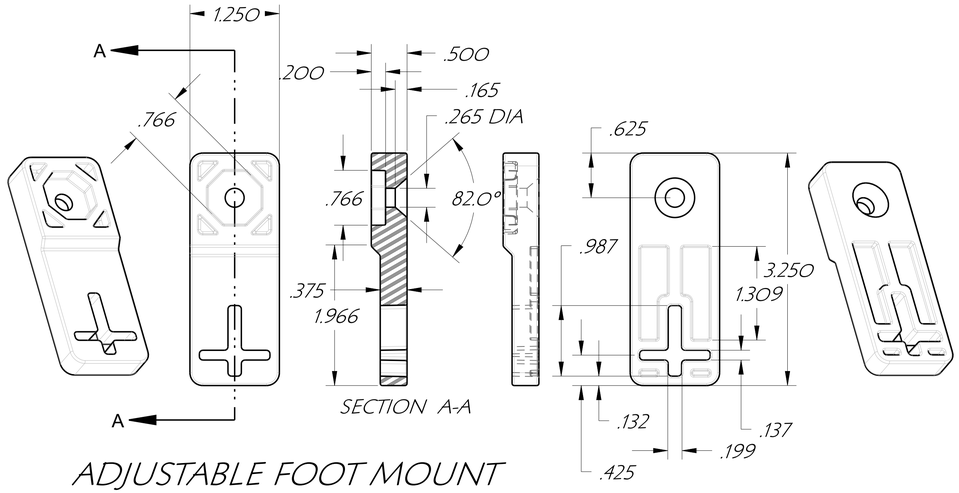



ADJUSTABLE FOOT MOUNT




LID HINGE CAP




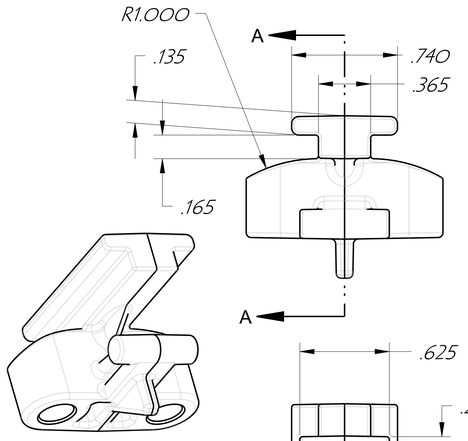


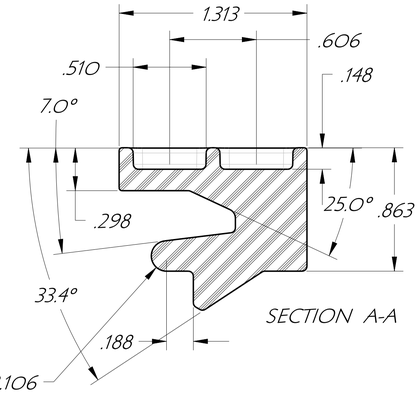


FLUSH PANEL MOUNT

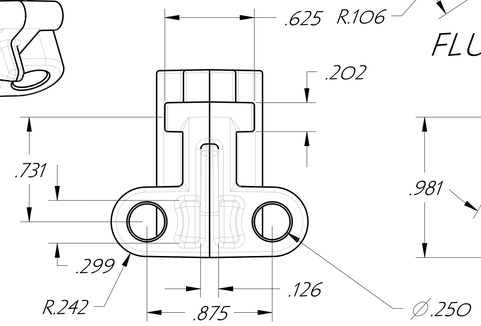








SECTION A-A

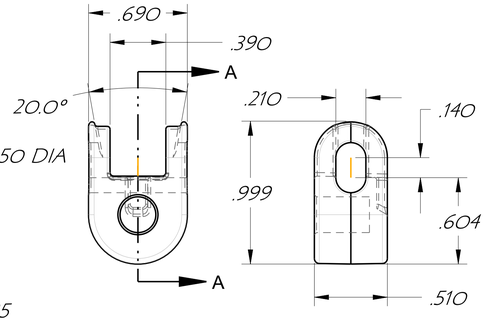


RETRACTING PANEL HINGE













PLUG













UPPER LATCH

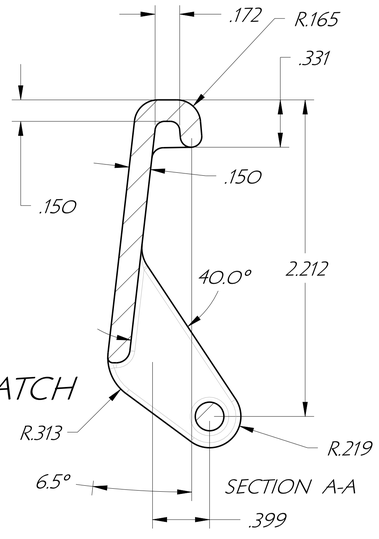

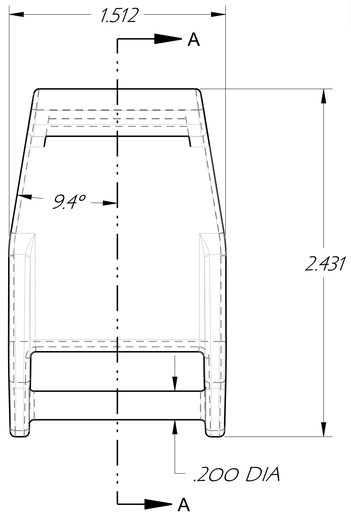

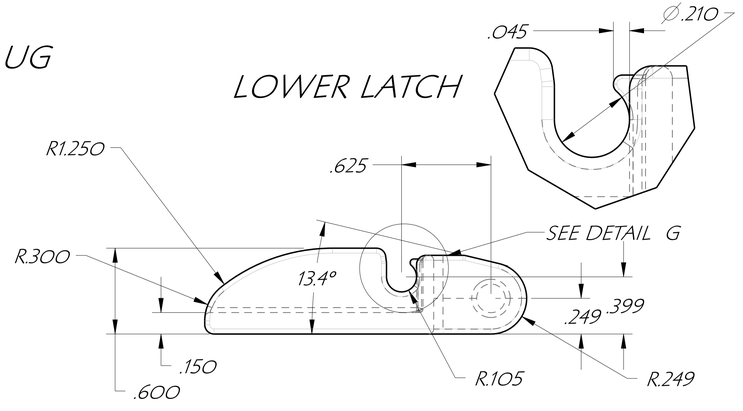

LOWER LATCH



DES. C.R.W.	DRN. C.R.W.	CHKD.	ATTABOX		CUSTOMER
APP.	DATE 10/16/07	SCALE			
TOLERANCES:	2 PLACE DEC. ±.010	FRAC. ±1/64	PART NAME ENCLOSURE & LID	PART NO.	PART MAT'L POLYCARBONATE
UNLESS OTHERWISE SHOWN	3 PLACE DEC. ±.005 4 PLACE DEC. ±.0005		TOOL DESC. SINGLE CAVITY INJECTION MOLD	SHRINK .006/IN.	SHEET OF