Model MASC Serial Cable

For MINI-ARRAY™ Measuring Light Screens

Model MASC Features

- This is a straight Serial cable, NOT a Null Modem cable
- Provides a communication path between Personal Computer RS-232 port and MINI-ARRAY RS-232 port
- 6' cable

Pin Connections

Connect Male connector pins to Female connector pins as follows:

Male Connector Pin		Female Connector Pin
2	⟷	2
3	⟷	3
5	⟷	5

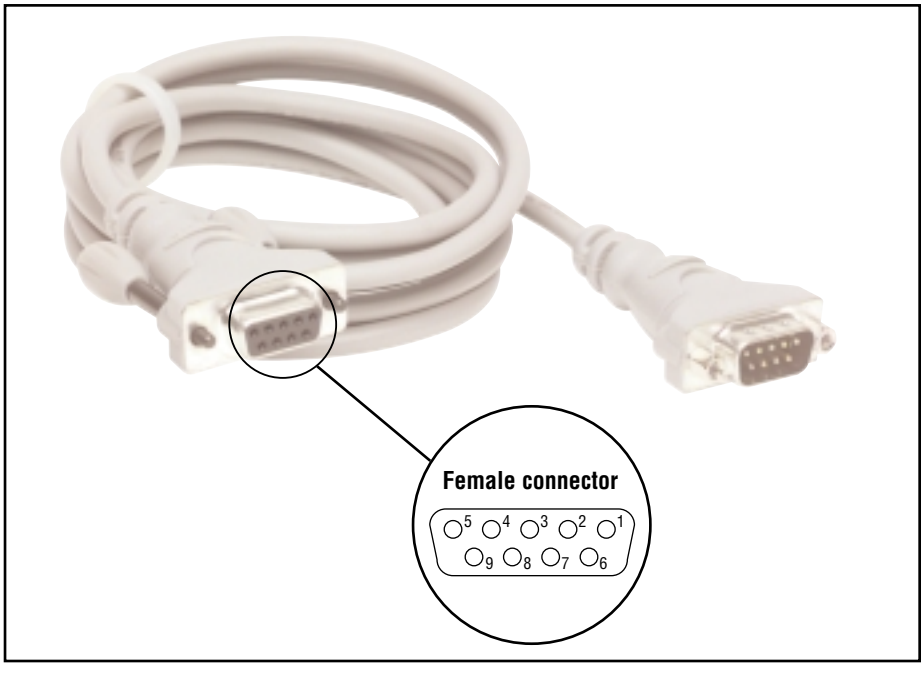

WARNING . . . Not To Be Used for Personnel Protection

Never use these products as sensing devices for personnel protection. Doing so could lead to serious injury or death.

These sensors do NOT include the self-checking redundant circuitry necessary to allow their use in personnel safety applications. A sensor failure or malfunction can cause either an energized or de-energized sensor output condition. Consult your current Banner Safety Products catalog for safety products which meet OSHA, ANSI and IEC standards for personnel protection.

WARRANTY: Banner Engineering Corp. warrants its products to be free from defects for one year. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture found to be defective at the time it is returned to the factory during the warranty period. This warranty does not cover damage or liability for the improper application of Banner products. This warranty is in lieu of any other warranty either expressed or implied.

Printed in USA P/N 55216

Banner Engineering Corp., 9714 Tenth Ave. No., Minneapolis, MN 55441 • Phone: 888.373.6767 • http://www.baneng.com • Email: sensors@baneng.com

ПРОМЭЛЕКТРОНИКА/ sales@prom-elec.com