WLS70 Industrial LED Strip Light (DC) Quick Start Guide

Features

This guide is designed to help you set up and install the WLS70 Industrial LED Strip Light (DC). For complete information on programming, performance, troubleshooting, dimensions, and accessories, please refer to the Product Manual at www.bannerengineering.com. Search for part number 220918 to view the Product Manual. Use of this document assumes familiarity with pertinent industry standards and practices.





For PWM dimming, use with the LC15T-127AP1RBGQP dimmer module. For more information, refer to the LC15T In-Line Touch Switch datasheet, p/n 217460.

IMPORTANT: Read the following instructions before operating the light. Please download the complete WLS70 Industrial LED Strip Light (DC) technical documentation, available in multiple languages, from www.bannerengineering.com for details on the proper use, applications, Warnings, and installation instructions of this device.

IMPORTANT: Lea el siguiente instructivo antes de operar el luminario. Por favor descargue desde www.bannerengineering.com toda la documentación técnica de los WLS70 Industrial LED Strip Light (DC), disponibles en múltiples idiomas, para detalles del uso adecuado, aplicaciones, advertencias, y las instrucciones de instalación de estos dispositivos.

IMPORTANT: Lisez les instructions suivantes avant d'utiliser le luminaire. Veuillez télécharger la documentation technique complète des WLS70 Industrial LED Strip Light (DC) sur notre site www.bannerengineering.com pour les détails sur leur utilisation correcte, les applications, les notes de sécurité et les instructions de montage.


Models

Family	Cascade	Color	Lighted Length (mm)	Window	Control	Connection[1]
WLS70	X	W	600	D	PWM	Q
	X = Non-cascadable	W = Daylight white	300 = 300 mm 600 = 600 mm 900 = 900 mm 1200 = 1200 mm	D = Diffused window	A = PWM dimming	Blank = 2 m (6.5 ft) unterminated 4-wire PVC-jacketed cable Q = Integral 4-pin M12 male quick-disconnect connector

The following model is no longer available for order but is still covered by the information in this document: WLS70XW300DPWM.

Installing the WLS70 Industrial LED Strip Light

Attaching the Clamp Brackets (Step 3)

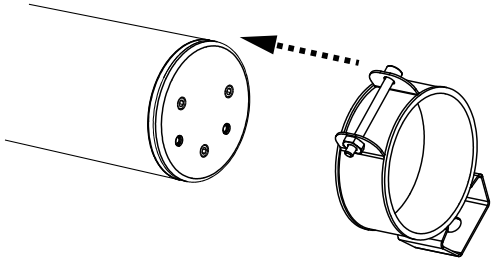

1. Turn off power at DC power supply.

   NOTE: This device requires a Class 2 or SELV DC power supply, max 4 A.

2. Remove the light from the packaging and inspect it for damage before installing it.
3. Attach the included LMBWLS70T clamp brackets to the light. Slide on gasket if desired.
   Refer to the instruction manual for a complete list of compatible brackets.
4. Select a suitable horizontal or vertical mounting location.
5. Place the light in the mounting location and mark the positions of the bracket mounting holes.
   The optional LMBWLS70HK bracket can be used to hang the light in conjunction with the LMBWLS70T (see "Brackets" on page 3).
6. Drill the holes and use appropriate screws to secure the bracket to the mounting location.

[1] Models with a quick-disconnect connector require a mating cordset. See "Cordsets" on page 4.

Original Instructions
07-May-26

© Banner Engineering Corp. All rights reserved.
www.bannerengineering.com



216263
p/n: 216263 Rev. C

ПРОМЭЛЕКТРОНИКА/ sales@prom-elec.com

7. Clamp the light onto the brackets.
8. Attach cables (cabled model) or cordsets (quick-disconnect model) per the wiring diagram. Terminate wire as appropriate per application.

Installation is complete. Turn on electricity at power supply.

Wiring

Diagram	Wire	Connection	Pinout (Male)
	1 - Brown	300, 600, and 900 mm models: 12 V DC to 30 V DC 1200 mm models: 18 V DC to 30 V DC	 1 = Brown 2 = White 3 = Blue 4 = Black
	2 - White	Not used	
	3 - Blue	DC common	
	4 - Black	Pulse width modulation (PWM) input. For maximum intensity, leave the black wire floating or connected to common. Connecting to 12 V DC to 30 V DC causes LEDs to shut off.	

Specifications

Supply Voltage

300, 600, and 900 mm models: 12 V DC to 30 V DC
1200 mm models: 18 V DC to 30 V DC
Use only with a suitable Class 2 power supply (UL) or SELV power supply (CE)
See electrical characteristics on product label

Supply Current

Lighted Length (mm)	Max. Current Draw (A) at 12 V DC	Typical Current Draw (A)		
		18 V DC	24 V DC	30 V DC
300	1.1	0.51	0.385	0.31
600	2	1.055	0.775	0.635
900	2.65	1.63	1.17	0.935
1200	-	2.2[(2)]	1.545	1.21

Dimming

Compatible with PWM LED dimming, dimmable to 5% intensity
Pulse Width Modulation (PWM)
Frequency: Up to 1000 Hz
Voltage: 12 V DC to 30 V DC
Current: 4 mA max. per foot
See "Dimmers" on page 3

[(2)] Maximum current draw for 1200 mm model is at 18 V.

Construction

Clear anodized aluminum housing; polycarbonate outer housing

Supply Protection Circuitry

Protected against reverse polarity and transient voltages

Mounting

(2) LMBWLS70T brackets included and mounting hardware
Several optional mounting brackets are available (see "Brackets" on page 3)

Connections

Integral 4-pin M12 male quick-disconnect connector (4-pin connecting cordset required), or 2 m (6.5 ft) integral PVC-jacketed cable
See "Cordsets" on page 4

Environmental Rating

IP65

LED Lifetime

Lumen Maintenance - L_{70}
When operating within specifications, output will decrease less than 30% after 50,000 hours.

Operating Temperature

Surface Mount Installation: –40 °C to +50 °C (–40 °F to +122 °F)
85% at +50 °C maximum relative humidity (non-condensing)

Storage Temperature

–40 °C to +70 °C (–40 °F to +158 °F)

Vibration and Mechanical Shock

Vibration: 10 Hz to 55 Hz, 0.5 mm peak-to-peak amplitude per IEC 60068-2-6 (5 minute sweep, 30 minute dwell)
Shock: 15G 11 ms duration, half sine wave per IEC 60068-2-27
Impact: IK10 (IEC 60068-2-75)

Certifications and Approvals

Banner Engineering BV
Park Lane, Culliganlaan 2F bus 3
1831 Diegem, BELGIUM

UL/cULus E338626

Light Characteristics

Daylight White Efficacy: up to 146 lumens/watt typical at 24 V AC at 25 °C (77 °F)
CRI: 82, typical

Model	Color	Color Temperature (CCT)	Lumens (Typical at 25 °C)	Watts at 24 V DC	Luminous Efficacy (lm/w)
300	Daylight White	5000 K (±300 K)	1350	9.3	145
600	Daylight White	5000 K (±300 K)	2700	18.6	145
900	Daylight White	5000 K (±300 K)	4050	28.1	144
1200	Daylight White	5000 K (±300 K)	5400	37.1	146

FCC Part 15 Class B for Unintentional Radiators

(Part 15.105(b)) This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

(Part 15.21) Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Industry Canada ICES-003(B)


This device complies with CAN ICES-3 (B)/NMB-3(B). Operation is subject to the following two conditions: 1) This device may not cause harmful interference; and 2) This device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme à la norme NMB-3(B). Le fonctionnement est soumis aux deux conditions suivantes : (1) ce dispositif ne peut pas occasionner d'interférences, et (2) il doit tolérer toute interférence, y compris celles susceptibles de provoquer un fonctionnement non souhaité du dispositif.

© Banner Engineering Corp. All rights reserved. www.bannerengineering.com

Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

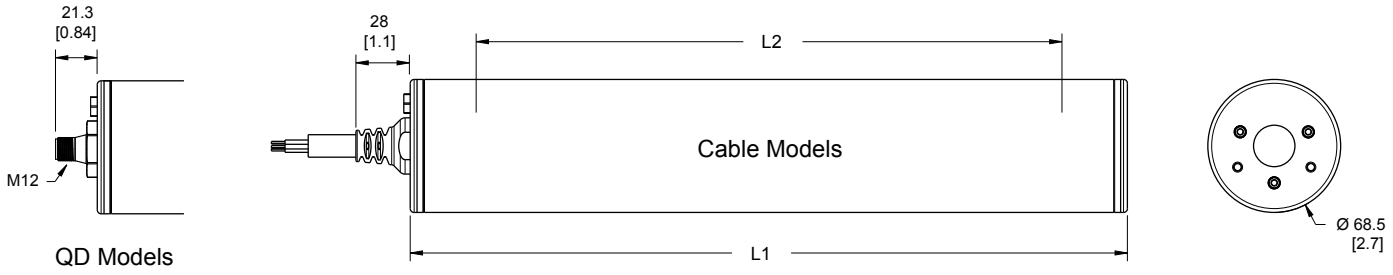

Model	Housing Length (L1)	Lighted Length (L2)
WLS70..300..	369.8	302
WLS70..600..	667.6	600
WLS70..900..	965.3	898
WLS70..1200..	1263	1196


Accessories

Brackets

All measurements are listed in millimeters, unless noted otherwise. The measurements provided are subject to change. Refer to the instruction manual for a complete list of compatible brackets.

LMBWLS70T


- Stainless steel
- Includes two clamp brackets for hanging or surface mount, two anti-rotation gaskets, and stainless steel hardware for securing the bracket to the light
- For use with M8 or 5/16" mounting hardware
- CAD Files: DXF, PDF, IGS, STP



NOTE: The LMBWLS70T is supplied with the light.

LMBWLS70HK


- Hanging bracket kit allows for suspended installation
- Includes two hanging bracket assemblies
- For use with bracket LMBWLS70T
- CAD Files: DXF, PDF, IGS, STP



Dimmers


LC15T-127AL2RGQP

- In-line capacitive touch switch with M12 connectors
- On/Off control and illuminated indication
- Rated for up to 30 V DC and 4 A maximum output current
- Rugged and waterproof IP67 housing




LC15T-127AP1RBGQP

- In-line capacitive touch switch with M12 connectors
- On/Off/Dimming control and illuminated indication
- Rated for up to 30 V DC and 4 A maximum output current
- Rugged and waterproof IP67 housing







LC65P1T

- Potentiometer with terminal and M12 connector options
- PWM control
- Rated for up to 30 V DC and 4 A maximum output current
- Unsealed IP20 housing



© Banner Engineering Corp. All rights reserved. www.bannerengineering.com

Cordsets

4-Pin Single-Ended M12 Female Cordsets					
Model	**Length**	**Style**	**Dimensions**	**Pinout (Female)**	
MQDC-406	2 m (6.56 ft)	Straight			1 = Brown 2 = White 3 = Blue 4 = Black 5 = Not used
MQDC-415	5 m (16.4 ft)				
MQDC-430	9 m (29.5 ft)				
MQDC-450	15 m (49.2 ft)				
MQDC-406RA	2 m (6.56 ft)	Right-Angle			
MQDC-415RA	5 m (16.4 ft)				
MQDC-430RA	9 m (29.5 ft)				
MQDC-450RA	15 m (49.2 ft)				

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

Mexican Importer

Banner Engineering de Mèxico, S. de R.L. de C.V. | David Alfaro Siqueiros 103 Piso 2 Valle oriente | San Pedro Garza Garcia Nuevo Leòn, C. P. 66269

81 8363.2714

© Banner Engineering Corp. All rights reserved. www.bannerengineering.com