

MODEL NO.	P/N
PGIRS66U-100	801976

ASSEMBLY CONSISTS OF A PLASTIC FIBER CABLE COUPLED TO A PLASTIC ARRAY FIBER ASSEMBLY.

1. DIMENSIONAL TOLERANCE +/- 5%
2. OPERATING TEMPERATURE -55°C TO +70°C
3. MINIMUM BEND RADIUS R40

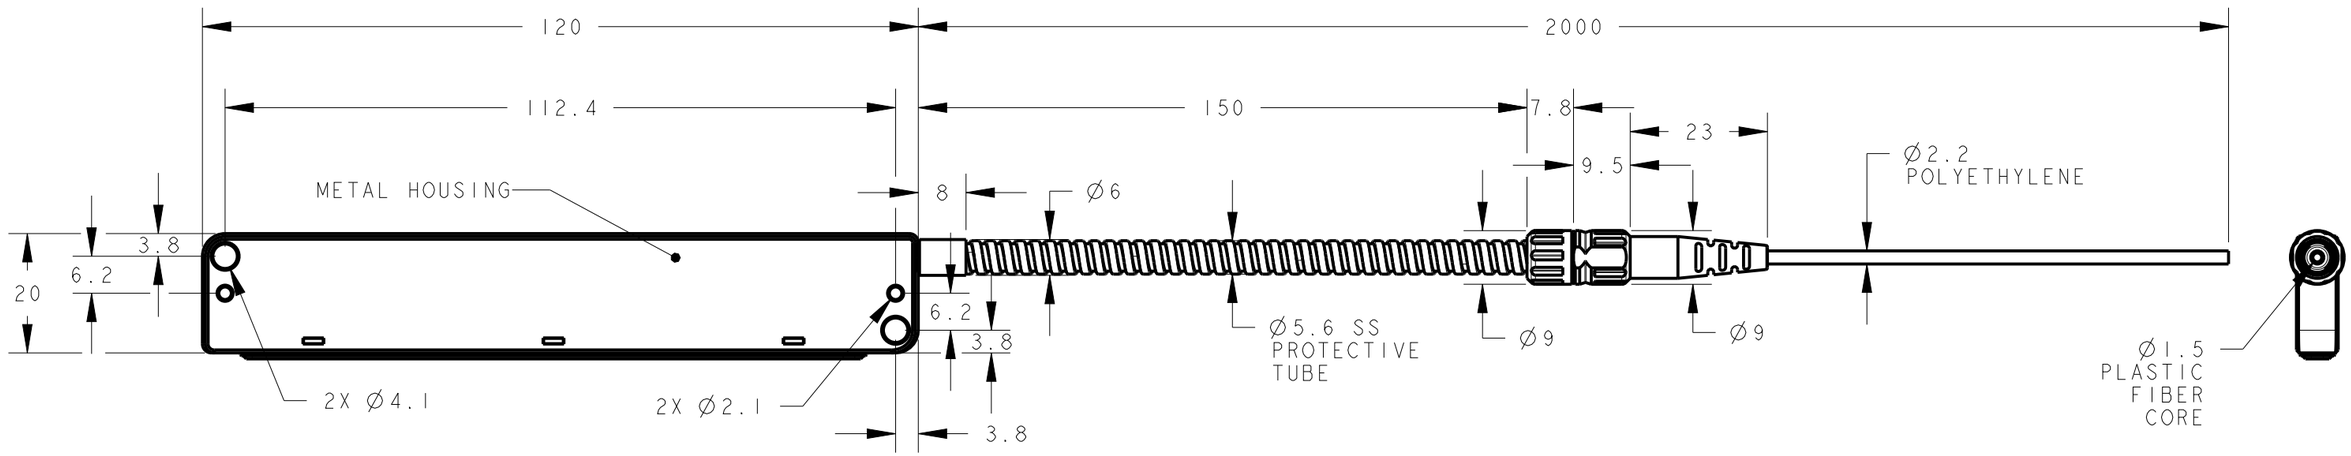

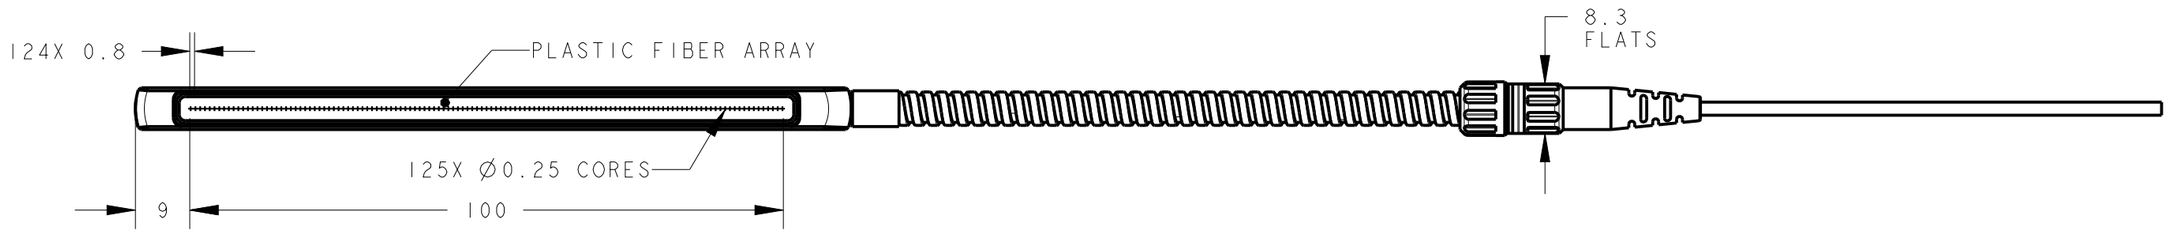

NOTES:
1. ALL DIMENSIONS ARE MILLIMETERS [INCHES] UNLESS OTHERWISE NOTED.
2. REFER TO "www.bannerengineering.com" FOR ADDITIONAL DATA AND SPECIFICATIONS.

This drawing is the property of BANNER ENGINEERING CORP. Any use or reproduction, in any form, without prior written permission of Banner is prohibited.
© 2015 Banner Engineering Corp.

THIRD ANGLE PROJECTION

BANNER ENGINEERING CORP.
www.bannerengineering.com

TITLE

PGIRS 100 SERIES UNTERMINATED

SIZE	DRAWING NO.	REV.
B	199250	B
SCALE 1:1	SHEET 1 OF 1	

CREO

ПРОМЭЛЕКТРОНИКА/ sales@prom-elec.com