
| MODEL NO. | "TL" | "PL" | "L" | "D" | P/N |
|---|---|---|---|---|---|
| ITETAI.51S | 38.1 [1.5] | 25.4 [1.0] | 304.8 [12] | 2.3 [.09] | 22881 |
| ITETAI.52S | 38.1 [1.5] | 25.4 [1.0] | 609.6 [24] | 2.3 [.09] | 22834 |
| ITETA.759S | 38.1 [1.5] | 25.4 [1.0] | 2743.2 [108] | 1.17 [.046] | 00000 |
| ITETAI.53SMI.5 | 38.1 [1.5] | 38.1 [1.5] | 914.4 [36] | 2.3 [.09] | 22724 |
| ITETA.53S | 38.1 [1.5] | 25.4 [1.0] | 914.4 [36] | 0.81 [.032] | 22700 |
| ITETAI5S | 38.1 [1.5] | 25.4 [1.0] | 1524 [60] | 1.5 [.06] | 22395 |
| ITETAI.51.5S | 38.1 [1.5] | 25.4 [1.0] | 457.2 [18] | 2.3 [.09] | 22343 |
| ITETAI.53SM.5. | 38.1 [1.5] | 12.7 [.50] | 914.4 [36] | 2.3 [.09] | 22067 |
| ITETA.753S | 38.1 [1.5] | 25.4 [1.0] | 914.4 [36] | 1.17 [.046] | 21815 |
| ITETAI3S | 38.1 [1.5] | 25.4 [1.0] | 914.4 [36] | 1.5 [.06] | 21745 |
| ITETAI.56S | 38.1 [1.5] | 25.4 [1.0] | 1828.8 [72] | 2.3 [.09] | 21517 |
| ITETAI.53S | 38.1 [1.5] | 25.4 [1.0] | 914.4 [36] | 2.3 [.09] | 21495 |

| MODEL NO. | "TL" | "PL" | "L" | "D" | P/N |
|---|---|---|---|---|---|
| ITETAI.53SMSTMPL | 19.1 [.75] | 57.2 [2.25] | 914.4 [36] | 2.3 [.09] | 23162 |
| ITETAI.53SM600 | 38.1 [1.5] | 25.4 [1.0] | 914.4 [36] | 2.3 [.09] | 59266 |
| ITETAI.57S | 38.1 [1.5] | 25.4 [1.0] | 2133.6 [84] | 2.3 [.09] | 23010 |

NOTES:

1. 'M600' SUFFIX INDICATES THAT FIBERS ARE POTTED ON ANGLED END WITH EPOXY THAT OPERATES IN MAX. TEMPERATURE OF 600°F.

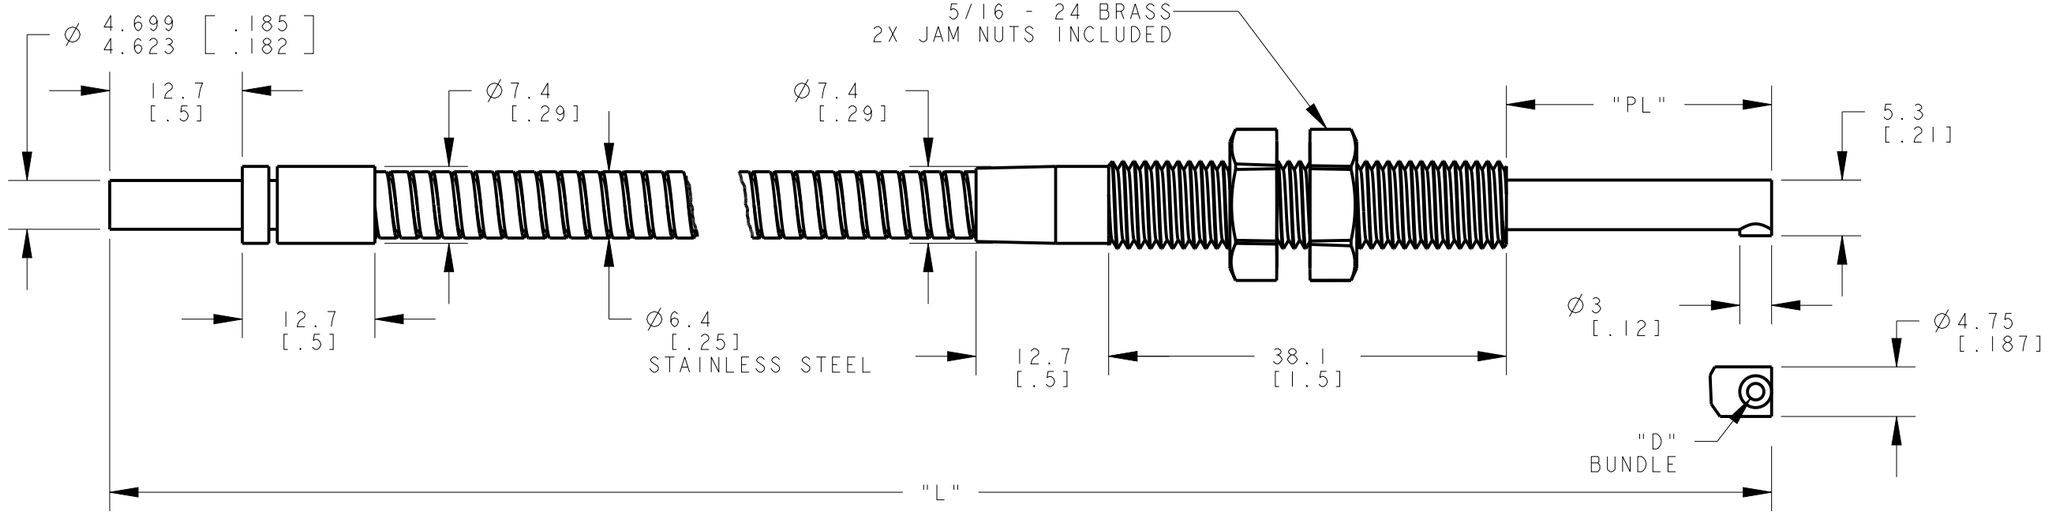


NOTES:
1. ALL DIMENSIONS ARE MILLIMETERS [INCHES] UNLESS OTHERWISE NOTED.
2. REFER TO "www.bannerengineering.com" FOR ADDITIONAL DATA AND SPECIFICATIONS.

This drawing is the property of BANNER ENGINEERING CORP. Any use or reproduction, in any form, without prior written permission of Banner is prohibited.
© Banner Engineering Corp.

THIRD ANGLE PROJECTION

BANNER ENGINEERING CORP.
www.bannerengineering.com

TITLE

**ITETAI.5 SERIES SS TERMINATED**

| SIZE | DRAWING NO. | REV. |
|---|---|---|
| B | 161913 | A |

SCALE 7:4 | SHEET 1 OF 2

CREO

ПРОМЭЛЕКТРОНИКА/ sales@prom-elec.com

| MODEL NO. | "TL" | "PL" | "L" | "D" | P/N |
|---|---|---|---|---|---|
| ITETAI.530SM600 | 38.1 [1.5] | 25.4 [1.0] | 9144 [360] | 2.3 [.09] | 00000 |
| ITETAI.53SMT2MPL | 50.8 [2.0] | 44.5 [1.75] | 914.4 [36] | 2.3 [.09] | 23984 |
| ITETAI.53SM.75 | 38.1 [1.5] | 19.1 [.75] | 914.4 [36] | 2.3 [.09] | 00000 |
| ITETAI1S | 38.1 [1.5] | 25.4 [1.0] | 381 [12] | 1.57 [.062] | 24127 |
| ITETA.756S | 38.1 [1.5] | 25.4 [1] | 1828.8 [72] | 1.17 [.046] | 24408 |
| ITETAI.53SM3 | 38.1 [1.5] | 76.2 [3.0] | 914.4 [36] | 1.57 [.062] | 00000 |
| ITETAI8S | 38.1 [1.5] | 25.4 [1] | 24380.4 [96] | 1.57 [.062] | 24665 |
| ITETAI.59S | 38.1 [1.5] | 25.4 [1] | 2743.2 [108] | 2.3 [.09] | 83022 |
| ITETAI3SM600 | 38.1 [1.5] | 25.4 [1] | 914.4 [36] | 1.57 [.062] | 24747 |
| ITETAI10S | 38.1 [1.5] | 25.4 [1] | 3048 [120] | 1.57 [.062] | 00000 |
| ITETAI6SM600 | 38.1 [1.5] | 25.4 [1] | 1828.8 [72] | 1.57 [.062] | 24834 |
| ITETAI.5SM600 | 38.1 [1.5] | 25.4 [1] | 152.4 [6] | 1.57 [.062] | 00000 |
| ITETA.751S | 38.1 [1.5] | 25.4 [1.0] | 381 [12] | 1.17 [.046] | 00000 |
| ITETA.758S | 38.1 [1.5] | 25.4 [1.0] | 24380.4 [96] | 1.17 [.046] | 64461 |
| ITETA.753SM600 | 38.1 [1.5] | 25.4 [1.0] | 914.4 [36] | 1.17 [.046] | 78748 |
| ITETA.755SM600 | 38.1 [1.5] | 25.4 [1.0] | 1524 [60] | 1.17 [.046] | 68604 |
| ITETAI.510S | 38.1 [1.5] | 25.4 [1.0] | 3048 [120] | 2.3 [.09] | 71188 |
| ITETA.754S | 38.1 [1.5] | 25.4 [1.0] | 1219.2 [48] | 1.17 [.046] | 72305 |
| ITETAI.58.5S | 38.1 [1.5] | 25.4 [1.0] | 2590.8 [102] | 2.3 [.09] | 75897 |
| ITETA.753SM.5 | 38.1 [1.5] | 12.7 [.50] | 914.4 [36] | 1.17 [.046] | 00000 |
| ITETAI.53SM5 | 38.1 [1.5] | 127 [5.0] | 914.4 [36] | 2.3 [.09] | 00000 |
| ITETAI.54SM.25 | 38.1 [1.5] | 6.35 [.25] | 1219.2 [48] | 2.3 [.09] | 81396 |
| ITETAI.53SMT2 | 50.8 [2.0] | 25.4 [1.0] | 914.4 [36] | 2.3 [.09] | 00000 |
| ITETAI.5S | 38.1 [1.5] | 25.4 [1.0] | 152.4 [6] | 1.5 [.06] | 00000 |
| ITETAI2S | 38.1 [1.5] | 25.4 [1.0] | 609.6 [24] | 1.5 [.06] | 00000 |
| ITETAI.55S | 38.1 [1.5] | 25.4 [1.0] | 1524 [60] | 2.3 [.09] | 62294 |
| ITETAI6S | 38.1 [1.5] | 25.4 [1.0] | 1828.8 [72] | 1.5 [.06] | 24425 |

| MODEL NO. | "TL" | "PL" | "L" | "D" | P/N |
|---|---|---|---|---|---|
| ITETAI4S | 38.1 [1.5] | 25.4 [1.0] | 1219.2 [48] | 1.5 [.06] | 23882 |
| ITETAI.56SM600 | 38.1 [1.5] | 25.4 [1.0] | 1828.8 [72] | 2.3 [.09] | 23658 |
| ITETAI.54S | 38.1 [1.5] | 25.4 [1.0] | 1219.2 [48] | 2.3 [.09] | 23626 |
| ITETAI.515S | 38.1 [1.5] | 25.4 [1.0] | 4572 [180] | 2.3 [.09] | 70794 |
| ITETA.755S | 38.1 [1.5] | 25.4 [1.0] | 1524 [60] | 1.17 [.046] | 23410 |
| ITETA.753SMT.5 | 12.7 [.50] | 25.4 [1.0] | 914.4 [36] | 1.17 [.046] | 23246 |

NOTES:

1. 'M600' SUFFIX INDICATES THAT FIBERS ARE POTTED ON ANGLED END WITH EPOXY THAT OPERATES IN MAX. TEMPERATURE OF 600°F.

NOTES:
1. ALL DIMENSIONS ARE MILLIMETERS [INCHES] UNLESS OTHERWISE NOTED.
2. REFER TO "www.bannerengineering.com" FOR ADDITIONAL DATA AND SPECIFICATIONS.

This drawing is the property of BANNER ENGINEERING CORP. Any use or reproduction, in any form, without prior written permission of Banner is prohibited.
© Banner Engineering Corp.

THIRD ANGLE PROJECTION

BANNER ENGINEERING CORP.
www.bannerengineering.com

TITLE

**ITETAI.5 SERIES SS TERMINATED**

| SIZE | DRAWING NO. | REV. |
|---|---|---|
| B | 161913 | A |
| SCALE 7:4 | | SHEET 2 OF 2 |

CREO