OptoSupply
Light It Up

5x5x7mm Rectangular Red & Pure Green Bi-polar LED

OSRPP27NE2B

▪Features

- High Luminous LED
- 5x5x7mm Standard Directivity
- Long Lifetime Operation
- UV Resistant Epoxy
- White Diffused Type
- Bi-polar

▪Applications

- Toys
- Audio
- Games
- Other Lighting

▪Outline Dimension

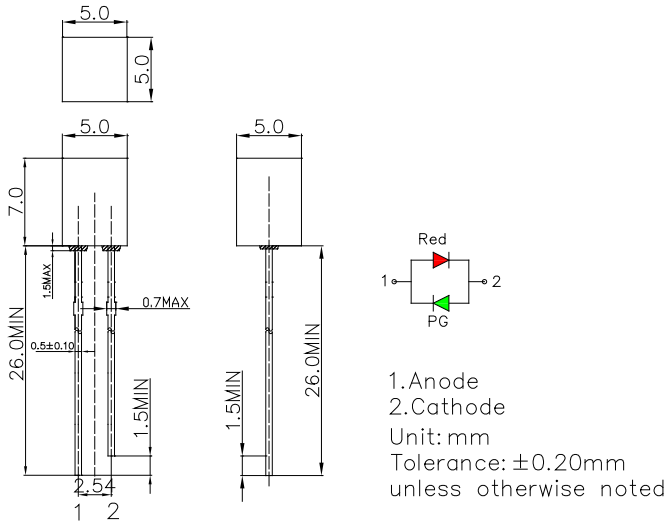

▪Absolute Maximum Rating (Ta=25℃)

Item	Symbol	Value		Unit
		Red	PG	
DC Forward Current	I_F	30	30	mA
Pulse Forward Current#	I_{FP}	100	100	mA
Reverse Voltage	V_R	5	5	V
Power Dissipation	P_D	78	102	mW
Operating Temperature	Topr	-30 ~ +85		℃
Storage Temperature	Tstg	-40~ +100		℃
Lead Soldering Temperature	Tsol	260℃/5sec		-

#Pulse width Max.10ms Duty ratio max 1/10

▪Directivity

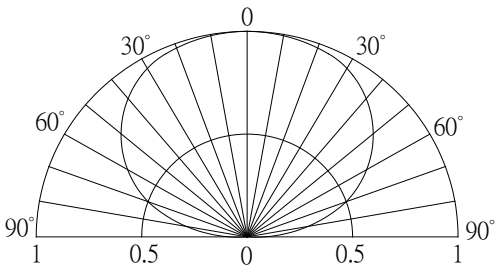

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage*1	V_F (Red)	I_F=20mA	-	2.1	2.6	V
	V_F (PG)	I_F=20mA	-	2.9	3.4	V
DC Reverse Current	I_R	V_R=5V	-	-	10	μA
Domi. Wavelength*2	λ_D(Red)	I_F=20mA	620	625	630	nm
	λ_D(PG)	I_F=20mA	520	525	530	nm
Luminous Intensity*3	Iv(Red)	I_F=20mA	220	330	-	mcd
	Iv(PG)	I_F=20mA	330	500	-	mcd
50% Power Angle	$2\theta_{1/2}$	I_F=20mA	-	140	-	deg

*1 Tolerance of measurements of forward voltage is±0.1V
*2 Tolerance of measurements of dominant wavelength is ±1nm
*3 Tolerance of measurements of luminous intensity is ±15%

LED & Application Technologies

ISO 9001: 2008

RoHS Compliant EU2002/95/EC

REACH The new EU chemicals legislation

ATTENTION
OBSERVE PRECAUTIONS
ELECTROSTATIC
SENSITIVE DEVICES

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА