
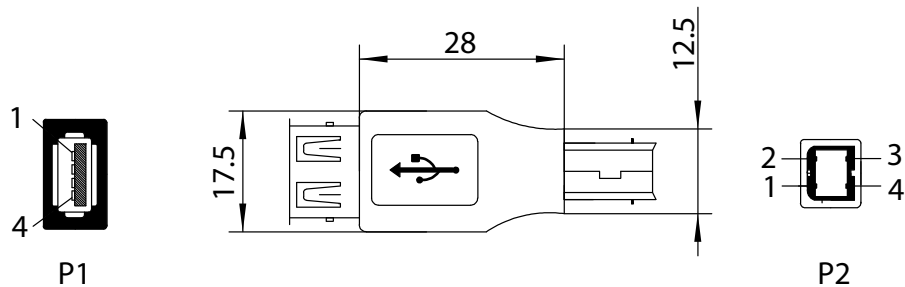


Schaltplan / Pin Out



USB 2.0 Hi-Speed-Adapter

Anschlüsse: USB 2.0 Stecker (Typ B)
USB 2.0 Buchse (Typ A)

Leiterwiderstand: 5 Ω

Isolationswiderstand: 5 M Ω @ 300 V ===

Kontaktmaterial: vernickelt

USB 2.0 Hi-Speed Adapter

Connections: USB 2.0 plug (type B)
USB 2.0 socket (type A)

Conductor resistance: 5 Ω

Insulation resistance: 5 M Ω @ 300 V ===

Contact material: nickel plated

Änderungen

Datum	Name	gez.:	Datum	Name
		gepr.:	24.01.2024	ir
		Norm:	24.01.2024	ZK
		Änderungen vorbehalten / Subject to change		

Bezeichnung

USB ADAP A-F/B-M

Zeichnungs-Nr.:

50291

goobay®

Blatt

1

von

1