
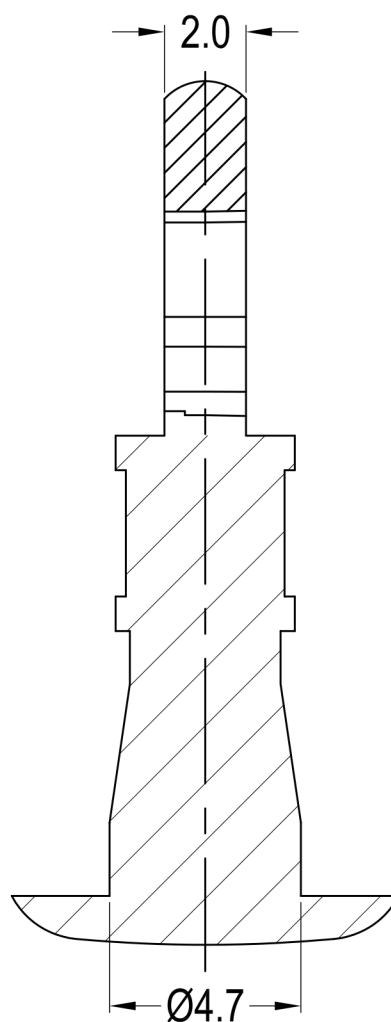
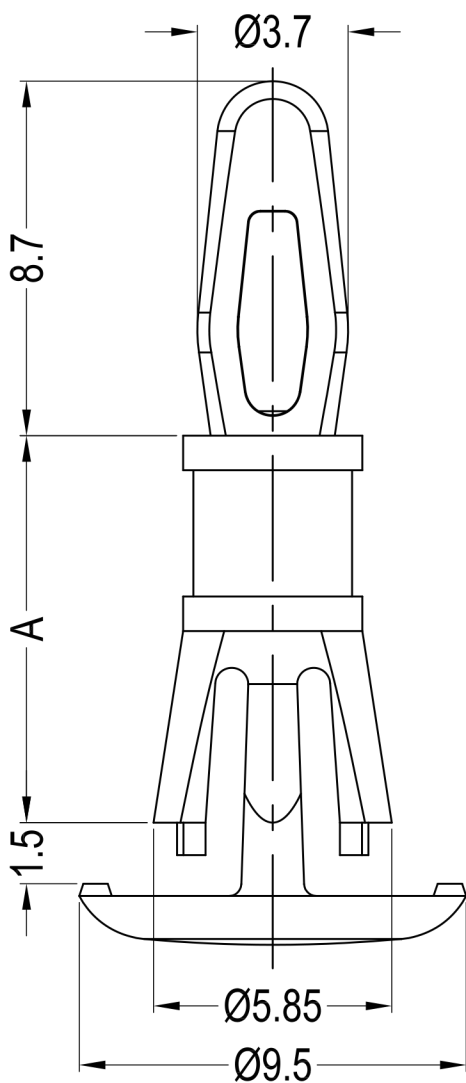




Notes:

- 1.RoHS Compliant;
- 2.Top Hole: $\text{Ø}3.18\pm0.05\text{mm}$,
Panel Thickness: 1.57mm;
- 3.Bottom Hole: $\text{Ø}4.75\pm0.08\text{mm}$,
Panel Thickness: 1.5-1.6mm.

Part No.	Part Name	Part No.	Part Name	A
41218	8G820V41218	41785	8G820V41785	6.4
41219	8G820V41219	41786	8G820V41786	7.9
41220	8G820V41220	41787	8G820V41787	9.5
41221	8G820V41221	41788	8G820V41788	11.1
41222	8G820V41222	41789	8G820V41789	12.7
41223	8G820V41223	41790	8G820V41790	14.3
41224	8G820V41224	41791	8G820V41791	15.9
Material: PA66 UL94 V2 Color: Natural		Material: PA66 UL94 V0 Color: Natural		

DREMEC Befestigungselemente GmbH						DATE	2020.03.21	DIMENSION	TOLERANCE
TITLE	CUPPED REVERSE LOCKING CIRCUIT BOARD SUPPORT					SCALE	FIT	L≤4	±0.10
PART NAME	8G820V41218	MOLD NO.	S0375	DRAW	PLK	UNIT	MM	4<L≤15	±0.20
PART NO.	SEE TABLE	MATERIAL	SEE TABLE	DESIGN	PLK	VERSION	A0	15<L≤50	±0.30
DWG NO.	E4129	COLOR	SEE TABLE	APPROVAL	FDL	VIEW		50<L≤100	±0.40