

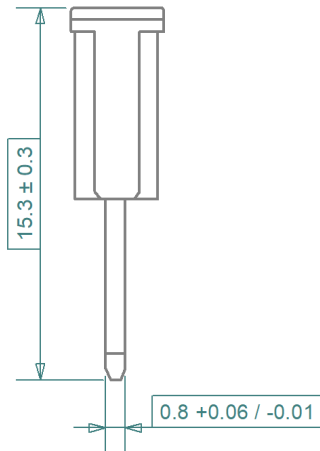
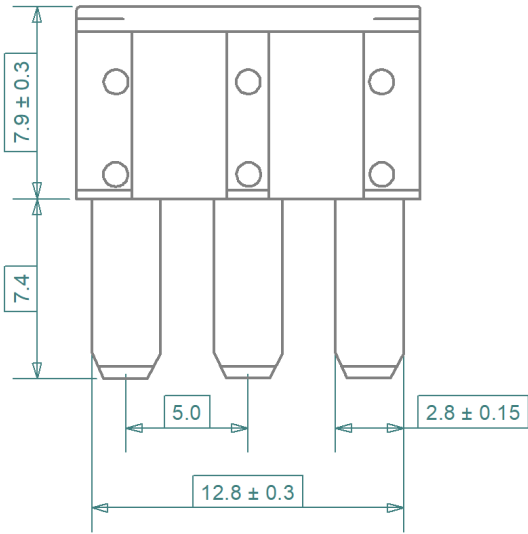


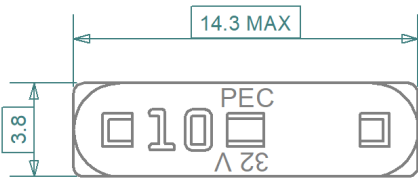

Circuit diagram:
1 input and 2 "fused" outputs

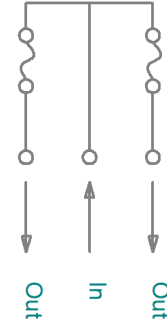

Rating [A]		Color	Volt [V]	iMaXX Reference
Fuse 1	Fuse 2			
5	5	Tan	32	FM3005
7.5	7.5	Brown	32	FM3075
10	10	Red	32	FM3010
15	15	Blue	32	FM3015

Fusing time DIN ISO 8820-13 [s]		
Load [%]	Minimum [s]	Maximum [s]
110 %	360,000	-
135 %	0.75	600
160 %	0.25	50
200 %	0.15	5
350 %	0.04	0.5
600 %	0.02	0.1

Notes	
Body	PA66, color coded with OCR printed rating
Element	Zinc alloy, silver plated blades

Revisions				Date	Appr.	
	Date	Type	Drawn	01/20	GRH	
a	01/20	fuse blade shape updated	Checked	01/20	BE	
b	06/20	ISO norm updated	Standards			
			Approved	01/20	AdH	
			Scale	3 : 1		Title
			Projection	Tolerance		Drawing type
				± 0.2 mm unless otherwise noted		Drawing number
						Sheet
						Layers / Sheet

