


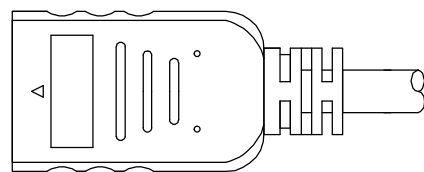


1 2 3 4 5 6 7 8 9 10 11 12 13 14


A

Schaltplan / Wiring diagram



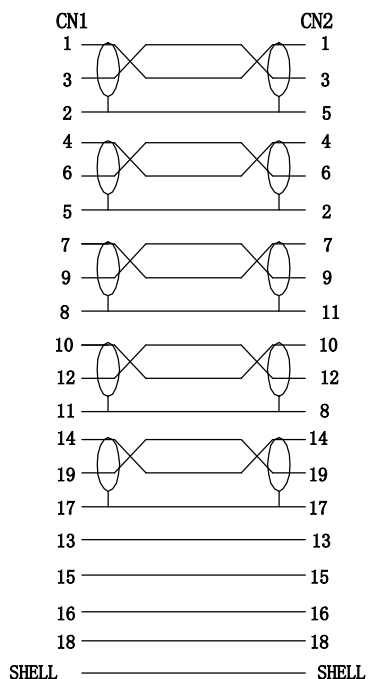


CN1
HDMI/A FEMALE

Kabelquerschnitt / Cable cross-section



- A) conductor: 1/0.254CCS
- B) insulation: FPE
- C) drain: 1/0.254CCS
- D) insulation: PE
- E) AL foil
- F) conductor: 1/0.254CCS
- G) insulation: PE
- H) drain: 1/0.254CCS
- I) AL foil
- J) jacket: 0D: 5.5 ± 0.2MM Black PVC (Half-matte)

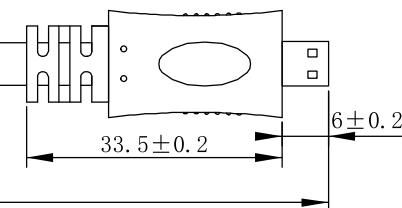

CN2
HDMI/D MALE

B

B

C

C

D

D

E

E

F

F

G

G

H

H



Micro HDMI™ / HDMI™-Adapter

- Hochauflösende Signalübertragung mit bis zu 4K @ 60 Hz (2160p)
- HDMI™-Micro-Adapterkabel für alle gängigen Features wie ARC, Ethernet-Channel (HEC) und 3D-Inhalte
- Vergoldete HDMI™-Stecker

Anschlüsse: HDMI™-Micro-Stecker (Typ D)
HDMI™-Buchse (Typ A)
Kabeltyp: Rundkabel
Kontaktmaterial: vergoldet
Kabellänge: 0,15 m

Micro HDMI™ / HDMI™ Adapter

- HD signal transmission with up to 4K @ 60 Hz (2160p)
- HDMI™ Micro adapter cable for current features such as ARC, Ethernet channel (HEC) and 3D content
- Gold-plated HDMI™ plugs

Connections: HDMI™ Micro male (type D)
HDMI™ female (Type A)
Cable type: round cable
Contact material: gold plated
Cable length: 0.15 m

Änderungen

Datum	Name	gez.:	Datum	Name
		gez.:	18.10.2024	FW
		gepr.:	18.10.2024	FW
		Norm:		

Änderungen vorbehalten / Subject to change

Bezeichnung
Adapter Micro HDMI/HDMI 2.0 Adapter **goobay®**
0015 0,15m sw
Zeichnungs-Nr.:
58683

Blatt

1

von
1

1 2 3 4 5 6 7 8 9 10 11 12 13 14