



VOLTAGE RANGE: 400 --- 1000 V
CURRENT: 1.0 A

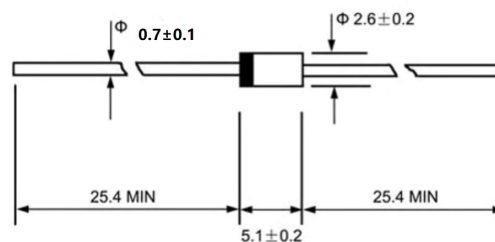
Features

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ◇ Case: JEDEC DO-41, molded plastic
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.012 ounces, 0.34 grams
- ◇ Mounting position: Any

DO - 41



Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

Parameter	Symbol	BA157	BA158	BA159D	BA159	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^{\circ}C$	$I_{F(AV)}$	1.0				A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^{\circ}C$	I_{FSM}	30.0				A
Maximum instantaneous forward voltage @ 1.0 A	V_F	1.3				V
Maximum reverse current @ $T_A=25^{\circ}C$ at rated DC blocking voltage @ $T_A=100^{\circ}C$	I_R	5.0 100.0				μA
Maximum reverse recovery time (Note1)	t_{rr}	150	250	300		ns
Typical junction capacitance (Note2)	C_J	12				pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	55				$^{\circ}C/W$
Operating junction temperature range	T_J	- 55---- +150				$^{\circ}C$
Storage temperature range	T_{STG}	- 55---- + 150				$^{\circ}C$

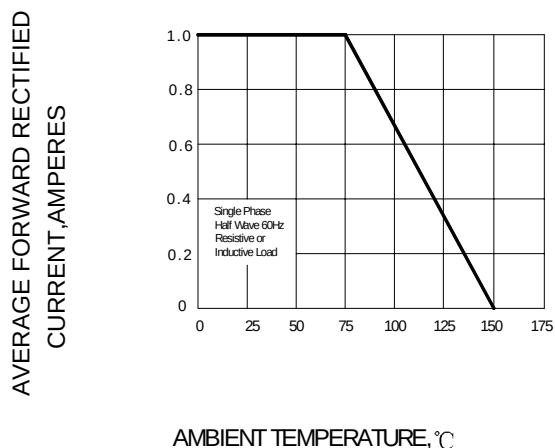
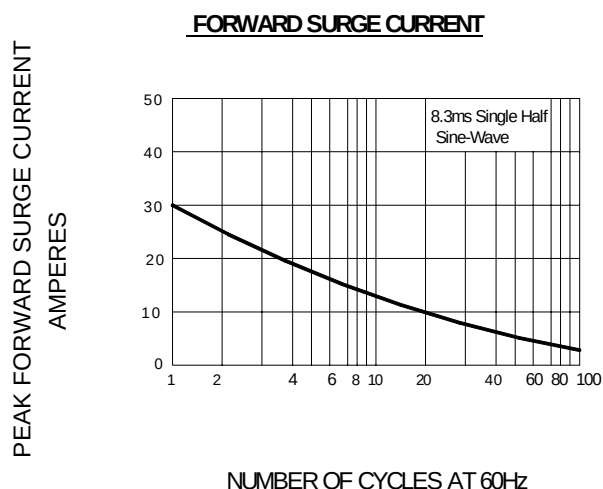
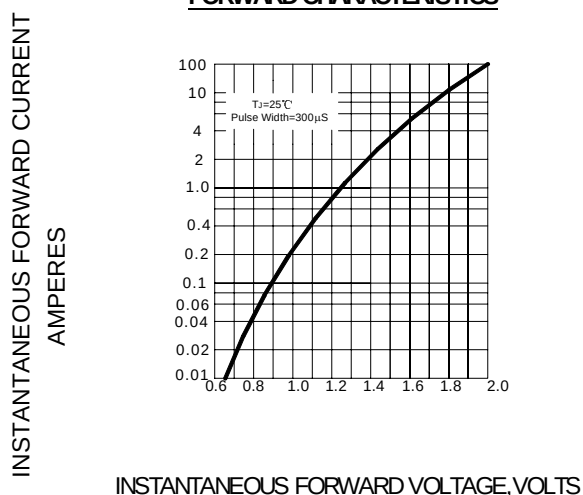
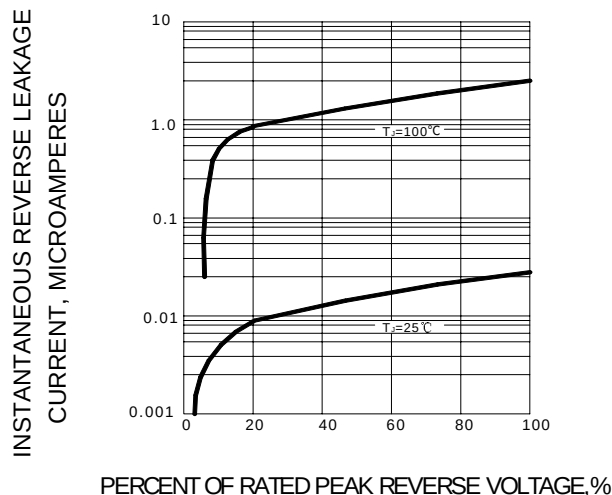
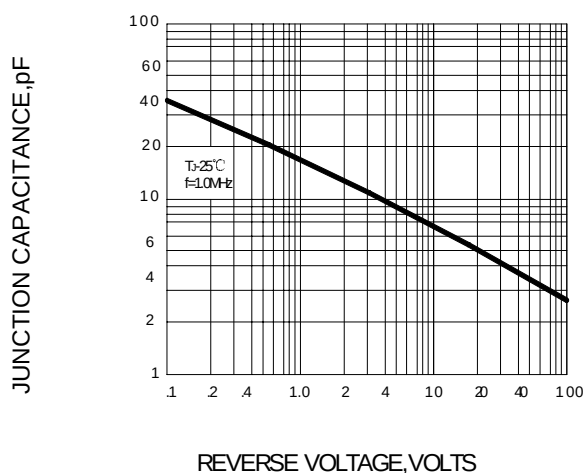
NOTE: 1. Measured with $I_F=0.5A$, $I_R=1A$, $t_{rr}=0.25A$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.



Ratings AND Characteristic Curves

FIG.1 – FORWARD CURRENT DERATING CURVE

FIG.2 –MAXIMUM NON-REPETITIVE PEAK

FIG.3 –TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

FIG.4-TYPICAL REVERSE CHARACTERISTICS

FIG.5-TYPICAL JUNCTION CAPACITANCE


PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
DO-41	5000/AMMO	50000	42X28X31	14.00	12.00