

4

3

2

1

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
H	—		M	ECR-07-008767	16-07-07	BSV KMA
			P	ECR-09-004273	02-03-09	AEG KMA
			P1	ECR-10-020025	13JAN11	RK KMA

- NOTES:
- 1

THIS RECEPTACLE ACCEPTS SIZE 20 REC. CONTACTS.
- 2

MAXIMUM WIRE INSULATION RECOMMENDED FOR USE WITH THIS RECEPTACLE IS 1,73 DIA. MAX..
- 3

RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- 4


FOLLOWING INSERTION/REMOVAL TOOLS ARE RECOMMENDED FOR USE WITH THESE CONNECTORS:
32-28AWG/28-24AWG CONTACTS
91067-3 INSERTION/REMOVAL
726363-1 INSERTION ONLY
24-20AWG CONTACTS
726363-1 INSERTION ONLY
726364-1 REMOVAL ONLY
- 5

INSERTS: GLASSFILLED SELF-EXTINGGUISHING PBT, COLOR BLACK.
- 6

TE, PARTNUMBER AND DATE CODE; INK STAMPED.
- 7

RAISED CAVITY IDENTIFICATION 0,8 HIGH.
- 8

RAISED CAVITY IDENTIFICATION NUMBERS ON WIRE SIDE ARE WHITENED FOR 164532-9.

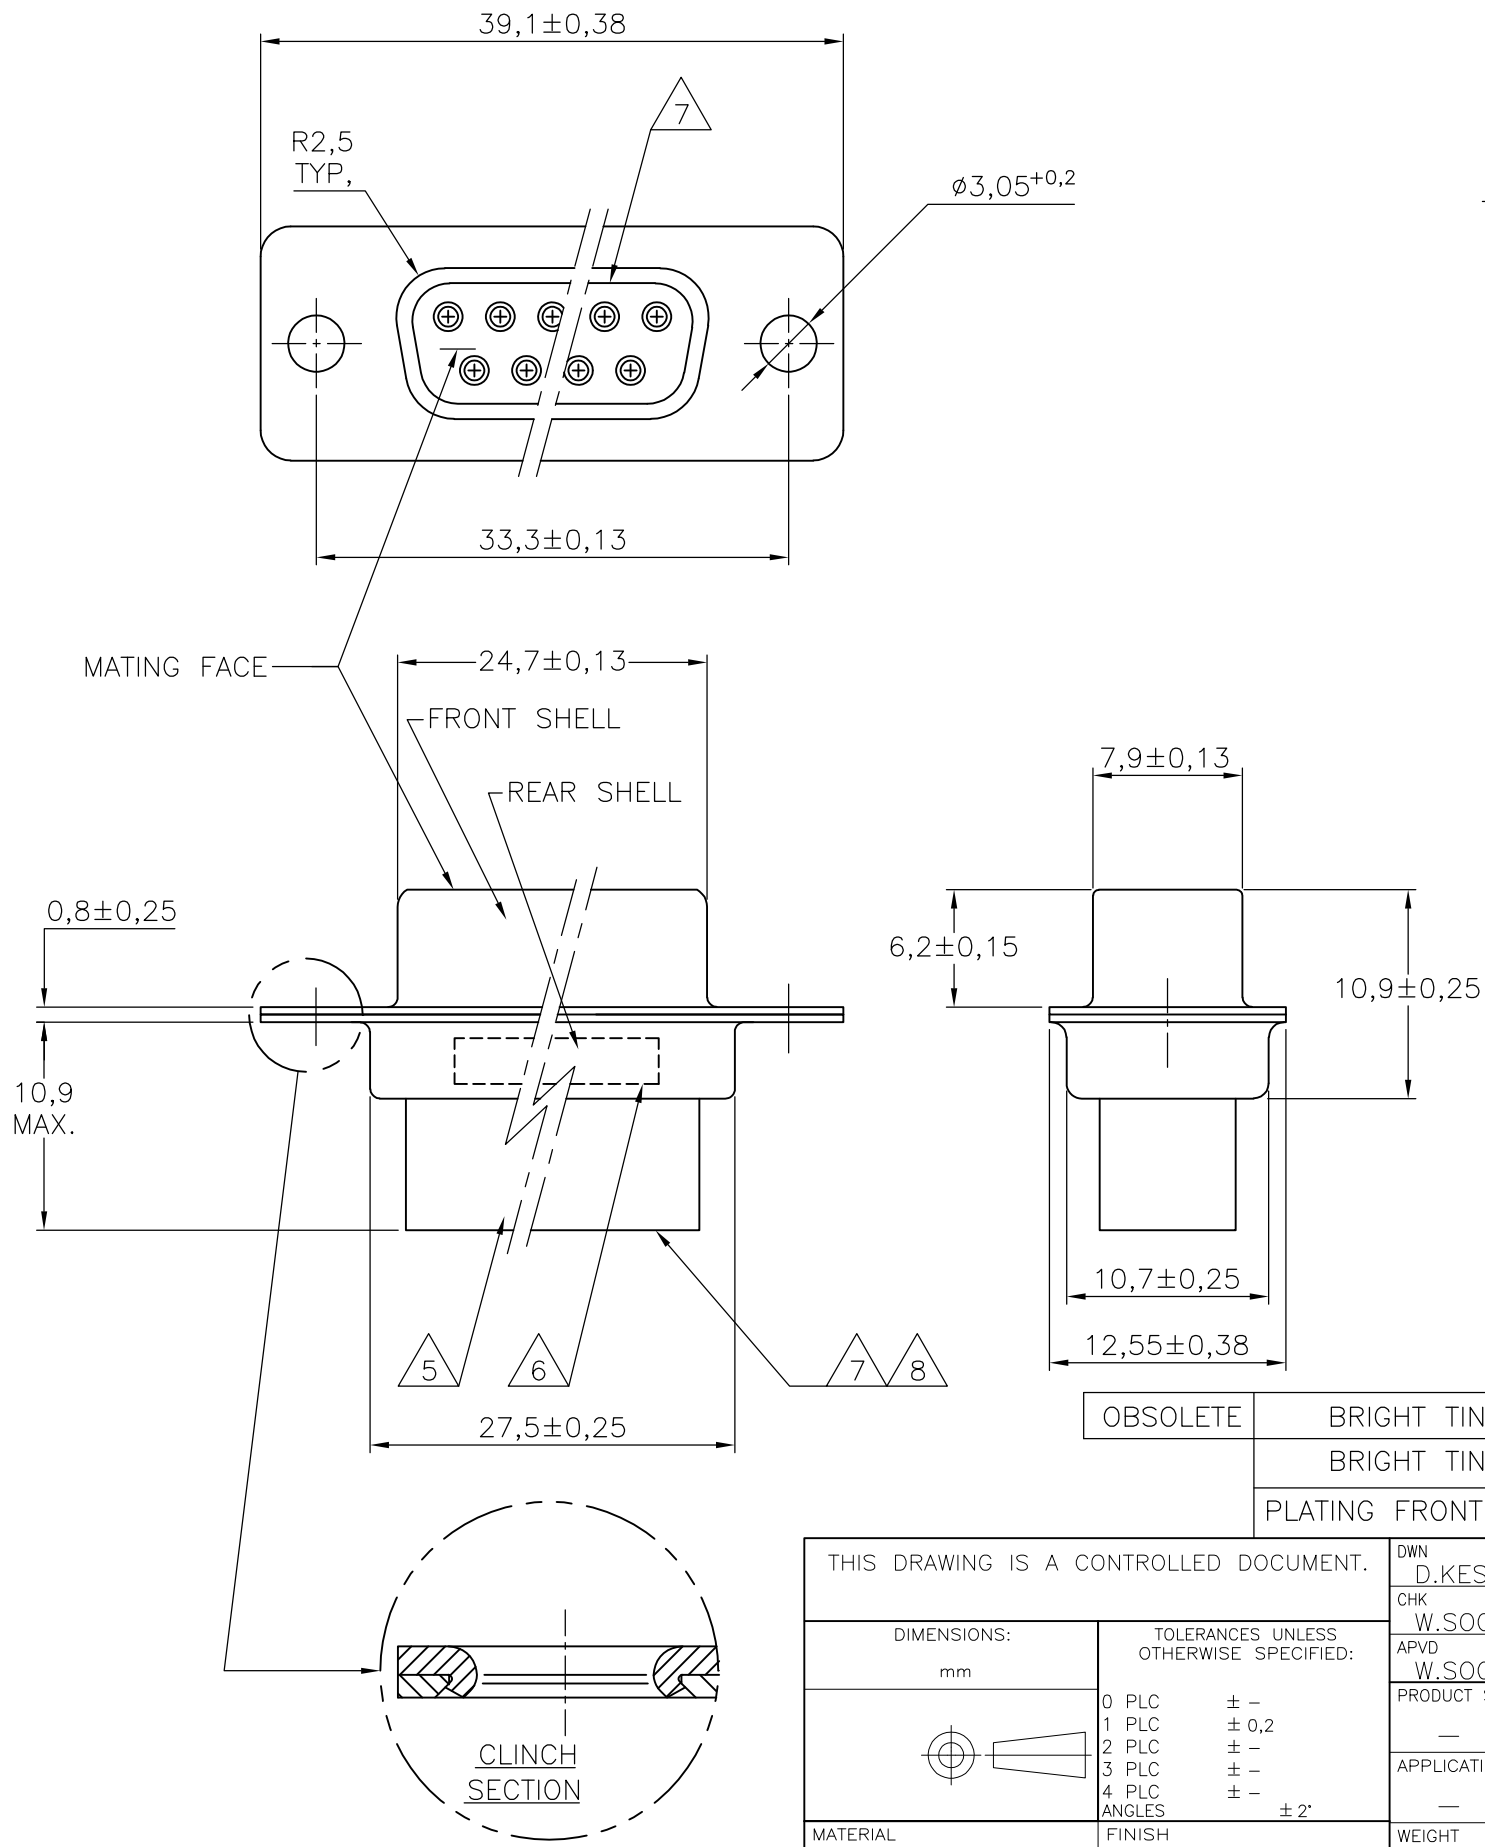

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	11FEB99	Tyco Electronics Corporation 's-Hertogenbosch, Nederland	
		CHK	—		
		W.SOOMERS	—	NAME 15 POS HDP-20 RECEPTACLE CONNECTOR SIZE 2 —	
		APVD	—		
		W.SOOMERS	—		
		PRODUCT SPEC	—	SIZE A3	
		APPLICATION SPEC	—		
		WEIGHT	—	CAGE CODE	—
		CUSTOMER DRAWING	—	DRAWING NO	—
		SCALE	NTS	SHEET	1 OF 1
		REV	P1		