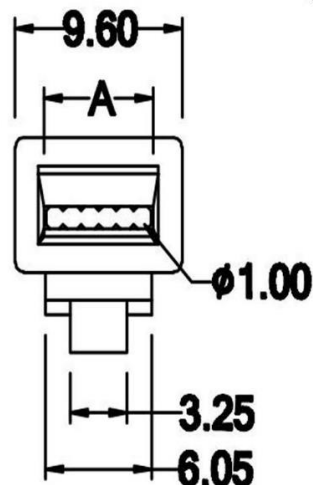
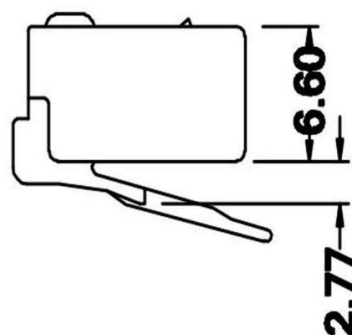




MATERIAL & FINISH

Body: PC. UL94V-2, clean

Contact: copper alloy, underplated 100uin Nickel,
and hard gold plated on contact region,
gold flash plated on remainder of terminal.

SPECIFICATION

Voltage Rating: 125 volts AC, at 1.5 amps.
Dielectric Withstanding Voltage: 1000 volts AC.
Insulation Resistance: 500 megaohms min.
Contact Resistance: 30 milliohms max.
Durability: 750 cycles.
Temp. Rating: -40°C to +85°C

	A
6P2C	5.20
6P4C	5.20
6P6C	7.15

UNIT: m / m
TOL.: +/- 0.10

RoHS Compliant		Ninigi	
APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	Helen	SCALE 比例 參考	MODULAR PLUG 6PXC ROHS
DATE 制表日	2024/5/8	UNIT 單位 M M	PART NO.
PAGE 張數 1 OF 1		SIZE. 紙張尺寸 A 4	料號 RJ11
		REV. 版次 F	