



SPECIFICATION

Switching Type		random
Approvals		UL
Output		triac
Application Fields		inductive loads
Input Circuit		
Control Voltage Range	V	3 - 32 DC
Control Current Max.	mA	14
Turn-off Voltage Min.	VDC	1
Input Resistance	Ω	constant current
Output Circuit		
Load Voltage Range	V rms	24 - 280 AC
Peak-off-state Voltage	V drms	600
Off-state Leakage Current	mA _{eff} Max.	5
Load Current Range	A rms	0,05 - 3
Surge Current 1 half wave	A peak	100
1 st t for Fusing	A ² s	50
On-state Voltage	V peak	1,6
Off-state (Static) dv/dt	V/μs	200
Snubber	Ω ; nF	47 ; 22
General Data		
Turn-on Time Max.	ms	0.1
Turn-off Time Max.	ms	11
Line Frequency Range	Hz	47 - 63
Isolation Voltage between:		
- Input / Output	V rms	4.000
- Input-output/base	V rms	-
Isolation Resistance	MΩ	50
Operating Temperature	°C	-20 ... +80
Recommended Varistor		SIOV-S14 K230

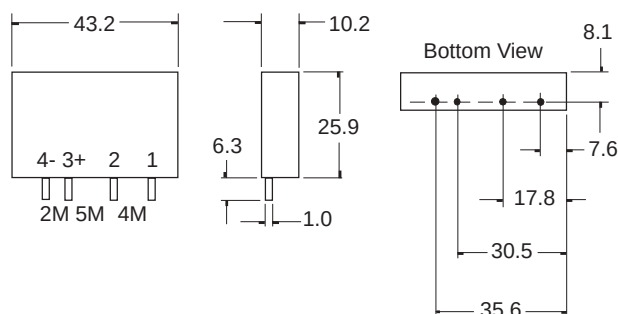


Drawings not to scale
All dimensions in mm nominal

Circuit Diagrams

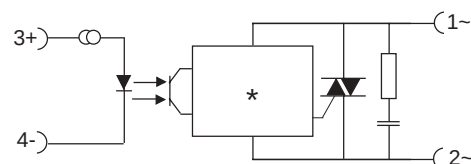

*R = Random switching

Derating diagram WG A8 6D 03 R

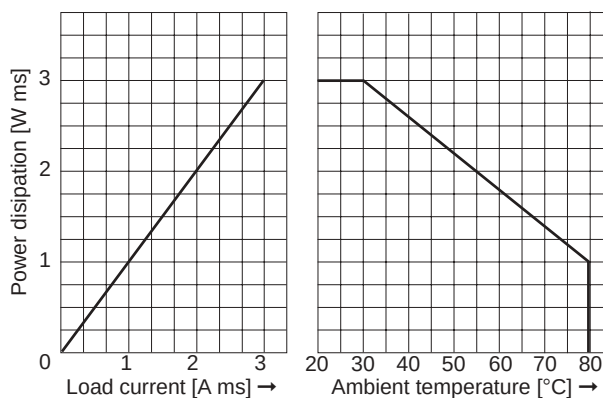

SOLID STATE RELAY

1-phase for AC loads and PCB mounting

PART NUMBER
WG A8 6D 03 R

Rev. No.	Revision Note	Date	Signature
A	Web Site 2002	1-6-02	RG

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.

© 2002 Copyright Comus Group of Companies

The Comus Group of Companies consist of:
Assemtech Europe Limited
E. Bachem GmbH
Comus International
W. Gunther GmbH
Gunther Belgium
Gunther France
S.T.G.