


RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS
10.0 [.31 in]





SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	(1-2)

() = MOMENTARY



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER PLATED COPPER
- RATING: 2A 48VDC
- ELECTRIC LIFE: 200,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MΩ MIN.
- DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
- CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
- OPERATING TEMP.: -20°C to 55°C
- TRAVEL: 1.8mm
- ▲ DENOTES CRITICAL PARAMETER
- ILLUMINATION VOLTAGE: ORANGE - 1.8V 20mA (FORWARD)
BLUE - 2.8V 20mA (REVERSE)
- HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)

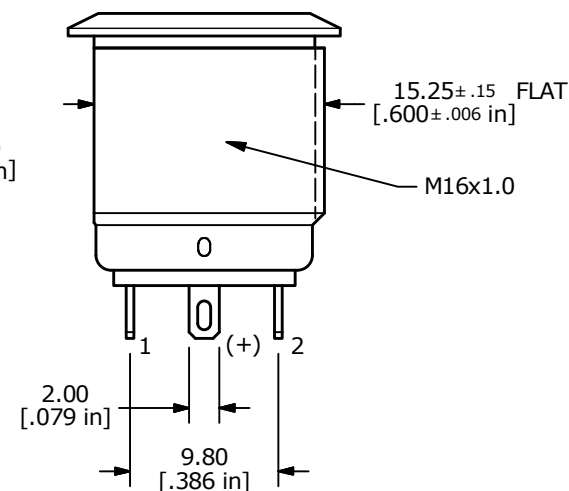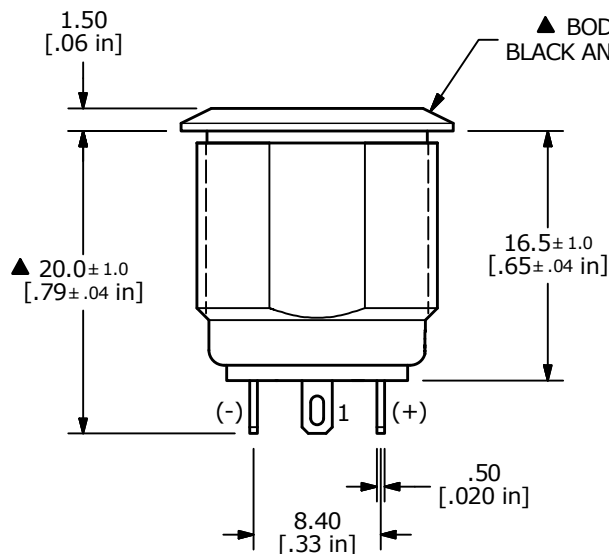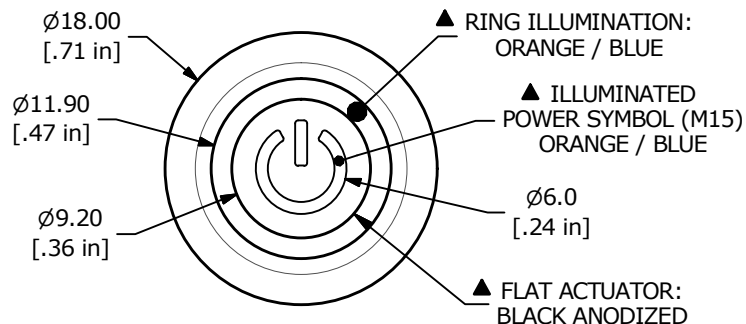

A	23872	RELEASE	5/7/19	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE PV6F24011-3L1-M15

SCALE 2:1	DATE 5/7/2019	DR MW	DWG 52-PV6F240113L1M15	REV A
--------------	------------------	----------	---------------------------	----------