


SPECIAL BUTTON CELL LITHIUM - CR2016

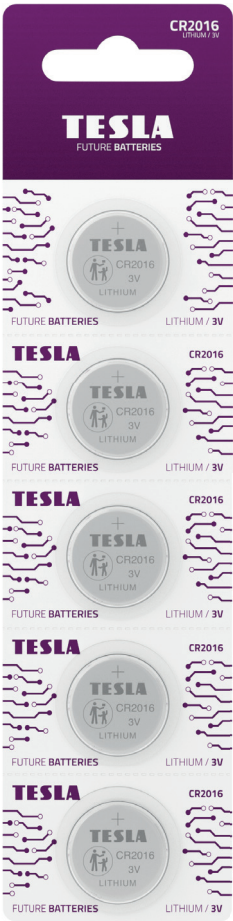

DESCRIPTION:

Mercury Free Lithium Cell Battery,
CR2016 / Non-Rechargeable

CHEMICAL SYSTEM:

Lithium Manganese Dioxide

SHELF LIFE:

7 years

NOMINAL VOLTAGE:

3 Volts

NOMINAL DIMENSIONS:

Ø 20 mm × 1.6 mm

APPLICATIONS:

Suitable for flashlights, car keys, watches,
scanners etc.

STORAGE TEMPERATURE:

+10 °C to + 25 °C

Should be stored in dry and cool place.

NOMINAL WEIGHT:

1,7 g

CROSS REFERENCES:

TESLA	IEC	JIS	VARTA	DURACELL
CR2016	CR2016	CR2016	CR2016	DL2016

TYPICAL SERVICE LIFE:

DISCHARGE RESISTANCE	DISCHARGE CONDITION	END POINT VOLTAGE	SERVICE LIFE
1.5 kOhms	24 Hrs/Day	2.0V	36.5 Hrs

FUTURE BATTERIES

www.teslabatteries.com