
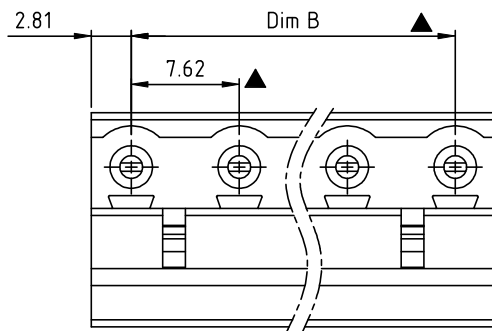
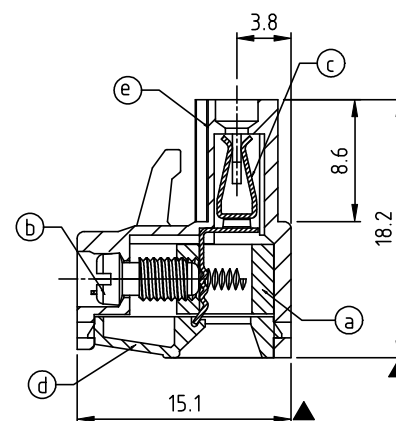
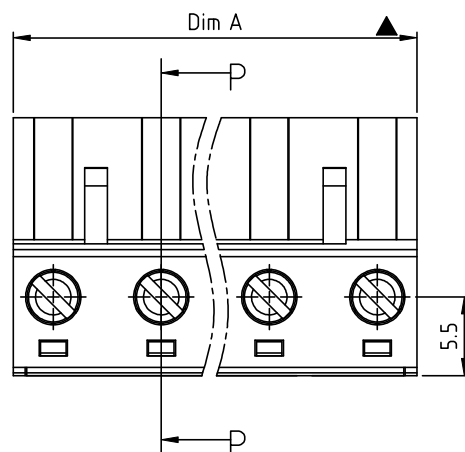


Material

- Item ① Clamp: Brass(CuZn) Ni plated
- Item ② Terminal screw: Steel Zinc plating "-" slot type
- Item ③ Female contact: PhBz ,Bright Tin plated over Nickel plated
- Item ④ Terminal Cover: Thermoplastic (UL94V-0)
- Item ⑤ Terminal housing: Thermoplastic (UL94V-0)

Electrical cULus


- Voltage rating: 300VAC
- Current rating: 12A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 5Lb-In
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval:
- Critical dimension:

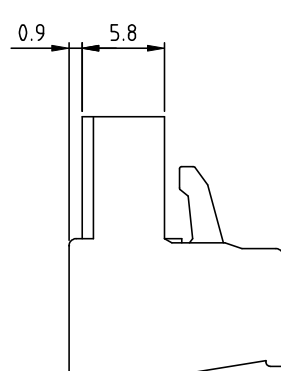

SECTION P-P

TJ xx 01 x 0 xxxx G

TJ xx 01 x 0 xxxx G		G RoHS compliant (lead<4%) In copper Alloy
02 2 Poles	0 Black (RAL9005)	0000 Standard @ Logo 000A Standard ANY Logo 0091 Standard ANY Logo Any special item by customer request, please contact sales department.
03 3 Poles	2 Red (RAL3001/D)	
... ..	3 Orange(RAL2011/P)	
16 16 Poles	4 Yellow(RAL1018/A)	
	5 Green(RAL6018/T)	
	6 Blue (RAL5015/A)	
	8 Grey(RAL7035/D)	
	9 White(RAL1102)	
	C Green(RAL6018/U)	

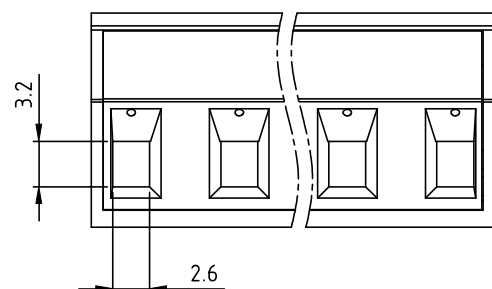

N = Number of poles
 Dim A=(N-1)X7.62+5.62
 Dim B=(N-1)x7.62

Poles	Tolerance Dim A/B
2p-6p	±0.15
7p-12p	±0.20
13p-16p	±0.30

Amphenol

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE				TJ-7.62mm Series 2P-16P (Without flange)					
PART NO.				TJxx01x0xxxxG		DWG NO.		8TJ0401	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance		
			Chen Bo 04/12-21	Chen Bo 04/12-21					
					SHEET: 01/01		SCALE: NONE		X.X ±0.30
							REV: G		X° ±1°