

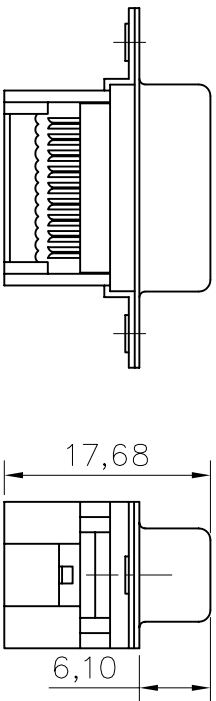


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be distributed, reproduced or used, in whole or in part, without the prior written consent of Amphenol Corporation. Amphenol Corporation reserves the right to make changes to this document without its prior consent, and that no right is granted to disclose or to use any information in this document.

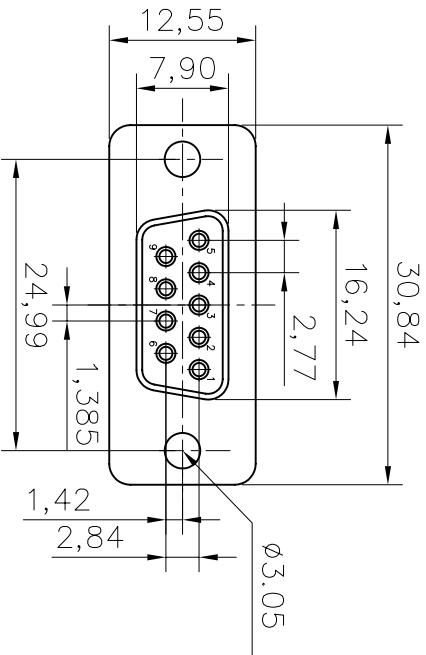

REVISIONS			
SYM	ECN	DESCRIPTION	DATE
A			09/27/07

D-SUB TECHNICAL DATA

SHELL : Steel with nickel plating

BODY : Glass filled thermoplastic. Flame retarding to UL94 V-0

CONTACTS : Brass, gold flash over 1.25um (50u") min nickel

ELECTRICAL : Voltage rating : 250 V RMS at 60 Hz, Current rating 5A.

Insulation resistance >1000 M Ohms

Contact resistance 20 mOhms max.

CLIMATIC : Temperature range -40 °C up to 125°C

Damp heat 56 days(40 °C-95% HR)

MARKING : Amphenol-...(Series No.)

Commercial reference

Manufacturing date

PRODUCT CODE

L 17D E FR A 09 S

L : RoHS Compliance

17D : tinned shell for plug and receptacle

Shell size : E

Contact type
S=socket

configuration : 09

Type : A=front metal shell

Flat ribbon cable type

UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE
TOLERANCES		DRAWN		09/27/07
U.S.		METRIC		09/27/07
.X	+/-	0.4		
.XX	+/-	0.50		
.XXX	+/-	0.75		
FRACTIONS	+/-	0.20		
ANGLES	+/-	2'		
FOR MATERIALS AND FINISHES SEE NOTES				
REMOVE SHARP EDGES		DRAWING FILE: Per master drawing/Desub		
DIMENSIONS		ANGLE OF PROJECTION		
THIS	INCHES			
REFLECT	MM			
SCALE		NONE		
SHEET		1 OF 1		
REV.		A		

Amphenol

7TITLE

IDC Flat Cable D-Sub Series