


R13-541

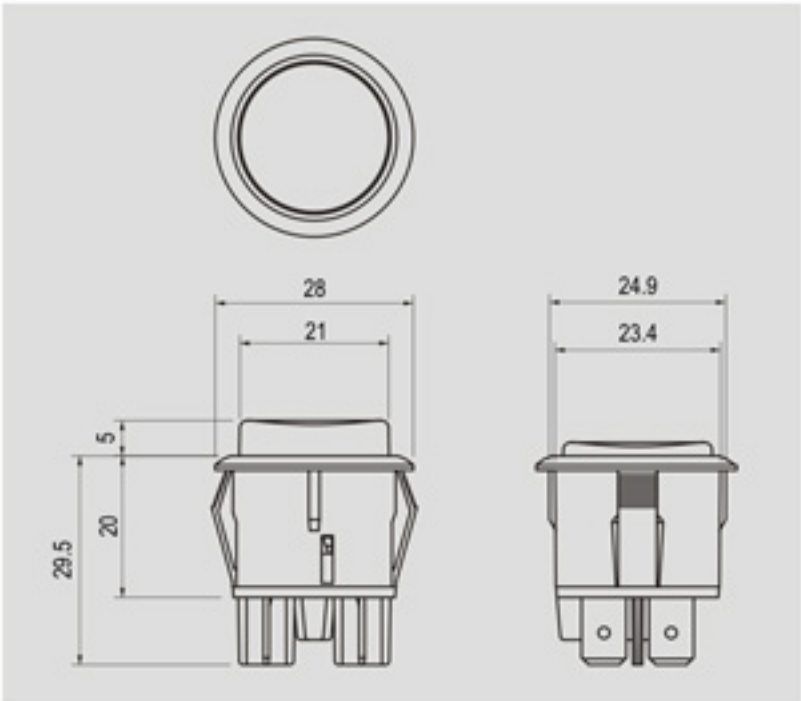


Rating
16A 125V AC 1/2HP 16A 250V AC 1HP
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out
 0.7~5 mm max

FEATURES

- *MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- *Illuminated actuators are molded in PC, available with red, amber and green colors.
- *Snap-in mounting, easy to install switch into panel.

R13-541 -

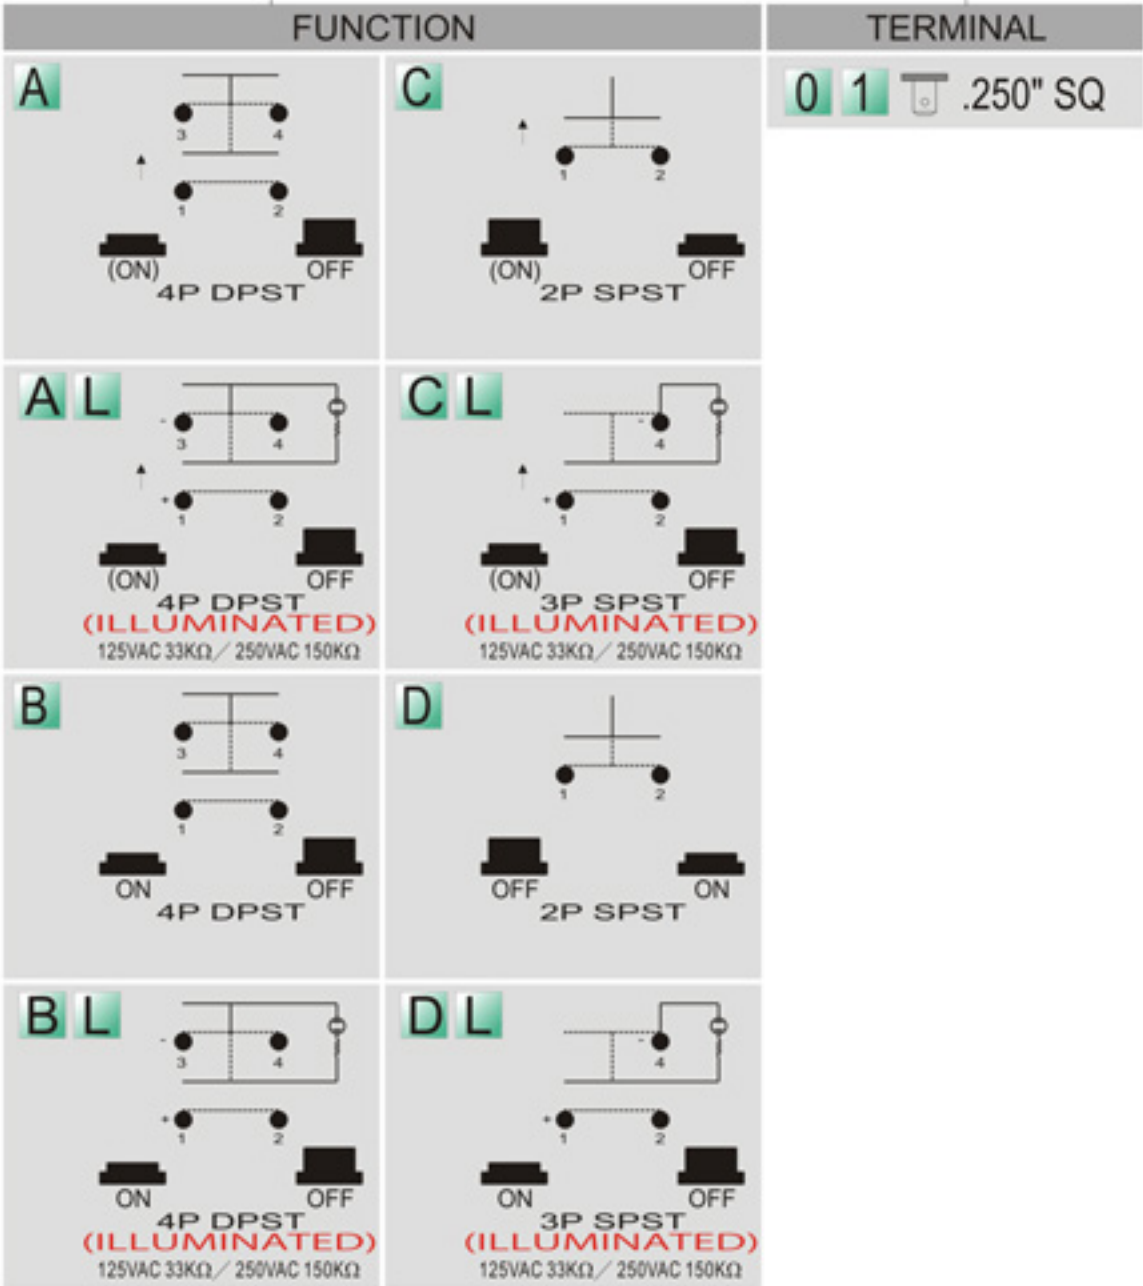

* () =momentary