


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

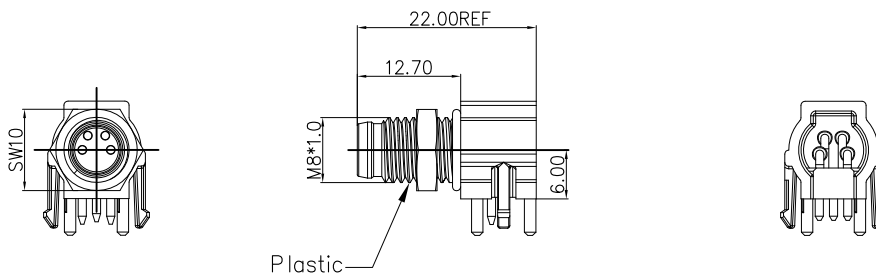

Detailed product Description:

1. Waterproof connector rating is IP67/IP68
2. Protected from dust and water during immersion, resistant to many oils and chemical etc

Electrical character:


1. Rating voltage: 60V AC/DC
2. Insulation resistance: >100MΩ
3. Rating current: 4A
4. Contact resistance of the connector ≤ 10 mΩ

Other Specification:

1. Contact PIN: Phosphor Copper with Gold plating
2. Coupling nut/screw: Brass with nickel plating
3. Insulation plastic: PA66+GF
4. Degree of protection: IP67/68
5. Operating temperature: -25℃ ~ +85℃

Electrical character

Prat Number	Contacts	Rated Voltage		Rated Current	Contact Resistance
		A/C	D/C		
SR-M8A-03P-MM-SF7001-00B(H)		60V	60V	3A	10mΩ
SR-M8A-04P-MM-SF7001-00B(H)		30V	30V	3A	10mΩ
SR-M8B-05P-MM-SF7001-00B(H)		30V	30V	3A	10mΩ
SR-M8A-06P-MM-SF7001-00B(H)		30V	30V	2A	10mΩ
SR-M8A-08P-MM-SF7001-00B(H)		30V	30V	1.5A	10mΩ

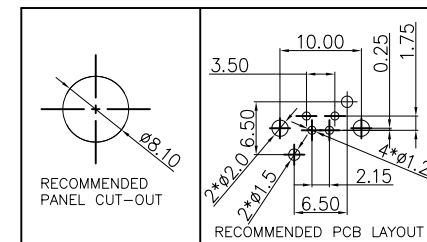

DETACHED LISTS	PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD: WYH 08/05/17"	NAME: SR-M8X-XXP-MM-SF7001-00B(H)			
	CHKD: BY 08/05/17"	TITLE: CUSTOMER DRAWING			
	DRFT: LD 08/05/17"				
	 THIRD ANGLE PROJECTION	DRAWING NO.:	REV	DO	

MM
(INCH)

DO NOT SCALE DRAWING

SHEET 1/1
SCALE 1:1