

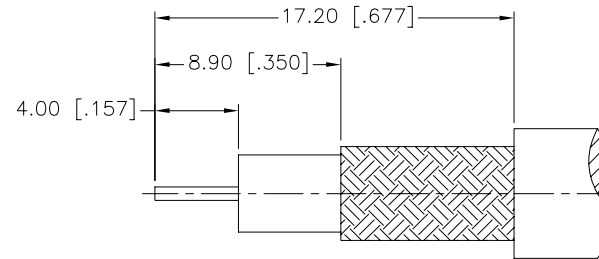
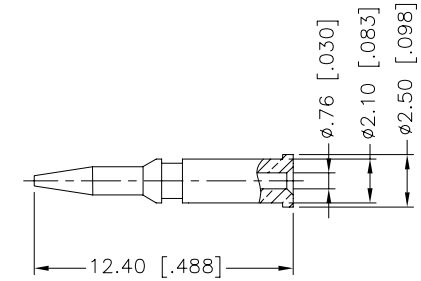


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/14/09	—	INITIAL RELEASE

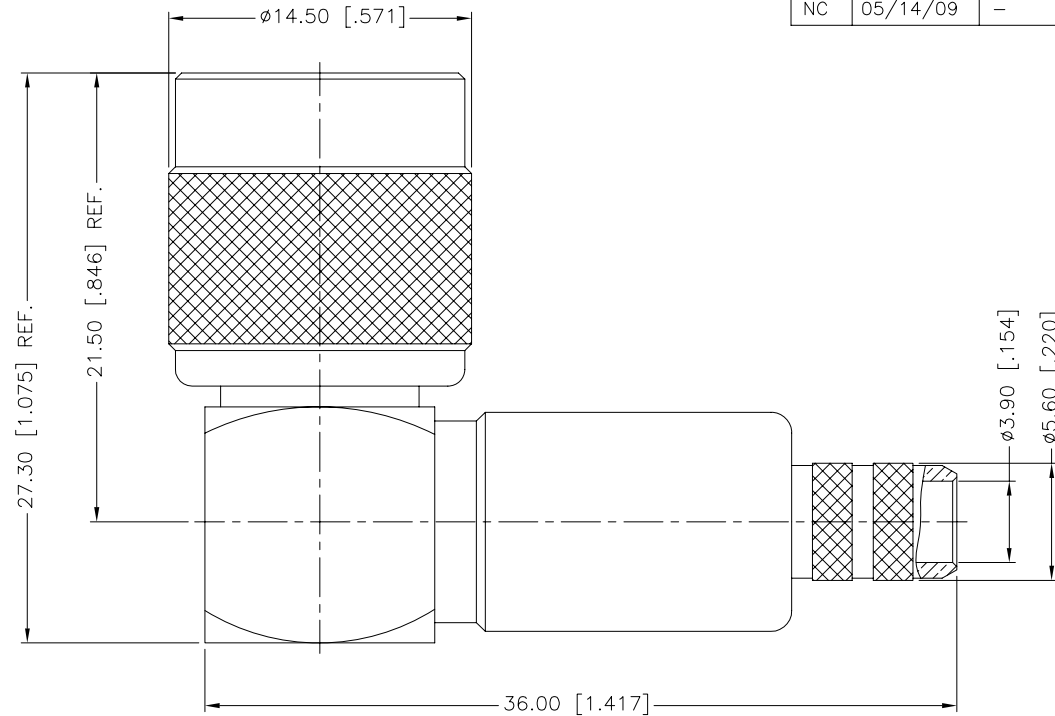

RECOMMENDED
CABLE STRIPPING DIM'S

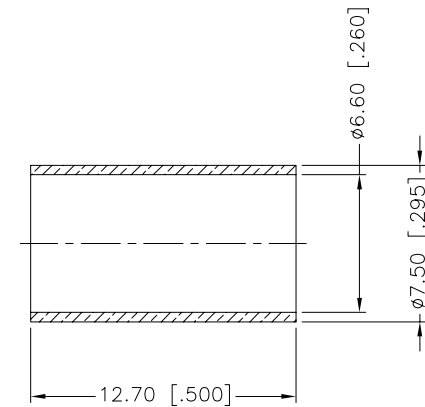

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN,
HEX CRIMP SIZE .068"

14	FERRULE	BRASS	NICKEL	1
13	CONTACT PIN	BRASS	GOLD	1
12	COVER	BRASS	NICKEL	1
11	CONTACT PIN	BRASS	GOLD	1
10	WASHER	BRASS	NICKEL	1
9	RING	DELIN	NATURAL	1
8	RETAINER RING	BRASS	NICKEL	1
7	GASKET	RUBBER	RED	1
6	INSULATOR	DELIN	NATURAL	1
5	BARREL	BRASS	NICKEL	1
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
3	INSULATOR	DELIN	NATURAL	1
2	HOUSING WITH BODY	BRASS	NICKEL	1
1	SHELL	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN J.CHENG	05/14/09
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/122153.DWG

Amphenol Connex

PART DESCRIPTION

TNC R/A CRIMP PLUG
(FOR RG-59/U CABLE)

PART NO.

122153

DWG. NO.

122153.DWG

REV. NC

SIZE A

SCALE NA