Pin-Belegung /
Pin Assignment

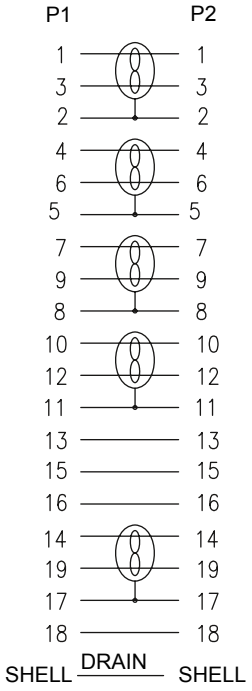

Art.-Nr. / *Item No.*	Beschreibung / *Description*	Länge / *Length* (L)	AD / *OD*	Innenleiter Material / *Material inner conductor*
41081	HDMI 2.1 Kabel 0050 0,5m STD sw	500 ± 20 mm	6.0 ± 0.15 mm	(1/0.254 x 1P + D (1/0.254) + AM + M) x 5 PCS + 1/0.254 x 4C + AM + D (1/0.254) + B (64/0.12ALM)
41082	HDMI 2.1 Kabel 0100 1,0m STD sw	1000 ± 30 mm	6.0 ± 0.15 mm	(1/0.254 x 1P + D (1/0.254) + AM + M) x 5 PCS + 1/0.254 x 4C + AM + D (1/0.254) + B (64/0.12ALM)
41083	HDMI 2.1 Kabel 0150 1,5m STD sw	1500 ± 50 mm	6.0 ± 0.15 mm	(1/0.254 x 1P + D (1/0.254) + AM + M) x 5 PCS + 1/0.254 x 4C + AM + D (1/0.254) + B (64/0.12ALM)
41084	HDMI 2.1 Kabel 0200 2,0m STD sw	2000 ± 50 mm	6.0 ± 0.15 mm	(1/0.254 x 1P + D (1/0.254) + AM + M) x 5 PCS + 1/0.254 x 4C + AM + D (1/0.254) + B (64/0.12ALM)
47575	HDMI 2.1 Kabel 0300 3,0m STD sw	3000 ± 50 mm	7.3 ± 0.15 mm	(7/0.12BC x 1P + 1/0.25TC + AM + M) x 5 PCS + 7/0.12BC x 4C + AM 1/0.25TC + 128/0.12ALM
52766	HDMI 2.1 Kabel 0500 5,0m STD sw	5000 ± 70 mm	7.8 ± 0.2 mm	(1/0.40 x 1P + D (1/0.32) + AM +HM) x 5 PCS + 1/0.40 x 4C + AM + D (1/0.40) + B (128/0.12ALM)

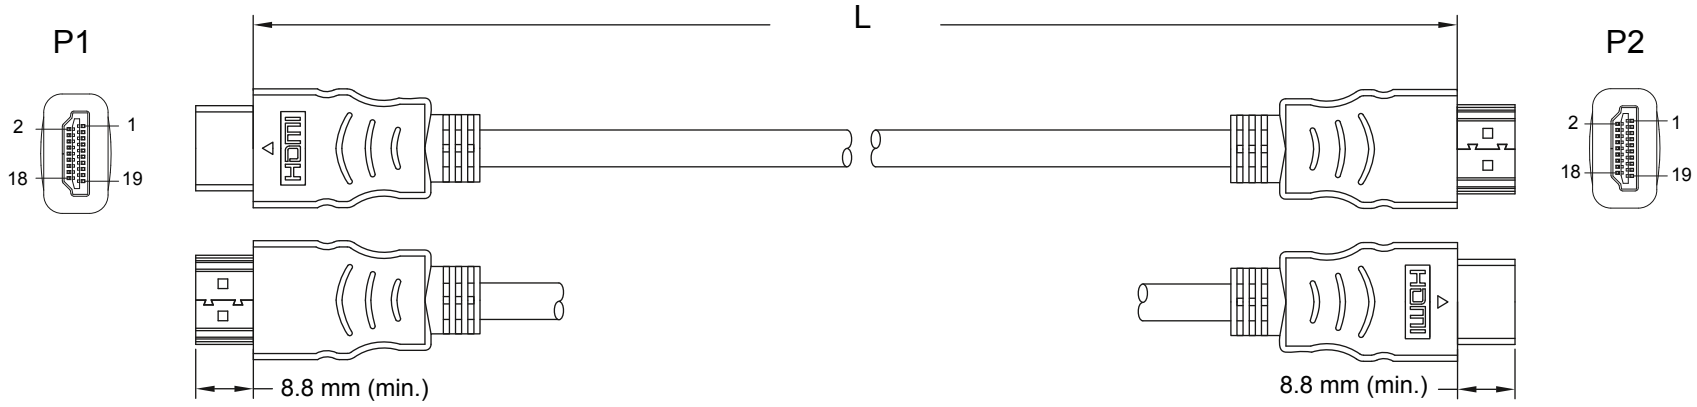

Ultra High Speed HDMI™ Kabel

- max. Datenrate 48 Gbit/s
- Hochgeschwindigkeitskabel für 8K @ 60 Hz

- Anschlüsse:	2x HDMI™-Stecker (Typ A)
- Kontakte:	vergoldet
- Anzahl Schirmungen:	2 (Aluminiumgeflecht 144x)
- Material Gehäuse:	PVC
- Material Kabelmantel:	PVC
- Isolationswiderstand:	10 MΩ min.
- Kontaktwiderstand:	5 Ω max.
- Max. Auflösung:	4K Ultra HD 2160p (120 Hz), 8K Ultra HD 4320p (60 Hz)
- Unterstützte Standards:	HDR (High Dynamic Range), HDCP 2.2, HDMI™ Ethernet Channel (HEC), 4K 3D, 21:9 Cinemascope, Consumer Electronics Control (CEC) Enhanced Audio Return Channel (eARC)
- Konformität:	RoHS

Ultra High Speed HDMI™ Cable

- max. Data rate 48 Gbit/s
- High speed cable for 8K @ 60 Hz

- Connectors:	*2x HDMI™ plug (Type A)*
- Contacts:	*gold-plated*
- Number of shieldings:	*2 (aluminum braiding 144x)*
- Material housing:	*PVC*
- Material cable jacket:	*PVC*
- Insulation resistance:	*10 MΩ min.*
- Contact resistance:	*5 Ω max.*
- Max. Resolution:	*4K Ultra HD 2160p (120 Hz),* *8K Ultra HD 4320p (60 Hz)*
- Supported standards:	*HDR (High Dynamic Range), HDCP 2.2,* *HDMI™ Ethernet Channel (HEC), 4K 3D,* *21:9 Cinemascope, Consumer Electronics Control (CEC)* *Enhanced Audio Return Channel (eARC)*
- Conformity:	*RoHS*

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	01.02.2021	aw	HDMI 2.1 Kabel XXXX Xm STD sw goobay®	1/1
		gepr.:	01.02.2021	aw		
		Norm:			Zeichnungs-Nr.:	von
		Änderungen vorbehalten / *Subject to change*				

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА