
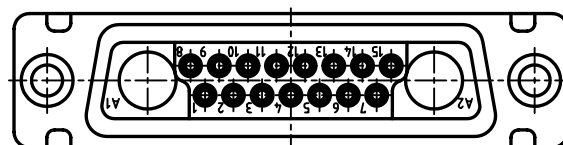

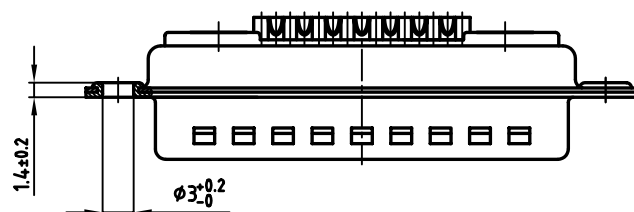
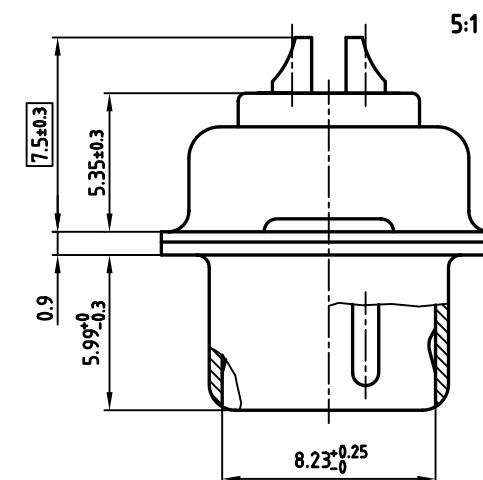


used for: D-SUB COMBINATION

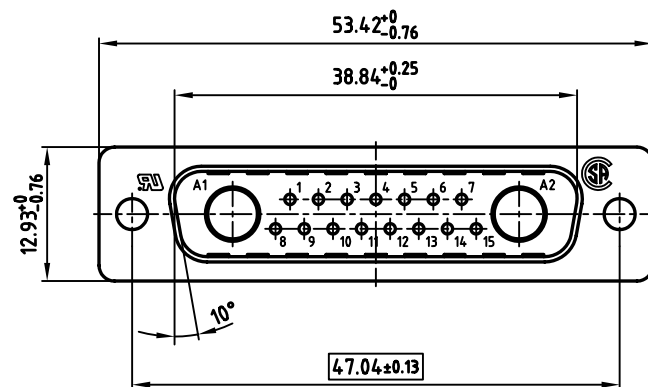

Directive 2002/95/EC
RoHS
Compliant

NOTES:

1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
4. PLATING: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL
5. = CRITICAL DIMENSION: SPC

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance			scale: 2:1 (5:1)							
							material: SEE NOTES							
								2001	date	name	title: D-SUB COMBINATION MALE 17W2P SOLDER CUP			
								drawn	20.11.	Parei				
								appd.	20.11.	Schrader				
								norm						
								d-old						
											dwg no:		AutoCAD 2000	DIN-A
											part no: 3017W2PCM99A10X		13K1A405A	3
				rev.	description	date	name				sh: 1/1			