

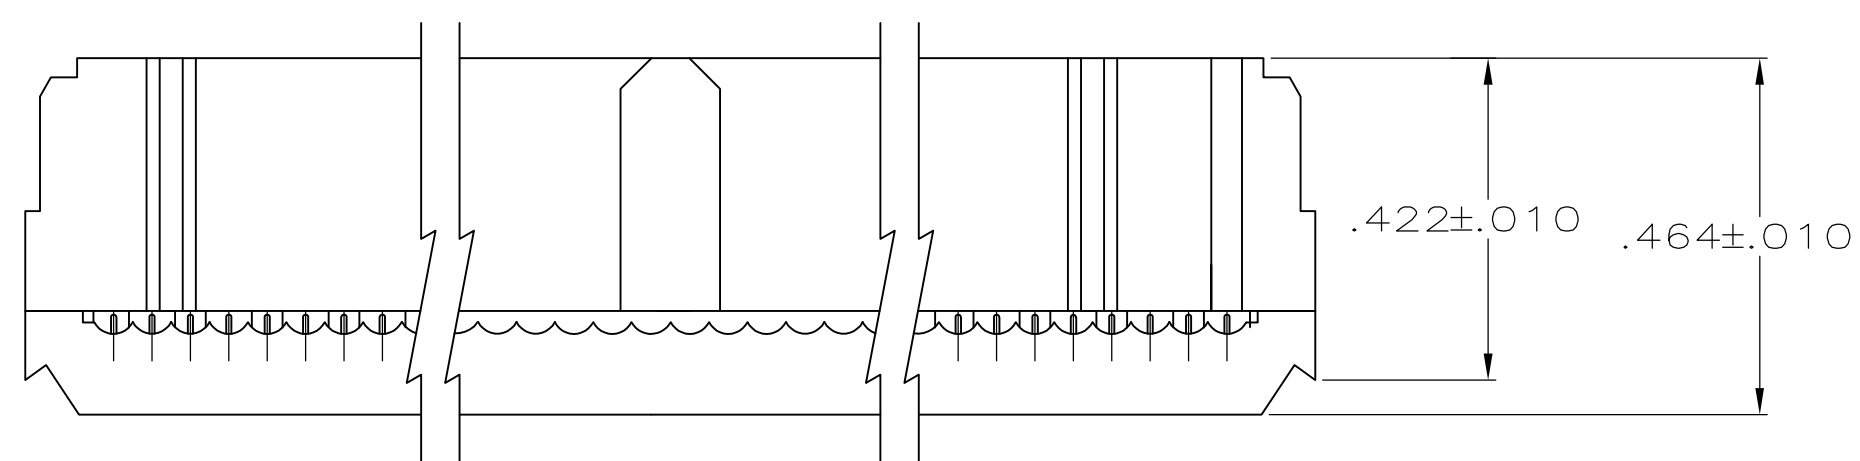
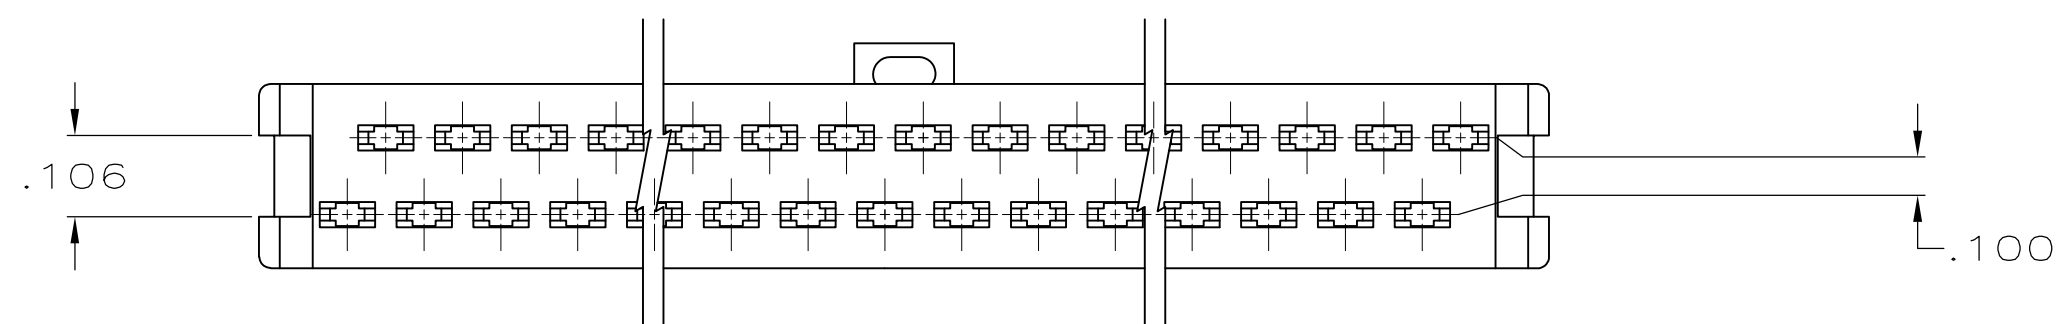




|     |      |           |     |                           |         |     |      |
|-----|------|-----------|-----|---------------------------|---------|-----|------|
| LOC | DIST | REVISIONS |     |                           |         |     |      |
| GP  | 00   | P         | LTR | DESCRIPTION               | DATE    | DWN | APVO |
|     |      |           | C1  | REVISED PER ECO-11-004835 | 11MAR11 | RK  | HMR  |

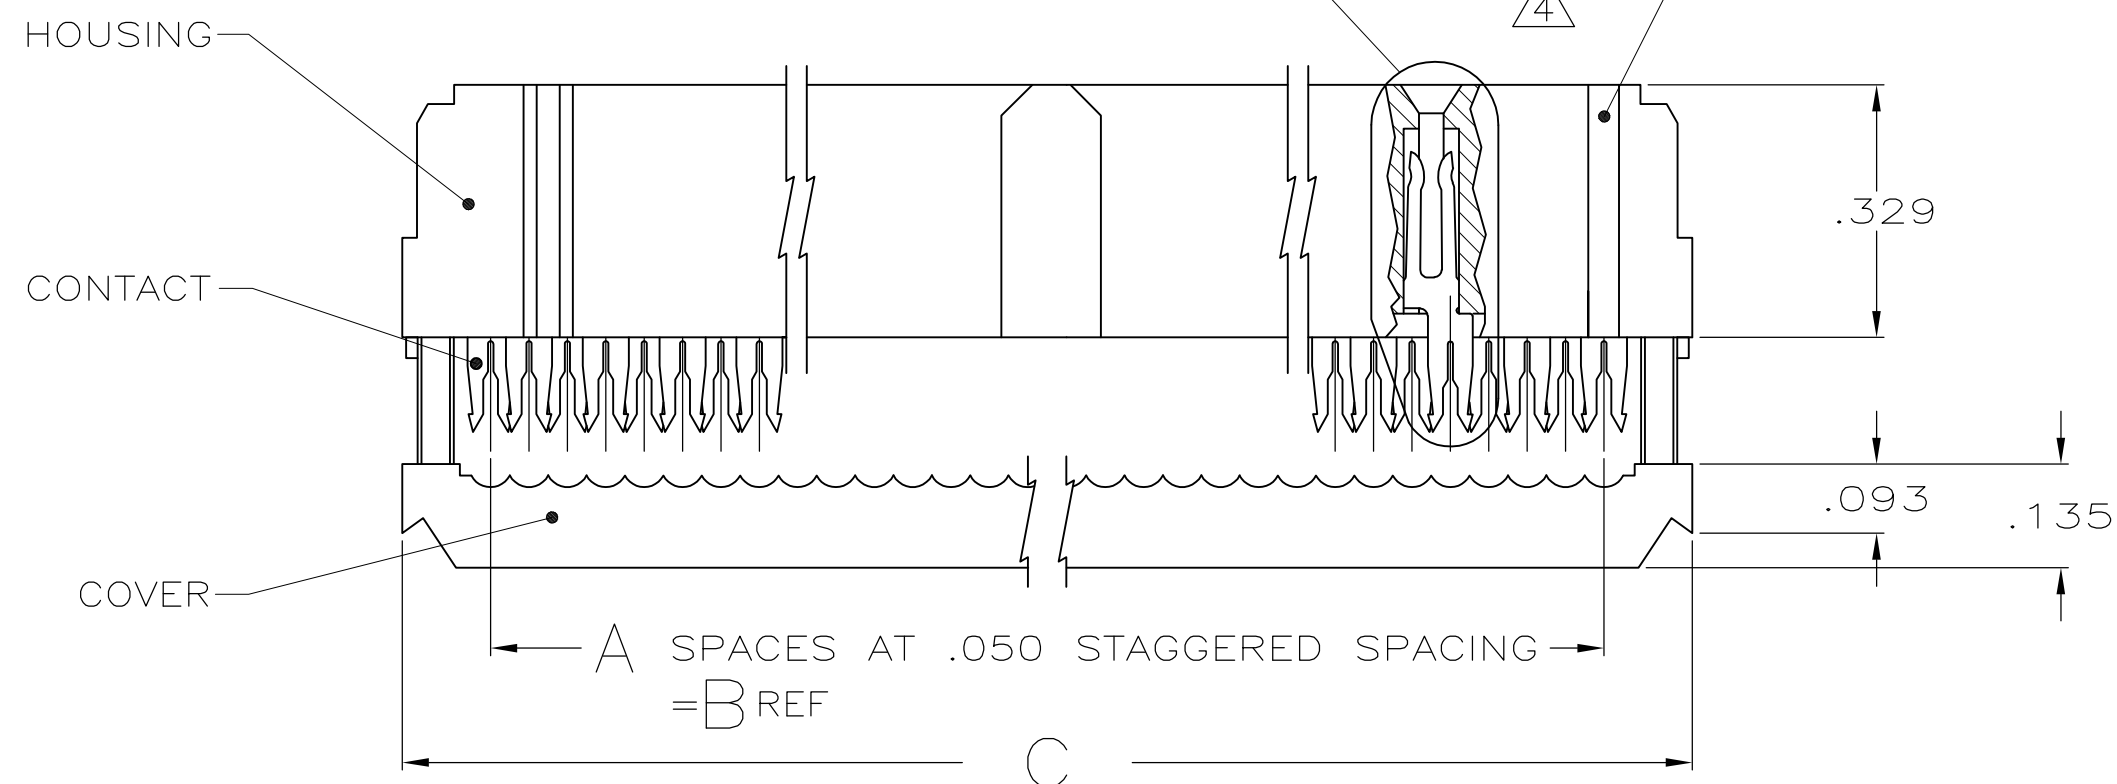

TERMINATED VIEW

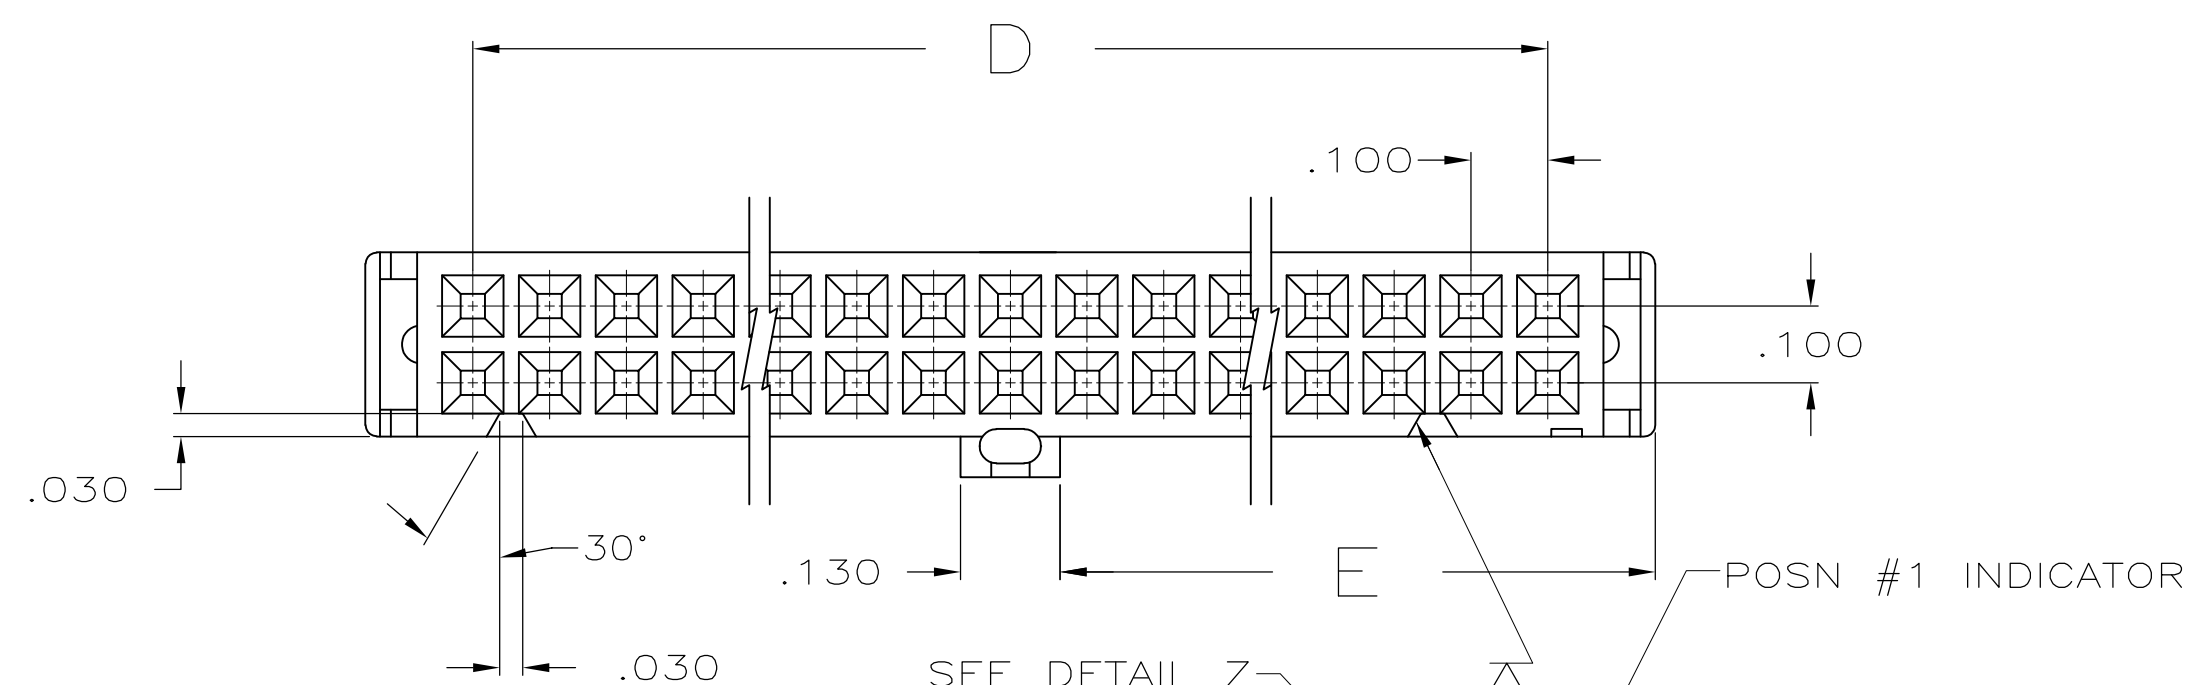

- ① MOLDED PARTS: UL RATED 94V-O THERMOPLASTIC, BLACK.
- ② CONTACTS: PHOSPHOR BRONZE PER QQ-B-750.
- ③ CONTACTS: PLATED WITH .000015 MIN GOLD IN LOCALIZED GOLD PLATE AREA, .000050 MIN TIN ON TERMINATION END, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.  
OR  
GOLD FLASH OVER PALLADIUM-NICKEL PLATE .000015 MIN TOTAL IN LOCALIZED GOLD PLATE AREA, .000050 MIN TIN ON TERMINATION END, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
- ④ POLARIZING FEATURE DOES NOT EXIST ON SAME END AS THE POSITION NUMBER 1 INDICATOR ON 10 AND 14 POSITION PRODUCT.

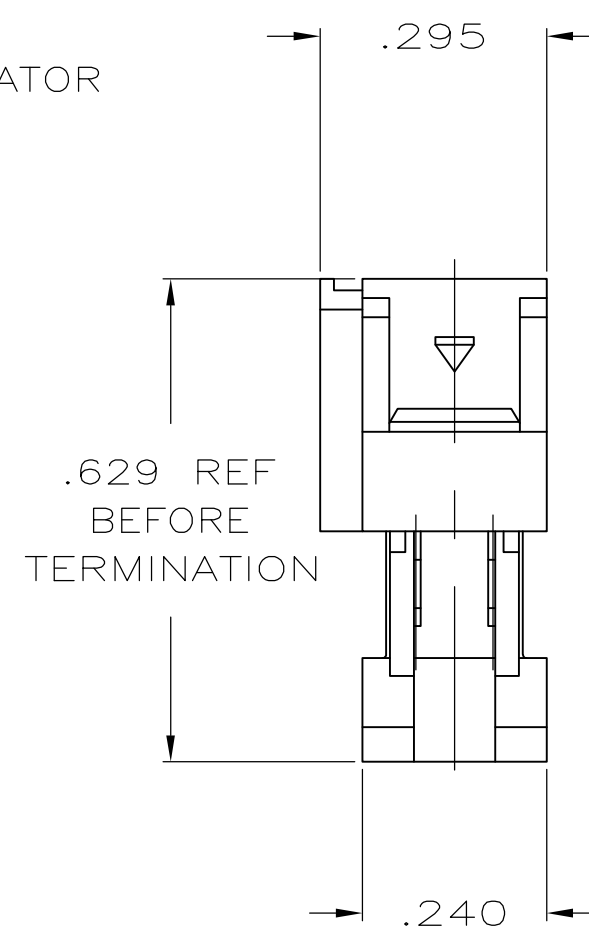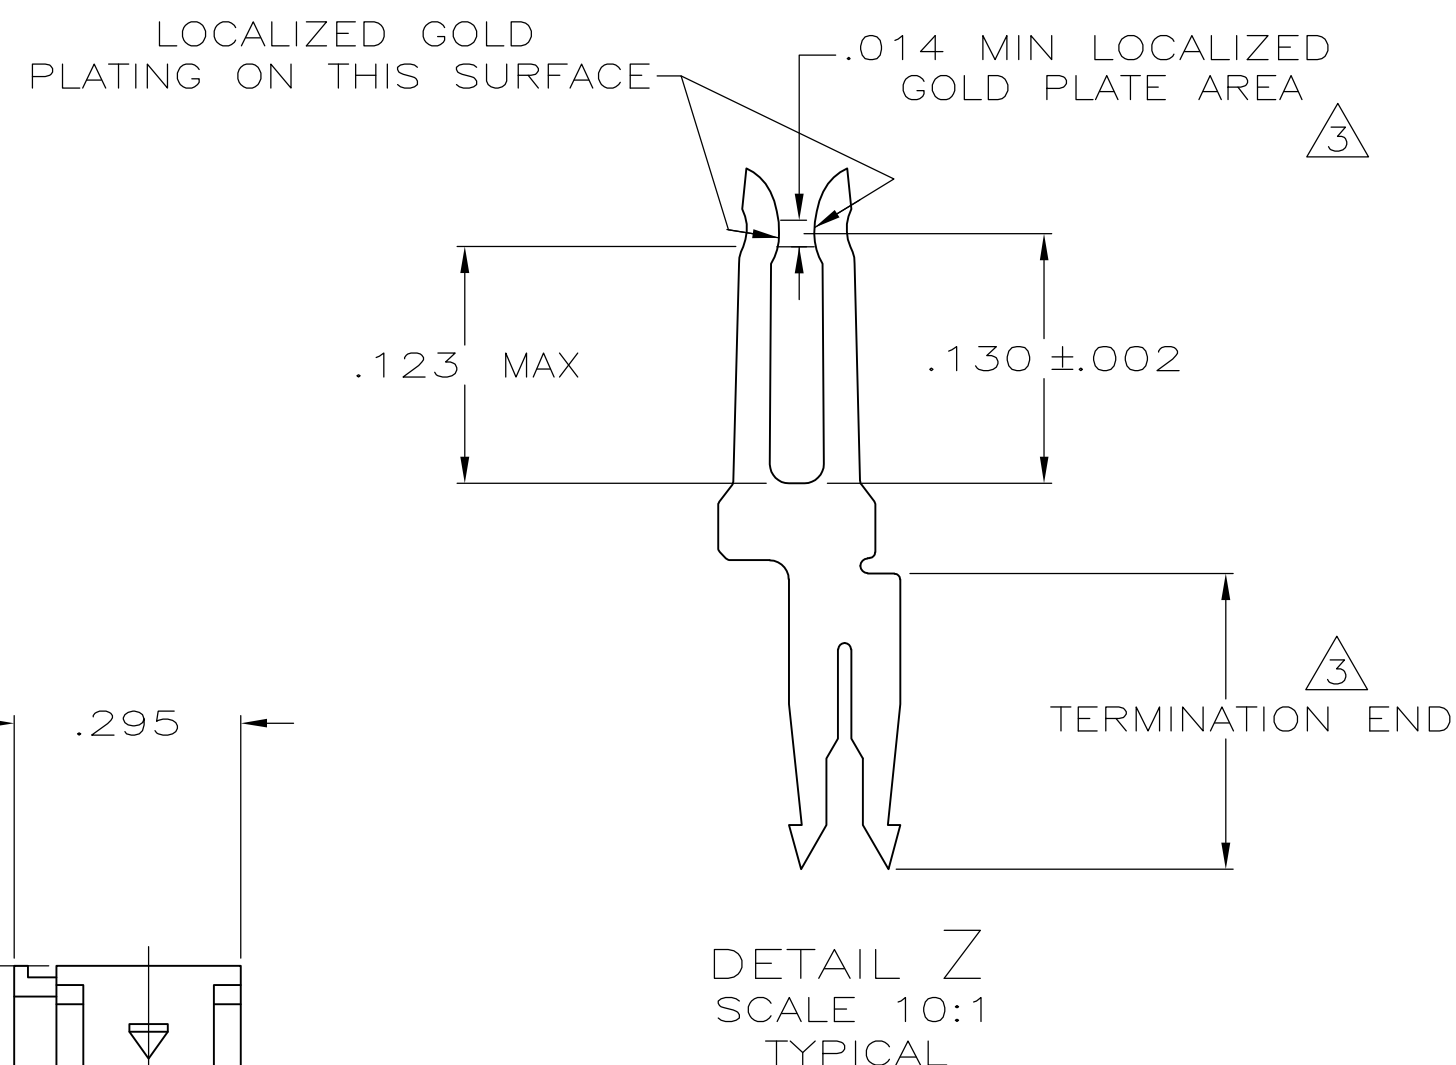

|       |       |       |       |    |               |                |
|-------|-------|-------|-------|----|---------------|----------------|
| 1.125 | 2.100 | 2.380 | 2.150 | 43 | 44            | 1-1658621-3    |
| 1.625 | 3.100 | 3.380 | 3.150 | 63 | 64            | 1-1658621-2    |
| 1.525 | 2.900 | 3.180 | 2.950 | 59 | 60            | 1-1658621-1    |
| 1.275 | 2.400 | 2.680 | 2.450 | 49 | 50            | 1-1658621-0    |
| 1.025 | 1.900 | 2.180 | 1.950 | 39 | 40            | 1658621-9      |
| .875  | 1.600 | 1.880 | 1.650 | 33 | 34            | 1658621-8      |
| .775  | 1.400 | 1.680 | 1.450 | 29 | 30            | 1658621-7      |
| .675  | 1.200 | 1.480 | 1.250 | 25 | 26            | 1658621-6      |
| .625  | 1.100 | 1.380 | 1.150 | 23 | 24            | 1658621-5      |
| .525  | .900  | 1.180 | .950  | 19 | 20            | 1658621-4      |
| .425  | .700  | .980  | .750  | 15 | 16            | 1658621-3      |
| .375  | .600  | .880  | .650  | 13 | 14            | 1658621-2      |
| .275  | .400  | .680  | .450  | 9  | 10            | 1658621-1      |
| E     | D     | C     | B     | A  | NO OF<br>POSN | PART<br>NUMBER |

|                                                                                       |  |                                           |  |                                                                                                       |           |
|---------------------------------------------------------------------------------------|--|-------------------------------------------|--|-------------------------------------------------------------------------------------------------------|-----------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                |  | DWN<br>R. SAMICK<br>22AUG03               |  |  TE Connectivity |           |
|                                                                                       |  | CHK<br>C. ROHDE<br>22AUG03                |  |                                                                                                       |           |
| DIMENSIONS:<br>INCHES                                                                 |  | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED: |  | NAME                                                                                                  |           |
|  |  | APVD<br>M. WALMSLEY<br>22AUG03            |  | RECEPTACLE ASSY,<br>CENTER & MILITARY POLARIZATION,<br>LEAD FREE, AMP-LATCH™ NOVO                     |           |
|                                                                                       |  | PRODUCT SPEC                              |  |                                                                                                       |           |
|                                                                                       |  | 108-40000                                 |  |                                                                                                       |           |
|                                                                                       |  | APPLICATION SPEC                          |  |                                                                                                       |           |
|                                                                                       |  | 114-40005                                 |  | SIZE                                                                                                  | CAGE CODE |
| MATERIAL                                                                              |  | FINISH                                    |  | DRAWING NO                                                                                            |           |
| SEE NOTES                                                                             |  | SEE NOTES                                 |  | RESTRICTED TO                                                                                         |           |
|                                                                                       |  | WEIGHT                                    |  | A2 00779 C-1658621                                                                                    |           |
|                                                                                       |  | CUSTOMER DRAWING                          |  | SCALE                                                                                                 | SHEET     |
|                                                                                       |  |                                           |  | 4:1                                                                                                   | 1 of 1    |
|                                                                                       |  |                                           |  | REV C1                                                                                                |           |