
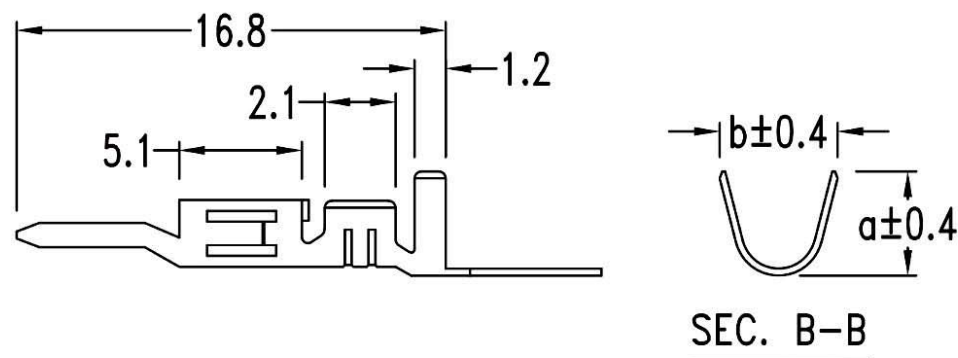


Features:

- 600V volts rating (R.M.S.)
- Thickness: 0.2mm

Specifications:

- Voltage rating: 600V AC, DC
- Current rating up to 9A (with #18 AWG)
- Dielectric withstanding Voltage: 1500V AC/minute
- Contact resistance: Initial value/10mΩ Max.
After environmental testing/20mΩ Max.
- Crimp resistance: 5mΩ Max,
- Terminal retention force: 3.0Kg Mn.
- Ambient temperature range: -40°C ~ 105°C
(including temperature rise)

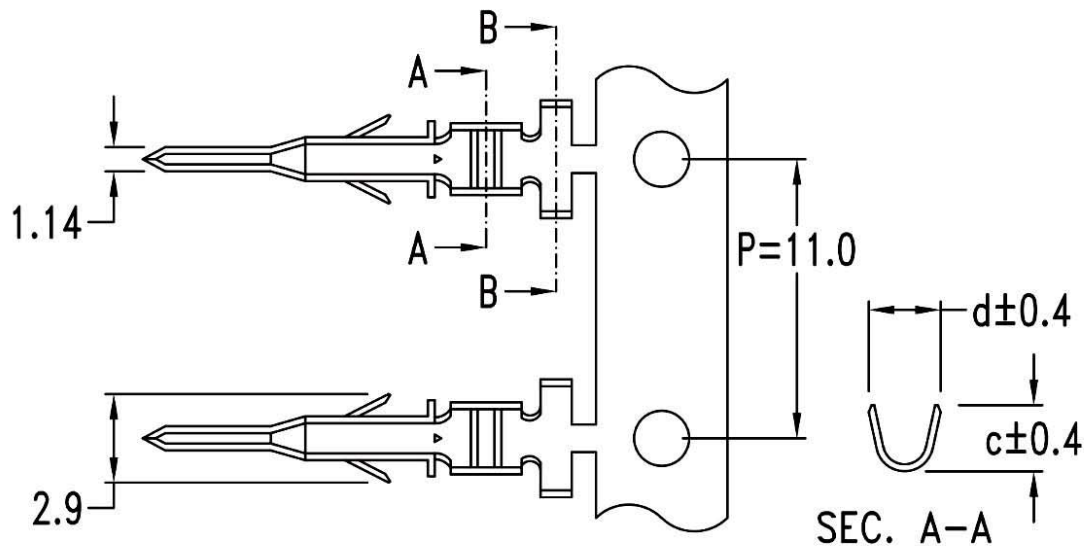

Ordering & Dimensional Information (mm)

Part No.	Dimension				Wire Size (AWG)	Material	Finished
	a	b	c	d			
N42G-T2	2.3	2.3	1.65	1.8	#22 ~ #28	Brass	Tin-plated
N42G-T1	4.5	3.6	2.3	1.9	#18 ~ #24		
N42G-T			2.7	2.3	#16		

RoHS
Compliant

APPD.
核准 HELEN

DWG.
製圖 ABBY

DATE 制表日

2024/12/10

SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

REV.
版次 B

TOLERANCE
容許公差

.000 ± 0.08
.00 ± 0.25
.0 ± 0.40

SIZE
紙張尺寸 A4

REV.
版次 B

Ninigi

PART NAME 品名

4.2mm MALE TERMINAL BRASS
MATERIAL TIN PLATING ROHS

PART NO.

料號 N42G