SPECIFICATION
MATERIAL
Insulator: Thermal Plastic UL94V-0
Contacts: Copper Alloy
Mount Ear: Copper Alloy
CONTACT PLATING
Underplate: 50u"~100u" Nickel
Contact Area: 3u"and 15u" Selective Gold
Solder Tails Area: 100u"~200u" Tin/Lead Free
(Brighten Tin/Matte Tin)


101B-T X A 0-R
1 2 3 4


1.Type
T:TOP Mount


2.Contact Plating
A:15u"Gold Plating
B:3u" Gold Plating


3.Stand Off
A:0mm

4.ROHS

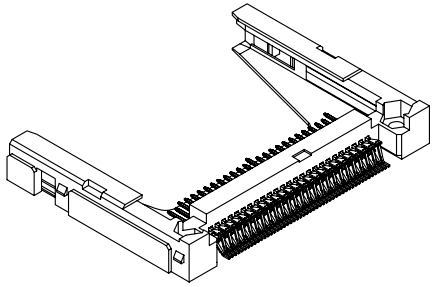

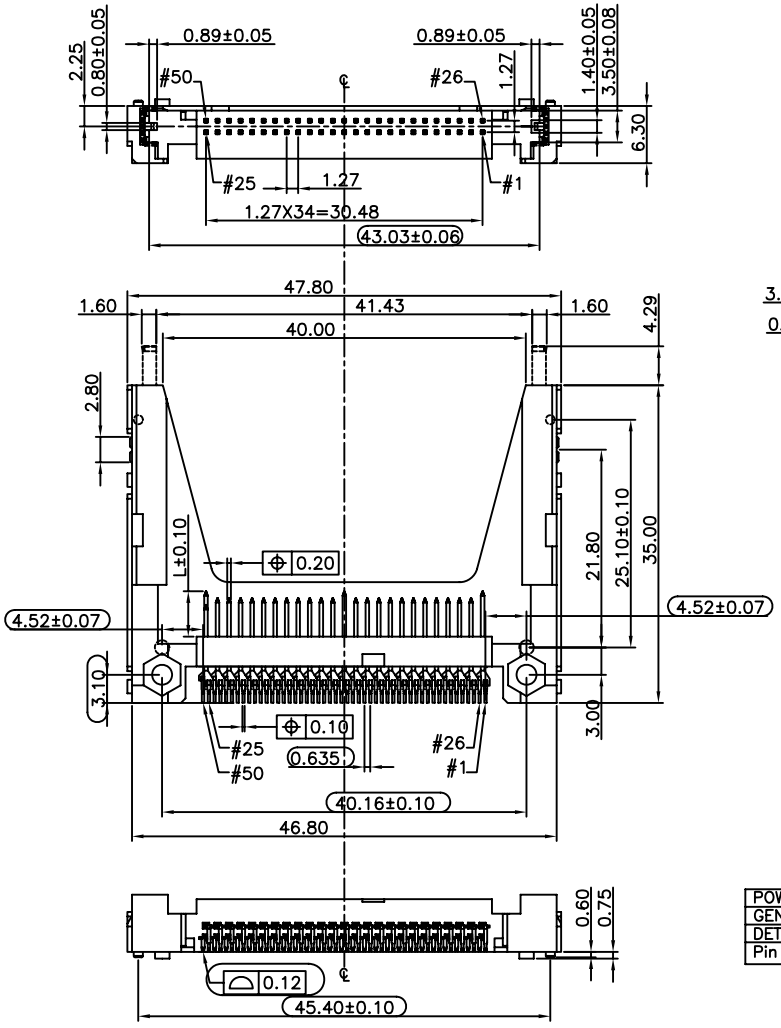

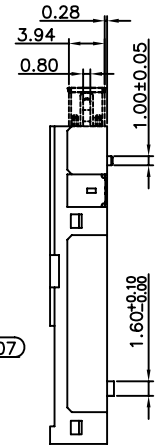

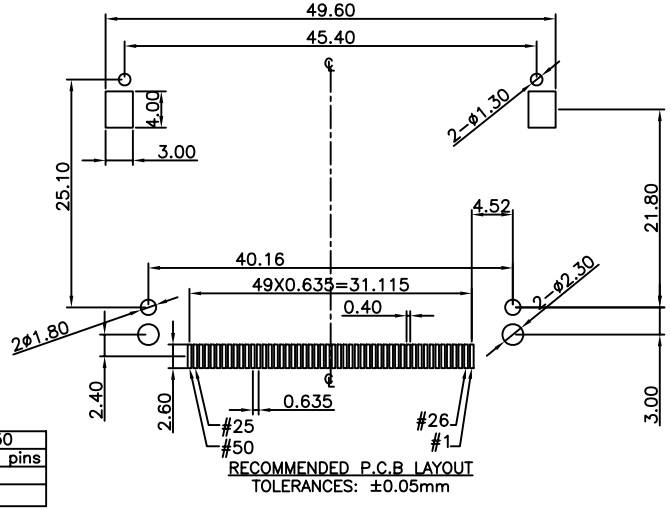

RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26
Pin type	Interface Dim. L	Pin No.

For SIP
ST For cmk/cpk

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±5'
0. ±
.0 ±0.25
.00 ±0.20

SCALE: AS SHOWED UNIT: mm
DRAWN Willis 2006/12/25
CHECKED / /
APPROVED / /
SIZE A4 REV.

ATTEND TECHNOLOGY INC.
www.attend.com.tw

DRAWN NAME: CF Type I/II Socket Top Mount,S/O=0
PRODUCT NO. 101B-TXA0-R
FILE NAME: 101B-TXA0-R

REV.	DESCRIPTION	DATE

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА