


Electro-magnetic Transducer


Shape



Type	BMT0905XH05	BMT0912XH05
Rated Voltage	5 V _{DC}	12V _{DC}
Operating Voltage	4...6V _{DC}	8-16V _{DC}
a)Rated Current	Max. 25mA	Max. 30mA
a)Sound Output at 10cm	min. 80dB	min. 82dB
a)Resonant Frequency	2600 ± 300Hz	2700 ± 300Hz
Operating Temperature	-25...+70 °C	
Storage Temperature	-30...+80 °C	
Weight	1g	

a)Value applying at rated voltage.

Dimension

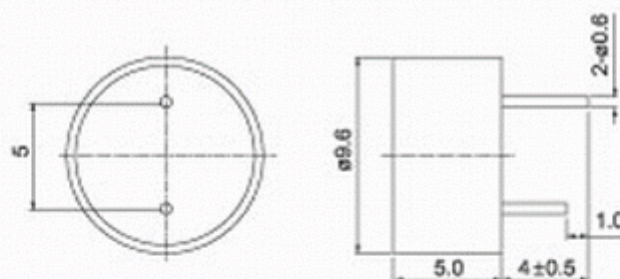

Characteristic

