
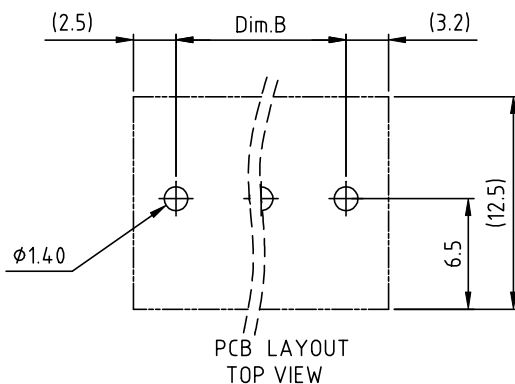
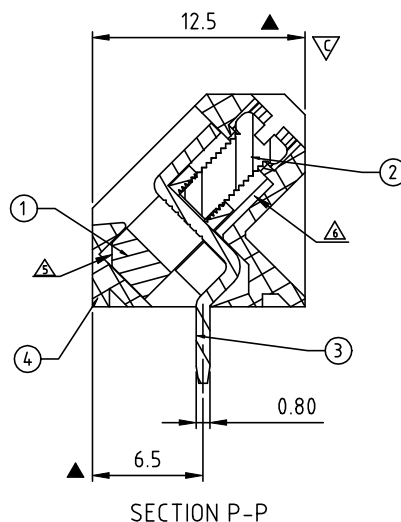


N = Number of poles
Dim A=Nx5.0
Dim B=(N-1)x5.0

	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

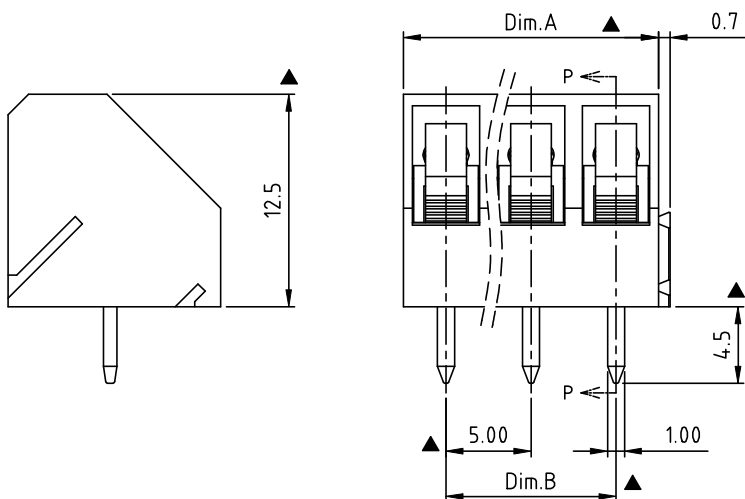

SIGN	DATE	DESCRIPTION	APPROVER
△	11/28'06	Electrical changed	Tony
△	04/30'09	Add VDE Standard	Eris
△	04/30'09	The tolerance of dimension is changed	Eris
△	04/30'09	Temperature changed from -33~105°C to -40~115°C	Eris
△	09/14'09	Add chamfer	Aaron
△	09/22'11	Structure changed	ChenMing
△	12/03'12	Soldering temperature is changed from 250°C±10°C/5 Sec to 260°C±5°C/5 Sec	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material:

- Item① Clamp: Brass, Ni plated
- Item② Terminal screw: Steel Zinc plating "-" slot type.
- Item③ Wire guard solder pin: Brass, Tin plated
- Item④ Terminal housing: Thermoplastic (UL94V-0)

△ △ Electrical:	UL/VDE
● Voltage rating:	300V/250V
● Current rating:	15A/10A
● Wire range:	0.34-4.0mm ²
● Solid wire(AWG):	12-24
● Stranded wire(AWG):	12-24
● Torque:	3.5 Lb-In / 0.4 N.m
● Screw:	M2.5
● Wire strip length:	6-7mm
● Withstanding Voltage:	1.6 KV/2 KV
△ ● Operating temperature:	-40°C to +115°C
△ ● Soldering temperature:	260°C±5°C/5 Sec
● Safety Approval:	UL US VDE
● Critical dimension:	▲

TG xx 0 1 x 0 B xxx G

No. OF POLES

02: 2 POLES
03: 3 POLES

24: 24 POLES

COLOR

0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange (RAL2011/P)
4 Yellow (RAL1018/A)
5 Green (RAL6018/T)
6 Blue (RAL5015/A)
8 Grey (RAL7035/D)
9 White (RAL1102)
C Grey (RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

000 "@" logo
00A "ANY" logo

Any special item by
customer request.
please contact sales
department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TG 5.0mm Long Interlock Type Series 2p-24p						
PART NO.	TGxx01x0BxxxG			DWG NO.	8TG0101		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Guoxue 2012.12.03	Guoxue 2012.12.03				
				SHEET: 01/01	UNIT: mm SCALE: NONE REV.: H	Tolerance	
						X.	±0.50
						X.X	±0.30
						X.XX	±0.10
						X°	±1°