






PANEL CUTOUT
MAX. PANEL THICKNESS 6mm

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	1-2



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- RATING: 20A/250VAC
- ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 100M Ω @ 500VDC
- DIELECTRIC STRENGTH: 1,500 VAC
- CONTACT RESISTANCE: 50m Ω
- OPERATING TEMP.: -40°C to 85°C
- TRAVEL: 3.5mm
- ▲ DENOTES CRITICAL PARAMETER.
- LAMP VOLTAGE: 12V
- ILLUMINATION COLOR: BLUE
- INGRESS PROTECTION: IP67
- HARDWARE SUPPLIED: O-RING AND HEXNUT

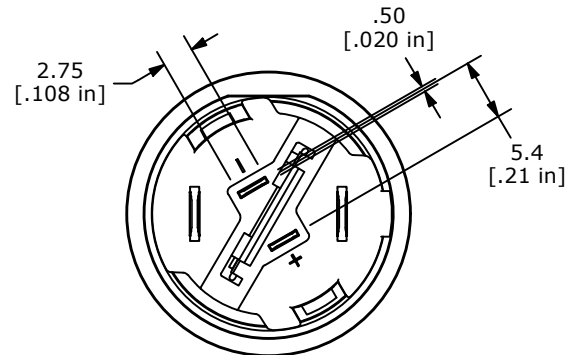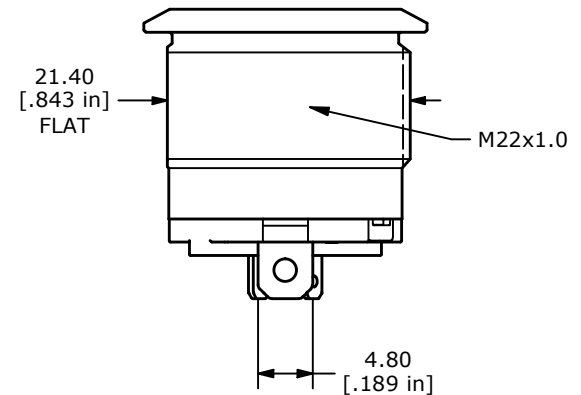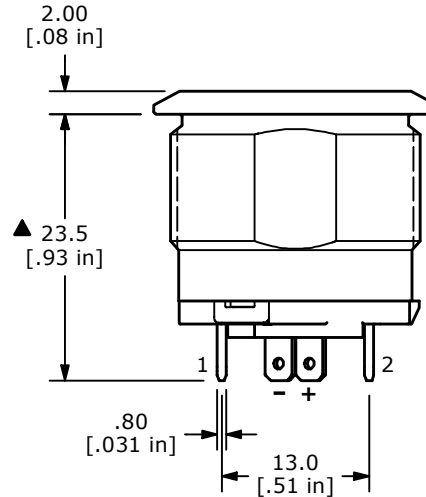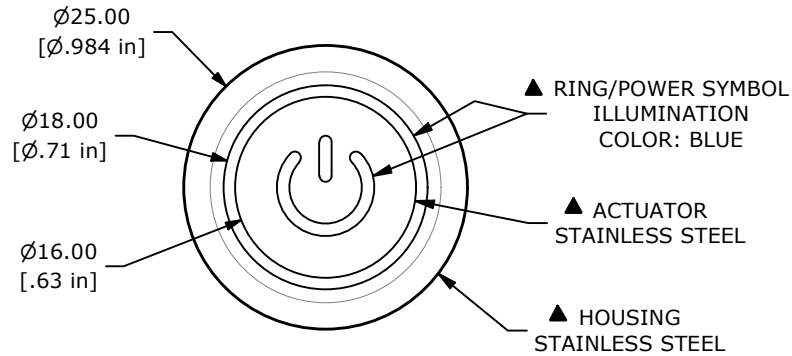

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102939	Release	09/13/24	MW	TITLE PVHC7F23SS644				100128246
					SCALE	DATE	DR	DWG	REV
					3:2	8/14/2024	MW	52-PVHC7F23SS644	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED