


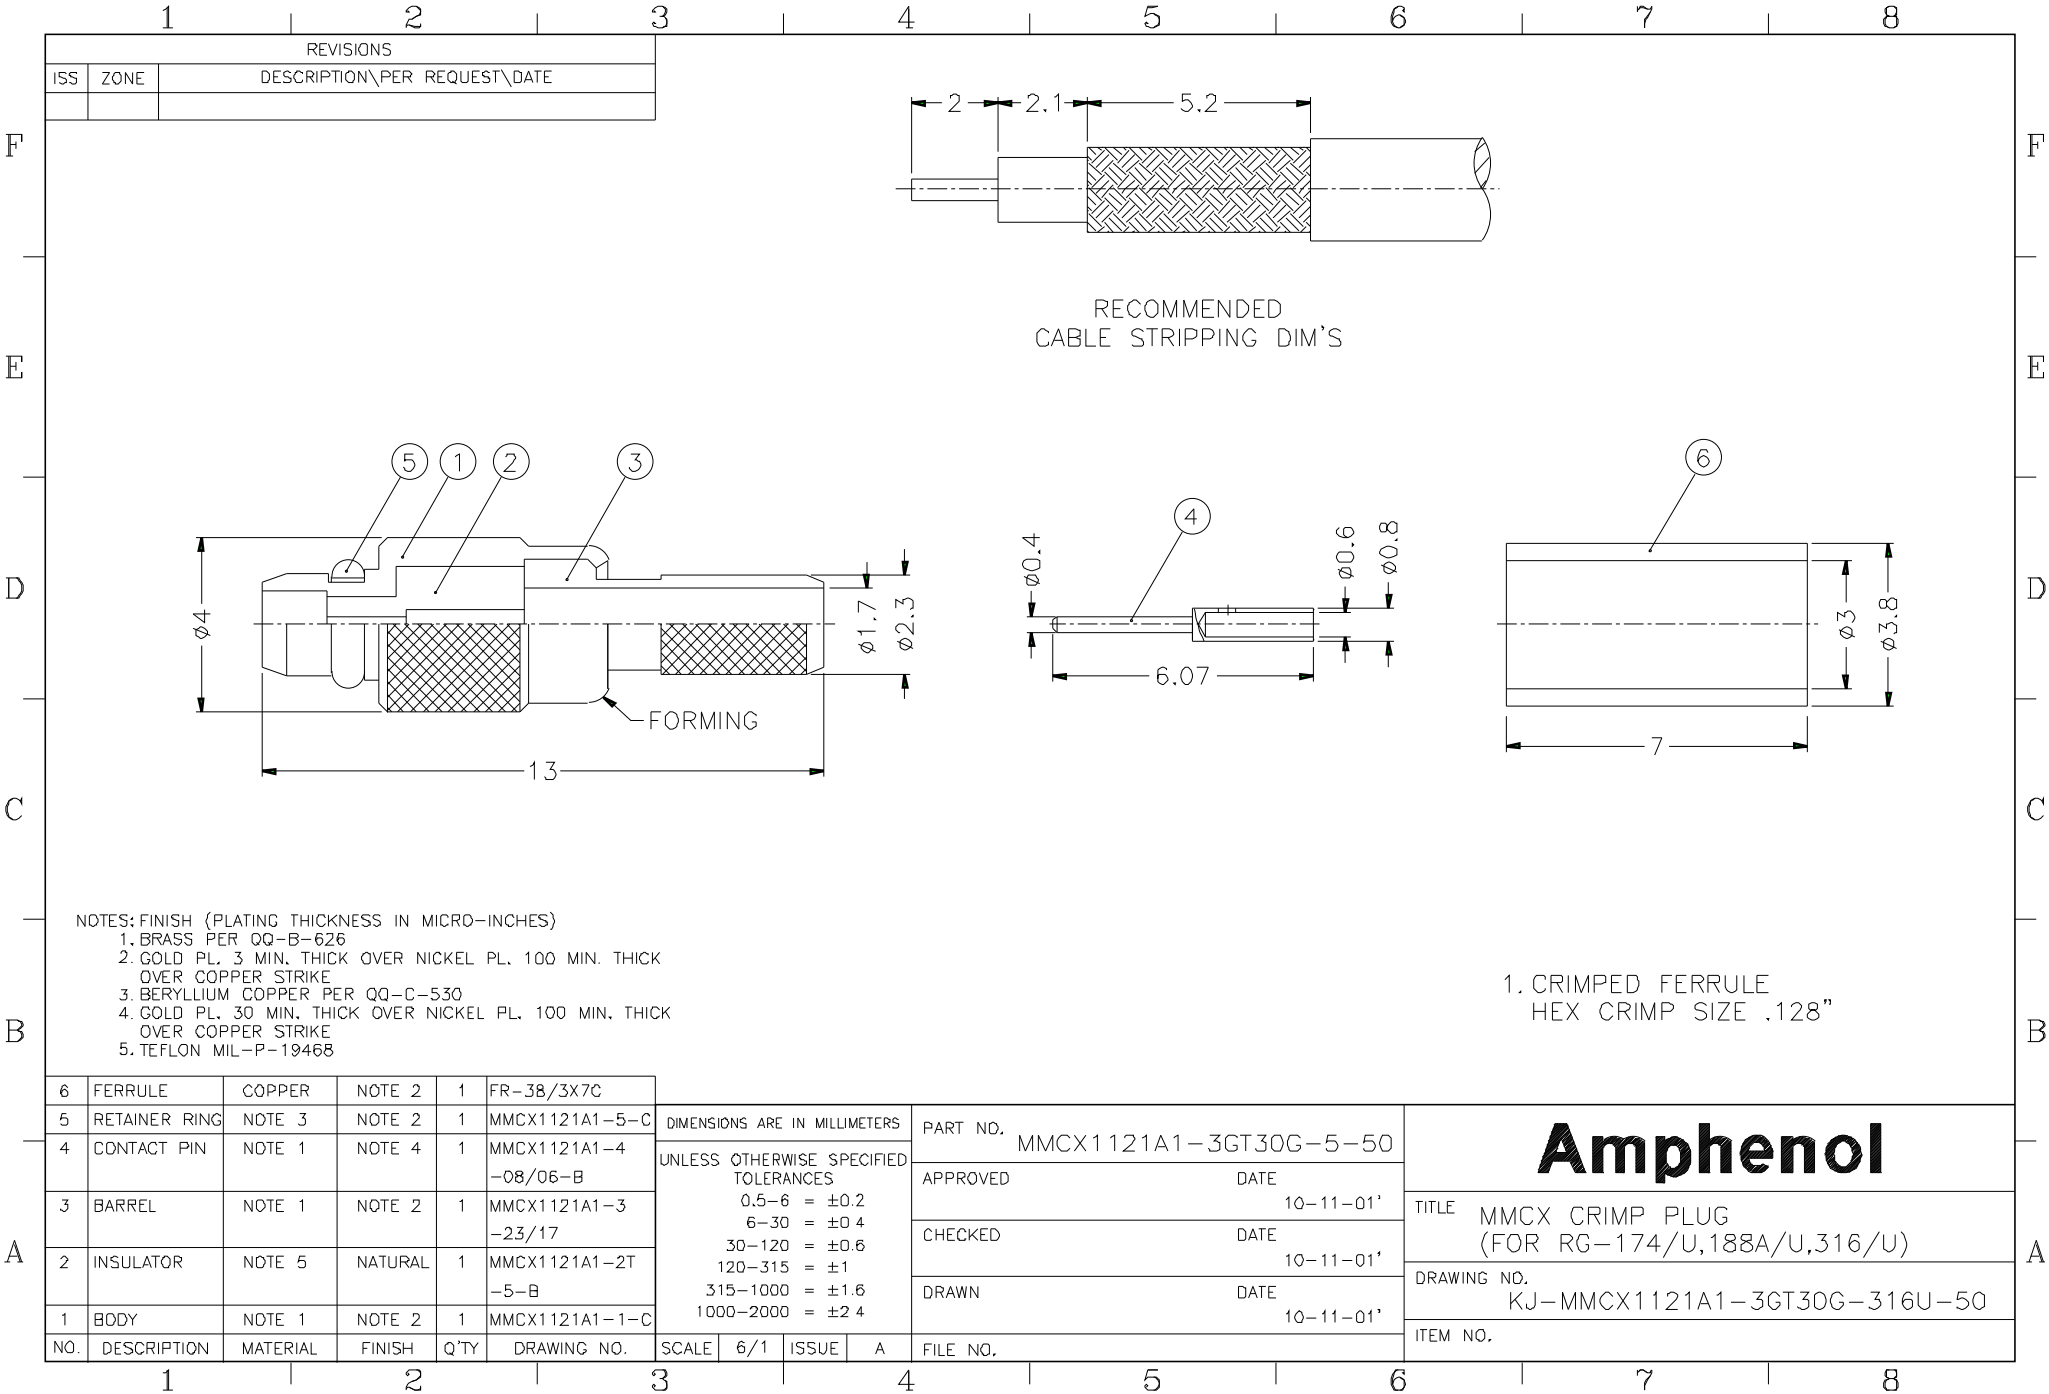

RECOMMENDED
CABLE STRIPPING DIM'S

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK
OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QQ-C-530
4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK
OVER COPPER STRIKE
5. TEFLON MIL-P-19468

6	FERRULE	COPPER	NOTE 2	1	FR-38/3X7C	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4	PART NO. MMCX1121A1-3GT30G-5-50			Amphenol TITLE MMCX CRIMP PLUG (FOR RG-174/U,188A/U,316/U) DRAWING NO. KJ-MMCX1121A1-3GT30G-316U-50 ITEM NO.
5	RETAINER RING	NOTE 3	NOTE 2	1	MMCX1121A1-5-C		APPROVED DATE 10-11-01'			
4	CONTACT PIN	NOTE 1	NOTE 4	1	MMCX1121A1-4-08/06-B		CHECKED DATE 10-11-01'			
3	BARREL	NOTE 1	NOTE 2	1	MMCX1121A1-3-23/17		DRAWN DATE 10-11-01'			
2	INSULATOR	NOTE 5	NATURAL	1	MMCX1121A1-2T-5-B					
1	BODY	NOTE 1	NOTE 2	1	MMCX1121A1-1-C					
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	6/1	ISSUE	A	FILE NO.