
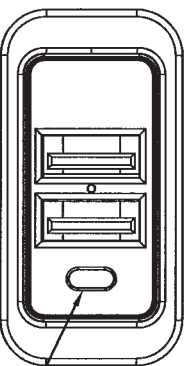


Rating	Input	12-24V DC	Mounting Hole
	Output	2 Port USB 5V-2.4A/2.4A	
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Operation Temperature	-20°C~+45°C		
Storage Temperature	-20°C~+60°C		
			36.8^{+0.3}_{-0.0} 21^{+0.3}_{-0.0}
			Thickness: 1.0~5.5mm

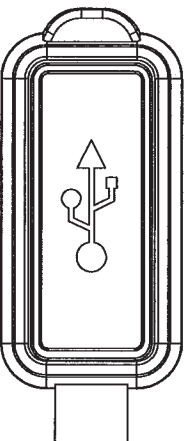

Led


***Materials:**

Frame: Black,Nylon 66 (94V-2)

Terminals : Nickel plated brass .

Water proof sealing cap.

*Sealed: Standard socket provides to IP64.

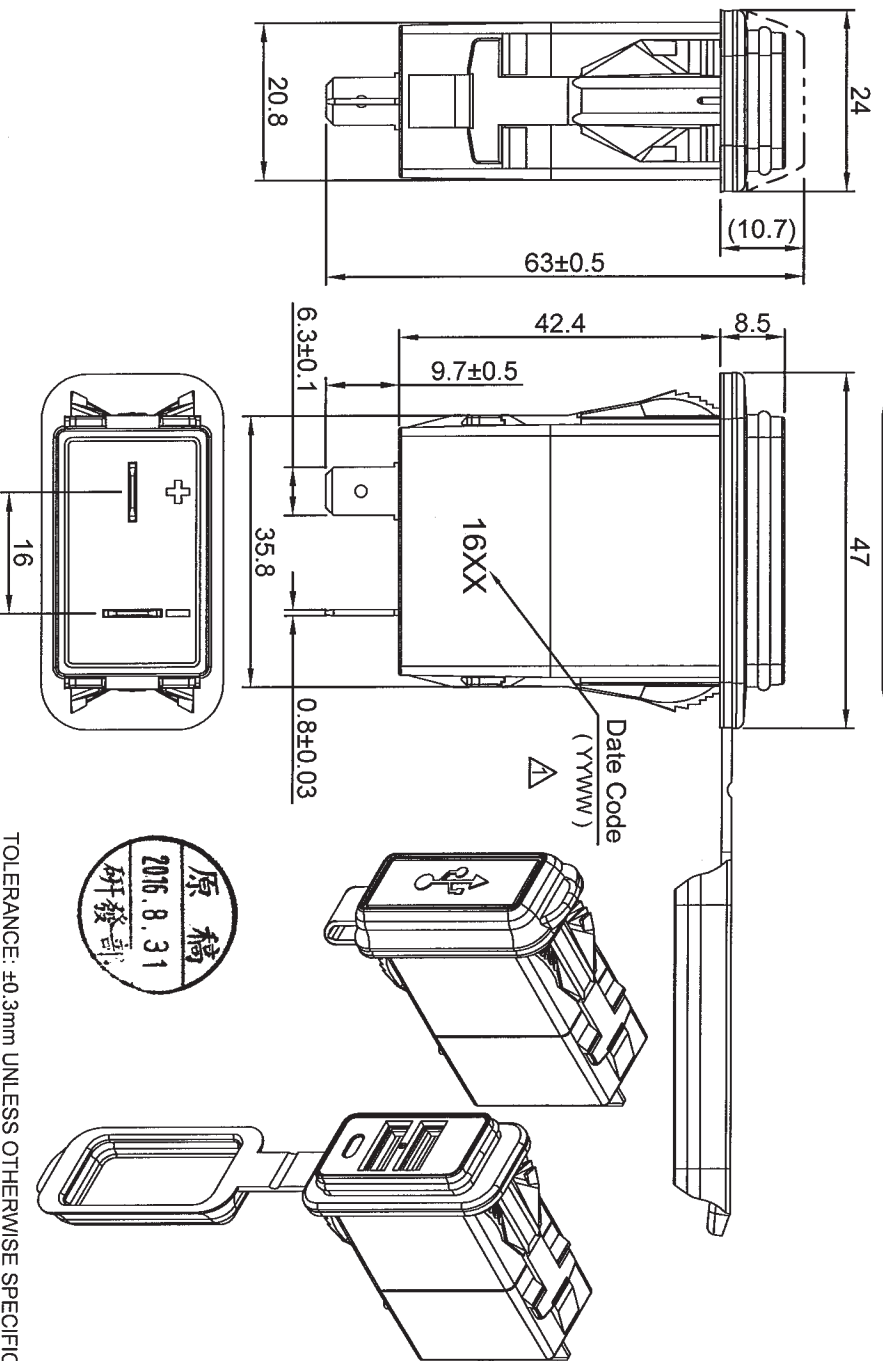

TOLERANCE: ±0.3mm UNLESS OTHERWISE SPECIFIED.

8/18/16	Jam Chan	增加Date Code 標示位置.					
Date	Name	Description		No.			
Drawn	Checked	Approved	SCI BOM No.	1251372	Model Name	USB Socket	
Jam Chan			Customer No.		Model No.	A13-208	Rev.
1/20/15	8/18/16		Unit	mm	Shin Chin Industrial Co., Ltd.		1