

PIEZO BUZZER

Customer	
Customer P/O	
BeStar Model Name	BPT-380XAP24VDC
Product No.	041003
Issue No.	BS/TEP01.166A
Issue Date	03/05/09

Approval:

- 1.Characteristic
- 2.Dimension
- 3.Reliability Test
- 4.Packing



BESTAR ELECTRONICS INDUSTRY CO.,LTD
TianAn Industry Park4/F,Site B ChangZhou New District
Tel:86-519-5103228
Fax:86-519-5131010
Http:www.be-star.com
E-Mail:bestarco@pub.cz.jsinfo.net

BPT-380XAP24VDC(BPT-380XA24)


1. Characteristic

Electrical and Mechanical Characteristics



No.	Item	Specifications
1.	Operating Voltage (VDC)	10-28
2.	Rated Voltage (VDC)	24
3.	a) Supply Current (mA)(MAX)	20
4.	a) Sound Pressure Level at 30 cm(dB)(MIN)	95
5.	a) Resonant Frequency(Hz)	2900 ± 500
6.	@Tone Nature	FAST PULSE
7.	Operating Temperature(° C)	-20...+60
8.	Storage Temperature(° C)	-30...+70
	a) Value applying at rated voltage	
	@ Rated Pulse 3± 20%Hz	

★Standard Output Measurement Setup

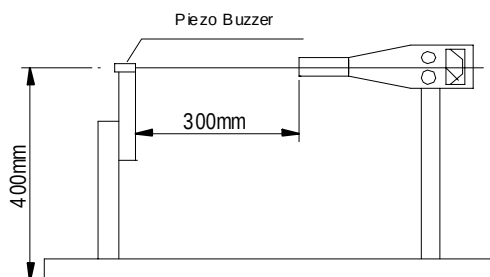

DIS.	王善梅	DATE		Page:1 of 3	BPT-380XAP24VDC
CHEC.		DATE		3rd angle projection	Piezo Buzzer
APPR.		DATE			DRG NO BS/TEP01.166A




BESTAR ELECTRONICS INDUSTRY CO.,LTD

TianAn Industry Park 4/F, Site B Chang Zhou New District

E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com

BPT-380XAP24VDC(BPT-380XA24)

2. Dimension

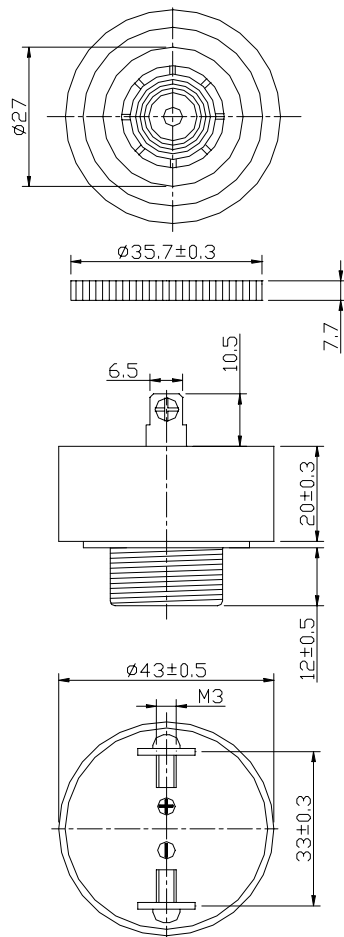

This print and information there in are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content

DIS.	王善梅	DATE		Page:2 of 3	BPT-380XAP24VDC
CHEC.		DATE		3rd angle projection	
APPR.		DATE			
BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					DRG NO BS/TEP01.166A



BPT-380XAP24VDC(BPT-380XA24)

3. Reliability test

- 3.1 high temperature test

Temperature

+70° C

Duration

96hrs
- 3.2 low temperature test

Temperature

-30° C

Duration

96hrs
- 3.3 life test in normal temperature

Power supply


24V

Duration

500hrs
- 3.4 temperature cycle test

Cycles


5



- 3.5 Humidity cycle test

Cycles

5



all these tests above should be measured after leaving normal temperature for 2hrs.

- 3.6 Drop test

Height

70cm

(to 10mm thickness woodenboard)

Direction

3

Notice: All specification must be satisfied in this condition.

4.Packing

- 4.1 Packing Quantity :1pcs per small box

250pcs per carton

carton size 49x25x30cm,

DIS.	王善梅	DATE		Page:3 of 3	BPT-380XAP24VDC
CHEC.		DATE		3rd angle projection	
APPR.		DATE			Piezo Buzzer
Bestar Acoustic BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					DRG NO BS/TEP01.166A