

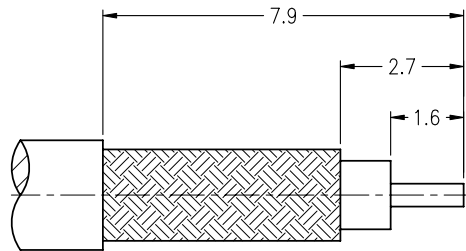



NOTES:

- MATERIALS AND FINISHES
BODY – BRASS, GOLD PLATING
CONTACT – BRASS, GOLD PLATING
INSULATOR – PTFE, NATURAL
- ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC 0–6 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.
- MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: –65°C to +165°C
- CRIMPED FERRULE
HEX CRIMP SIZE .128"
- CONTACT PIN TO SOLDER

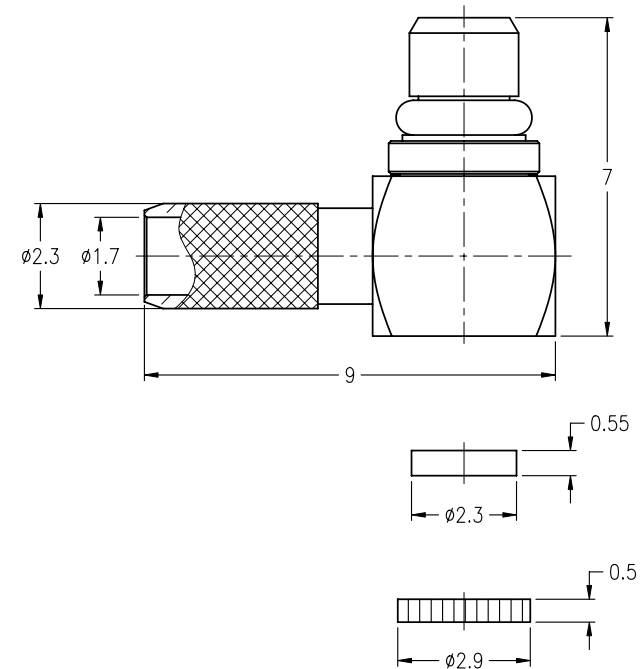

RECOMMENDED
CABLE STRIPPING DIM'S

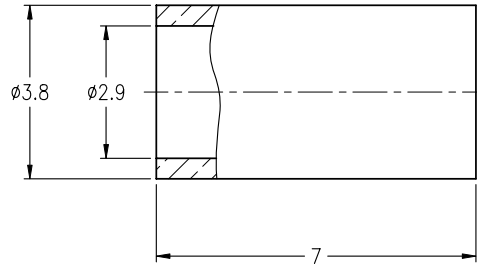

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ±0.05mm 0.5 – 6mm ±0.1mm 6 – 30mm ±0.2mm 30 – 120mm ±0.3mm ANGLES ±1°	MATERIAL	DRAWN	DATE	TITLE		Amphenol RF	
		R.MAO	19-Dec-13	MMCX R/A CRIMP PLUG (FOR RG-174/U,188A/U,316/U)		Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com	
		ENGINEER	DATE			DRAWING NO. MMCX1112A1-3GT30G-316U-50	
		S.LI	19-Dec-13	SCALE: 6/1		ITEM NO. 091112AAB36GE5F	
NOTICE – These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	REFERENCE	APPROVED	DATE	SHEET 2 OF 2		PART NO. 908-43300	
	FINISH	S.HSIEH	20-Dec-13	CAD FILE		REV K	
		F:\DWG\MMCX\1112A1\316U-50\3GT30G-KSZ					