THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	Z	REVISED PER ECO–11–020101	12APR2012	CJV	CWR

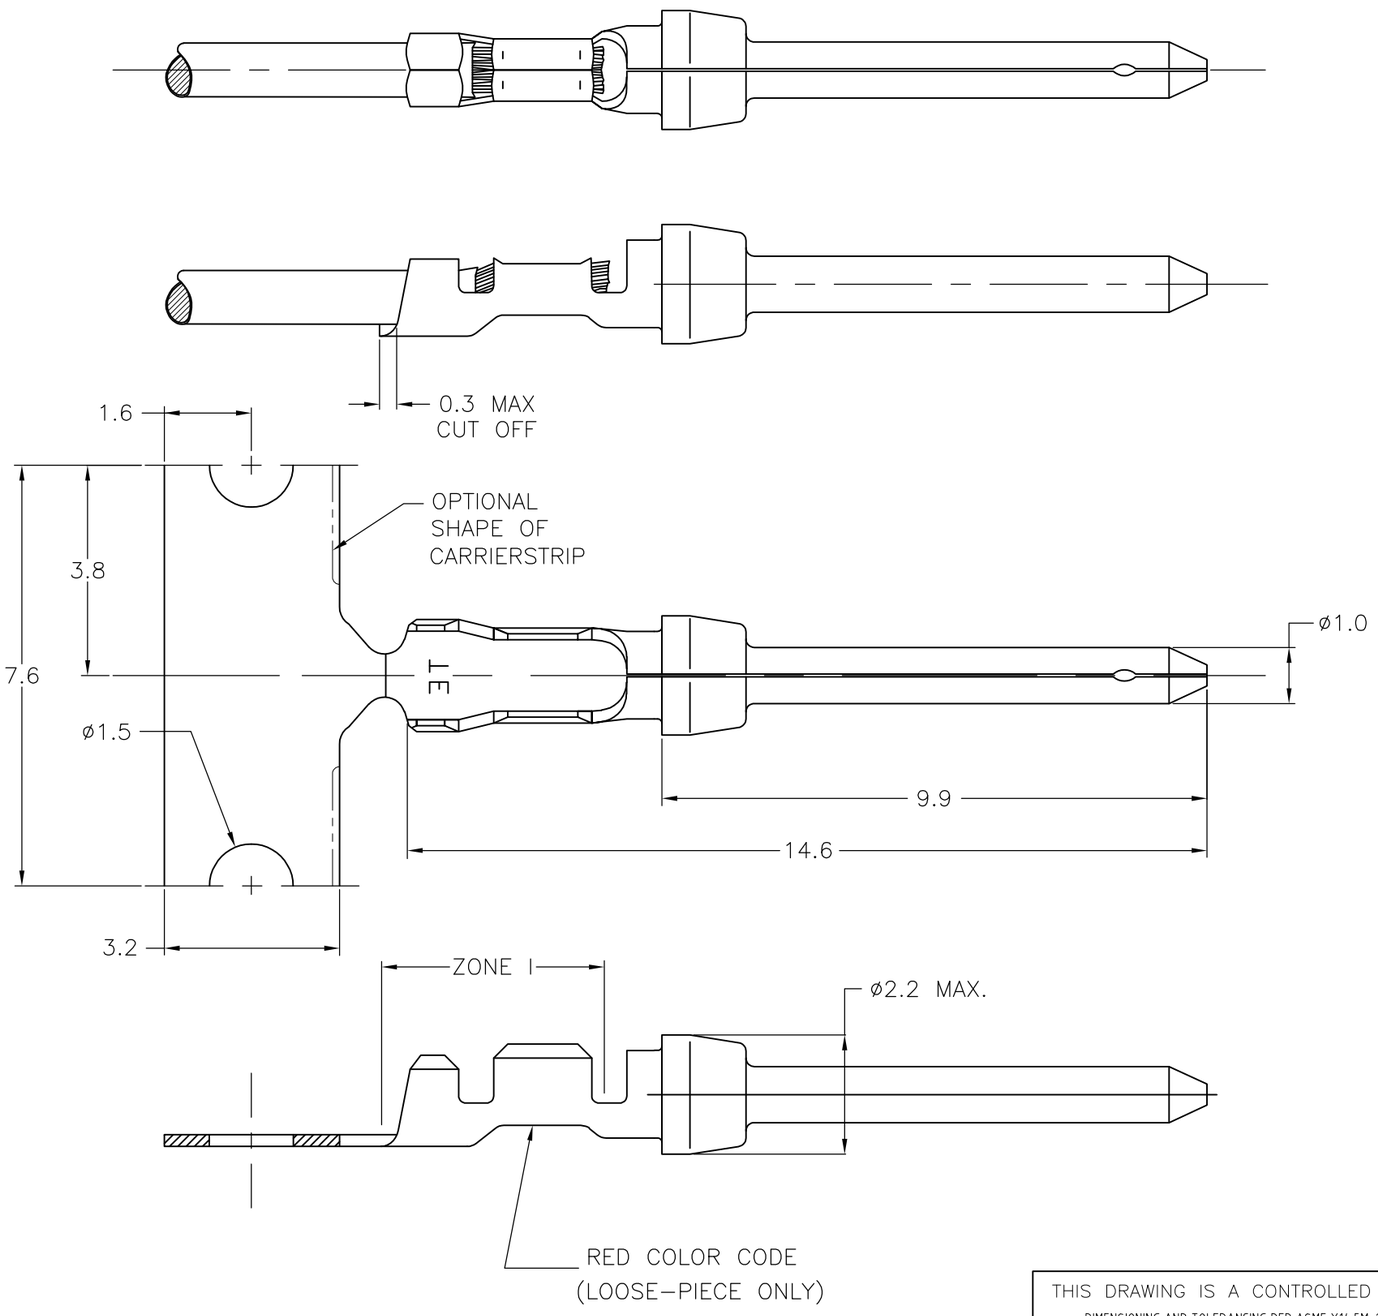

1. FOR MINI–APPLICATOR–12500 PCS REEL.
2. FOR REEL–FEED HAND TOOLING–500 PCS REEL.
3. FOR HAND TOOLING– LOOSE PIECE.
4. MATERIAL: BRASS.
5. FINISH:
   - Ni UNDERPLATING ALL OVER.
   - CONTACT AREA PLATING MEETS IEC–807–3 PERFORMANCE LEVEL 2.
   - CRIMP ZONE Sn PLATED.

WIRE RANGE: 24–20 AWG(0,56–0,20mm²)
INSUL. RANGE: 1,27 – 1,52 DIA.

5	166293–1	5–166053–1	166053–1
FINISH	LOOSE PIECE 3	PART NUMBER 2	PART NUMBER 1

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONING AND TOLERANCING PER ASME Y14.5M–2009

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ± –
	1 PLC ± 0,127
	2 PLC ± –
	3 PLC ± –
	4 PLC ± –
	ANGLES ± –
MATERIAL: –	FINISH: –

DWN	–	
CHK	K. MALCZYK	09SEP08
APVD	T. DE BOER	09SEP08
PRODUCT SPEC	108–40005	
APPLICATION SPEC	114–10000	
WEIGHT	–	

TE Connectivity

NAME: PIN CONTACT, SIZE 20 DF. –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–166053	–

CUSTOMER DRAWING	SCALE NTS	SHEET 1 OF 1	REV Z

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА