
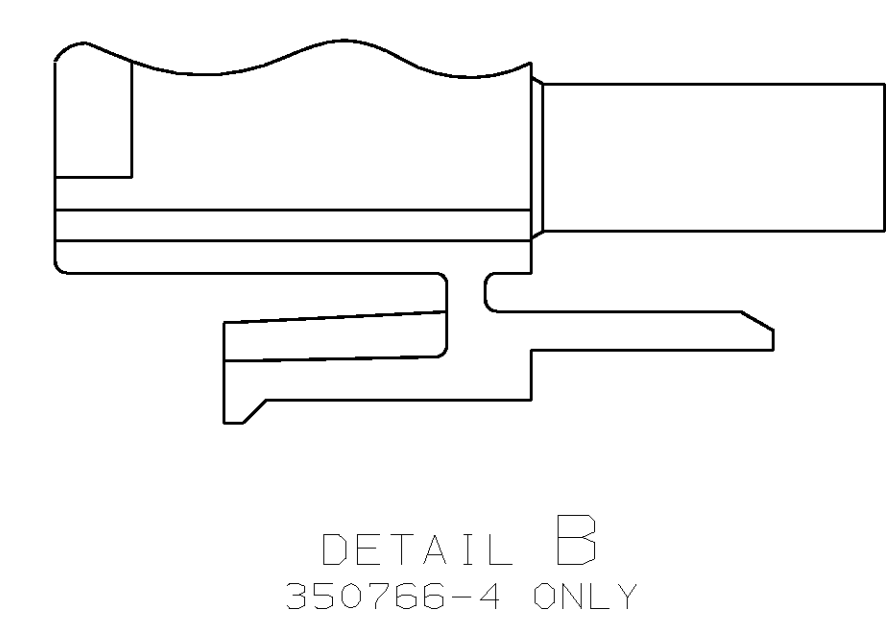
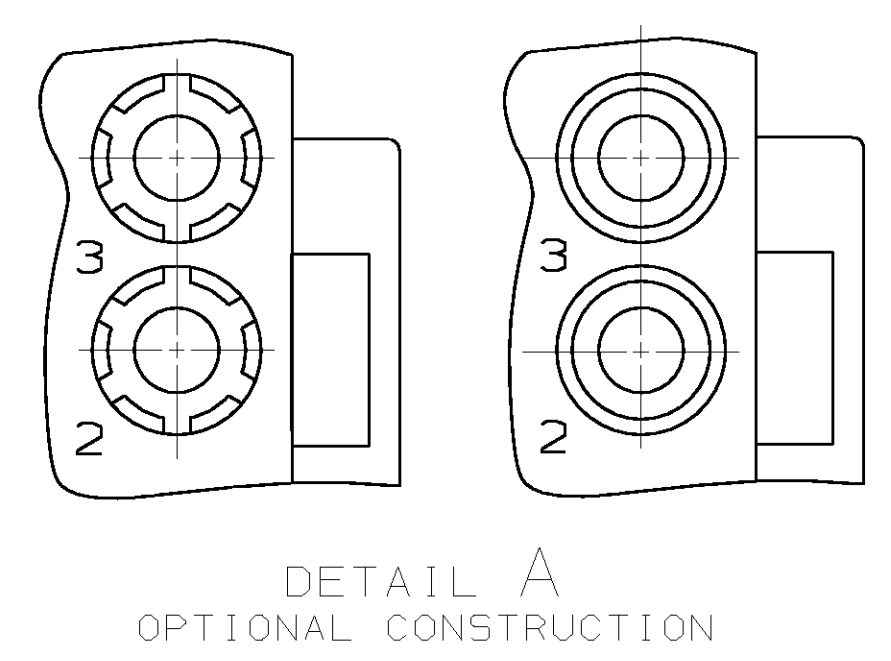
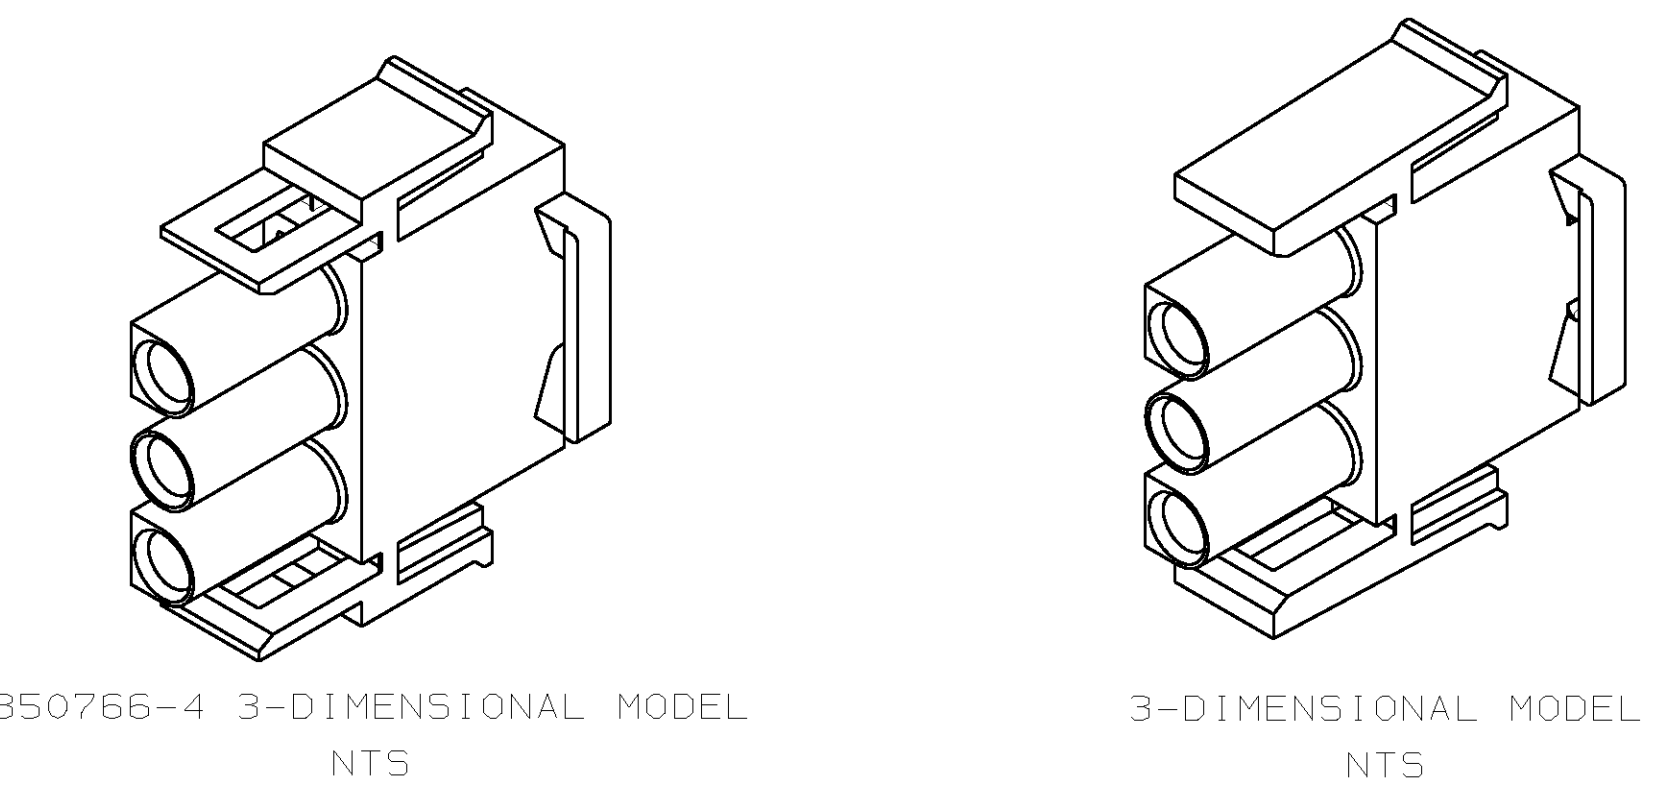
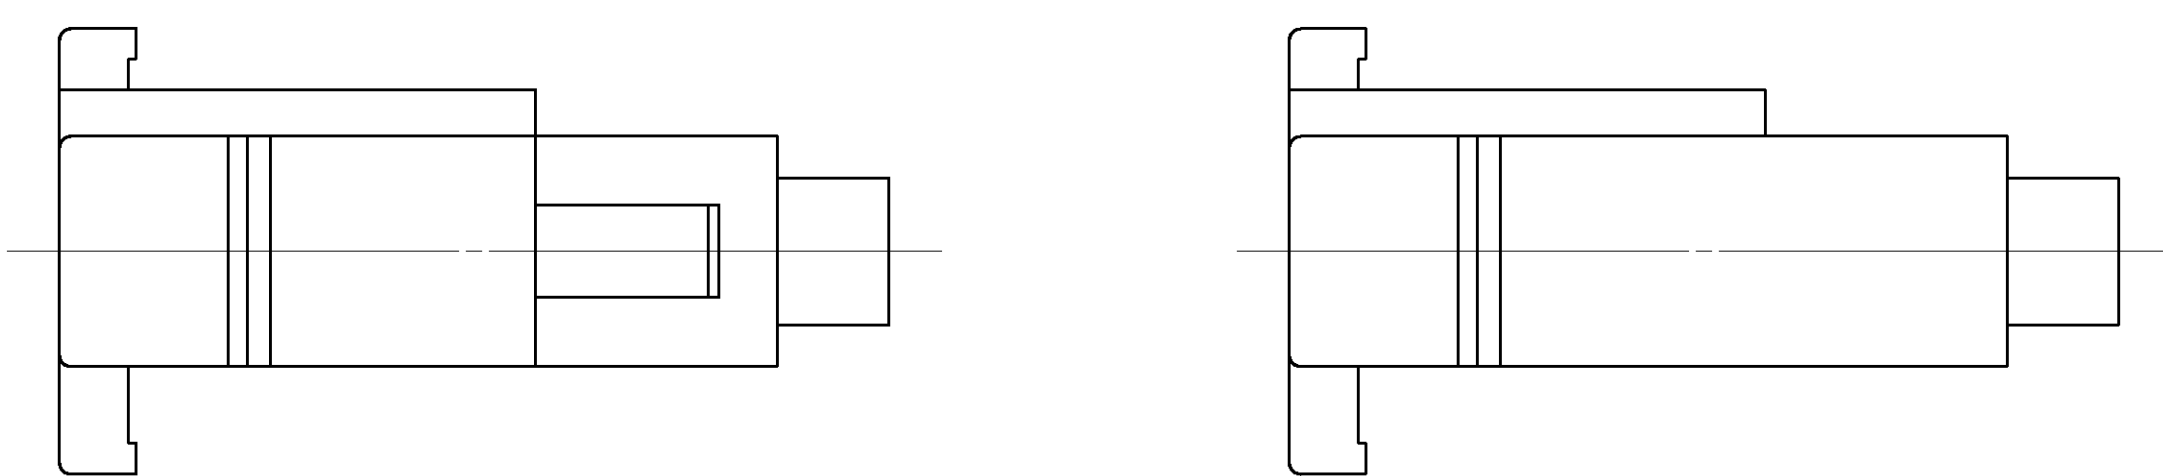


D

C

B

A

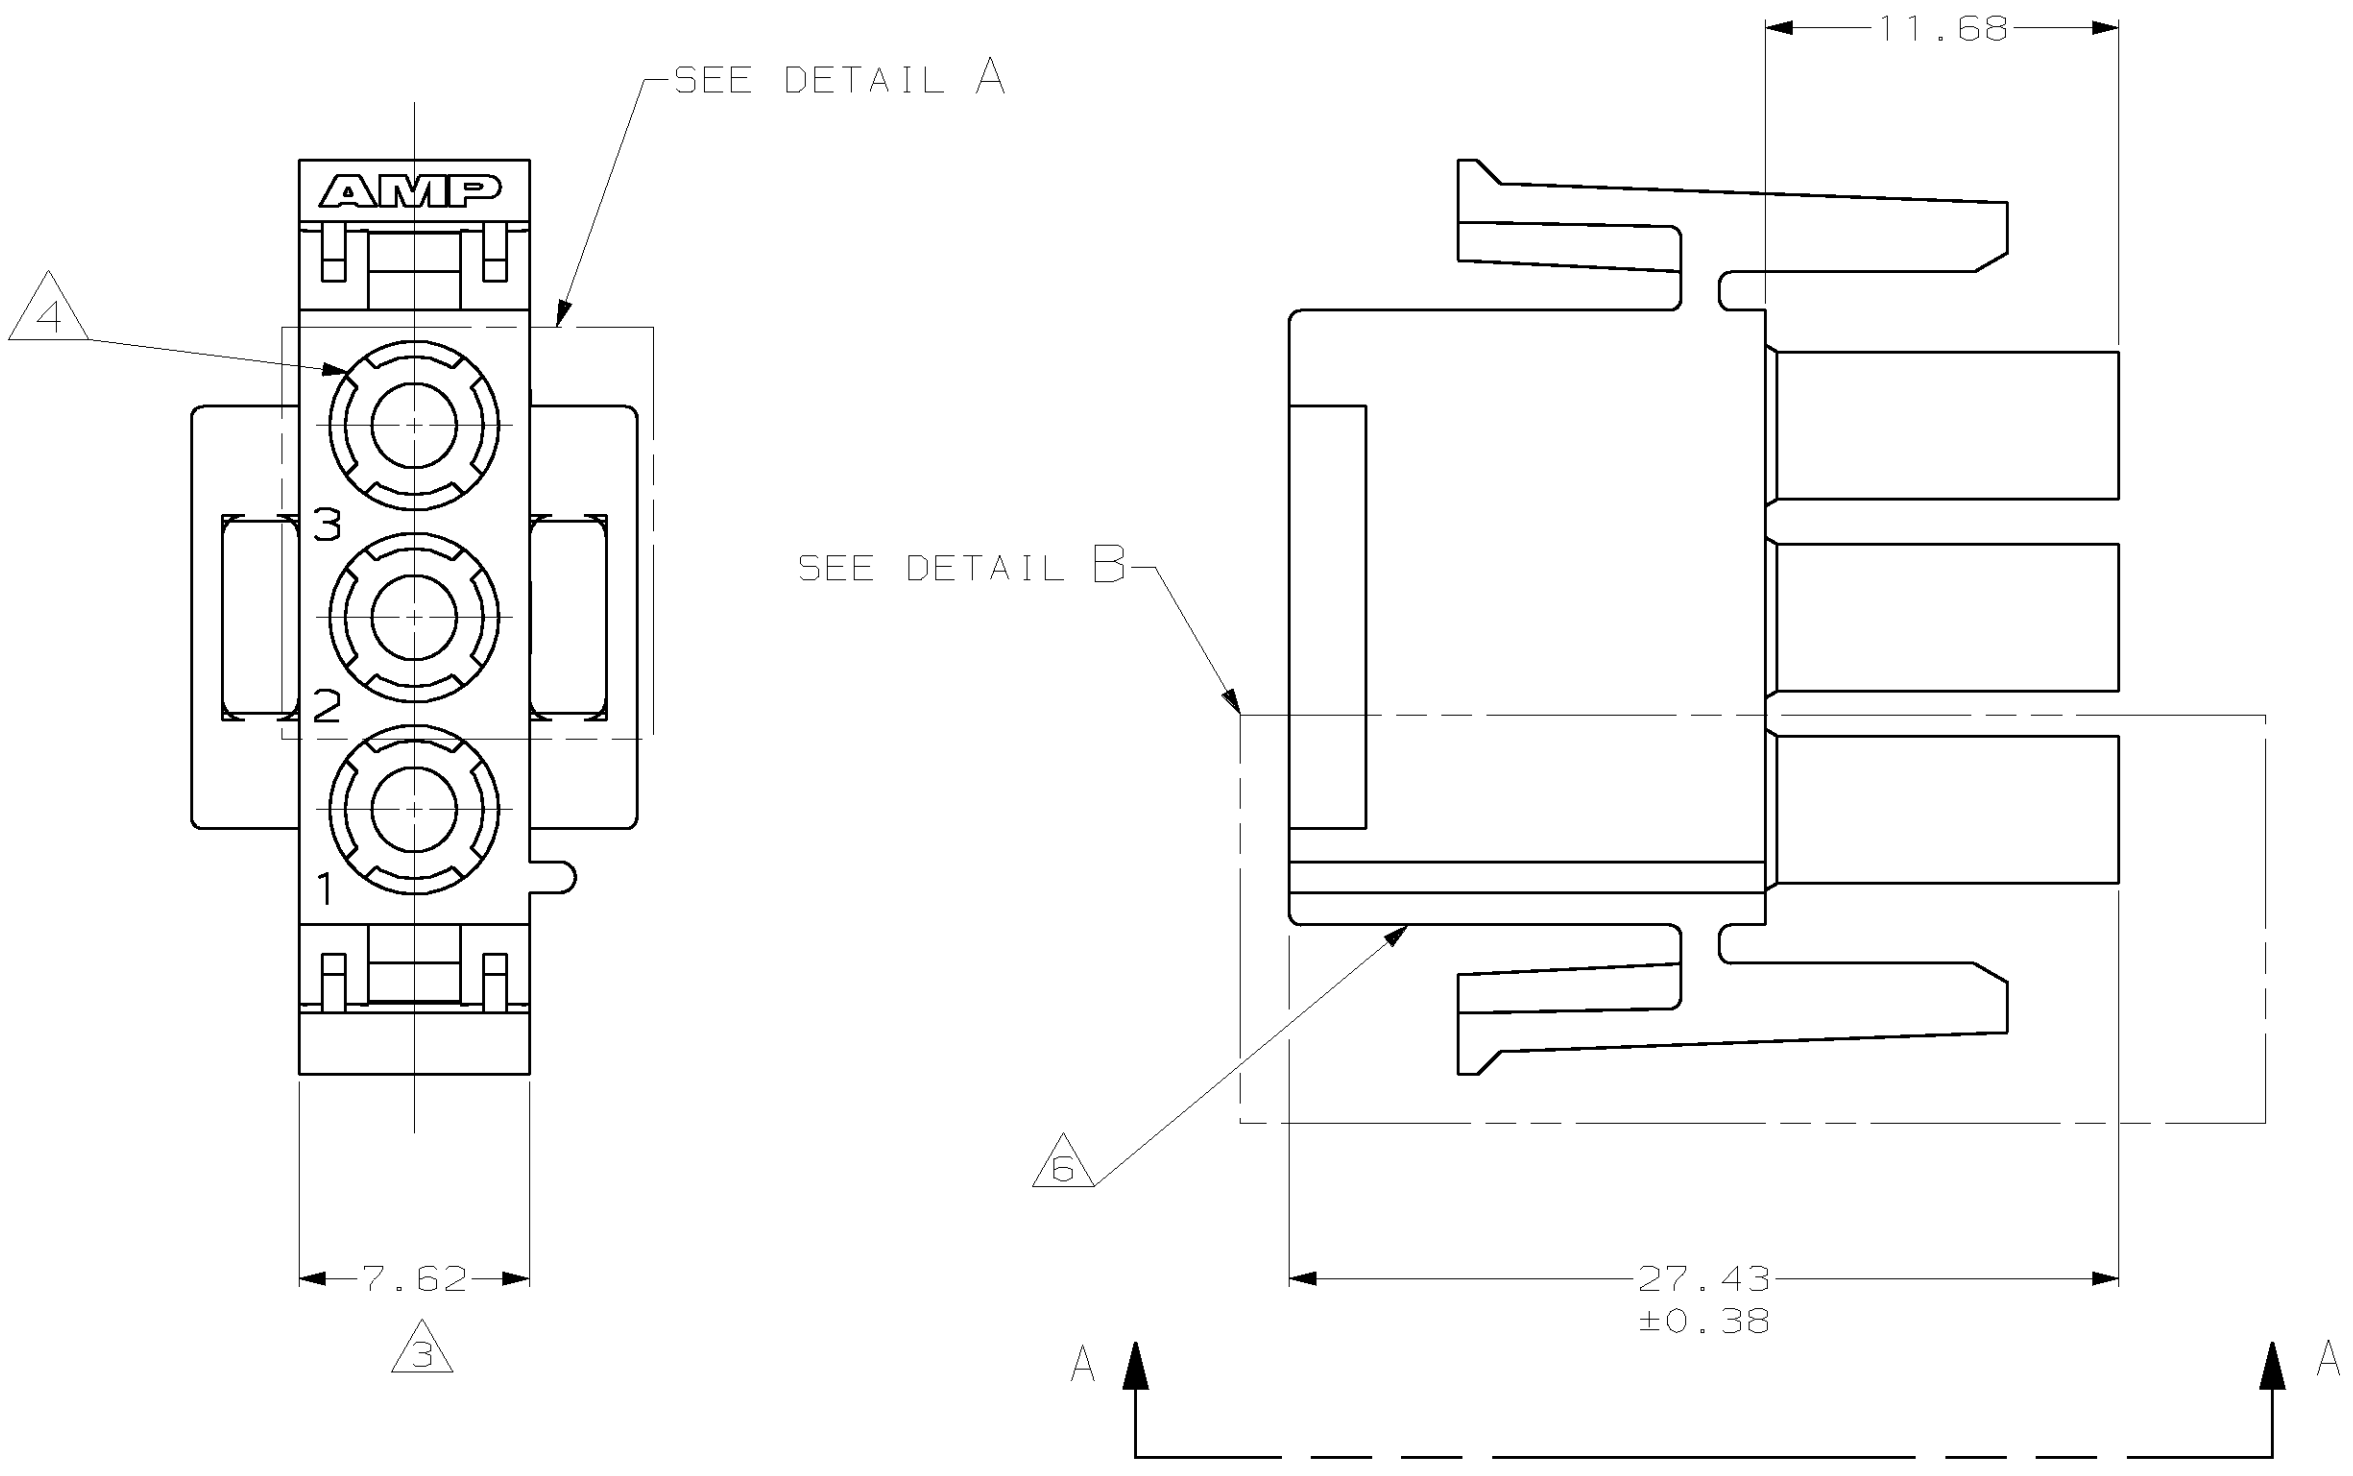

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
 - SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [0.5 LBS].
- 3 DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- 4 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- 5 NOT MANUFACTURED IN U.S.
- 6 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

27.43	1.080
20.32	.800
14.73	.580
11.68	.460
7.62	.300
0.38	.015
0.13	.005
MM	IN
CONVERSION TABLE	



THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST EDITION.		OWN R. VESTAL 1-18-95	
DIMENSIONS: mm (INCHES)		CHK R. SWING 1-18-95	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ± 10 PLC ±.03 11 PLC ±.03 12 PLC ±.03 13 PLC ±.03 14 PLC ±.03 ANGLES ±30° FINISH —		APPROV D. SELF 1-18-95	
MATERIAL NYLON, UL 94V-0,		NAME PLUG 3 CIRCUIT, UNIVERSAL MATE-N-LOK™	
CUSTOMER DRAWING		SCALE 4:1	
SIZE A1		SHEET 1	
DRAWING NO. 00779		REV 1	
DATE 17-FEB-99		BY JH	
APPROVED RS		DATE 17-FEB-99	