

圖號. DRAWING. NO :

品名 NAME : NYLON INSULATED CORD-END TERMINALS

版次 EDITION



NO: 記述 DESCRIPTION 日期 DATE 核可 CHECKED

WIRE RANGE mm²	產品編號 ITEM NO.	MOQ REQUIRED	F	L	C	W	t	COLOR 顏色		
								FRENCH	GERMAN	DIN
26AWG 0.14mm²	TUL-RI-00106		6.00 ±0.40	10.50 ±1.50	0.80 ±0.14	1.90 ±0.20	0.15 ±0.05	BROWN 咖啡色	GREY 灰色	GREY 灰色
			8.00 ±0.40	12.50 ±1.50						
24AWG 0.25mm²			6.00 ±0.40	10.50 ±1.50	0.80 ±0.14	1.90 ±0.20	0.15 ±0.05	VIOLET 紫色	LIGHT BLUE 淺藍色	YELLOW 黃色
			8.00 ±0.40	12.50 ±1.50						
22AWG 0.34mm²			6.00 ±0.40	10.50 ±1.50	0.80 ±0.14	1.90 ±0.20	0.15 ±0.05	PINK 粉紅色	TURQUOISE 淺綠色	TURQUOISE 淺綠色
			8.00 ±0.40	12.50 ±1.50						
			10.00 ±0.40	14.50 ±1.50						
			12.00 ±0.40	16.50 ±1.50						
20AWG 0.5mm²			5.00 ±0.40	11.00 ±1.50	1.00 ^{+0.14} _{-0.00}	2.60 ±0.20	0.15 ±0.05	WHITE 白色	ORANGE 橘色	WHITE 白色
			6.00 ±0.40	12.00 ±1.50						
			8.00 ±0.40	14.00 ±1.50						
			10.00 ±0.40	16.00 ±1.50						
18AWG 0.75mm²			6.00 ±0.40	12.00 ±1.50	1.20 ^{+0.14} _{-0.00}	2.80 ±0.20	0.15 ±0.05	SKY BLUE 天藍色	WHITE 白色	GREY 灰色
			☆ 6.00 ±0.40	12.00 ±1.50		3.00 ±0.20				
			8.00 ±0.40	14.00 ±1.50		2.80 ±0.20				
			☆ 8.00 ±0.40	14.00 ±1.50		3.00 ±0.20				
			10.00 ±0.40	16.00 ±1.50		2.80 ±0.20				
			☆ 10.00 ±0.40	16.00 ±1.50		3.00 ±0.20				
			12.00 ±0.60	18.00 ±1.50		2.80 ±0.20				
			☆ 12.00 ±0.60	18.00 ±1.50		3.00 ±0.20				
			18.00 ±0.60	24.00 ±1.50		2.80 ±0.20				
			☆ 18.00 ±0.60	24.00 ±1.50		3.00 ±0.20				

NOTE:

1. TEMPERATURE RANGE : -40 °C UP TO + 105 °C
2. MAXIMUM ELECTRICAL RATING: 600 VOLTS
3. TERMINAL MATERIAL : COPPER TUBE
4. PLATING : ELECTRO TIN PLATED
5. INSULATION MATERIAL : NYLON

2022.04.12

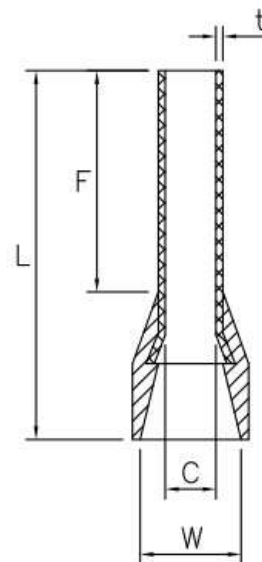

認可 APPROVALS

第三視角
THIRD VIEW


MATERIAL

單位 UNIT

製圖 DRAFT: TINA

設計 DESING: KEN

核可 CHECKED: KEN



INSULATION: NYLON

MATERIAL: COPPER TUBE

TIN PLATING

m/m

比例 SCALE

1 : 1

日期 DATE : 2022. 04. 12