



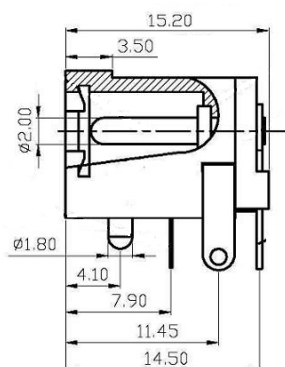
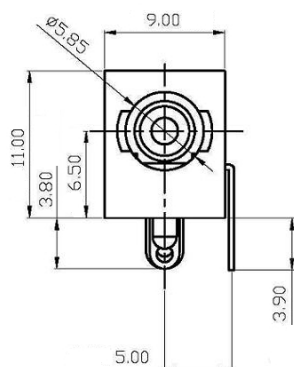


# CLIFF

## LOCKING DC PLUG & SOCKET

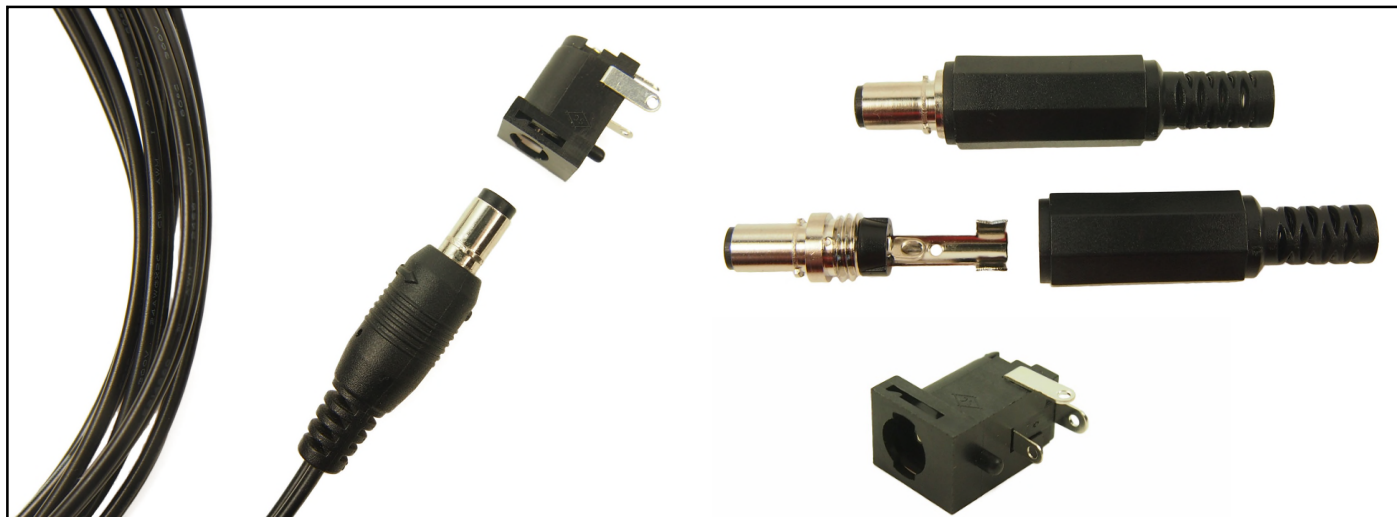

Pin Hole Layout  
(Jack Bottom View)

### Part No.

**FC681477**

**FC681478**

### Description

Locking DC Socket Ø2.5mm

Locking DC Socket Ø2.1mm


### Specification

Contact Resistance : 30mΩ max.

Current rating : Max 2.0A, 16V DC

Insulation Resistance : 100MΩ min at DC500V

Dielectric Withstand Voltage : AC 500V for 1 minute.

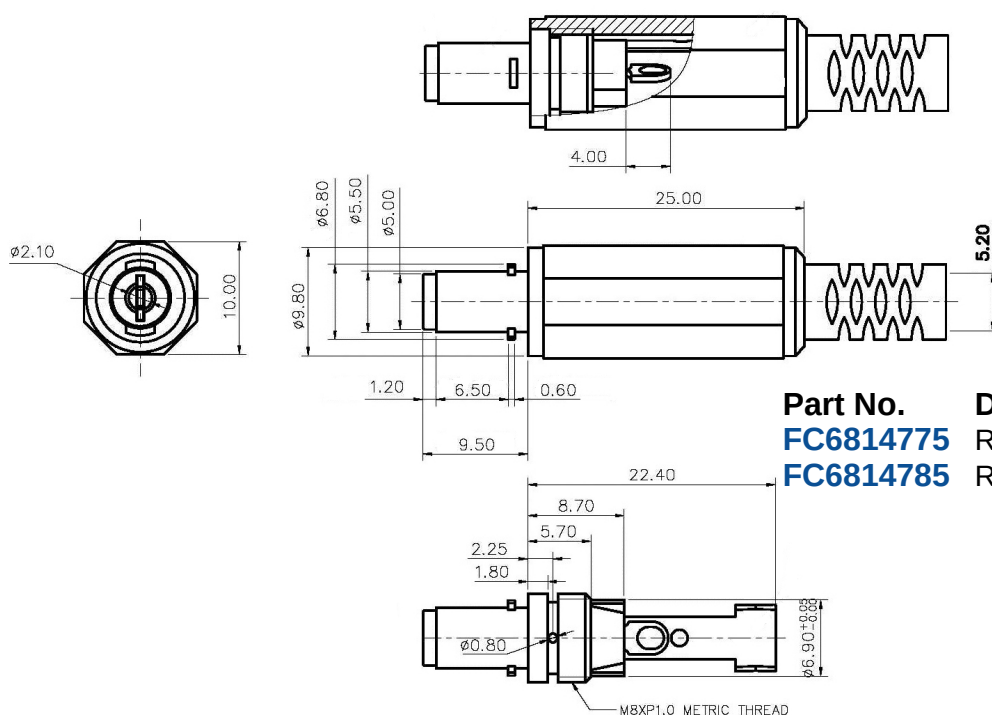

### Part No.


**FC681477S**

**FC681478S**

### Description

Rewireable Locking DC Plug Ø2.5mm

Rewireable Locking DC Plug Ø2.1mm

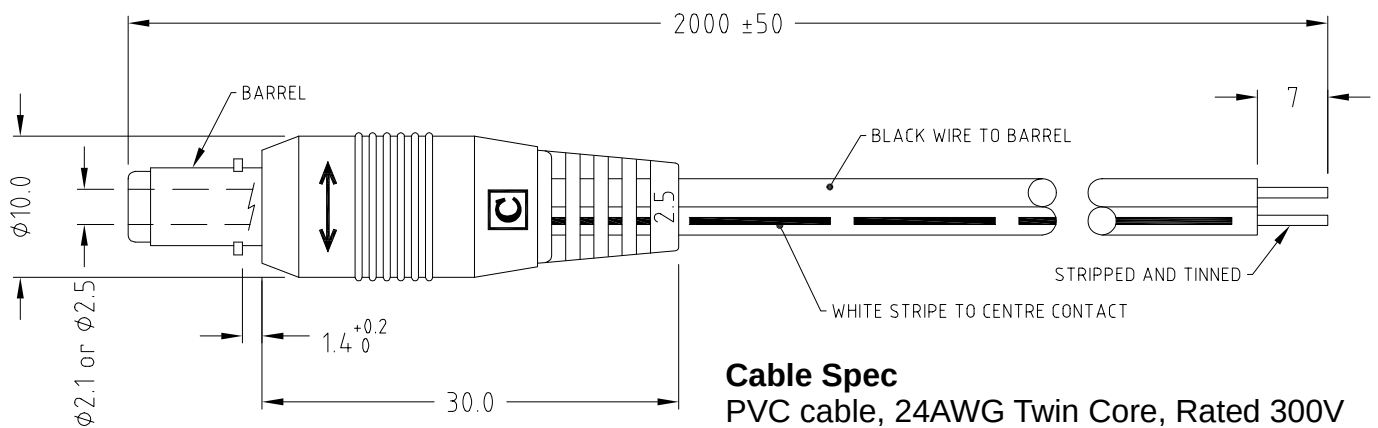

**Part No.**  
**FC6814751**  
**FC6814761**

**Description**  
Ø2.5mm LOCKING DC PLUG 2m CABLE  
Ø2.1mm LOCKING DC PLUG 2m CABLE