



used for: DIN 41617

Part-No.	No. of pos.	A -0.3	B ±0.1	C ±0.1	D
102E10019X	13	45.8	40	12x2.5=30	35
102E10029X	21	65.8	60	20x2.5=50	55
102E10039X	31	90.8	85	30x2.5=75	80

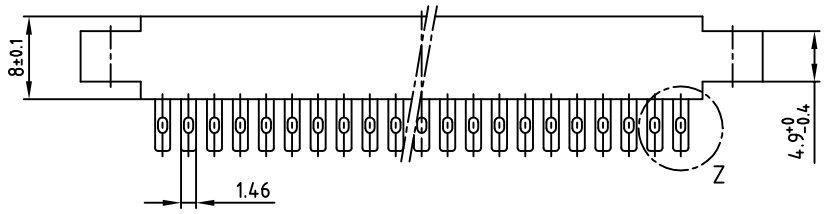




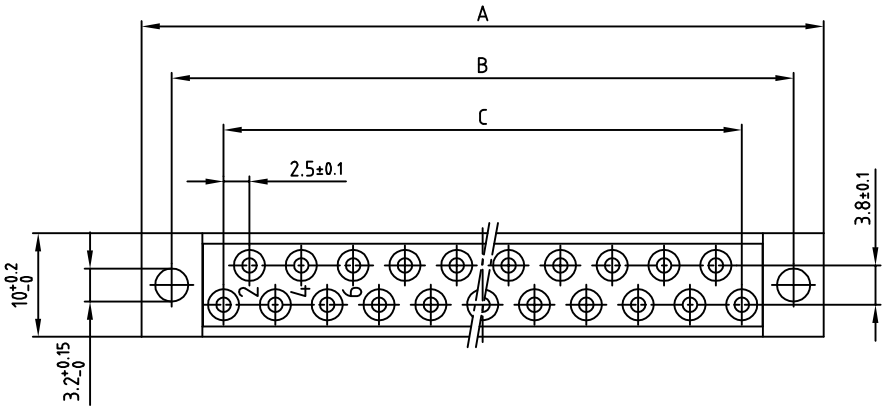



Directive 2002/95/EC „RoHS" Compliant

PANEL CUT OUT

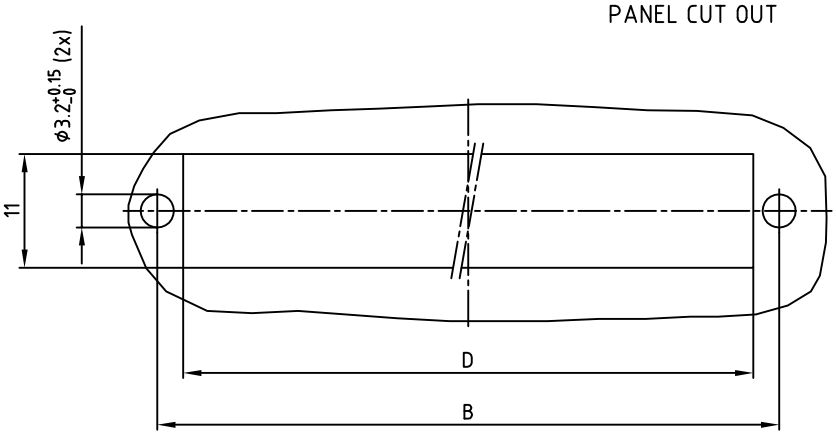

NOTES:
1. INSULATOR: PC GF UL 94 V-1, GREY
2. CONTACTS: COPPER ALLOY
   PLATING: HARD SILVER PLATED
   500 MATING CYCLES
3. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:
NAME: TITLE:
COMPANY NAME:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance | dim. in mm

	date	name
2008		
drawn	20.08.	Sonnenberg
appd.	20.08.	Mickenbecker
norm	DIN 41617	
d-old		

scale: 2:1 (4:1)
material: SEE NOTES
title: FEMALE CONNECTOR
13-31pos. / 2,5mm
with solder termination
dwg no: 10K2A015
AutoCAD 2006 | DIN-A 3 | sh: 1/1
part no: SEE TABLE

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА