

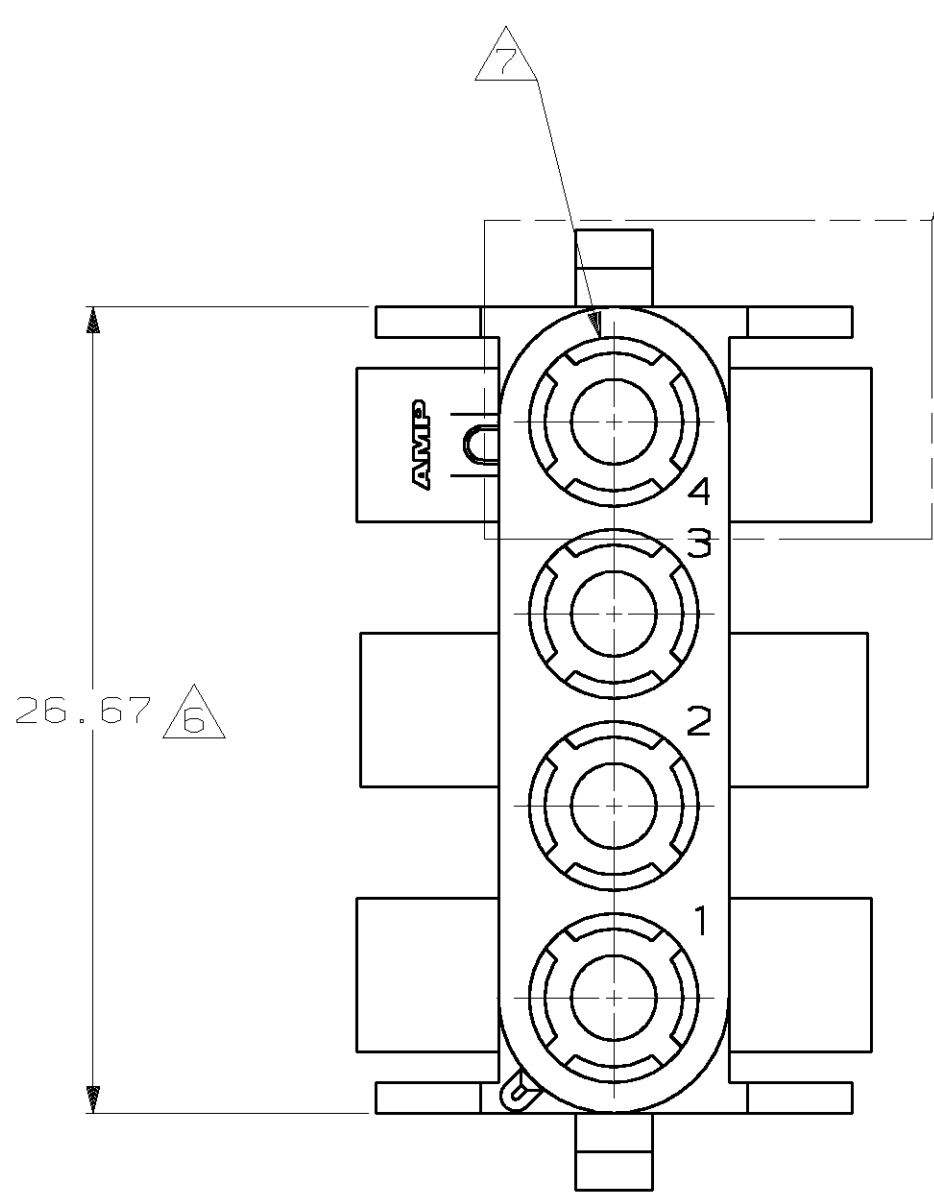
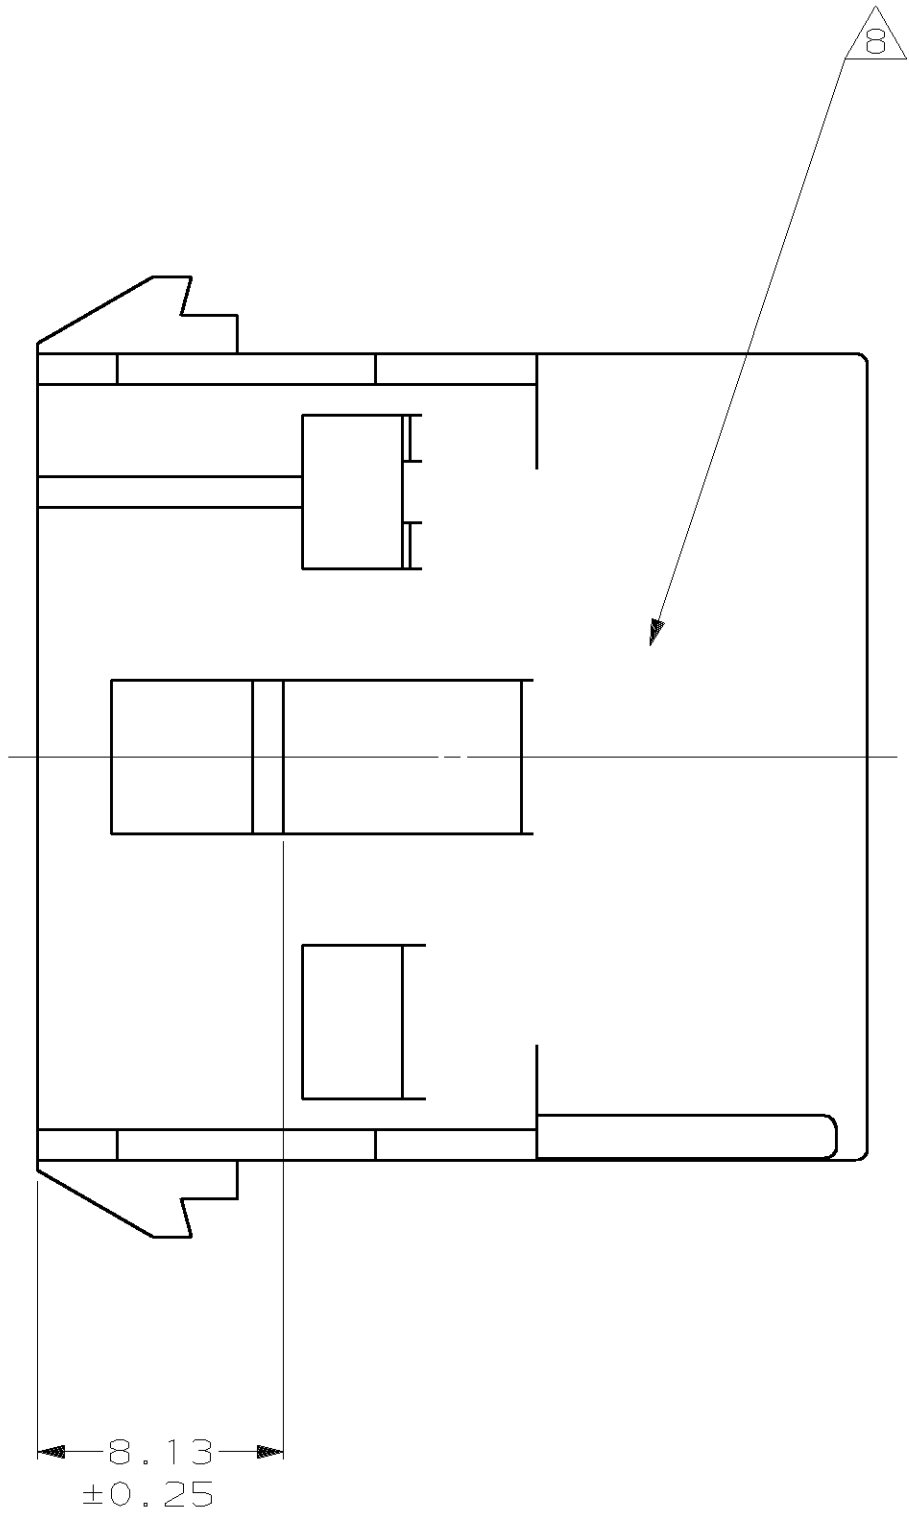




LOC		DIST			REVISIONS					
CM		53	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD	
					V		REV PER EC 061B-0229-98	17-FEB-98	JH	RS

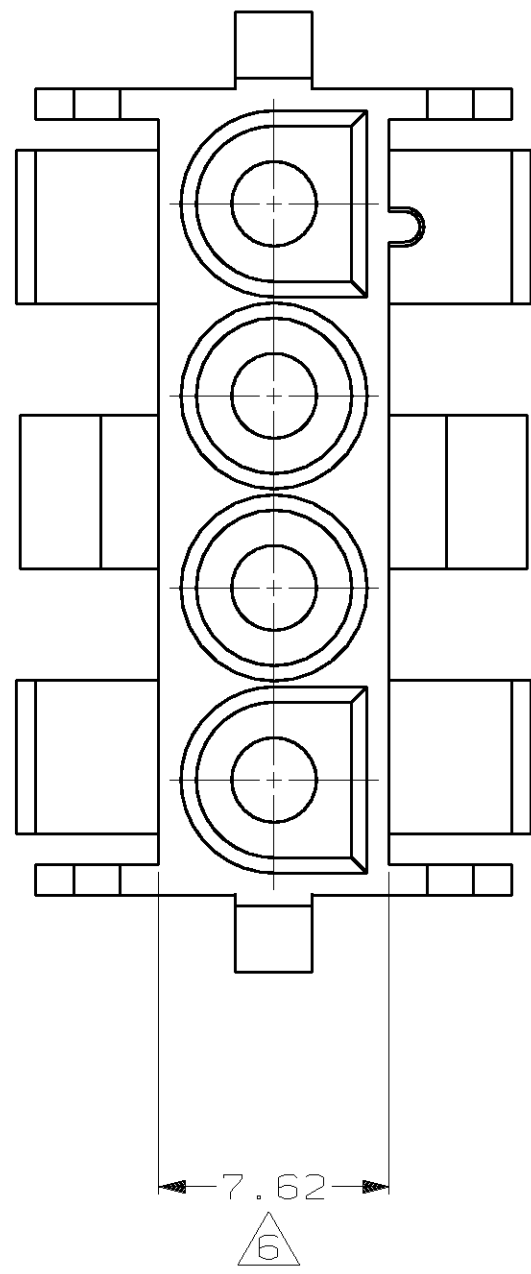


1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
 2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
 3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- OPTIONAL FOR KEYING HOUSING IN PANEL.
- CIRCUIT NUMBER 1 LOCATION.
- DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

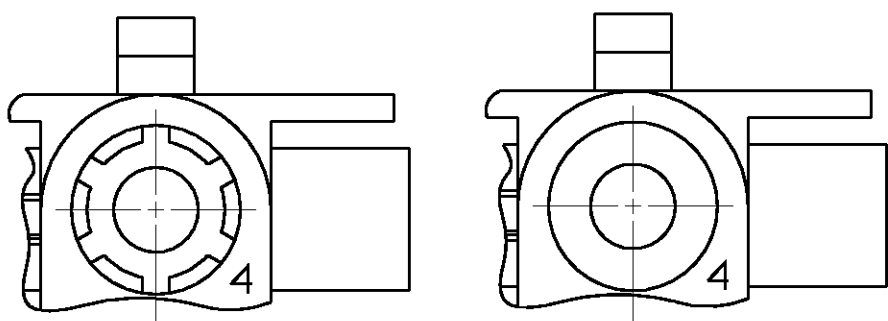

DETAIL A
OPTIONAL CONSTRUCTIONS

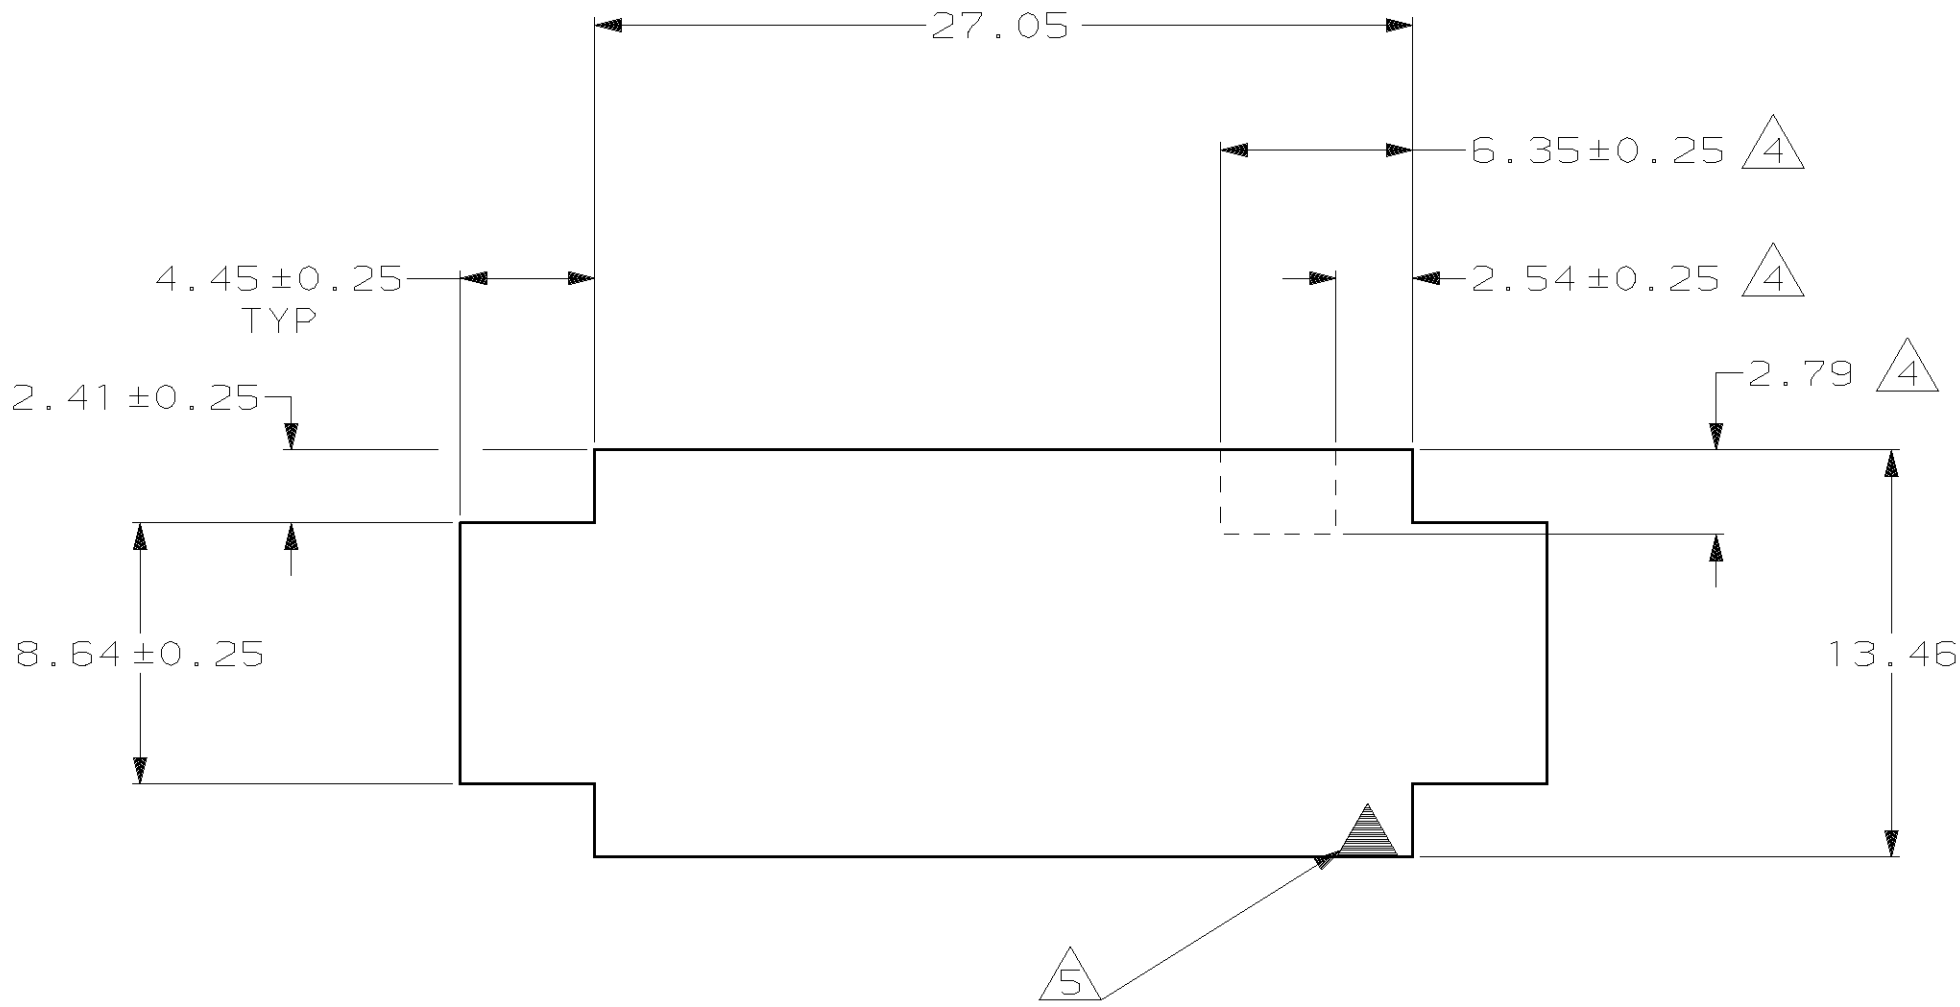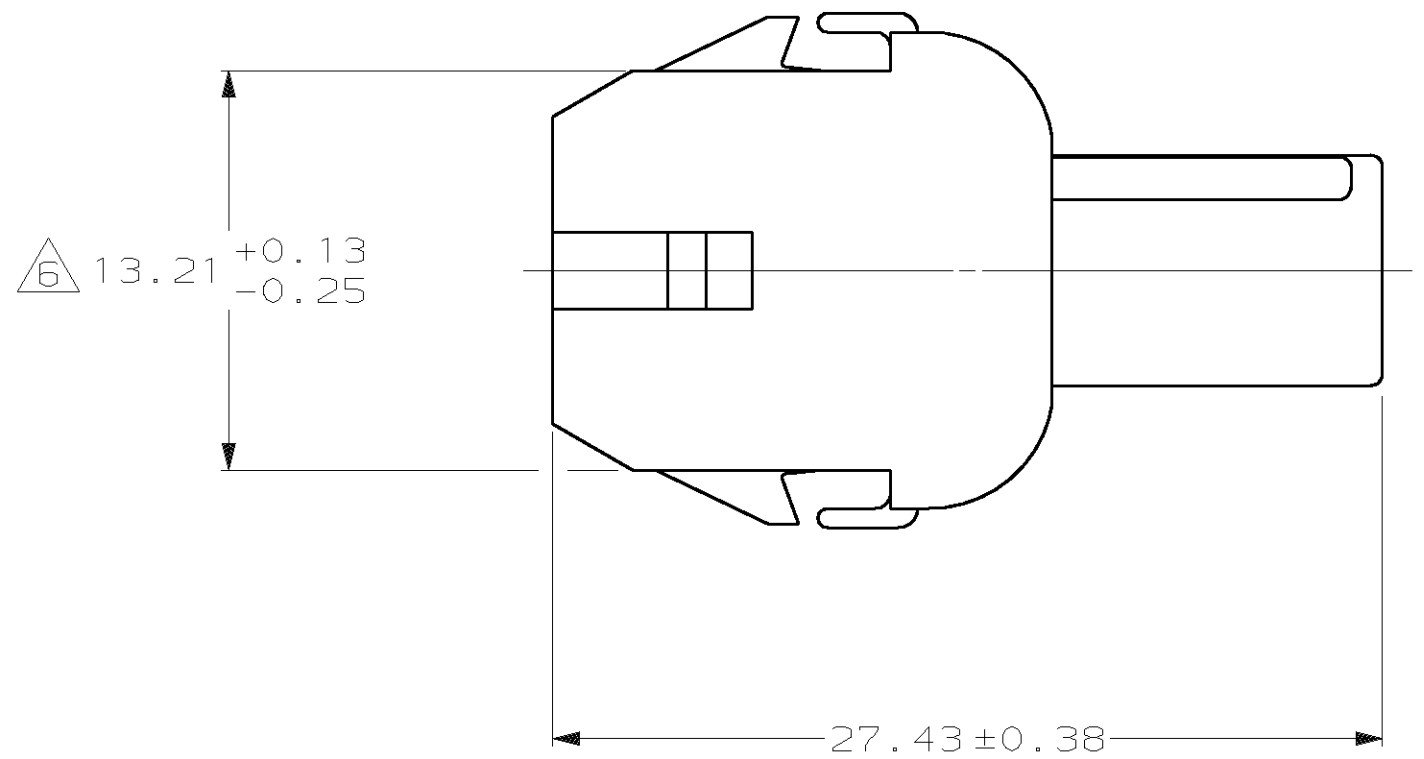

RECOMMENDED PANEL CUT OUT

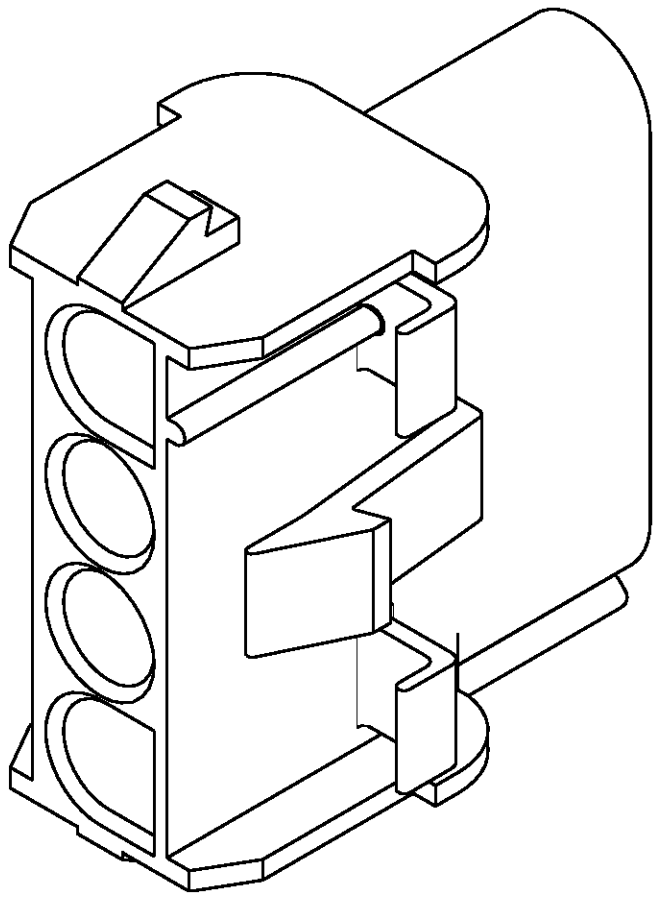

3-DIMENSIONAL MODEL
NTS

4.45	.175	27.43	1.080
2.79	.110	27.05	1.065
2.54	.100	26.67	1.050
2.41	.095	13.46	.530
2.29	.090	13.21	.520
0.76	.030	8.64	.340
0.38	.015	8.13	.320
0.25	.010	7.62	.300
0.13	.005	6.35	.250
MM	IN	MM	IN
CONVERSION TABLE			

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

				PART NO			
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.13 3 PLC DEC ± . ANGLES ± 1°0' MATERIAL NYLON,UL 94V-0		DR 7-15-92 K. WHITAKER		AMP AMP Incorporated Harrisburg, PA 17105-3608			
		CHK 7-15-92 R. SWING					
		APPD 7-20-92 D. SELF				NAME	
		APPD 7-20-92 D. SELF				CAP,4 CIRCUIT, UNIVERSAL MATE-N-LOK™	
PRODUCT SPEC -							
APPLICATION SPEC -		SIZE					
FINISH -		WEIGHT _		CAGE CODE		DRAWING NO	
				D 00779		C-350780	
				SCALE 4:1		SHEET 1 OF 1	

CUSTOMER DRAWING