

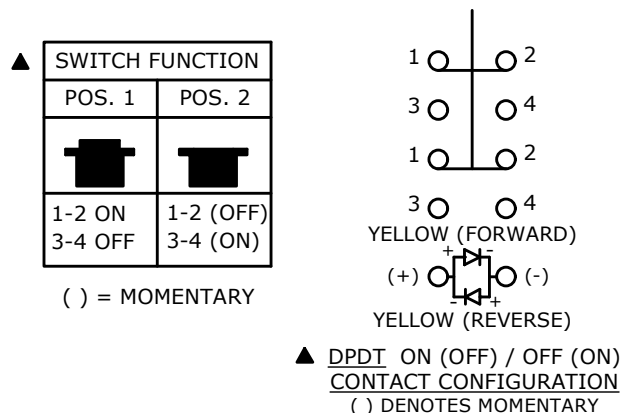

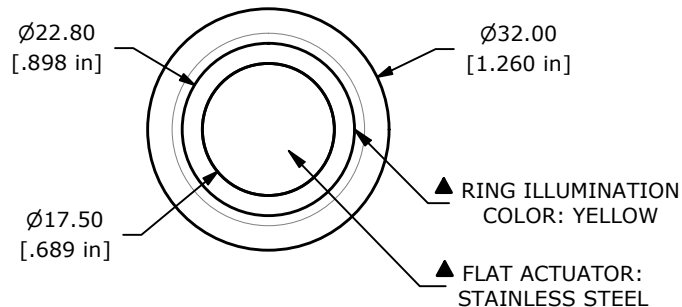


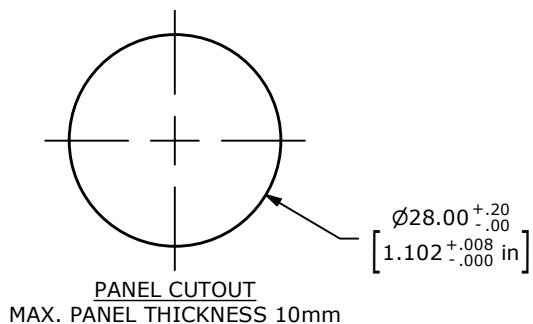

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF. ONLY
- RATING: 2A @ 48VDC
- CONTACT RESISTANCE: 50m Ω MAX. @ 1A 12VDC
- INSULATION RESISTANCE: 1,000M Ω @ 500VDC
- DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
- ELECTRICAL LIFE: 50,000 CYCLES
- OPERATING TEMPERATURE: -20°C to 55°C
- INGRESS PROTECTION: IP66
- ▲ DENOTES CRITICAL PARAMETER
- SUPPLIED HARDWARE: O-RING AND HEXNUT
- ILLUMINATION COLOR: YELLOW
- ILLUMINATION VOLTAGE: BASE VOLTAGE 1.8V

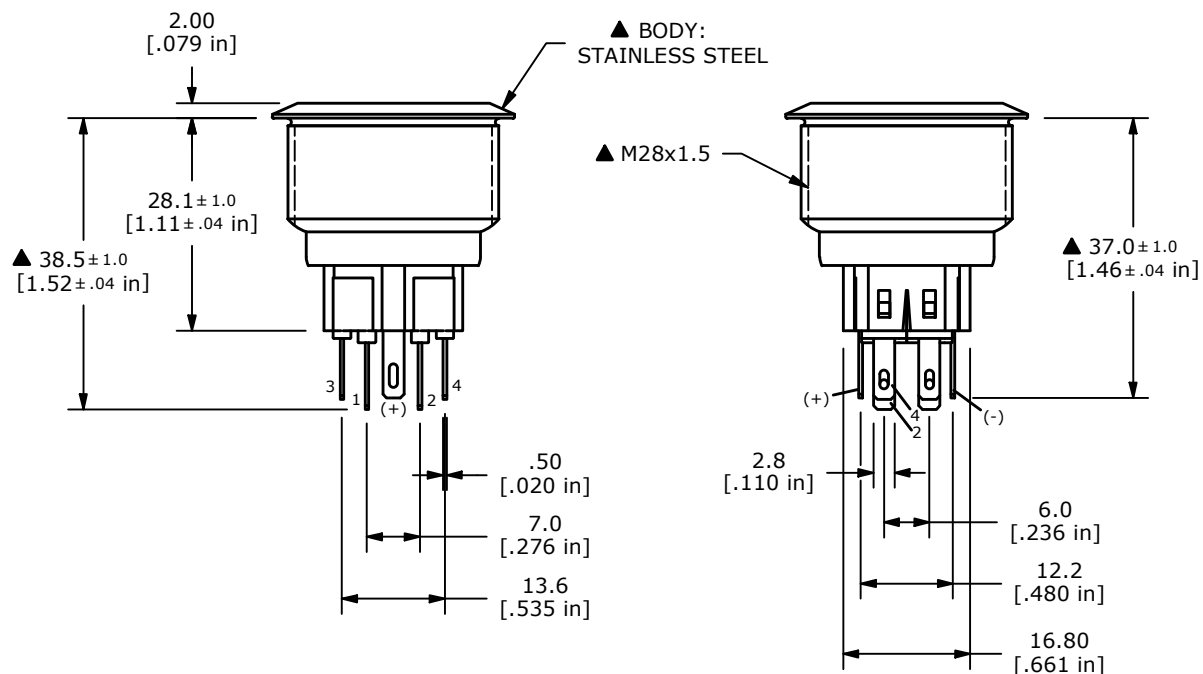

C	24637	UPDATE THREAD LENGTH TO 15.0	12/10/20	JM
B	23839	UPDATED RATING TO IP66	4/8/19	MJR
A	22770	RELEASE FOR PRODUCTION	3/21/17	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE PV9F2V0SS-351

SCALE 1:1	DATE 3/21/2017	DR MW	DWG 52-PV9F2V0SS351	REV C
--------------	-------------------	----------	------------------------	----------