

NOTES:




- MATERIALS AND FINISHES:
BODY – BRASS, GOLD PLATING
CONTACT – BERYLLIUM COPPER, GOLD PLATING
INSULATOR – PTFE
- ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC 0–6 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.
- MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: – 65°C to +165°C
- PACKAGING:
A. PACKAGE CONNECTOR IN TAPE AND REEL, QTY OF 750 PCS

THIRD ANGLE PROJ.



REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	SEE SHEET 1	05–Mar–03	--	--
B	SEE SHEET 1	11–Aug–08	--	SH
C	SEE SHEET 1	30–Apr–09	47924	SH
D	ADD NOTE 4\RD–DM10040701T1	15–Apr–10	48059	SH
E	4.45 WAS 4.5,5.21 WAS 5.26\RD–DM14012101J8	03–Mar–14	49948	J.C

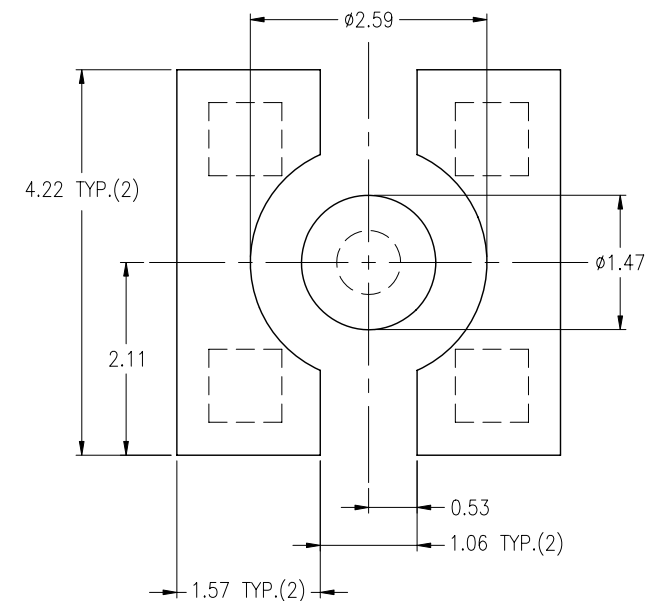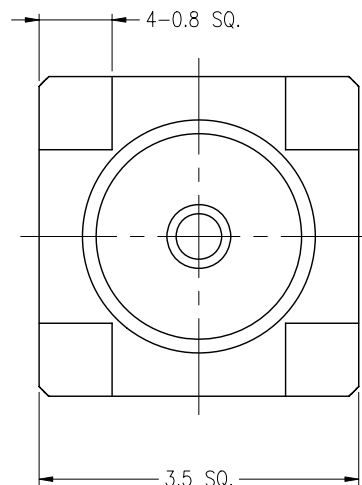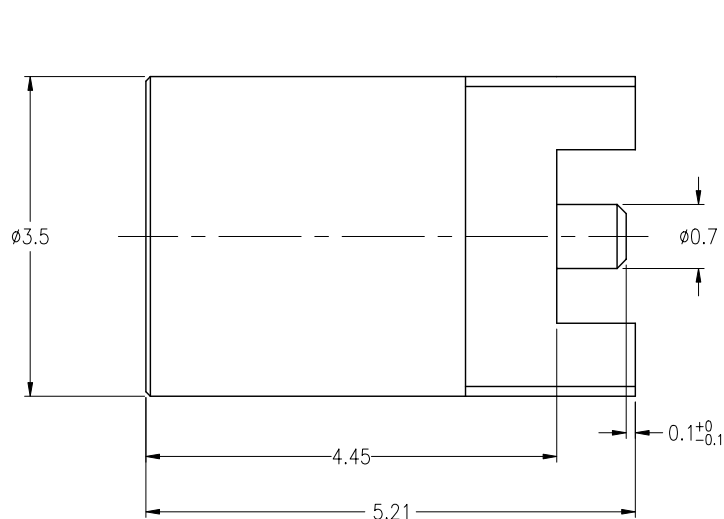

RECOMMENDED MOUNTING PATTERN

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: 0.5 – 6mm ±0.1mm 6 – 30mm ±0.2mm 30 – 120mm ± 0.3mm ANGLES ±1°	MATERIAL	DRAWN	DATE	TITLE			Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com			
		J.CHEN	26–Mar–14							
		REFERENCE	ENGINEER	DATE	MMCX SURFACE MOUNT JACK			DRAWING NO. MMCX6251N3–3GT30G–50		
			KEN	05–Mar–03						
			APPROVED	DATE	SCALE: 12/1	SHEET	1	OF	1	
SCOTT	28–Mar–14						ITEM NO. 096251AAG56GE5F			
NOTICE – These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	FINISH	CAD FILE	DWG SIZE	CODE ID	REV	PART NO. 908–22116				
		F:\DWG\MMCX\6251N3\50\3GT30G–ESZ	B	74868	E					