

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AJ	16


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECO-11-005030	11MAR11	RK	HMR

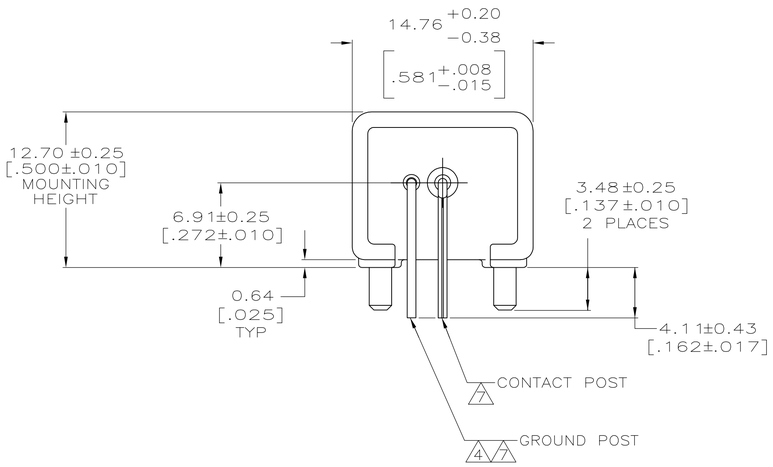


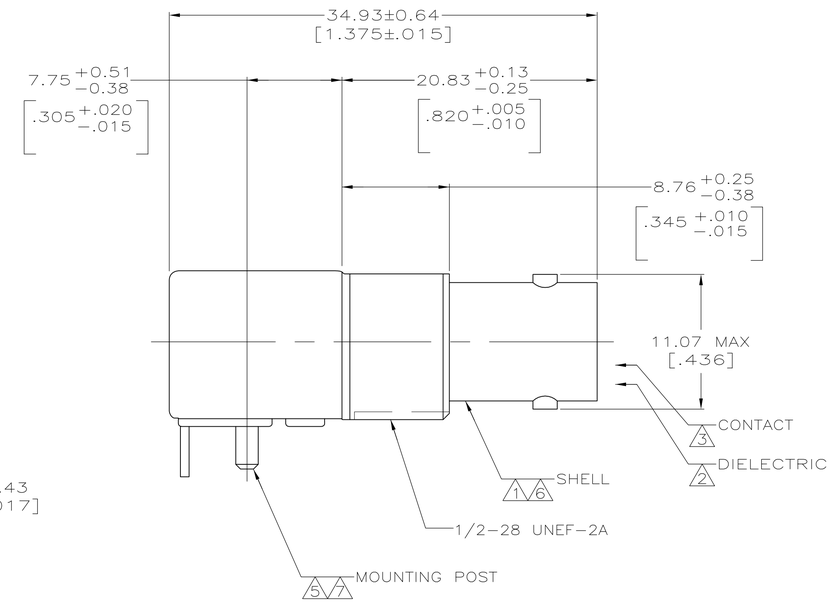

1. ZINC PER QQ-Z-363.
2. POLYMETHYLPENTENE PER ASTM-D-1238.
3. PHOSPHOR BRONZE PER QQ-B-750.
4. BRASS PER ASTM-B-453.
5. BRASS PER ASTM-B-16.
6. NICKEL PLATE PER QQ-N-290, 3.81 µm [.000150] MINIMUM THICK.
7. TIN PLATE PER ASTM-B-545, 3.81 µm [.000150] MINIMUM THICK.
8. GOLD PLATE PER MIL-G-45204, 1.27 µm [.000050] MINIMUM THICK.
9. GOLD PLATE PER MIL-G-45204, 0.76 µm [.000030] MINIMUM THICK.
10. SEE INSTRUCTION SHEET 408-2769.

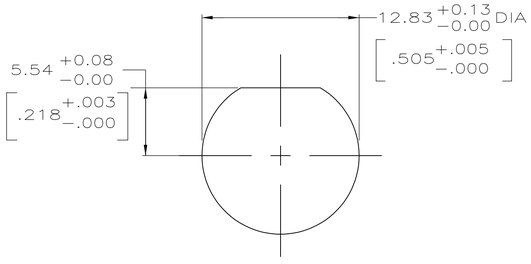

RECOMMENDED PANEL CUTOUT

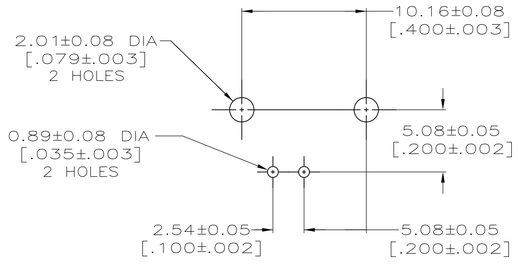

PCB CONFIGURATION

A	5413879-2
B	5413879-1
CONTACT FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.20 [.008]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL: SEE NOTES 1-5

FINISH: SEE NOTES 6-9

DWN 22APR2005 A. FERNANDEZ-DOCK5
CHK 22APR2005 J. HAVENER
APVD 22APR2005 J. LIPPERT
PRODUCT SPEC 108-12078
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME: JACK, RIGHT ANGLE, PCB 50 OHM, SERIES BNC

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-5413879	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV A1

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА