



Rating	10A125VAC 6A250VAC T85 UL-20  US	Circuit Diagram
Contact R	50m ohm Max.	 1 2 SPST 2P ON-OFF
Insulation R	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation temp	-20°C ~ 85°C	

Material of case are nylon-66.
Switch operation force: 450g±150g

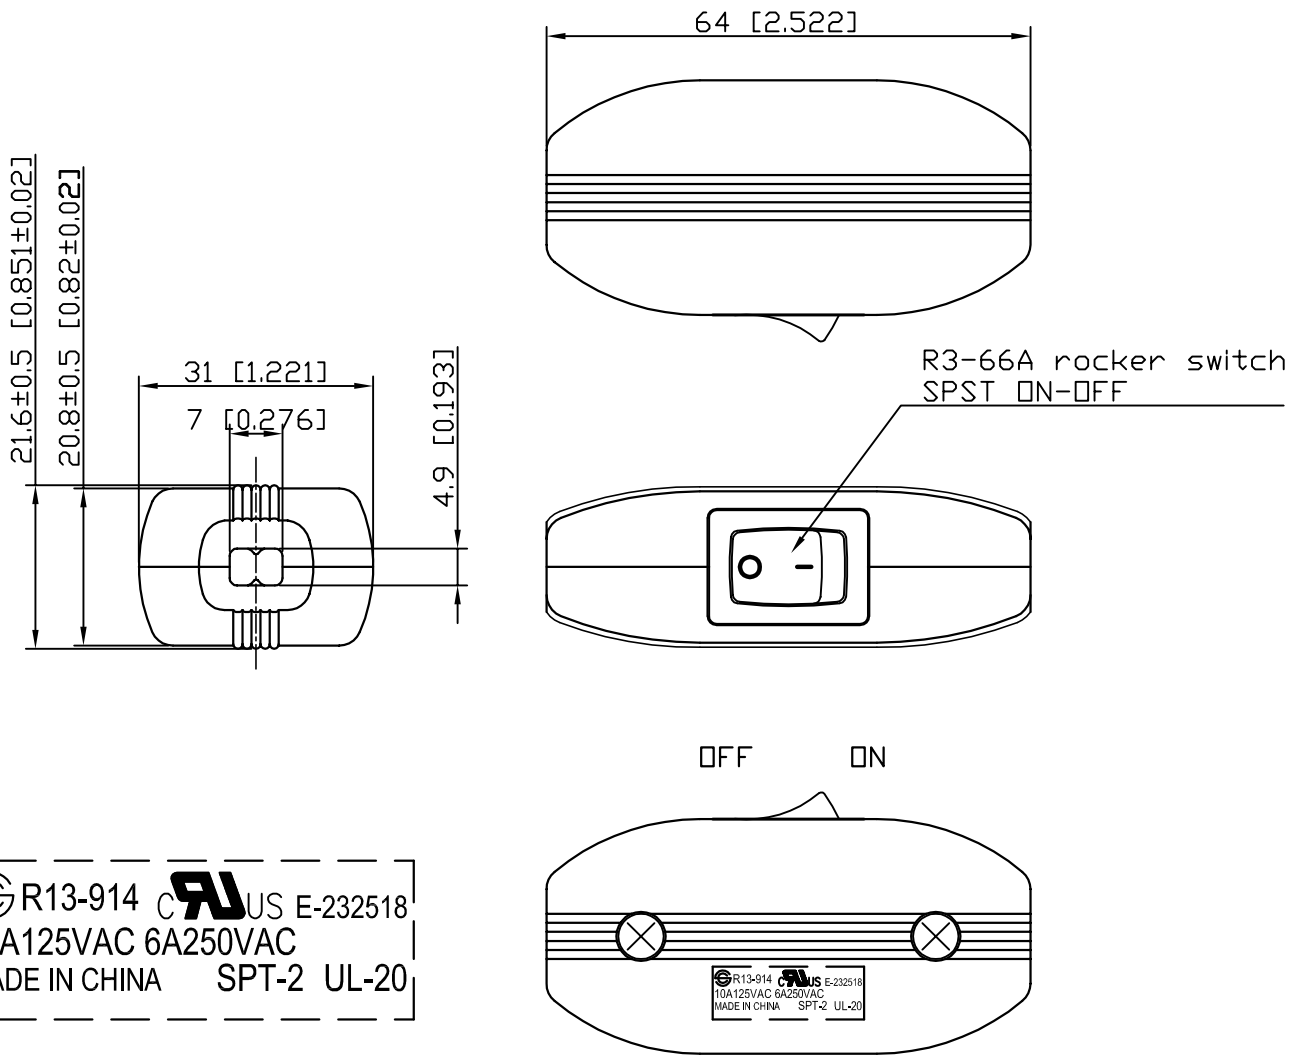

R13-914  US E-232518
10A125VAC 6A250VAC
MADE IN CHINA SPT-2 UL-20

Tolerance ±0.3 except noticed

C8\R13\R13-914

							△
							△
Date	Name	Descriptions					NO
Drawing	Check	Approval	SCI No.	1910024		Model Name	Through Cord Switch
曹 盈 芳		李 景 煌	Customer No.			Model No.	R13-914
02/17/'04		02/17/'04	Unit	mm	SHIN CHIN INDUSTRIAL CO., LTD.		